SONY

HD CAMCORDER

HDW-750

HD-SD DOWN CONVERTER BOARD
HKDW-702

PICTURE CACHE BOARD
HKDW-703

HDCAM Tele-File MEMORY STICK

MAINTENANCE MANUAL
Volume 2 1st Edition
Serial No. 10001 and Higher : HDW-750 (UCJ)
Serial No. 70001 and Higher : HDW-750 (J)

⚠警告

このマニュアルは，サービス専用です。
お客様が，このマニュアルに記載された設置や保守，点検，修理などを行うと感電や火災，人身事故につながることがあります。
危険をさけるため，サービストレーニングを受けた技術者のみご使用ください。

設置や保守，点検，修理などを行う前に，別冊のメンテナンスマニュアルVolume 1の「安全のために」と別冊のオペレーションマニュアルの「安全のために」を必ずお読みください。

⚠WARNING

This manual is intended for qualified service personnel only.
To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

⚠WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.
Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegeben Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

⚠AVERTISSEMENT

Ce manual est destiné uniquement aux personnes compétentes en charge de l’entretien. Afin de réduire les risques de décharge électrique, d’incendie ou de blessure n’effectuer que les réparations indiquées dans le mode d’emploi à moins d’être qualifié pour en effectuer d’autres. Pour toute réparation faire appel à une personne compétente uniquement.

目次/Table of Contents

このマニュアルについて

本書の目的 ..... 5 (J)
関連マニュアル ..... 5 (J)
構成 ..... 6 (J)

Manual Structure

Purpose of this manual ..... 5 (E)
Related manuals ..... 5 (E)
Contents ..... 6 (E)

1. Spare Parts

1-1. 補修部品注意事項 1-1
1-1. Notes on Repair Parts 1-1
1-2. Exploded Views 1-2
1-3. Hardware List 1-34
1-4. Electrical Parts List 1-35
1-5. Frame List 1-130
1-6. Packing Materials & Supplied Accessories 1-132
1-7. Optional Fixtures List 1-133
1-8. HKDW-702 1-133
1-9. HKDW-703 1-142

2. Semiconductor Pin Assignments

3. Block Diagrams

CAMERA BLOCK Overall 3-2
PA-253 3-4
CN-2037 3-5
DR-433 3-5
TG-219 3-5
DCP-28 3-6
RM-188 3-7
IO-202 ..... 3-8, 3-25
DC-110 3-12
AT-143 3-14
VTR BLOCK Overall 3-15
DVP-18 3-18
CCM-45 3-23
CI-27 3-23
HN-277 3-23
IF-794 3-23
MY-99 3-23
SS-92 3-24
MDC-13 3-26
MDR-14 3-26
SE-613 3-26
EQ-88 3-27
FP-121 3-30
IFA-11 3-30
MA-103 3-30
RX-54 3-30
SW-1031 3-30
APR-59 3-31
HP-103 3-31
AL-43 3-32
AXM-24 3-32
BP-33 3-32
HP-104 3-32
LP-114 3-32
ENC-61 3-33
KY-475 3-33
SW-1038 3-33
CNB-15 3-34
DC-111 3-34
PS-595 3-34
RE-186 3-34
RE-187 3-34
SW-1030 3-34

http://getMANUAL.com

4. Schematic Diagrams

PA-253 4-2
DR-433 4-4
CN-2037 4-7
TG-219 4-8
DCP-28 4-11
IO-202 4-33
RM-188 4-33
DC-110 4-34
AT-143 4-44
DVP-18 4-48
MY-99 4-71
IF-794 4-75
HN-277 4-76
CI-27 4-77
CCM-45 4-79
SS-92 4-80
MDC-13 4-86
MDR-14 4-94
SE-613 4-95
EQ-88 4-96
FP-121 4-118
IFA-11 4-130
MA-103 4-132
RX-54 4-132
SW-1031 4-133
APR-59 4-134
HP-103 4-136
AL-43 4-137
AXM-24 4-138
BP-33 4-139
HP-104 4-139
ENC-61 4-140
LP-114 4-140
KY-475 4-141
SW-1038 4-141
RE-186 4-142
RE-187 4-144
CNB-15 4-146
DC-111 4-149
PS-595 4-150
SW-1030 4-151
MB-898 4-152
FRAME 4-154

5. Board Layouts

PA-253 5-2
DR-433 5-3
CN-2037 5-4
TG-219 5-5
DCP-28 5-6
IO-202 5-12
RM-188 5-12
DC-110 5-13
AT-143 5-16
DVP-18 5-17
MY-99 5-20
HN-277 5-21
IF-794 5-21
CI-27 5-22
CCM-45 5-23
SS-92 5-24
MDC-13 5-25
MDR-14 5-28
SE-613 5-28
EQ-88 5-29
FP-121 5-31
IFA-11 5-35
MA-103 5-36
RX-54 5-36
SW-1031 5-36
APR-59 5-37
AL-43 5-38
HP-103 5-38
AXM-24 5-39
BP-33 5-39
ENC-61 5-40
HP-104 5-40
KY-475 5-40
LP-114 5-40
SW-1038 5-40
RE-186 5-41
RE-187 5-42
CNB-15 5-43
DC-111 5-44
PS-595 5-44
SW-1030 5-44
MB-898 5-45

このマニュアルについて

本書の目的

本書は，HD カムコーダ HDW-750 のメンテナンスマニュアル Volume 2 です。
メンテナンスマニュアル Volume 2は，システム／サービスエンジニアの方々にご使用いただくことを想定し，部品レベルでのサービスを前提とした情報（パーツリスト，半導体ピンアサイン，ブロック図，回路図，マウント図）を記載しています。

関連マニュアル

本機には，この「メンテナンスマニュアル Volume 2」の他に，下記のマニュアルが用意されています。

- **オペレーションマニュアル（本機に付属）**
  本機を実際に運用および操作する際に必要なマニュアルです。
  部品番号：3-204-824-0X

- **メンテナンスマニュアル Volume 1（別途用意）**
  システム／サービスエンジニアの方々にご使用いただくことを想定し，部品レベルでのサービスを前提とした情報（定期点検および保守，故障診断，部品の交換，調整要項等）を記載したマニュアルです。
  入手を希望される方は，ソニーの営業窓口にお問い合わせください。
  部品番号：9-968-581-0X

- **HDVF-20A メンテナンスマニュアル（別途用意）**
  ビューファインダのサービスに関する情報を記載したマニュアルです。
  システム／サービスエンジニアの方々にご使用いただくことを想定し，部品レベルでのサービスを前提とした情報（サービスインフォメーション，電気調整要項，パーツリスト，半導体ピンアサイン，ブロック図，回路図，マウント図）を記載したマニュアルです。
  入手を希望される方は，ソニーの営業窓口にお問い合わせください。
  部品番号：9-968-559-0X

- **“Semiconductor Pin Assignments” CD-ROM 版（別途用意）**
  この“Semiconductor Pin Assignments” CD-ROM版は，コミュニケーションシステムソリューションネットワークカンパニーの機器に使用されている半導体を検索することができます。
  このCD-ROMで検索できない半導体は，その半導体が使用されている機種のメンテナンスマニュアルに記載されています。メンテナンスマニュアルには，その機種に使用されているすべての半導体一覧とそのID番号を記載していますので，このCD-ROM 版と合わせて使用してください。
  部品番号：9-968-546-XX

構成

本書の構成を把握していただくために，全章の概略を以下に説明します。

Section 1　Spare Parts

本機で使用している部品のうち，サービス対象の分解図，部品リスト，フレームリストを記載しています。

Section 2　Semiconductor Pin Assignments

本機で使用している半導体の型名一覧とその半導体標準図検索用ID番号を記載しています。
別売の”Semiconductor Pin Assignments”CD-ROM版と合わせてご覧ください。
また，本書作成時に，CD-ROM版に含まれていない半導体標準図がある場合は，本章に追加掲載しています。

Section 3　Block Diagrams

オーバーオールブロック図および基板ごとのブロック図を記載しています。

Section 4　Schematic Diagrams

基板ごとの回路図とフレーム図を記載しています。

Section 5　Board Layouts

基板ごとのマウント図を記載しています。

Manual Structure

Purpose of this manual

This manual is the maintenance manual volume 2 of HD Camcorder HDW-750. This manual is intended for use by trained system and service engineers, and describes the information regarding the parts list, semiconductor pin assignments, block diagrams, schematic diagrams and board layouts.

Related manuals

Beside this Maintenance Manual Volume 2, the following manuals are available for the unit.

- **Operation Manual (Supplied with this unit)**
  This manual is necessary for application and operation of this unit.
  Part number: 3-204-824-0X

- **Maintenance Manual Vol. 1 (Available on request)**
  This manual intended for use by trained system and service engineers describes (the circuit overview, character display functions, the main part replacements, electrical alignment, etc.) required for parts-level service.
  For obtaining, contact your local Sony Sales Office/Service Center.
  Part number: 9-968-581-0X

- **HDVF-20A Maintenance Manual (Available on request)**
  This manual is the maintenance manual of the supplied viewfinder.
  This manual is intended for use by trained system and service engineers, and describes the information regarding the service overview, electrical alignment, parts list, semiconductor pin assignments, block diagrams, schematic diagrams and board layouts.
  For obtaining, contact your local Sony Sales Office/Service Center.
  Part number: 9-968-559-0X

- **“Semiconductor Pin Assignments” CD-ROM (Available on request)**
  This “Semiconductor Pin Assignments” CD-ROM allows you to search for semiconductors used in Communication System Solutions Network Company equipment.
  Semiconductors that cannot be searched for on this CD-ROM are listed in the maintenance manual for the corresponding unit. The maintenance manual contains a complete list of all semiconductors and their ID Nos., and thus should be used together with the CD-ROM.
  Part number: 9-968-546-XX

Contents

The following is a summary of the sections of this manual.

Section 1 Spare Parts

Describes exploded views, parts list, frame list used in the unit.

Section 2 Semiconductor Pin Assignments

Contains information on semiconductors used for the unit.
It includes a complete list of the semiconductors and their ID Nos. for retrieving information on “Semiconductor Pin Assignments” CD-ROM, which is available separately.
Please refer to this section together with the “Semiconductor Pin Assignments” CD-ROM.
Information on the semiconductors not contained in the CD-ROM at the time of issue of this manual, if any, is given in this section as well.

Section 3 Block Diagrams

Describes overall block diagram and block diagrams for every circuit board.

Section 4 Schematic Diagrams

Describes schematic diagrams for every circuit board and frame wiring.

Section 5 Board Layouts

Describes board layouts for every circuit board.

Section 1
Spare Parts

1-1. Notes on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked ⚠ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.
Parts list has the present standardized repair parts.

3. Stock of Parts

Parts marked with "o" at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.
In need of repair, get components shown in the list and repair using them.

1-1. 補修部品注意事項

1. 安全重要部品

⚠警告

⚠印のついた部品は安全性を維持するために重要な部品です。したがって，交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は，セットに使われているものと異なることがあります。
これは部品の共通化，改良等によるものです。
部品表には現時点での共通化された補修用部品が記載されています。

3. 部品の在庫

部品表のSP (Supply code) 欄に"o"で示される部品は在庫していないことがあり，納期が長くなることがあります。

4. ハーネス

部品番号が記載されていないハーネスは，サービス部品として登録されていません。
これらは，リストに展開されているコンポーネント部品で補修してください。

1-2. Exploded Views

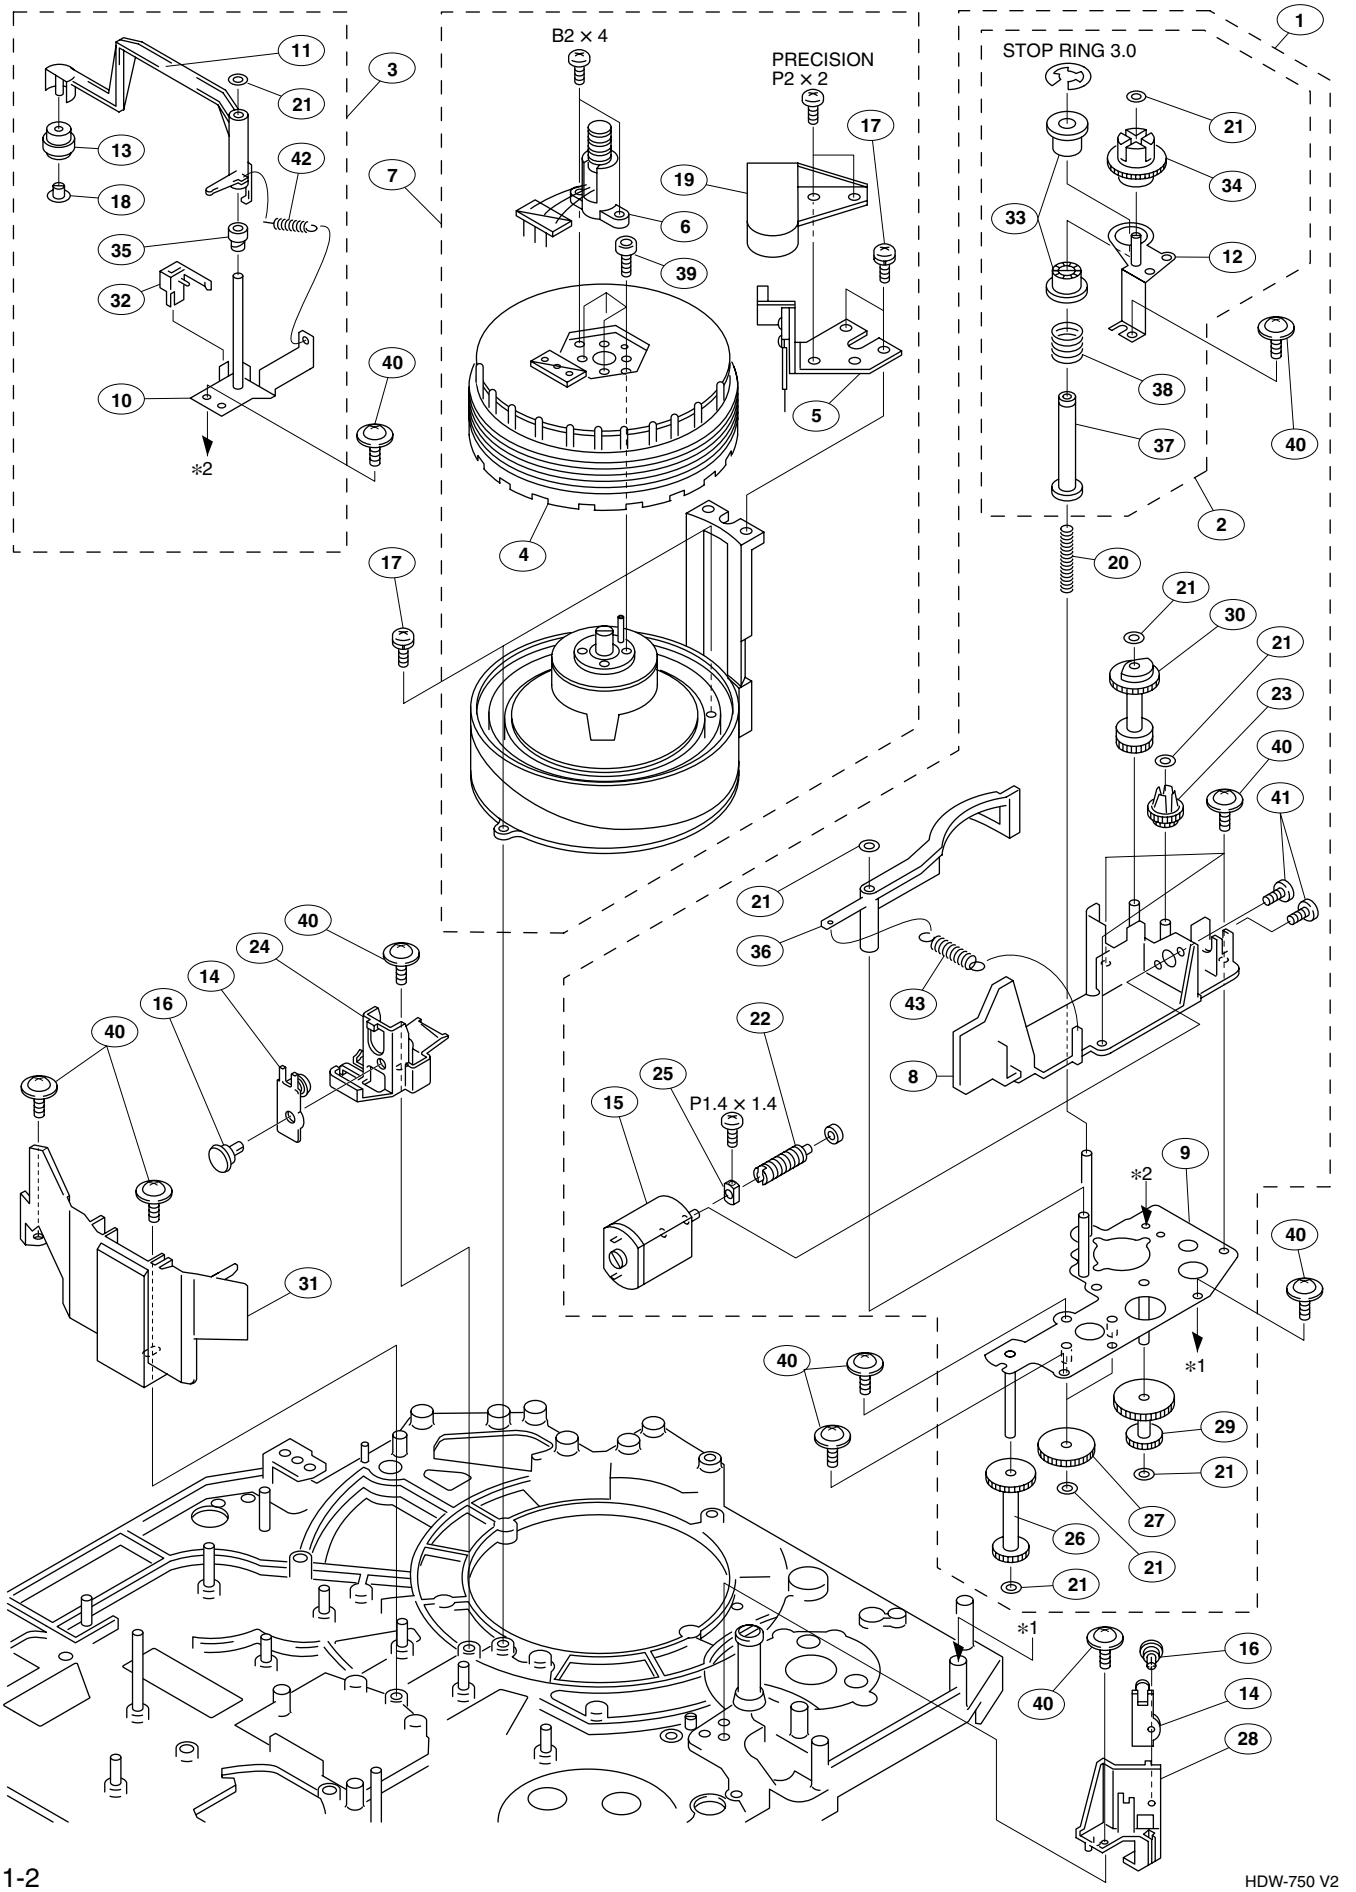

No.	Part No.	SP	Description
1	A-8279-470-B	o	GEAR BLOCK ASSY
2	A-8279-478-C	o	EJECT ASSY, MANUAL
3	A-8279-479-C	s	CLEANING ASSY
4	A-8326-897-A	s	DJR-27-R
5	A-8326-898-A	s	BRUSH ASSY(RP)
6	A-8326-899-A	s	RING ASSY(RP)SLIP
7	A-8327-237-A	s	DJH-27A-R
8	X-3605-974-1	o	BASE ASSY, MOTOR
9	X-3605-995-1	o	PLATE(B) ASSY, GEAR
10	X-3605-996-1	o	BASE ASSY, CLEANING
11	X-3605-997-3	o	ARM ASSY, CLEANING
12	X-3605-998-1	o	BASE ASSY, EJECT,MANUAL
13	X-3949-109-1	s	ROLLER ASSY, AHC
14	1-543-316-21	s	HEAD, SENSING (SMALL TYPE)
15	1-698-003-11	o	MOTOR, DC
16	2-279-715-11	s	RIVET, NYLON
17	2-640-315-01	o	SCREW(M2X5), SMALL (STEEL)
18	3-182-765-02	s	SPACER, CR (POM)
19	3-204-765-01	o	COVER, BRUSH
20	3-351-715-01	s	SPRING, COMPRESSION (COIL) (ST)
21	3-559-408-11	s	WASHER, POLYETHYLENE,DIA.1.2
22	3-603-570-02	o	GEAR, WORM
23	3-603-571-01	o	WHEEL, WORM
24	3-603-581-01	o	SENSER, FULL TOP
25	3-631-664-01	o	JOINT
26	3-629-202-01	o	GEAR (C)
27	3-629-211-01	o	GEAR(D)
28	3-629-212-02	o	HOLDER, TOP SENSOR
29	3-629-225-01	o	GEAR (E)
30	3-629-269-02	o	GEAR (CLEANING)
31	3-629-286-02	o	STOPPER, CASSETTE
32	3-629-300-03	o	ROLLER, CAM, CLEANING
33	3-629-301-01	o	GEAR(B), EJECT, MANUAL
34	3-629-303-02	o	GEAR(A), MANUAL, EJECT
35	3-629-304-02	o	ROLLER, CAM, CLEANING
36	3-629-307-01	o	ARM(B), CLEANING
37	3-629-309-03	o	ROLLER, MANUAL EJECT
38	3-629-310-03	s	SPRING, COMPRESSION
39	3-689-039-11	s	SCREW (M2.6X6), SMALL
40	3-729-013-41	s	SCREW (M1.4X3.5), WASHERHEAD(+P)
41	3-729-076-01	s	SCREW +B 2X3 (STEEL)
42	3-908-986-01	s	SPRING (ARM)
43	3-631-663-01	s	SPRING, EXTENTION

S Side Reel Chassis

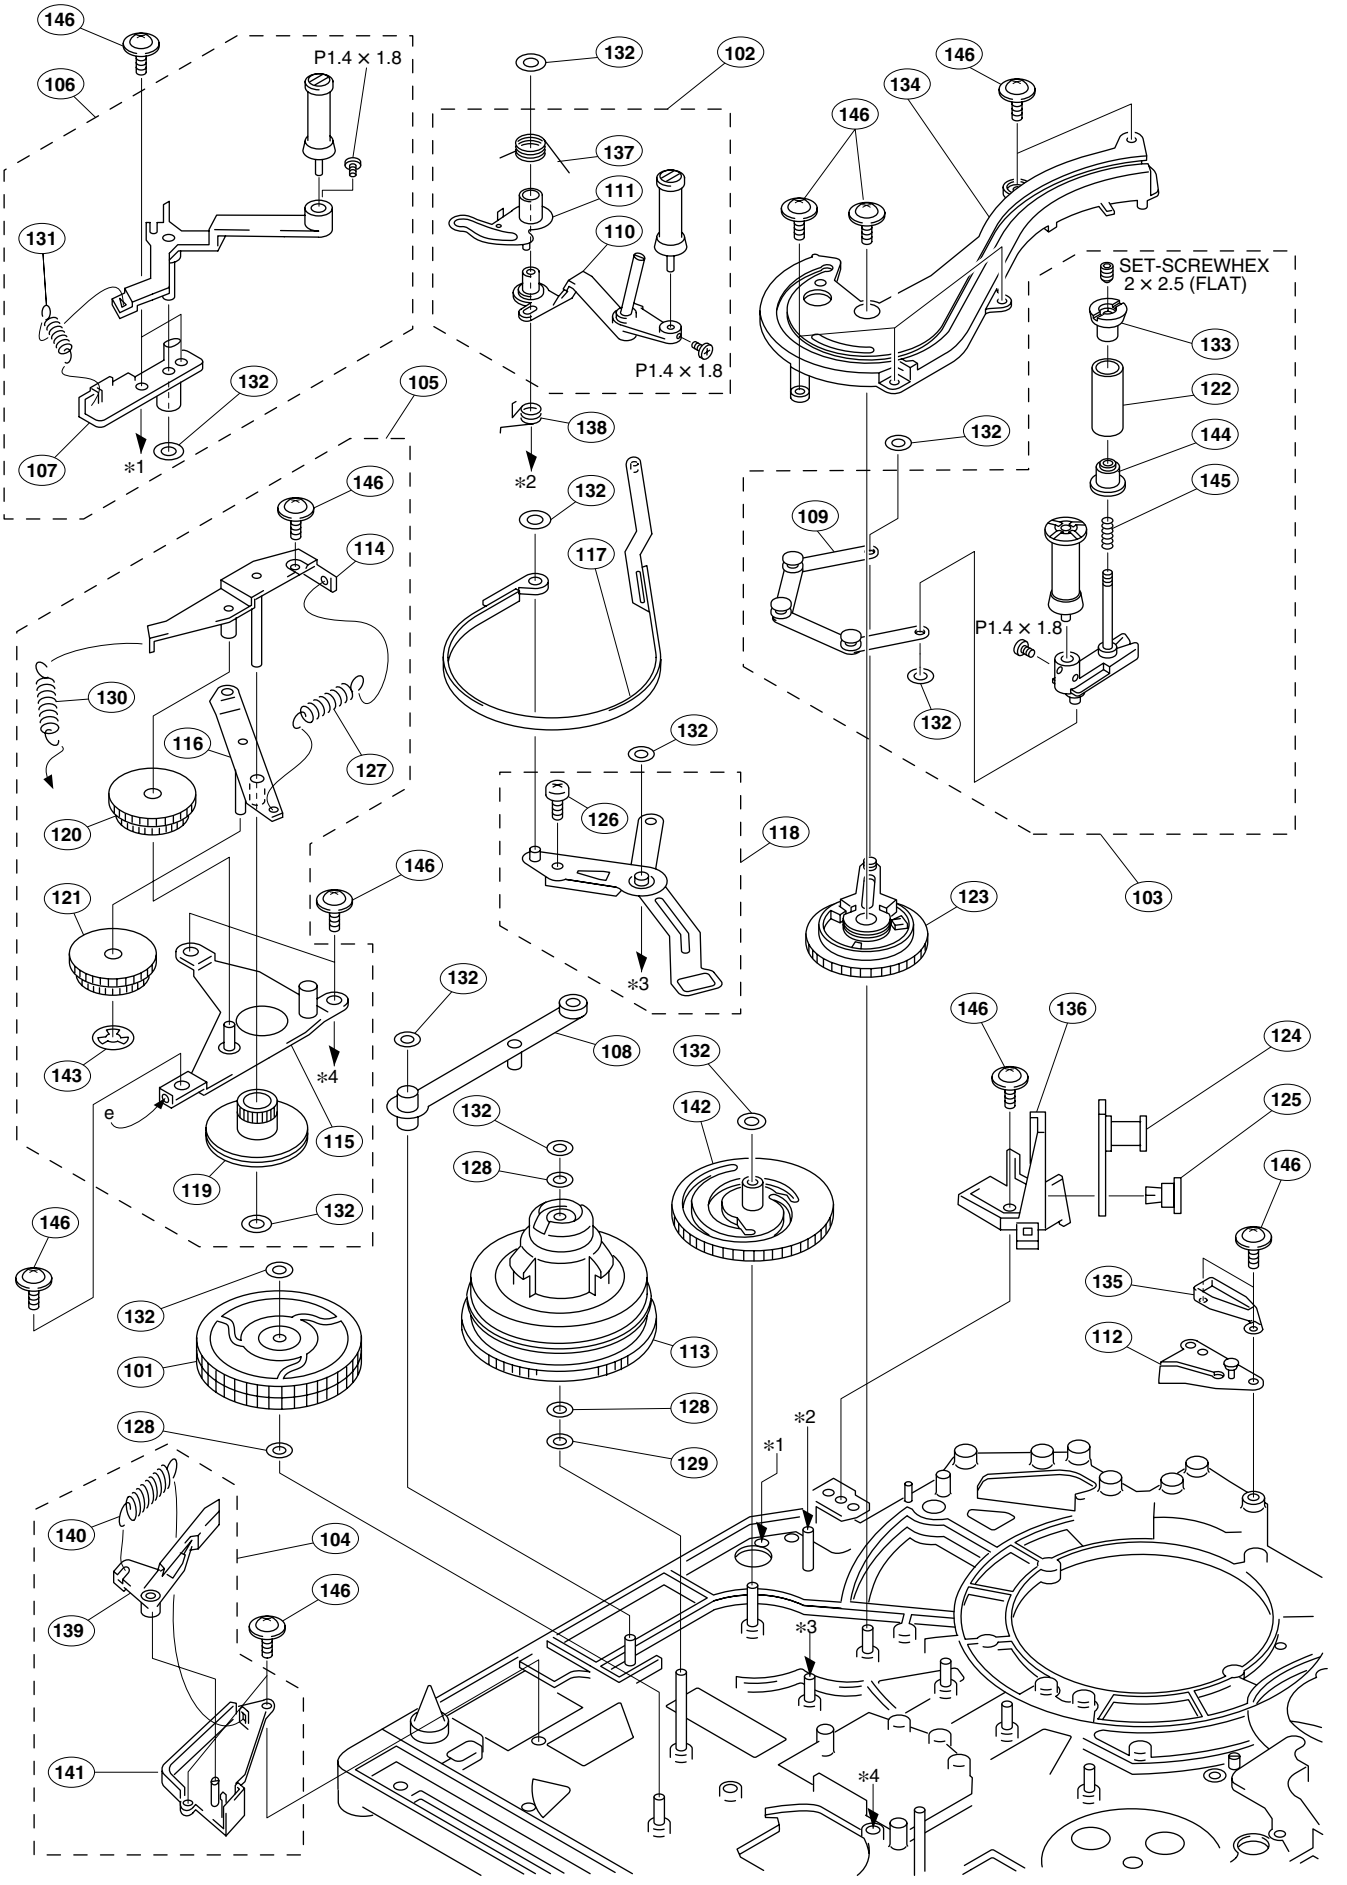

http://getMANUAL.com

No.	Part No.	SP	Description
101	A-8278-249-D	s	IDLER ASSY, S
102	A-8279-469-D	o	ARM ASSY, THREADING
103	A-8279-472-E	o	SLIDER ASSY, S
104	A-8279-475-B	o	SOFT BRAKE ASSY, (S)
105	A-8279-476-B	o	GEAR ASSY, REEL DRIVE
106	A-8279-477-E	o	S-TENSION REGURATOR ASSY
107	X-3605-959-1	o	HOLDER ASSY, BEARING
108	X-3605-964-1	o	DRAWER ASSY, S LINK
109	X-3605-966-2	o	LINK ASSY, S
110	X-3605-967-2	o	S-DRAWER ASSY
111	X-3605-969-3	o	S CAM ASSY
112	X-3605-970-3	o	PLATE ASSY, S
113	X-3605-975-2	o	TABLE ASSY, S REEL
114	X-3605-982-1	o	BASE ASSY, PULLEY
115	X-3605-983-1	o	BASE ASSY, GEAR
116	X-3605-984-1	o	BASE ASSY, ONEWAY
117	X-3605-986-1	s	BAND(S) ASSY, TEN-REGI
118	X-3605-987-1	o	LINK(S) ASSY
119	X-3605-991-2	o	PULLEY ASSY, RELAY
120	X-3605-992-1	o	GEAR ASSY, T-ONEWAY
121	X-3605-993-1	o	GEAR ASSY, S-ONEWAY
122	X-3678-091-3	s	COLLER ASSY
123	X-3678-664-3	s	GEAR ASSY, S
124	1-543-316-21	s	HEAD, SENSING (SMALL TYPE)
125	2-279-715-11	s	RIVET, NYLON
126	2-640-315-01	o	SCREW(M2X5), SMALL (STEEL)
127	3-173-842-01	s	SPRING, TENSION (COIL)(ST)
128	3-303-961-01	s	WASHER, POLY
129	3-303-961-11	s	WASHER, POLY
130	3-323-657-01	s	SPRING, TENSION (COIL) (STEEL)
131	3-351-448-01	s	SPRING(LOCK LEVER)(COIL) (ST)
132	3-559-408-11	s	WASHER, POLYETHYLENE, DIA.1.2
133	3-603-638-01	s	FLANGE, UPPER
134	3-628-984-05	o	RAIL, S
135	3-628-996-03	o	GUARD, S
136	3-629-209-03	o	HOLDER, END SENSOR
137	3-629-216-01	s	SPRING, GUIDE, S
138	3-629-217-02	o	SPRING, ARM, S
139	3-629-233-01	o	BRAKE, SOFT
140	3-629-240-01	s	SPRING, BRAKE
141	3-629-255-02	o	BASE, BRAKE
142	3-629-256-03	o	GEAR, CAM SUB
143	3-669-595-00	s	WASHER, 2 (PLA)
144	3-680-230-01	s	FLANGE, LOWER
145	3-729-011-01	s	SPRING, COMPRESSION(COIL) (ST)
146	3-729-013-41	s	SCREW(M1.4X3.5), WASHERHEAD(+P)

T Side Reel Chassis

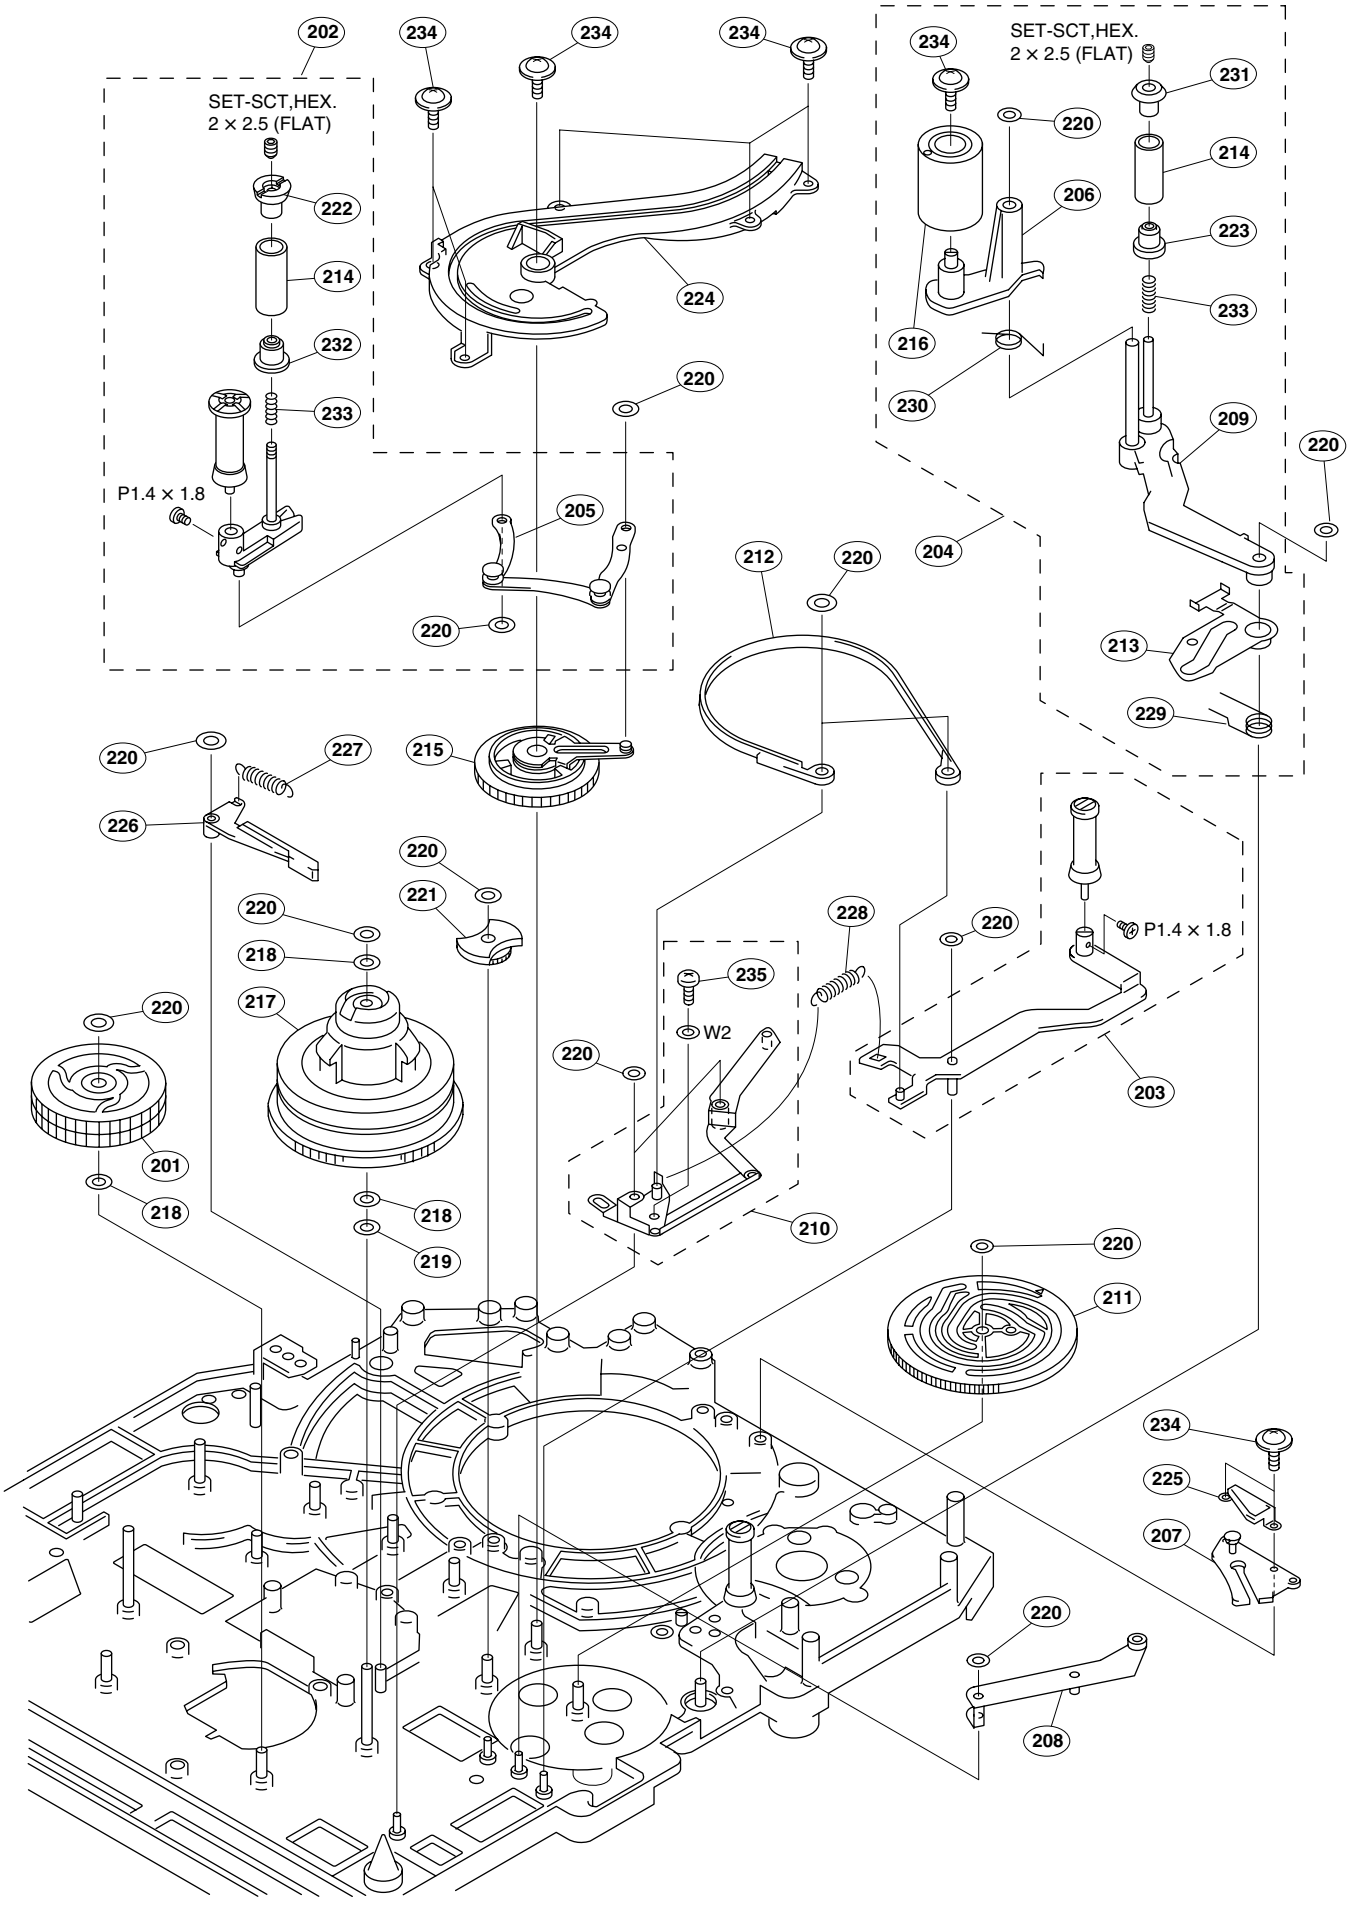

No.	Part No.	SP	Description
201	A-8279-077-A	s	IDLER ASSY, T
202	A-8279-471-E	o	SLIDER ASSY, T
203	A-8279-474-B	o	T-TENSION REGULETOR ASSY
204	A-8279-480-C	o	ARM ASSY, PINCH
205	X-3605-965-2	o	LINK ASSY, T
206	X-3605-968-3	o	PINCH HOLDER ASSY
207	X-3605-971-3	o	PLATE ASSY, T
208	X-3605-972-1	o	LINK ASSY, F
209	X-3605-973-3	o	ARM ASSY, PINCH
210	X-3605-979-3	o	LINK ASSY(B), EJECT
211	X-3605-990-1	o	GEAR ASSY, CAM
212	X-3605-994-2	s	BAND ASSY, TENSION REGULATOR(T)
213	X-3605-999-1	o	ARM ASSY,
214	X-3678-091-3	s	COLLER ASSY
215	X-3678-665-3	s	GEAR ASSY, T
216	X-3678-926-1	s	PINCH ROLLER ASSY
217	X-3679-500-4	s	TABLE ASSY, T REEL
218	3-303-961-01	s	WASHER, POLY
219	3-303-961-11	s	WASHER, POLY
220	3-559-408-11	s	WASHER, POLYETHYLENE,DIA.1.2
221	3-603-591-01	o	GEAR, INTERMITTENT
222	3-603-638-01	s	FLANGE, UPPER
223	3-605-851-01	s	FLANGE, UNDER
224	3-628-985-05	o	RAIL, T
225	3-629-203-03	o	GUARD, T
226	3-629-233-01	o	BRAKE, SOFT
227	3-629-240-01	s	SPRING, BRAKE
228	3-629-295-02	s	SPRING, EXTENSION
229	3-629-316-02	s	SPRING, TORSION
230	3-629-810-01	s	SPRING, TORSION
231	3-679-729-03	s	FLANGE, UPPER
232	3-680-230-01	s	FLANGE, LOWER
233	3-729-011-01	s	SPRING, COMPRESSION(COIL) (ST)
234	3-729-013-41	s	SCREW(M1.4X3.5), WASHERHEAD(+P)
235	3-374-615-01	s	SCREW +B M2X3 (EP-FE/CU, NI, CR)

FE/CTL and CUE/TC Heads

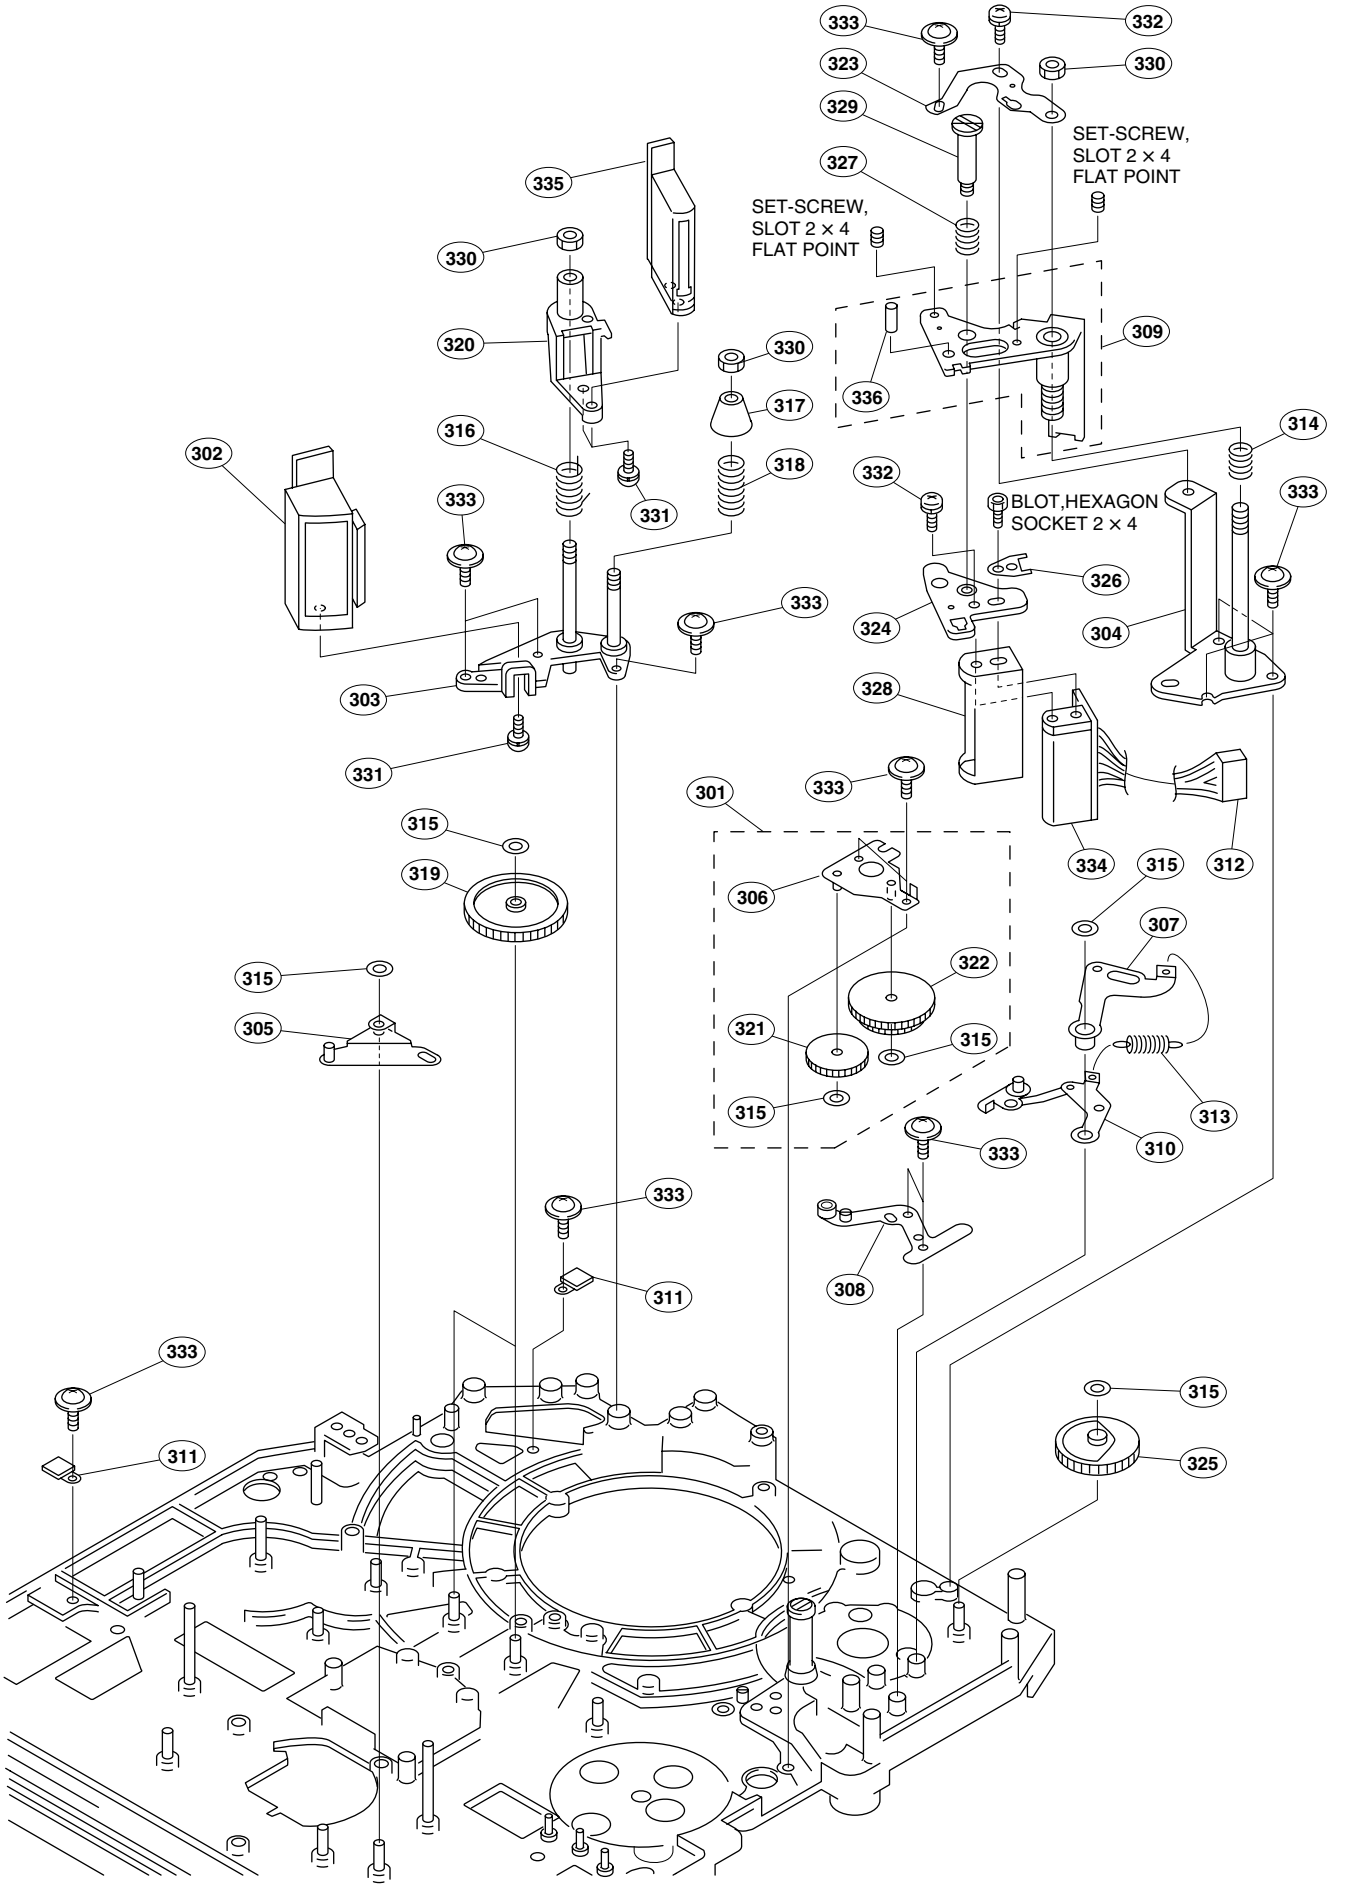

No.	Part No.	SP	Description
301	A-8279-473-A	o	GEAR BLOCK (B) ASSY
302	X-3605-885-1	s	HEAD ASSY, (FE291-21A)
303	X-3605-961-3	o	PLATE ASSY, HEAD CTL
304	X-3605-962-1	o	BASE ASSY, A/T HEAD
305	X-3605-976-2	o	LINK ASSY(A), EJECT
306	X-3605-978-1	o	PLATE ASSY, GEAR
307	X-3605-980-2	o	LEVER ASSY, PRESS
308	X-3605-981-2	o	PLATE ASSY, GUIDE
309	X-3605-985-2	o	PLATE ASSY, A/T
310	X-3605-988-3	o	ARM ASSY, PRESS
311	1-810-599-11	s	SENSOR, DEW CONDENSATION
312	1-960-877-11	o	HARNESS, SUB (CUE-MDC)
313	3-489-325-01	s	SPRING, TENSION (STEEL)
314	3-534-236-00	s	SPRING, COMPRESSION
315	3-559-408-11	s	WASHER, POLYETHYLENE, DIA.1.2
316	3-603-615-02	s	SPRING, COIL,HEAD
317	3-603-672-01	o	SPACER TAPER
318	3-603-678-01	s	SPRING, COMPRESSION
319	3-603-691-01	o	GEAR, MIDWAY
320	3-628-987-01	o	ARM, CTL
321	3-629-200-01	o	GEAR (A)
322	3-629-201-01	o	GEAR (B)
323	3-629-222-01	o	DAMPER, AT
324	3-629-264-02	o	PLATE, AT HEAD
325	3-629-268-03	o	GEAR, CAM, PRESS
326	3-631-500-01	o	PLATE, AT LOCK
327	3-669-316-00	s	SPRING, COMPRESSION (STEEL)
328	3-679-788-01	o	CASE, SHIELD
329	3-680-223-01	s	SHAFT
330	3-698-829-01	s	NUT, NYLON
331	3-729-012-01	s	SCREW (M2X5) (STEEL)
332	3-729-012-21	s	SCREW (M2X4) (ST)
333	3-729-013-41	s	SCREW(M1.4X3.5), WASHERHEAD(+P)
334	8-825-779-61	s	HEAD, AU PS244-2103L
335	8-825-779-72	s	CTL HEAD, PS244-21D
336	3-669-481-02	s	PIN PARALLEL (1X4)

Belt and Capstan Motor

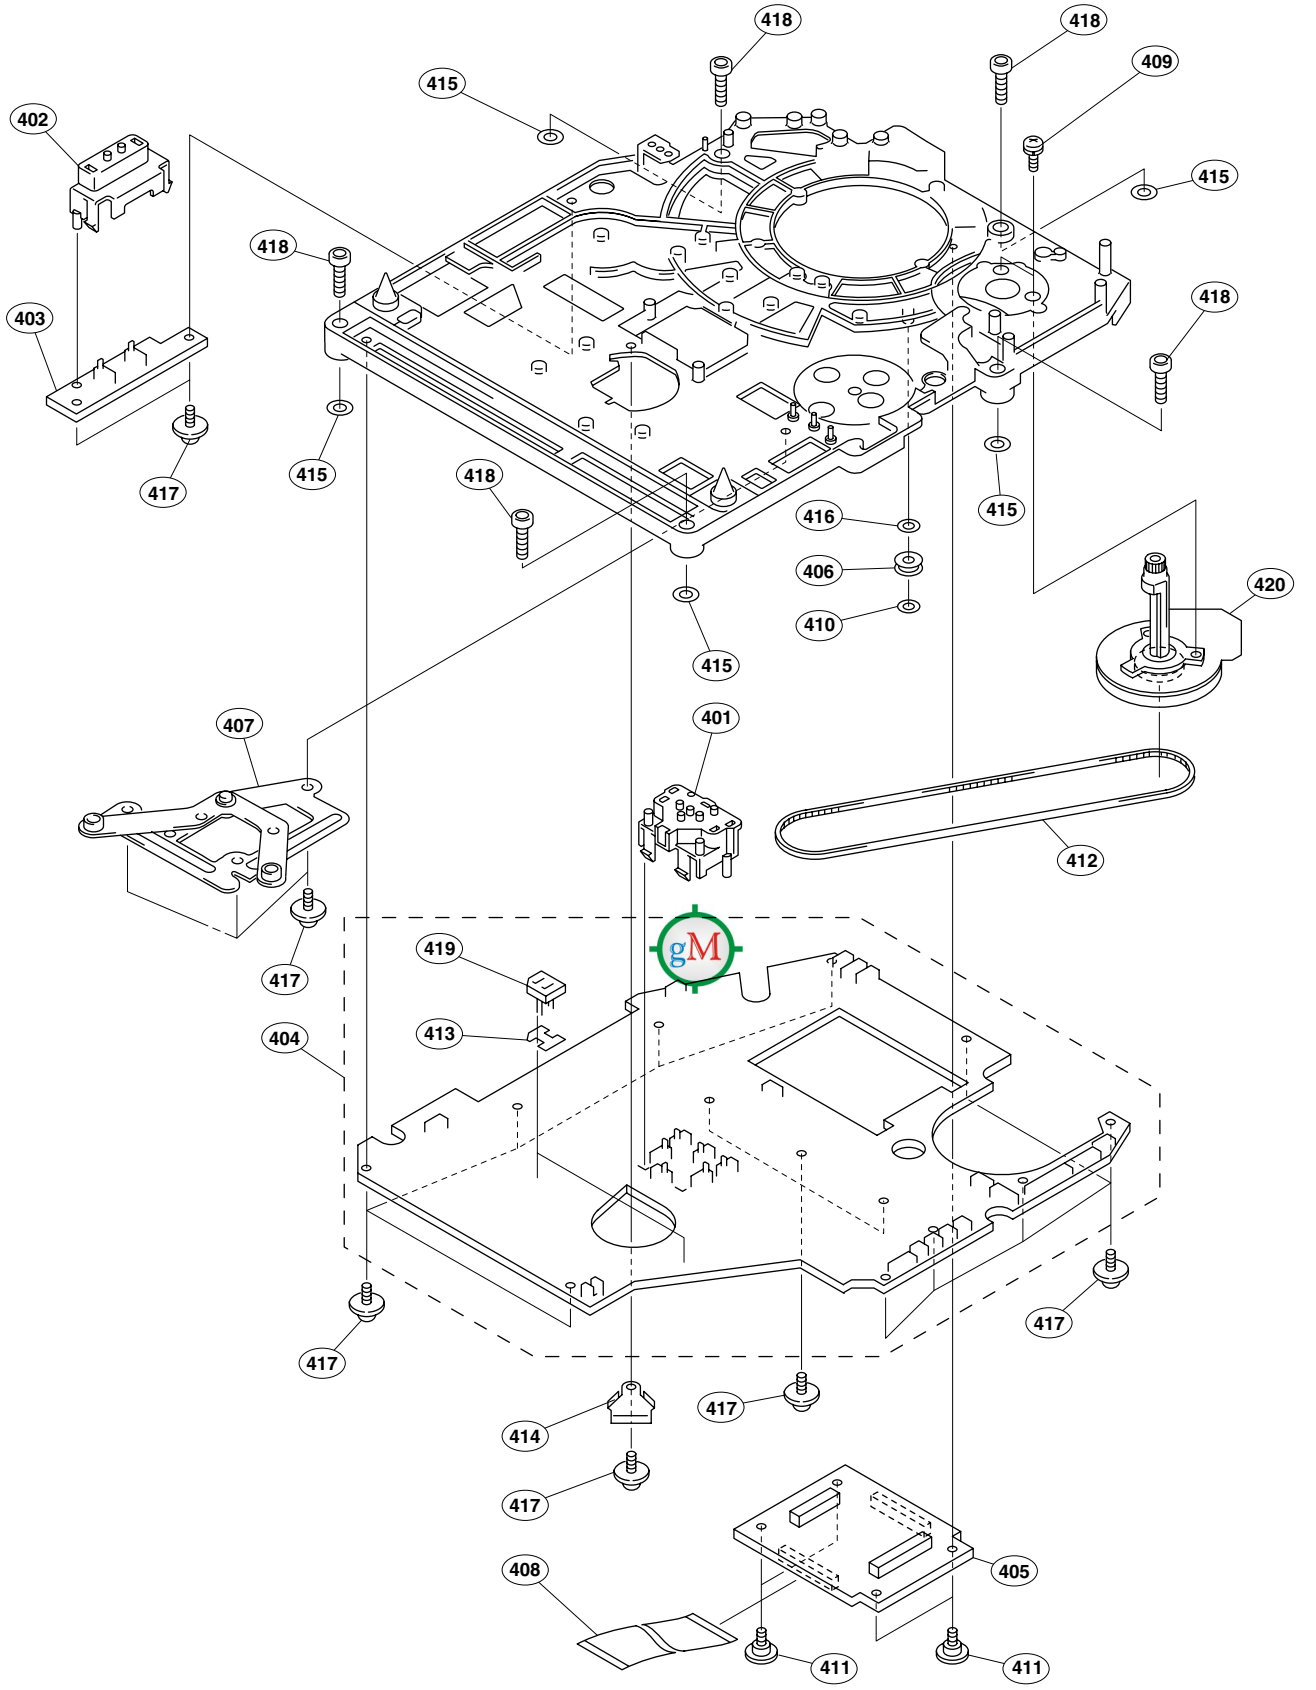

No.	Part No.	SP	Description
401	A-8279-512-A	o	HOLDER ASSY SENSOR(ID)
402	A-8279-513-A	o	HOLDER ASSY SENSOR(REC)
403	A-8326-155-A	o	MOUNTED CIRCUIT BOARD,SE-613
404	A-8326-333-A	o	MOUNTED CIRCUIT BOARD,MDC-13
405	A-8326-337-A	o	MOUNTED CIRCUIT BOARD,MDR-14
406	X-3608-100-1	o	PULLEY ASSY
407	X-3678-698-1	o	ARM ASSY,JOINT
408	1-783-287-13	s	CABLE, FLEXIBLE FLAT (45 CORE)
409	2-640-315-01	o	SCREW(M2X5)
410	3-559-408-11	s	WASHER,POLYETHYLENE,DIA.1.2
411	3-631-895-01	s	SCREW, STEP
412	3-629-223-01	s	BELT,TIMMING
413	3-629-224-01	o	SPACER,GP2S09
414	3-629-827-01	o	PLATE,GROUND
415	3-669-465-01	s	WASHER(1.5), STOPPER (PA)
416	3-701-436-11	s	WASHER (1.6X0.25) (PLASTIC)
417	3-729-013-41	s	SCREW(M1.4X3.5),WASHERHEAD(+P)
418	3-729-084-41	s	BOLT (M2X8), HEXAGON HOLE
419	8-719-939-23	s	PHOTO SENSOR GP2S09C
420	A-8328-110-A	o	SCV12B/J-RP

Cassette Compartment

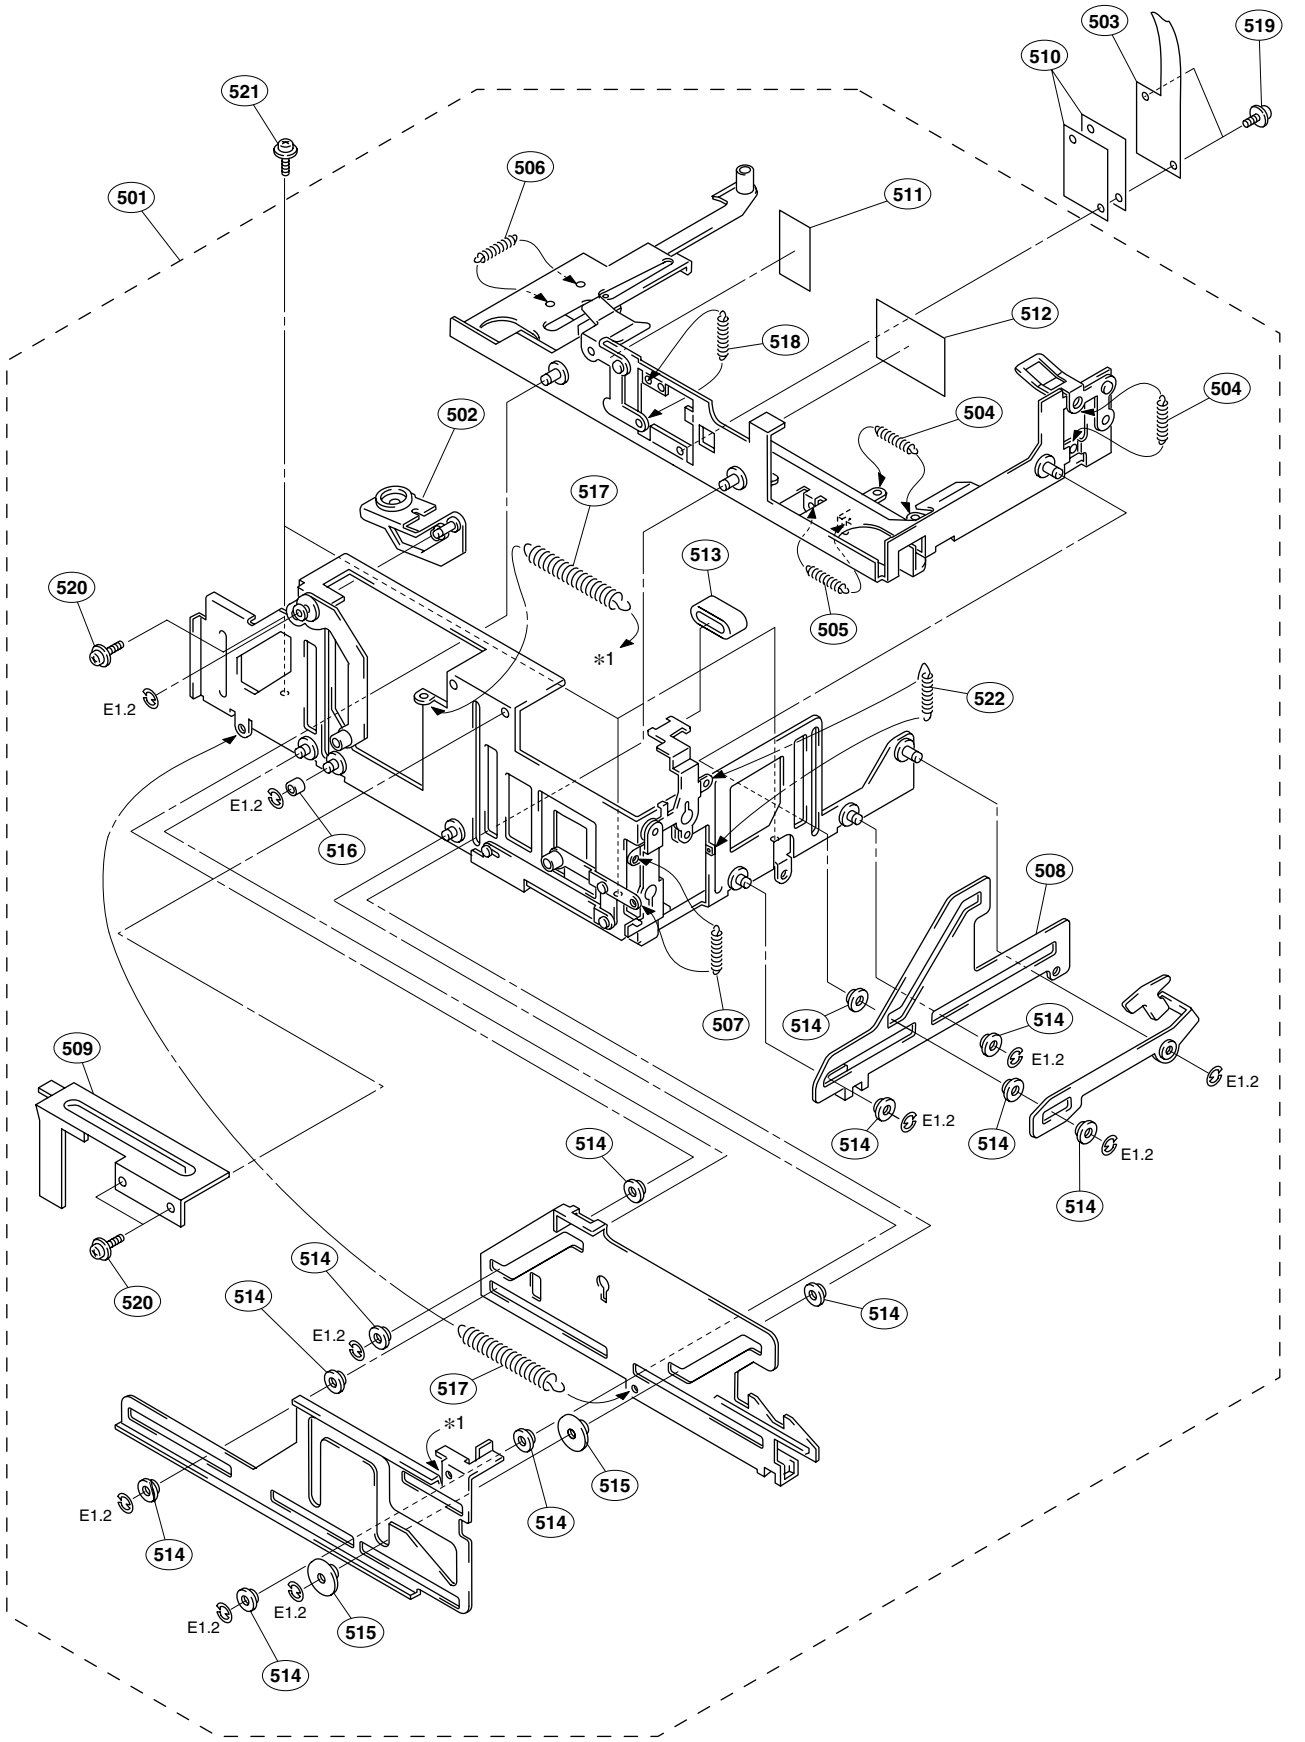

No.	Part No.	SP	Description
501	A-8318-064-G	s	CASSETTE COMPARTMENT ASSY (RP)
502	X-3678-080-5	o	ARM(L) ASSY, LID
503	1-679-693-11	s	PRINTED WIRING BOARD, FL-283
504	3-319-686-01	s	SPRING, TENSION (STEEL)
505	3-329-998-01	s	SPRING, TENSION (COIL) (ST)
506	3-343-503-01	s	SPRING, TENSION (STEEL)
507	3-571-829-00	s	SPRING, TENSION
508	3-612-386-01	o	PLATE(A), CAM
509	3-614-802-05	o	PLATE, STOPPER
510	3-614-804-01	o	SHEET, ANTENNA(A)
511	3-614-805-01	o	SHEET, ANTENNA(B)
512	3-614-806-01	o	SHEET, ANTENNA(C)
513	3-624-199-01	s	RUBBER, BRAKE (EPDM)
514	3-680-032-01	o	ROLLER(A)
515	3-680-081-01	o	ROLLER(B)
516	3-680-258-01	o	ROLLER SOPPER
517	3-680-995-01	o	SPRING, EXTENSION
518	3-727-927-11	s	SPRING (POWER TENSION), TENSION
519	3-729-013-01	s	SCREW(M1.4X1.6), WASHER HEAD
520	3-729-013-21	s	SCREW(M1.4X2.5), WASHER HEAD(ST)
521	3-729-013-41	s	SCREW(M1.4X3.5), WASHERHEAD(+P)
522	4-606-897-01	s	SPRING, TENSION

Outside Panel and Main Block

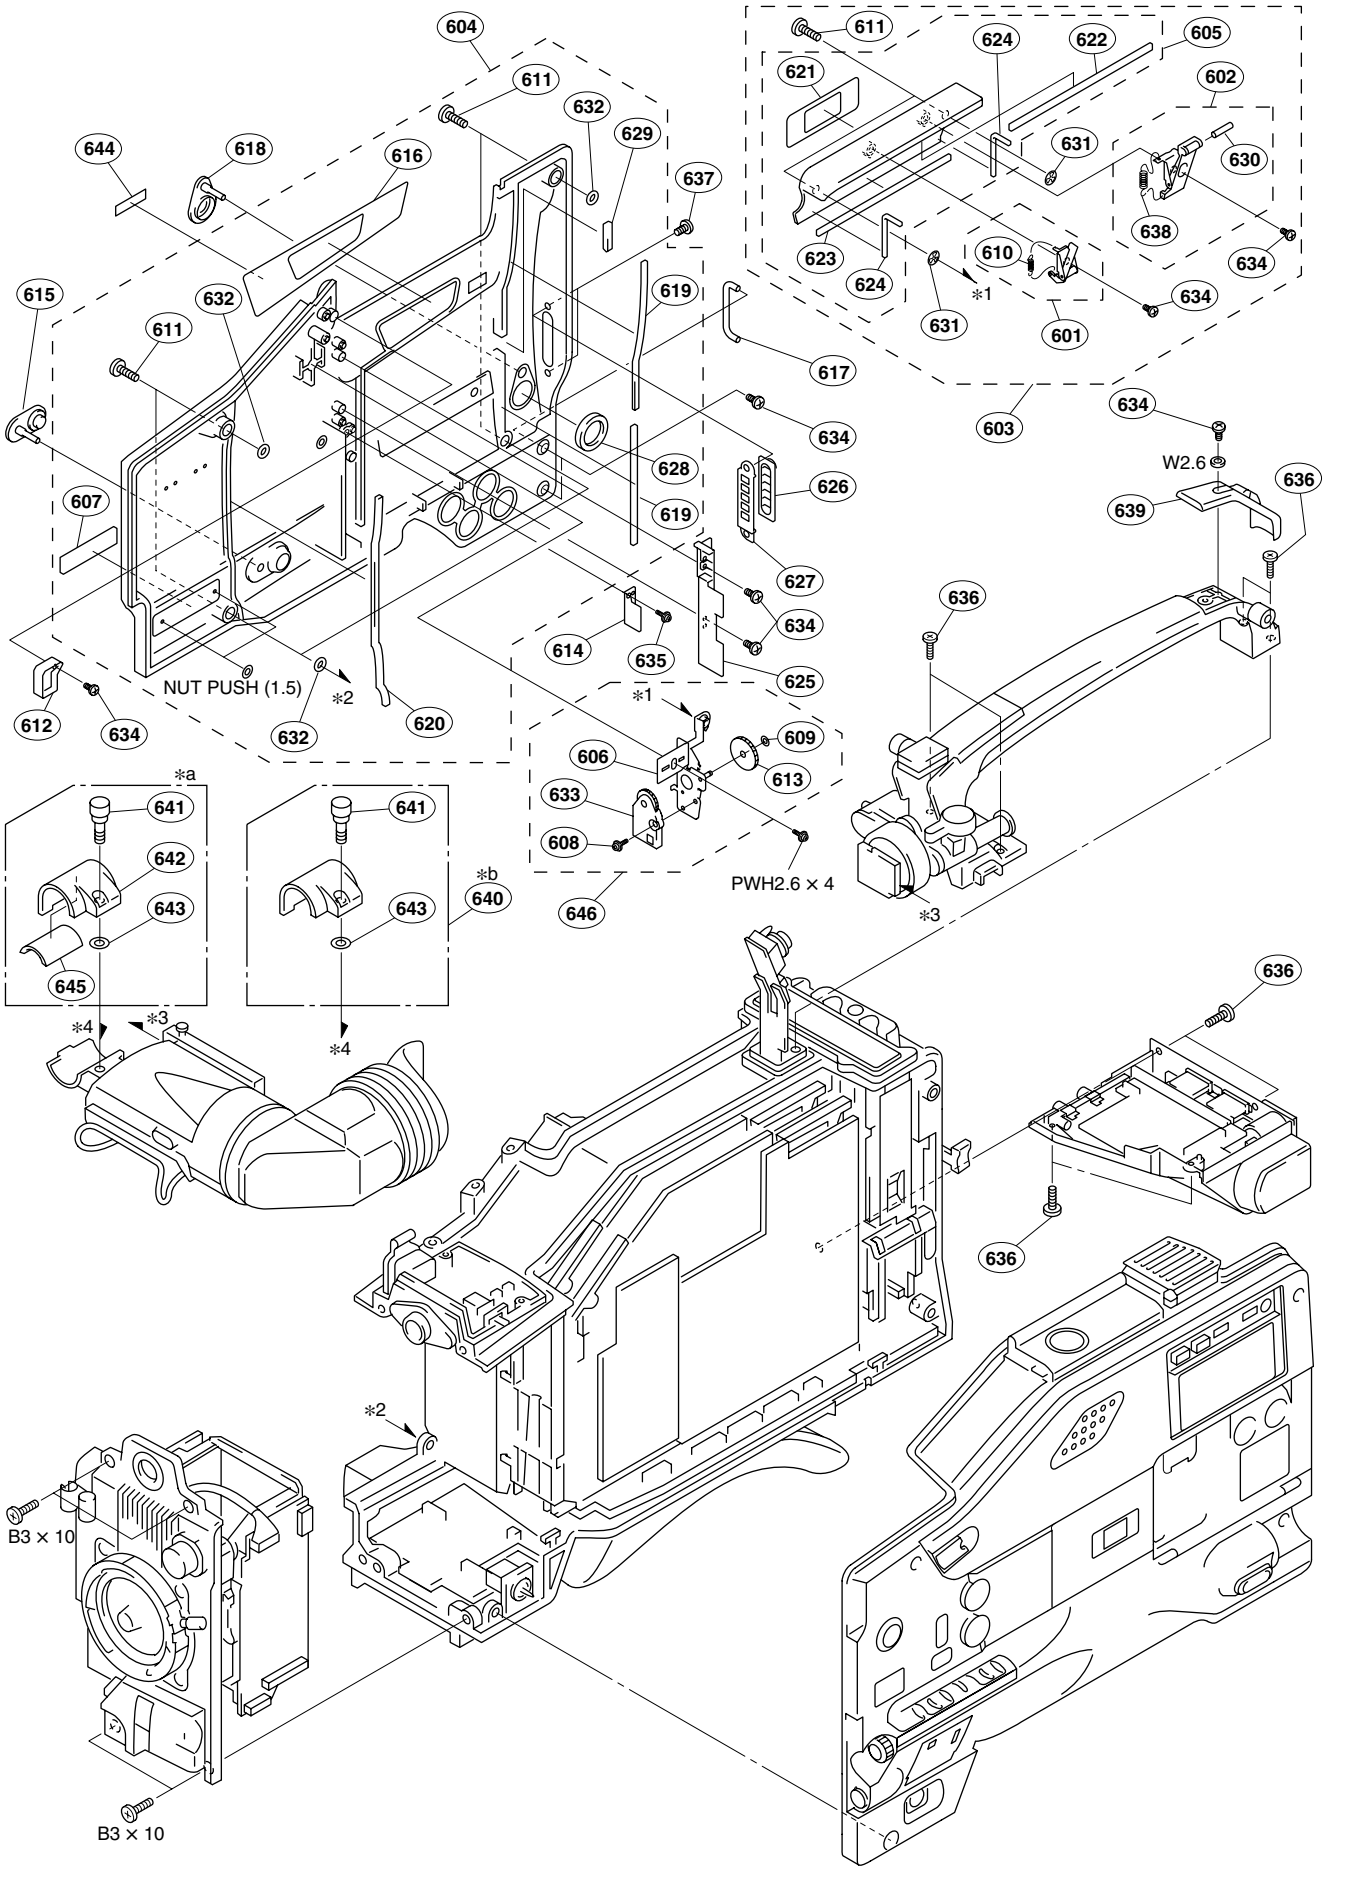

http://getMANUAL.com

No.	Part No.	SP	Description	
Note				
*a: Serial No.10001 -				
*b: Serial No.70001 -				
601	A-8278-840-B	s	CASSETTE RETAINER ASSY	
602	A-8279-344-A	s	ARM ASSY, CASSETTE, LOCK	
603	A-8279-484-C	o	LID ASSY, FRONT	
604	X-3608-109-4	o	PANEL SUB ASSY,OUT SIDE	
605	X-3608-110-3	o	LID, FRONT SUB ASSY	
606	X-3608-131-1	o	ARM ASSY, LID	
607	3-193-229-01	s	EMBLEM, HDVS	
608	3-203-203-01	s	SCREW (2X7), DAMPER (+PSW)	
609	3-315-384-31	s	WASHER, STOPPER	(PLA)
610	3-329-998-01	s	SPRING, TENSION (COIL)	(ST)
611	3-603-680-01	s	STAINLESS SCREW +B3X12	
612	3-611-304-01	o	GUIDE, CASSETTE IN	
613	3-611-654-01	o	GEAR, MIDWAY	
614	3-613-664-01	o	GUIDE(2), CASSETTE	
615	3-629-424-01	s	DROP PROTECTION(ME)	
616	3-629-425-01	o	WINDOW(L), CASSETTE	
617	3-629-426-01	o	GUARD	
618	3-629-427-01	s	CAP, REMOTE	
619	3-629-428-01	o	RUBBER, DUST PROTECTION(S)	
620	3-629-429-01	o	RUBBER, DUST PROTECTION(L)	
621	3-629-432-01	o	WINDOW(U), CASSETTE	
622	3-629-433-02	s	RUBBER, DROP PROTECTION(F-LID)	
623	3-629-434-01	s	RUBBER, DROP PROTECTION(LID)B	
624	3-629-435-01	s	RUBBER, DROP PROTECTION(LID)A	
625	3-631-421-02	o	GUIDE, CASSETTE	
626	3-631-422-01	o	PLATE, HEAT RESISTING	
627	3-631-423-01	o	NUT PLATE(HEAT, RESISTING)	
628	3-631-424-01	o	RUBBER, DROP PROTECTION(REMOTE)	
629	3-631-546-01	o	RUBBER, DUST PROTECTION(SS)	
630	3-661-278-01	s	PIN, PARALLEL	
631	3-669-596-00	s	WASHER, 2.3	(PLA)
632	3-672-250-01	o	RING(M2.6), O	(CR)
633	3-681-528-11	s	DAMPER	
634	3-694-181-01	s	AROCK PRECISION +P2.6 TYPE 1	
635	3-729-013-21	s	SCREW(M1.4X2.5), WASHER HEAD(ST	
636	3-742-074-11	s	SCREW (3)	
637	3-742-886-01	s	SCREW (M2X4)	(ST)
638	3-949-973-01	s	SPRING, TENSION	
639	X-3679-292-3	o	COVER ASSY, REAR	
640 *b	X-3608-149-1	o	UPPER ASSY, MIC HOLDER	
641	3-657-657-00	s	SCREW (M5)	
642 *a	3-692-134-01	o	MIC CLAMP	
643	3-165-904-01	s	WASHER, SCREW STOPPER	
644	3-633-291-01	o	STICKER, TF	
645 *a	3-692-138-01	s	CUSHION MIC RUBBER (IIR)	
646	A-8279-503-A	o	ASSY, CASSE-CONDAMPER	

CCD Block and Front Panel

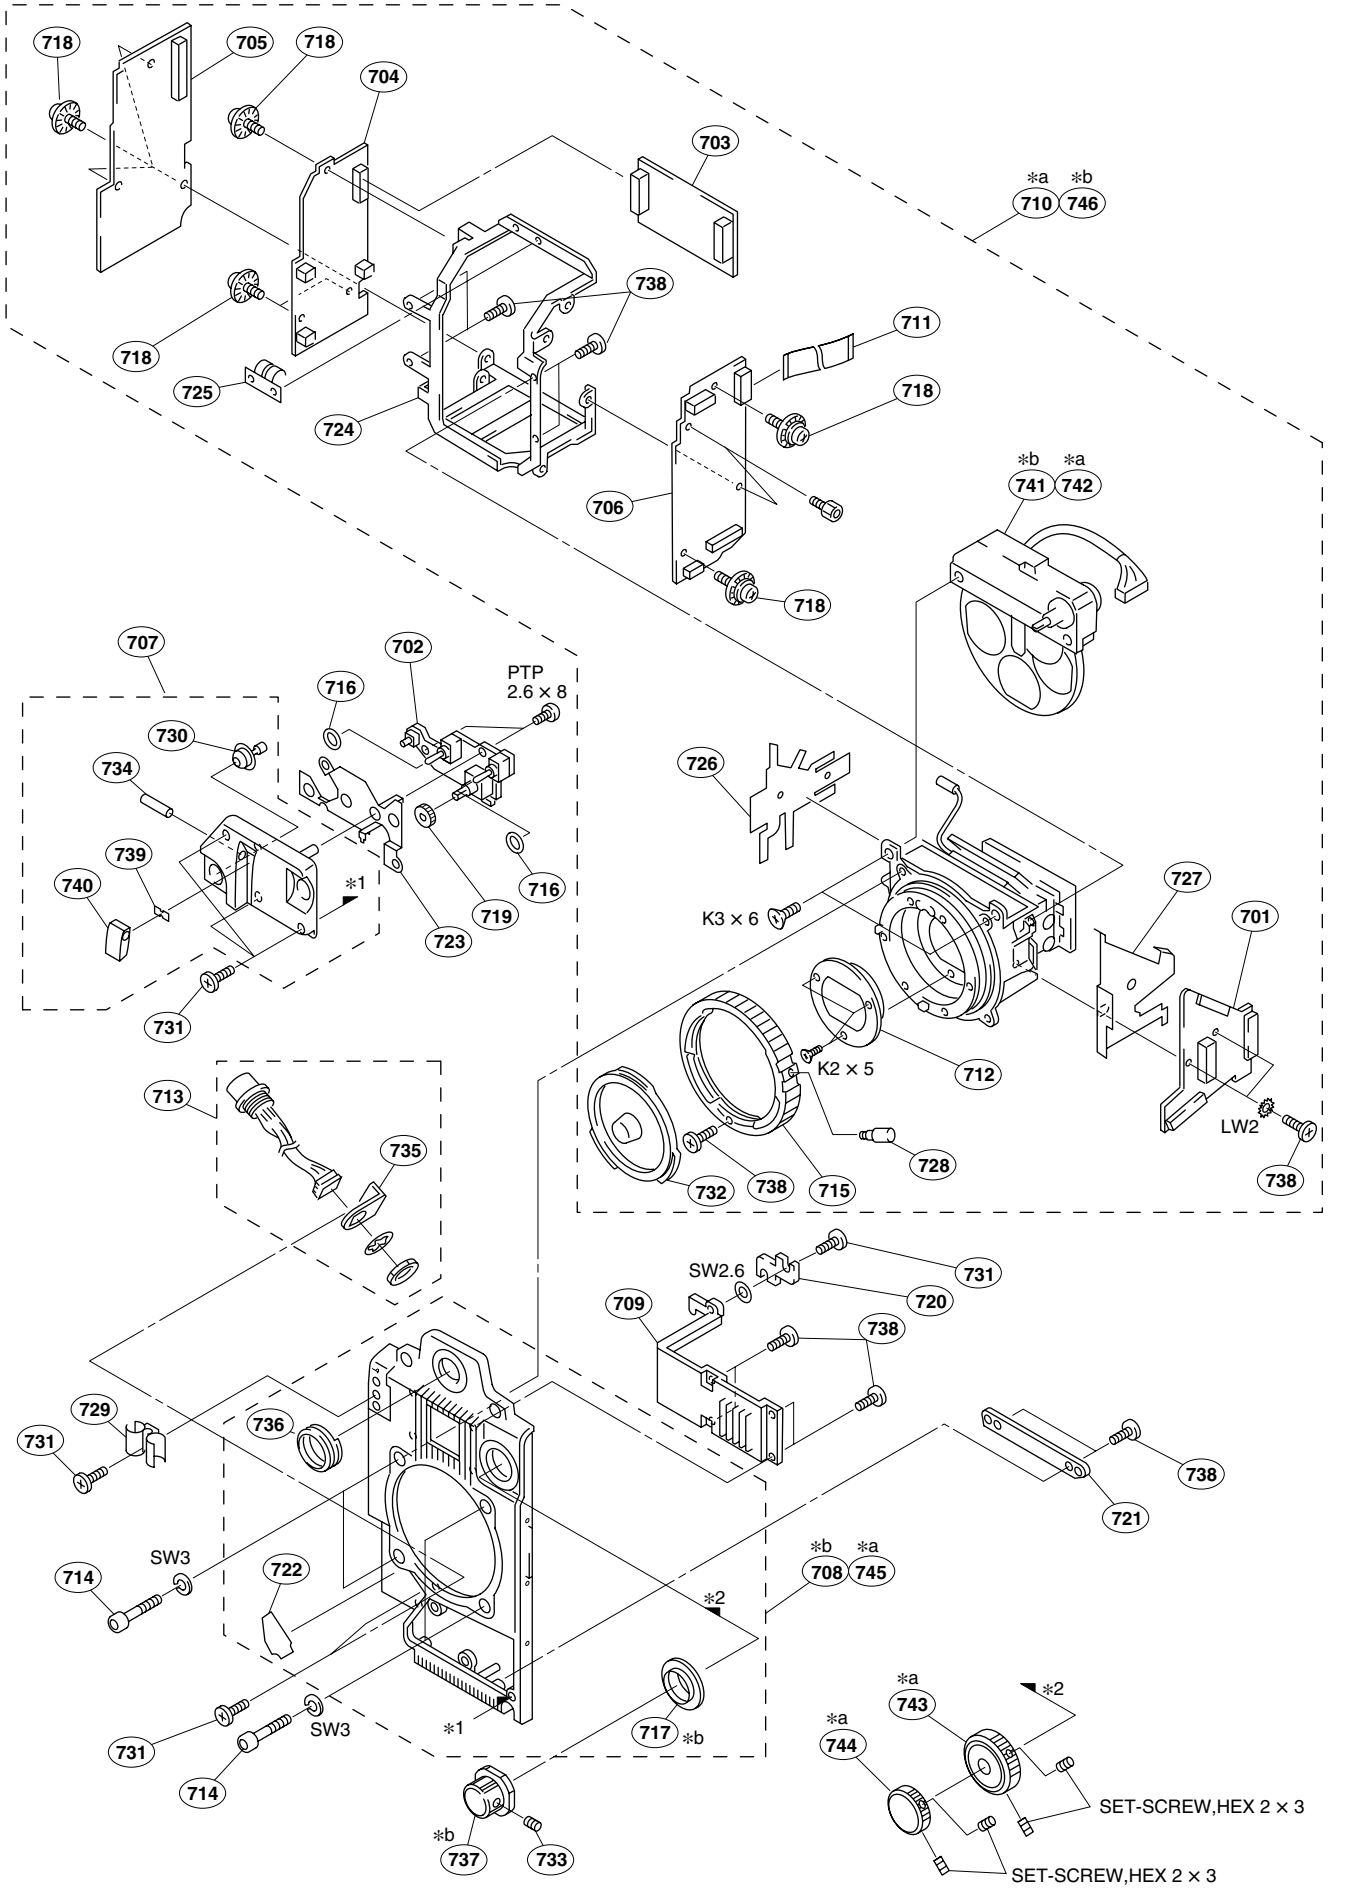

No.	Part No.	SP	Description
Note			
*a: Serial No.10001 -			
*b: Serial No.70001 -			
701	A-8326-016-A	o	MOUNTED CIRCUIT BOARD, CN-2037
702	A-8326-031-A	o	MOUNTED CIRCUIT BOARD, SW-1031
703	A-8326-037-A	o	MOUNTED CIRCUIT BOARD, TG-219
704	A-8326-042-A	o	MOUNTED CIRCUIT BOARD, PA-253
705	A-8326-043-A	o	MOUNTED CIRCUIT BOARD, RP-123
706	A-8326-044-A	o	MOUNTED CIRCUIT BOARD, DR-433
707	X-3608-112-1	o	SUB ASSY, FRONT SW
708 *b	X-3608-113-1	o	SUB ASSY, FRONT FRAME
709	X-3608-115-2	o	HEAT SINK ASSY
710 *a	----------		HKDW-C750R
711	1-757-273-11	s	CABLE, FLEXIBLE FLAT (30 CORE)
712	1-758-483-11	o	FILTER UNIT, OPTICAL
713	1-959-401-11	o	HARNESS (LENS)
714	2-623-773-11	s	BOLT (M3X8), STAINLESS
715	3-186-442-01	o	RING, MOUNT
716	3-312-823-01	s	PACKING, KNOB
717 *b	3-603-644-01	o	SPACER(FILTER)
718	3-623-677-01	s	PRECISION SCREW(M1.4X3.5), EXT
719	3-624-135-01	s	KNOB, VR(AUDIO)
720	3-629-465-01	o	RETAINER, HEAT PIPE
721	3-629-474-01	o	BLAIND PLATE
722	3-629-476-01	o	SHEET, PROTECTION
723	3-629-480-01	o	PLATE(FR), SHIELD
724	3-629-631-03	o	STAY, CHB
725	3-629-632-02	o	FINGER, SHELD
726	3-631-369-02	o	SHEET(OUT), CCD GND
727	3-631-370-02	o	SHEET(IN), CCD GND
728	3-678-629-00	s	LEVER, MOUNT
729	3-679-659-03	o	CLAMP, CABLE (PP)
730	3-679-668-01	s	BUTTON, VTR START
731	3-694-181-01	s	AROCK PRECISION +P2.6 TYPE 1
732	3-699-048-01	s	CAP, MOUNT
733	3-701-505-00	s	SET-SCREW, HEX 3X3 ST
734	3-703-357-05	o	PIN, PARALLEL(DIA.1.6X16)
735	3-709-105-01	o	BRACKET, LENS
736	3-710-024-01	o	PACKING, VF
737 *b	3-710-054-01	s	KNOB, FILTER
738	3-719-381-01	s	SCREW +P M2X4 (ZNBK)(LOCK)
739	3-742-066-11	o	SPRING, SHUTTER
740	3-742-067-04	o	LID, SHUTTER
741 *b	1-758-609-11	s	DISK UNIT, FILTER
742 *a	1-475-492-11	o	DISK UNIT, FILTER
743 *a	3-679-671-02	s	KNOB, FILTER (CC)
744 *a	3-679-670-03	s	KNOB, FILTER (ND)
745 *a	X-3608-166-1	o	SUB ASSY (2M), FRONT FRAME
746 *b	----------		HKDW-C750NR

Inside Panel-1

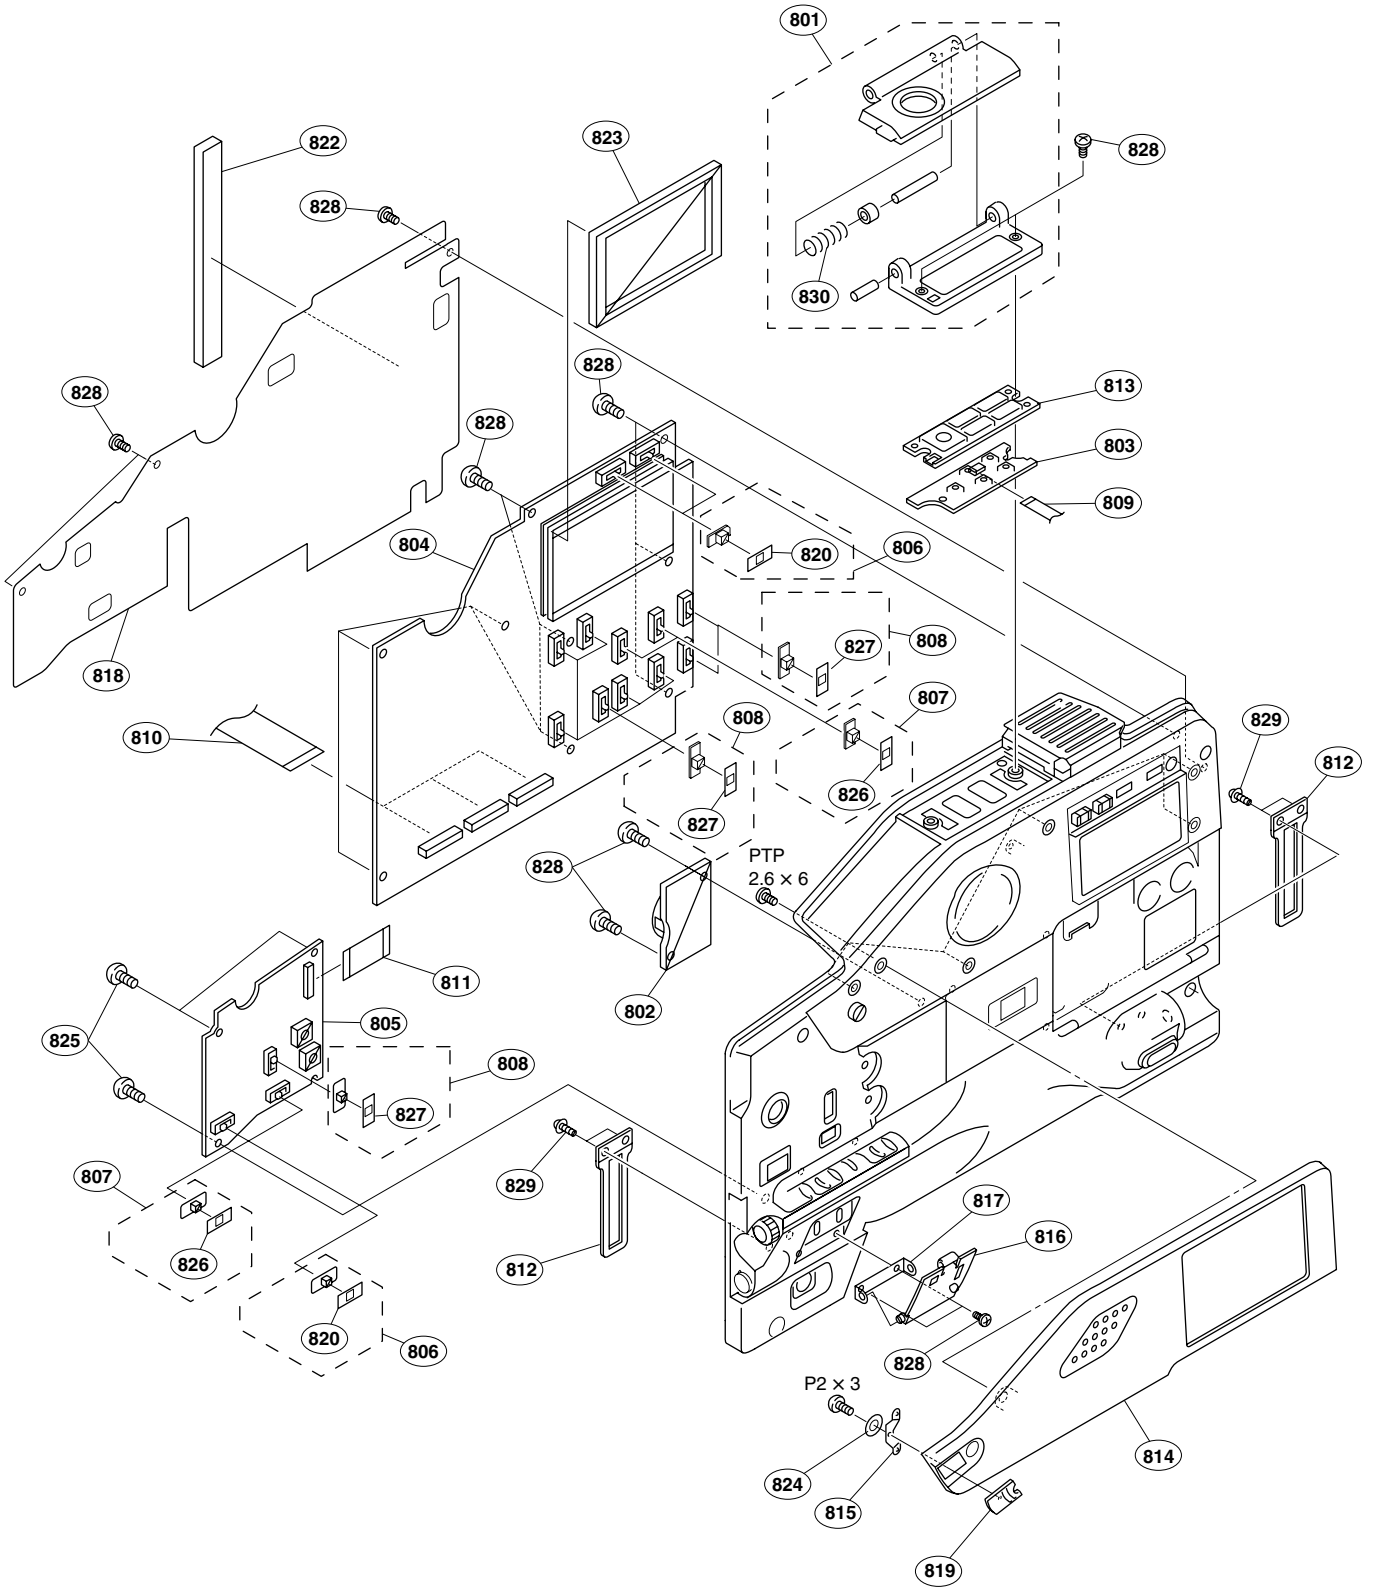

No.	Part No.	SP	Description
801	A-8279-505-A	o	FRAME KEY, ASSY
802	A-8326-087-A	o	MOUNTED CIRCUIT BOARD, BP-33
803	A-8326-095-A	o	MOUNTED CIRCUIT BOARD, KY-475
804	A-8326-328-B	o	MOUNTED CIRCUIT BOARD, FP-121
805	A-8327-036-A	o	MOUNTED CIRCUIT BOARD, APR-59
806	X-3608-136-2	s	KNOB(3 POSI) ASSY, SW
807	X-3678-125-1	s	KNOB(2 POSI) ASSY, SW
808	X-3678-126-1	s	KNOB(3 POSI) ASSY, SW
809	1-757-276-11	s	CABLE, FLEXIBLE FLAT (10 CORE)
810	1-757-279-11	s	CABLE, FLEXIBLE FLAT (45 CORE)
811	1-777-867-12	s	CABLE, FLEXIBLE FLAT (50CORE)
812	3-603-759-01	o	SUPPORT(R), INSIDE
813	3-629-745-01	o	COVER, KEY SW
814	3-629-746-03	o	PAD, SIDE
815	3-629-749-02	o	SPRING, TURBO GAIN
816	3-629-753-01	o	LID, MENU
817	3-629-754-01	o	LID BRACKET, MENU
818	3-629-759-03	o	PLATE, SHIELD
819	3-629-776-01	o	COVER, TURBO GAIN
820	3-629-813-01	o	LABEL.KNOB
822	3-631-371-02	o	BLIND CUSHION
823	3-680-214-01	o	SPACER LCD
824	3-701-437-11	s	WASHER PLASTIC (2.1X4X0.25)
825	3-701-468-01	s	SCREW (+- 2X4), LOCK
826	3-717-902-21	o	PLATE, ORNAMENTAL
827	3-717-902-31	o	PLATE, ORNAMENTAL
828	3-719-381-01	s	SCREW +P M2X4 (ZNBK)(LOCK)
829	3-729-013-41	s	SCREW(M1.4X3.5), WASHERHEAD(+P)
830	3-931-388-01	s	SPRING (EJ), COMPRESSION

Inside Panel-2

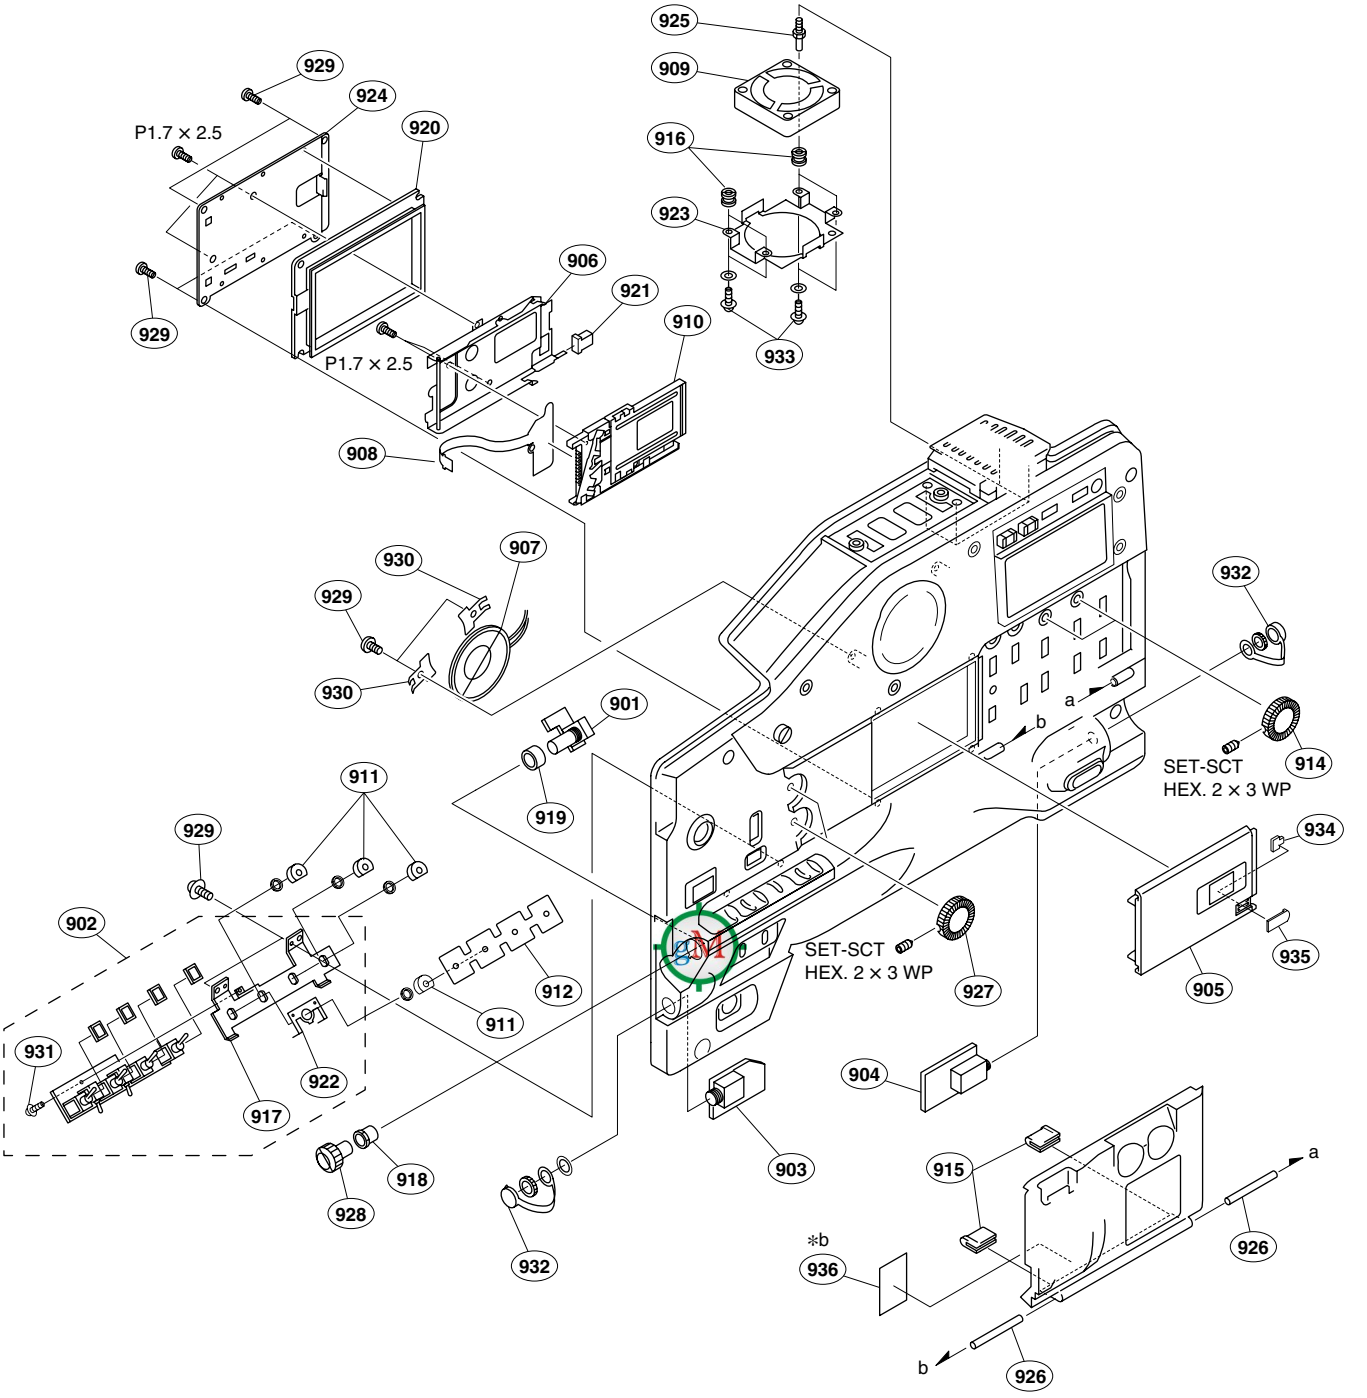

No.	Part No.	SP	Description
Note			
*b: Serial No.70001 -			
901	A-8326-097-A	o	MOUNTED CIRCUIT BOARD, ENC-61
902	A-8326-098-A	o	MOUNTED CIRCUIT BOARD, SW-1038
903	A-8326-099-A	o	MOUNTED CIRCUIT BOARD, HP-103
904	A-8326-100-A	o	MOUNTED CIRCUIT BOARD, HP-104
905	X-3608-132-5	o	LID ASSY, MS
906	X-3949-613-1	s	CHASSIS ASSY, MS
907	1-504-977-11	s	SPEAKER (3.6CM)
908	1-673-614-11	s	PRINTED WIRING BOARD, FP-84
909	1-763-652-11	s	FAN, D.C.
910	1-785-593-11	s	CONNECTOR, MEMORY STICK
911	3-603-761-01	o	DROP PROTECTION(CAM SW)
912	3-603-767-01	o	BLIND SHEET(CAM SW)
914	3-611-740-01	o	KNOB(2), VR
915	3-611-742-01	o	CLICK CLAMP
916	3-617-812-01	o	VIBRATION PROOF, RUBBER
917	3-629-445-01	o	BRACKET, SW
918	3-629-446-02	o	SLEEVE(ENC2)
919	3-629-447-01	o	SLEEVE(ENC1)
920	3-629-449-02	o	RUBBER(MS), DROP PROTECTION
921	3-629-452-03	o	KNOB(OPEN), MS
922	3-629-459-03	o	PLATE, GROUND
923	3-629-736-01	o	BRACKET, FAN
924	3-629-752-02	o	BRACKET, MS
925	3-629-756-01	o	SHAFT(1), RETAINING
926	3-649-266-01	o	PIN, PARALLEL (1.6X20)
927	3-680-219-02	s	KNOB, VR
928	3-692-111-01	s	KNOB, RE
929	3-719-381-01	s	SCREW +P M2X4 (ZNBK)(LOCK)
930	3-724-726-01	o	HOLDER, SPEAKER
931	3-729-013-41	s	SCREW(M1.4X3.5), WASHERHEAD(+P)
932	3-849-405-00	s	COVER, EARPHONE JACK
933	4-963-924-01	s	SCREW (DAMPER)
934	3-629-760-01	o	SPACER MS KNOB
935	3-629-748-03	o	KNOB (EJECT), MS
936 *b	3-631-775-01	o	SEAL, PLATE, ORNAMENTAL

Inside Panel-3

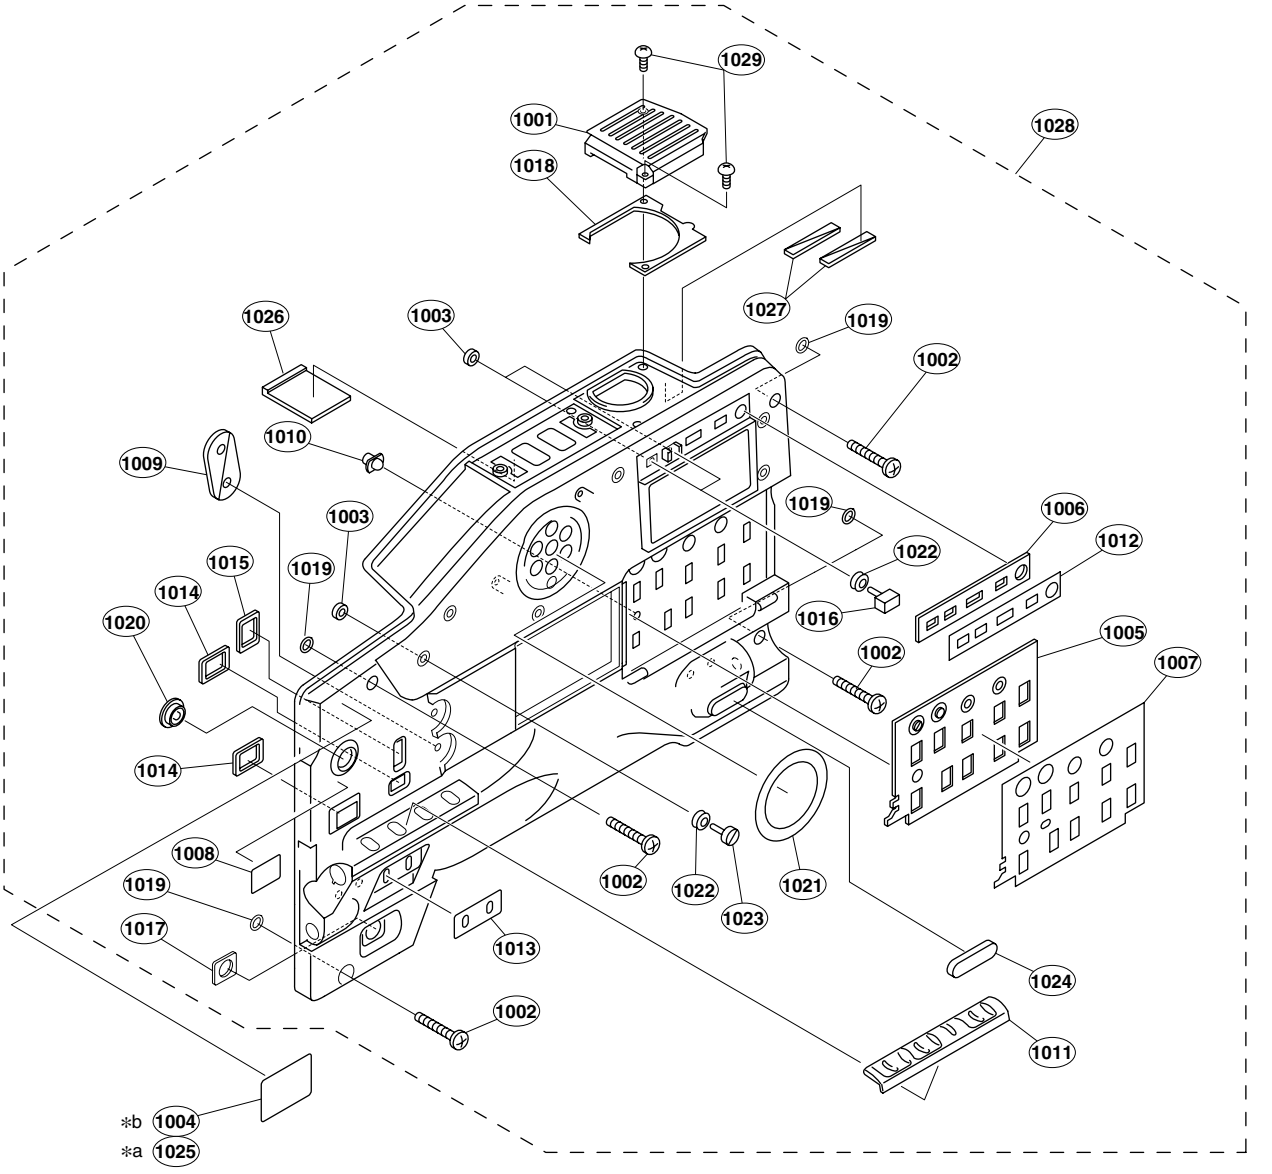

No.	Part No.	SP	Description
Note			
*a: Serial No.10001 -			
*b: Serial No.70001 -			
1001	X-3608-150-1	o	COVER ASSY, TOP
1002	3-603-680-01	s	STAINLESS SCREW +B3X12
1003	3-608-362-01	s	CLAMP(2), PUSH SW
1004 *b	3-611-743-01	s	LABEL(3), FILTER (PETP)
1005	3-629-448-02	o	RUBBER(VTR), DROP PROTECTION
1006	3-629-450-02	o	RUBBER(LCD), DROP PROTECTION
1007	3-629-451-03	o	PLATE(VTR), ORNAMENTAL
1008	3-629-455-01	o	PLATE(AS), ORNAMENTAL
1009	3-629-456-01	o	RUBBER(VOR), DROP PROTECTION
1010	3-629-458-01	o	GUIDE, LIGHT
1011	3-629-768-01	o	ORNAMENTAL PLATE(3), SW, CAMERA
1012	3-629-770-01	o	PLATE(LCD), ORNAMENTAL
1013	3-629-771-02	o	PLATE(MENU), ORNAMENTAL
1014	3-629-772-01	o	RUBBER(SW)1, DROP PROTECTION
1015	3-629-773-01	o	RUBBER(SW)2, DROP PROTECTION
1016	3-629-774-01	s	KEY, PUSH
1017	3-631-381-01	o	KUSHON, POWER SW
1018	3-631-460-01	o	PACKING(1), TOP COVER
1019	3-672-250-01	s	RING(M2.6), O (CR)
1020	3-676-244-02	s	COVER, SWITCH
1021	3-724-716-02	s	SHEET, DROP PROTECTION (PLA)
1022	3-724-758-02	s	RUBBER(PUSH), DROP
1023	3-724-759-03	s	PUSH SW (KNOB)
1024	3-742-035-01	o	STOPPER, ORNAMENTAL PANEL
1025 *a	3-182-055-02	o	LABEL (1), FILTER (PAPER)
1026	3-629-836-02	o	HOLDER, PWB
1027	3-606-305-01	o	RUBBER (OUT), DROP PROTECTION
1028	A-8279-506-F	o	PANEL SUB ASSY, INSIDE
1029	3-719-381-71	s	SCREW +P M2X8 (FP-FE/ZNBK)

Connector Box

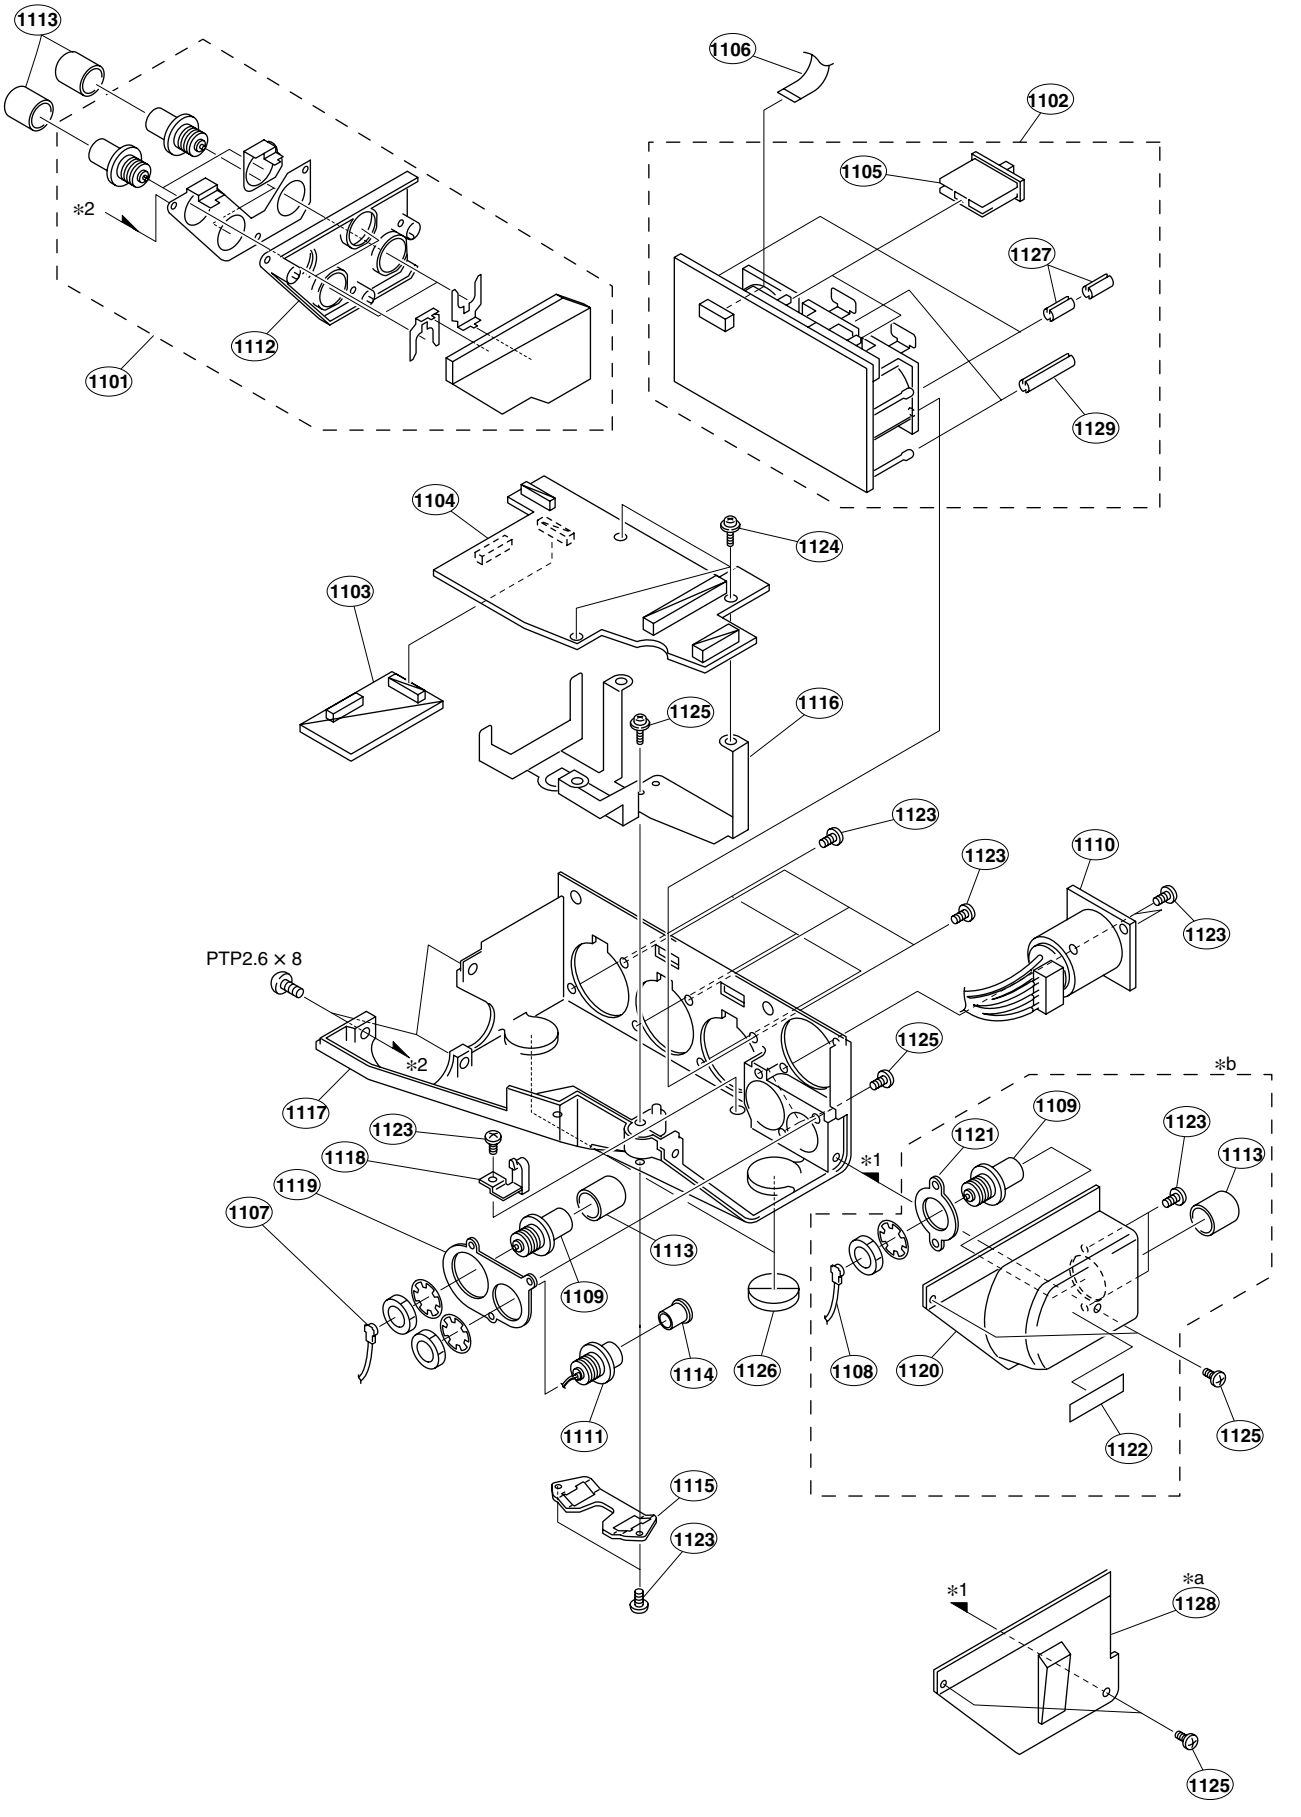

http://getMANUAL.com

No.	Part No.	SP	Description
Note			
*a: Serial No.10001 -			
*b: Serial No.70001 -			
1101	A-8326-102-A	o	MOUNTED CIRCUIT BOARD, IO-202
1102	A-8326-332-A	o	MOUNTED CIRCUIT BOARD, AXM-24
1103	A-8326-334-A	o	MOUNTED CIRCUIT BOARD, AL-43
1104	A-8326-335-A	o	MOUNTED CIRCUIT BOARD, CNB-15
1105	X-3678-131-3	s	KNOB(M)ASSY, SW
1106	1-757-275-11	s	CABLE, FLEXIBLE FLAT (24CORE)
1107	1-757-430-11	s	CABLE ASSEMBLY, COAXIAL
1108 *b	1-783-252-11	s	CABLE ASSEMBLY, COAXIAL
1109	1-784-240-11	s	CONVERTER, COAXIAL CONNECTOR
1110	1-960-880-11	o	HARNESS, SUB (EXT DC IN)
1111	1-960-881-11	o	HARNESS, SUB (DC OUT)
1112	3-603-545-02	s	SUPPORT A, BNC CONNECTOR
1113	3-604-795-01	s	CAP BNC
1114	3-609-573-01	s	CAP, DC OUT
1115	3-626-781-02	o	STOPPER
1116	3-629-439-01	o	BRACKET, CNB
1117	3-629-442-03	o	BOX, CONNECTOR
1118	3-629-443-02	o	COVER, LED
1119	3-629-444-01	o	BRACKET, OUT
1120 *b	3-629-741-01	o	BRACKET, OPTION OUT
1121 *b	3-629-742-01	o	BRACKET(2), BNC
1122 *b	3-631-795-01	o	LABEL, VBS/SDI OUT
1123 *b	3-694-181-01	s	AROCK PRECISION +P2.6 TYPE 1
1124	3-701-468-01	s	SCREW (+- 2X4), LOCK
1125	3-719-381-01	s	SCREW +P M2X4 (ZNBK)(LOCK)
1126	3-723-097-01	o	FOOT, RUBBER (SI-RBR)
1127	4-937-336-42	o	HOLDER, LED
1128 *a	3-631-796-01	o	SUB PANEL, CNBOX
1129	4-937-336-21	o	HOLDER, LED

Handle

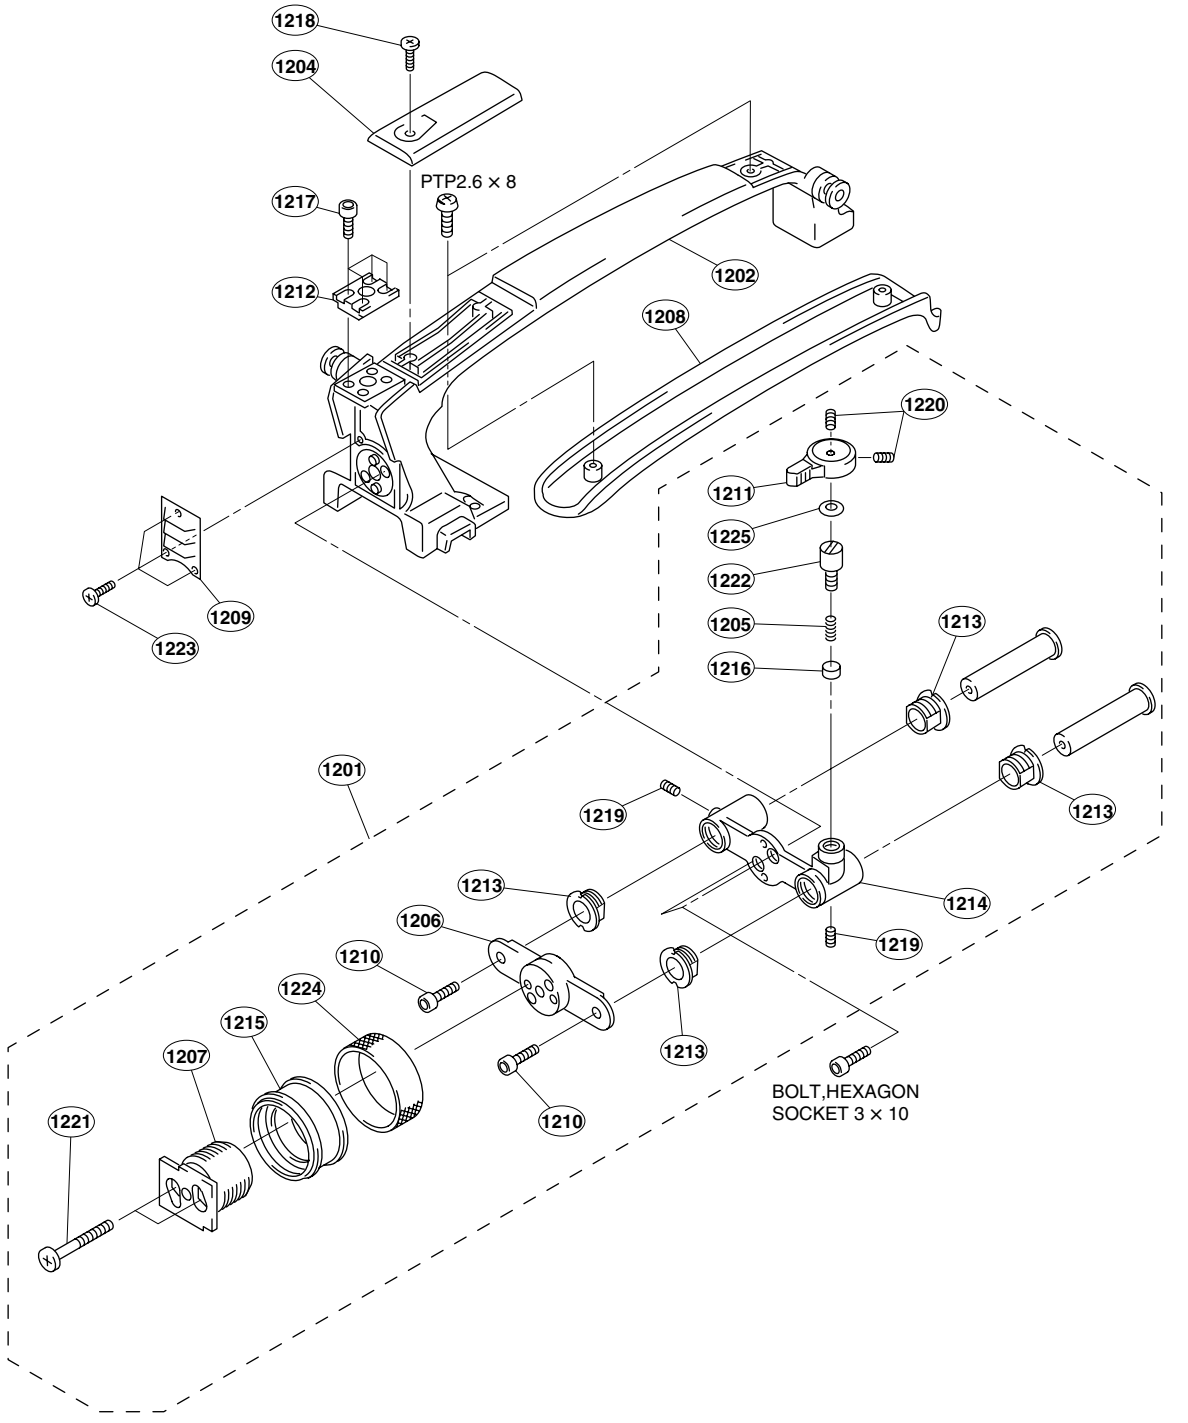
1218
1204
PTP2.6 × 8
1217
1212
1202
1208
1220
1211
1225
1222
1205
1216
1213
1209
1223
1201
1219
1213
1214
1206
1219
1210
1224
1215
1213
1207
1210
BOLT,HEXAGON
SOCKET 3 × 10
1221

No.	Part No.	SP	Description
1201	A-8279-413-B	o	SLIDE ASSY(LB), VF
1202	X-3608-116-1	o	HANDLE SUB ASSY
1204	3-603-702-02	o	COVER, FRONT
1205	3-612-822-01	s	SPRING, COMPRESSION
1206	3-617-745-01	o	FIXED TABLE(WS), VF SHOE
1207	3-627-853-02	s	SHOE, SLIDE
1208	3-628-219-01	o	COVER, BOTTOM
1209	3-629-483-01	o	PLATE, HANDLE
1210	3-657-705-91	s	BOLT (M4X25), HEXAGON HOLE
1211	3-673-046-00	s	LEVER, LOCK
1212	3-679-650-02	o	BRACKET, ACCESSORY
1213	3-679-684-01	o	REST, ARM
1214	3-679-685-11	o	TABLE, FIXED, VF SLIDE
1215	3-679-698-01	o	RING(C), LOCK (ABS)
1216	3-679-702-01	o	CUSHION, STOPPER(SLIDE ASSY)
1217	3-689-039-11	s	SCREW(M2X6), SMALL (STEEL)
1218	3-694-181-01	s	AROCK PRECISION +P2.6 TYPE 1
1219	3-701-505-00	s	SET-SCREW, HEX 3X3 ST
1220	3-701-507-00	s	SET-SCREW, HEX 3X5 ST
1221	3-711-765-01	s	BOLT(M3), HEXAGON SOCKET(STEEL)
1222	3-711-794-11	o	PIN, STOOPER
1223	3-719-381-01	s	SCREW +P M2X4 (ZNBK)(LOCK)
1224	3-720-919-01	o	RUBBER, LOCK RING
1225	3-895-622-01	s	RING (DIA. 5), O (NBR)

Plug-in Boards

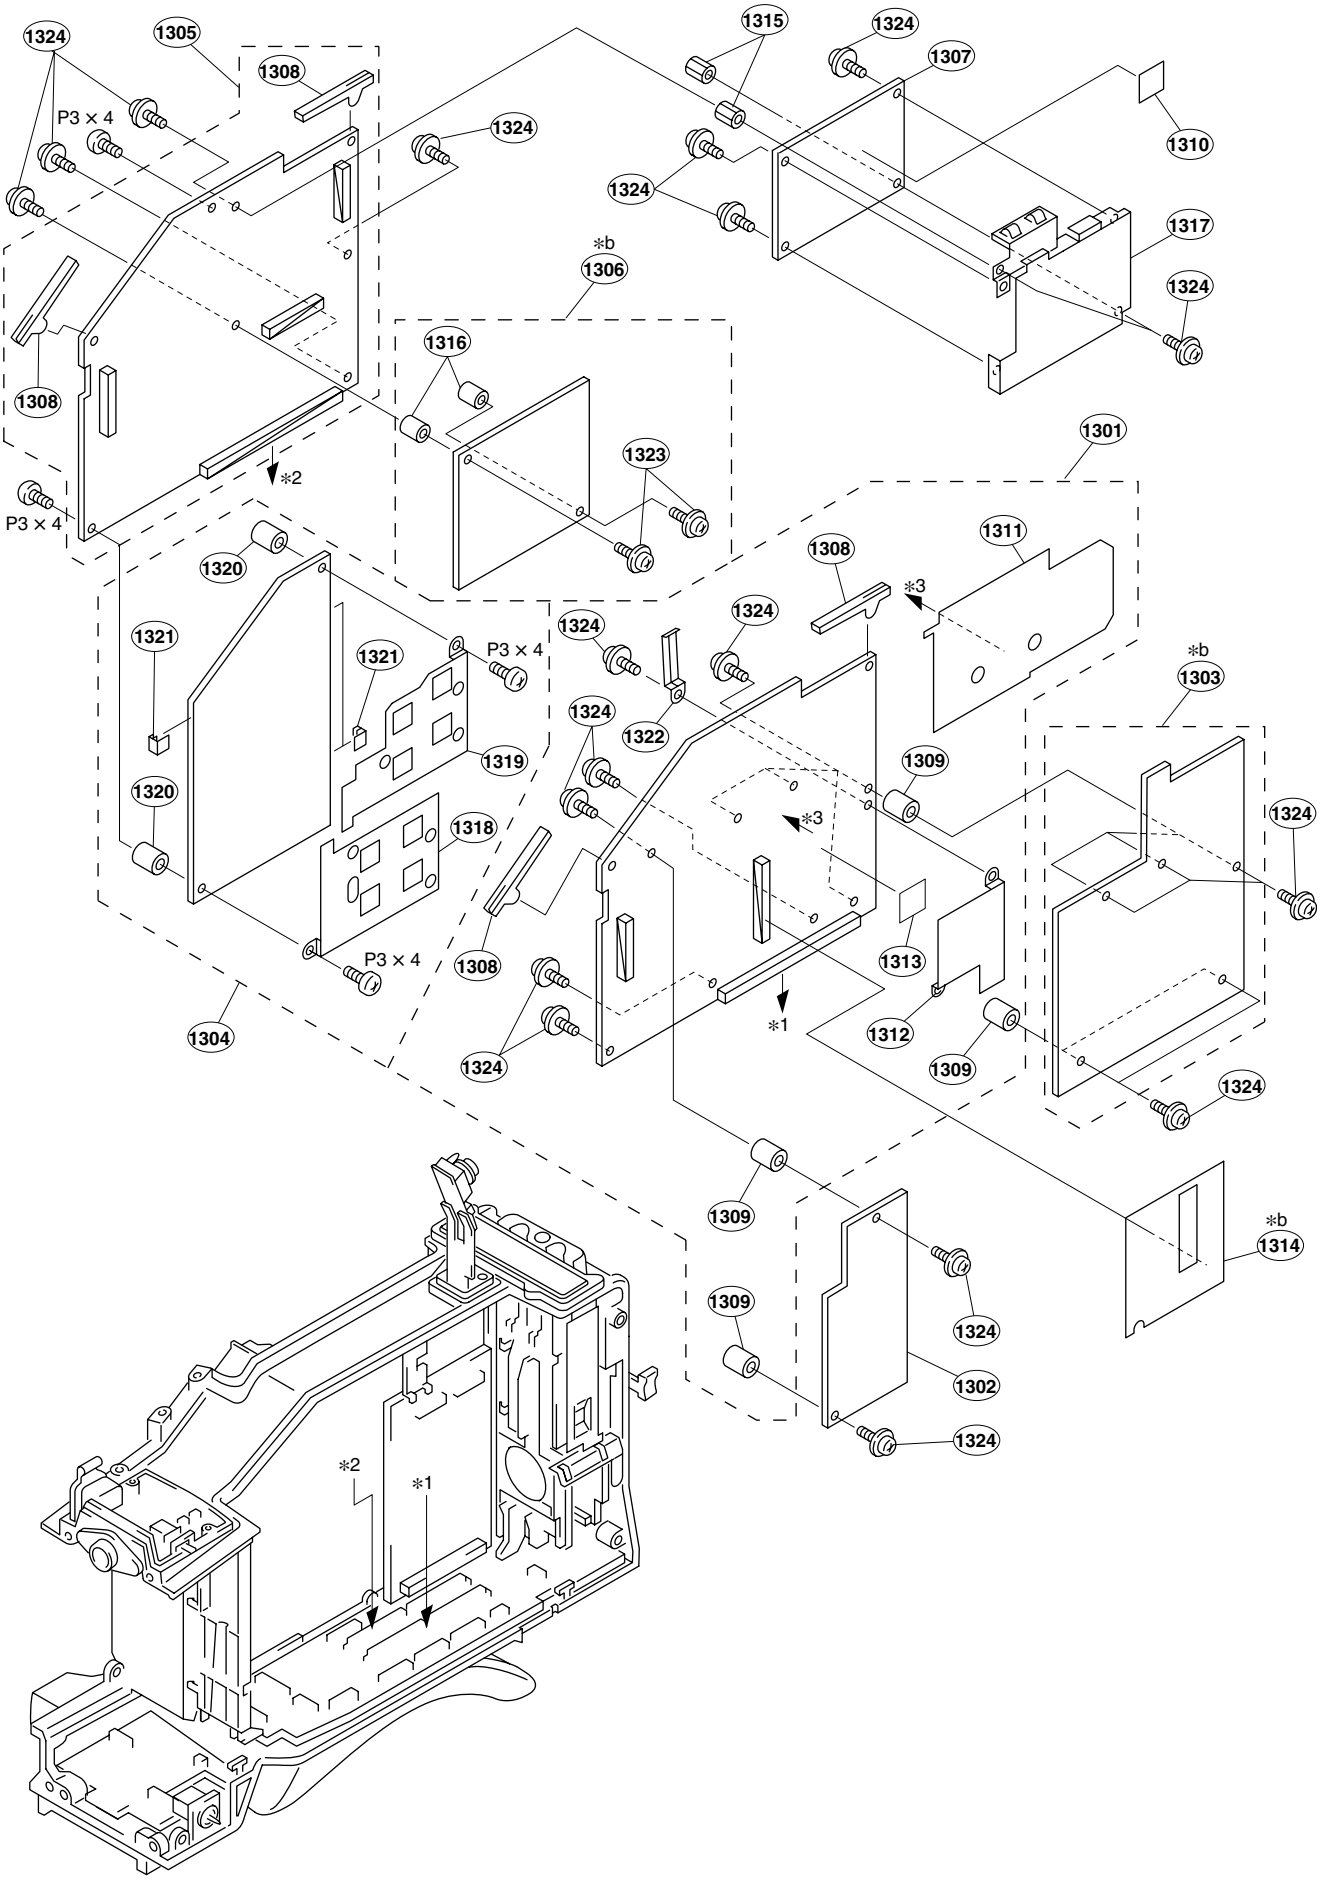

No.	Part No.	SP	Description
Note			
*b: Serial No.70001 -			
1301	A-8326-039-A	o	MOUNTED CIRCUIT BOARD, DCP-28
1302	A-8326-040-A	o	MOUNTED CIRCUIT BOARD, AT-143
1303 *b	----------		HKDW-702 (DC-110)
1304	A-8326-251-A	o	MOUNTED CIRCUIT BOARD, EQ-88
1305	A-8326-326-A	o	MOUNTED CIRCUIT BOARD, DVP-18
1306 *b	----------		HKDW-703 (MY-99)
1307	A-8326-894-C	o	MOUNTED CIRCUIT BOARD, TX-78
1308	3-603-737-02	o	LEVER, BOARD
1309	3-633-475-01	o	SUPPORT(7)
1310	3-617-807-01	s	SHEET, RADIATION(B)
1311	3-629-482-01	o	SHILD SHEET(DCP)
1312	3-629-623-01	o	HEAT SINK, DCP
1313	3-629-624-01	o	HEAT TRANS SHEET(SCVP)
1314 *b	3-629-625-01	o	SHILD SHEET(DC)
1315	3-629-743-01	o	SUPPORT(M1.4)
1316	3-629-775-01	o	SUPPORT(MY)
1317	3-629-782-03	o	PLATE(2), SDI SHIELD
1318	3-629-797-02	o	HEAT SINK(1), EQ
1319	3-629-798-03	o	HEAT SINK(2), EQ
1320	3-629-799-01	o	SPACER
1321	3-631-336-02	o	RETAINER, PLATE
1322	3-631-372-01	o	FINGER(DCP), SHIELD
1323	3-719-381-01	s	SCREW +P M2X4 (ZNBK)(LOCK)
1324	3-729-013-41	s	SCREW(M1.4X3.5), WASHERHEAD(+P)

Main Frame-1

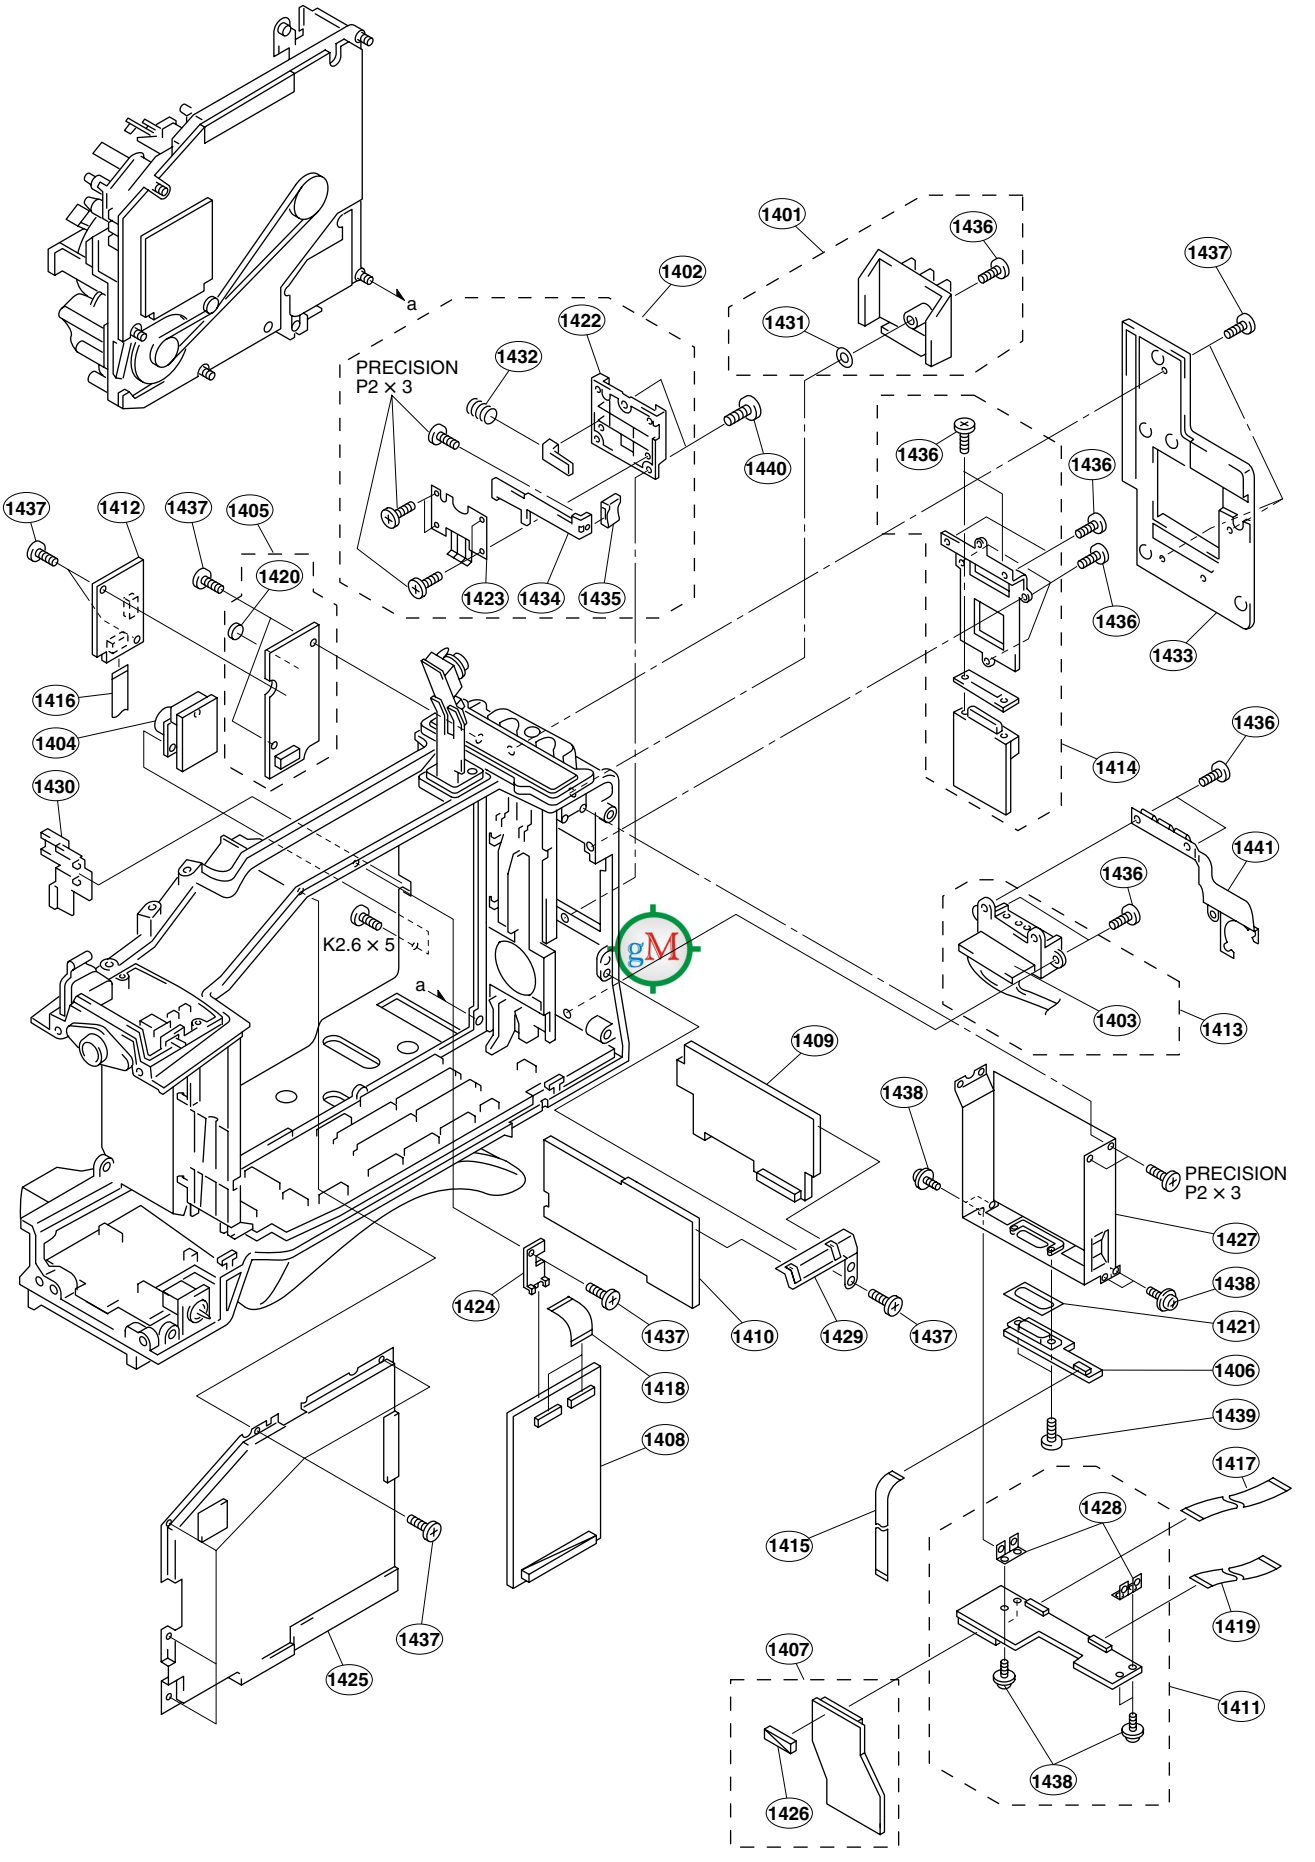
PRECISION
P2 × 3
K2.6 × 5
a
1401
1402
1403
1404
1405
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441

No.	Part No.	SP	Description

Note
*a: Serial No.70011 - 70110
*b: Serial No.70111 -
Serial No.10001 -

1401	A-8278-683-A	o	CONNECTOR COVER ASSY
1402	A-8279-091-A	s	MOUNT ASSY, V
1403	A-8326-022-A	o	MOUNTED CIRCUIT BOARD, DC-111
1404	A-8326-030-A	o	MOUNTED CIRCUIT BOARD, RM-188
1405	A-8326-038-A	o	MOUNTED CIRCUIT BOARD, PS-595
1406	A-8326-107-A	o	MOUNTED CIRCUIT BOARD, RX-54
1407	A-8326-110-A	o	MOUNTED CIRCUIT BOARD, HN-277
1408	A-8326-336-A	o	MOUNTED CIRCUIT BOARD, SS-92
1409	A-8326-338-A	o	MOUNTED CIRCUIT BOARD, RE-186
1410 *a	A-8326-339-A	o	MOUNTED CIRCUIT BOARD, RE-187
*b	A-8326-339-B	o	MOUNTED CIRCUIT BOARD, RE-187
1411	A-8326-342-A	o	MOUNTED CIRCUIT BOARD, IF-794
1412	A-8326-343-A	o	MOUNTED CIRCUIT BOARD, CCM-45
1413	A-8327-011-A	o	CONNECTOR ASSY, BATTERY
1414	A-8327-012-A	o	BRACKET ASSY, 50P FITTING
1415	1-757-274-11	s	CABLE, FLEXIBLE FLAT (15 CORE)
1416	1-757-276-11	s	CABLE, FLEXIBLE FLAT (10 CORE)
1417	1-757-277-11	s	CABLE, FLEXIBLE FLAT (30 CORE)
1418	1-783-287-13	s	CABLE, FLEXIBLE FLAT (45 CORE)
1419	1-783-288-13	s	CABLE, FLEXIBLE FLAT (30 CORE)
1420	2-389-320-01	o	CUSHION(SILICONE RBR)
1421	3-603-668-02	o	RETAINER, CONNECTOR
1422	3-616-721-01	o	MOUNT (2), V
1423	3-616-724-01	o	LID, REAR
1424	3-629-438-01	o	RETAINER, PC BOARD,SS
1425	3-629-738-03	o	COVER, DUST PROTECTION
1426	3-629-755-02	o	SUPPORT, PWB
1427	3-629-765-01	o	GUIDE, WRR
1428	3-629-766-01	o	BLACKET, PC BOARD
1429	3-631-368-01	o	RE RETAINER(2)
1430	3-631-438-01	o	RETAINER 2, CABLE
1431	3-669-595-00	s	WASHER, 2 (PLA)
1432	3-679-648-02	o	SPRING, COMPRESSION
1433	3-679-669-05	o	SPACER
1434	3-679-688-02	o	LEVER, RELEASE
1435	3-680-952-01	o	KNOB, RELEASE LEVER
1436	3-694-181-01	s	AROCK PRECISION +P2.6 TYPE 1
1437	3-719-381-01	s	SCREW +P M2X4 (ZNBK)(LOCK)
1438	3-729-013-21	s	SCREW(M1.4X2.5), WASHER HEAD(ST
1439	3-729-061-01	s	SCREW (M2X4.5) (TYPE 1)(STEEL)
1440	3-742-074-11	s	SCREW (3)
1441	3-633-396-01	s	SHIELD FINGER (BATT)

Main Frame-2

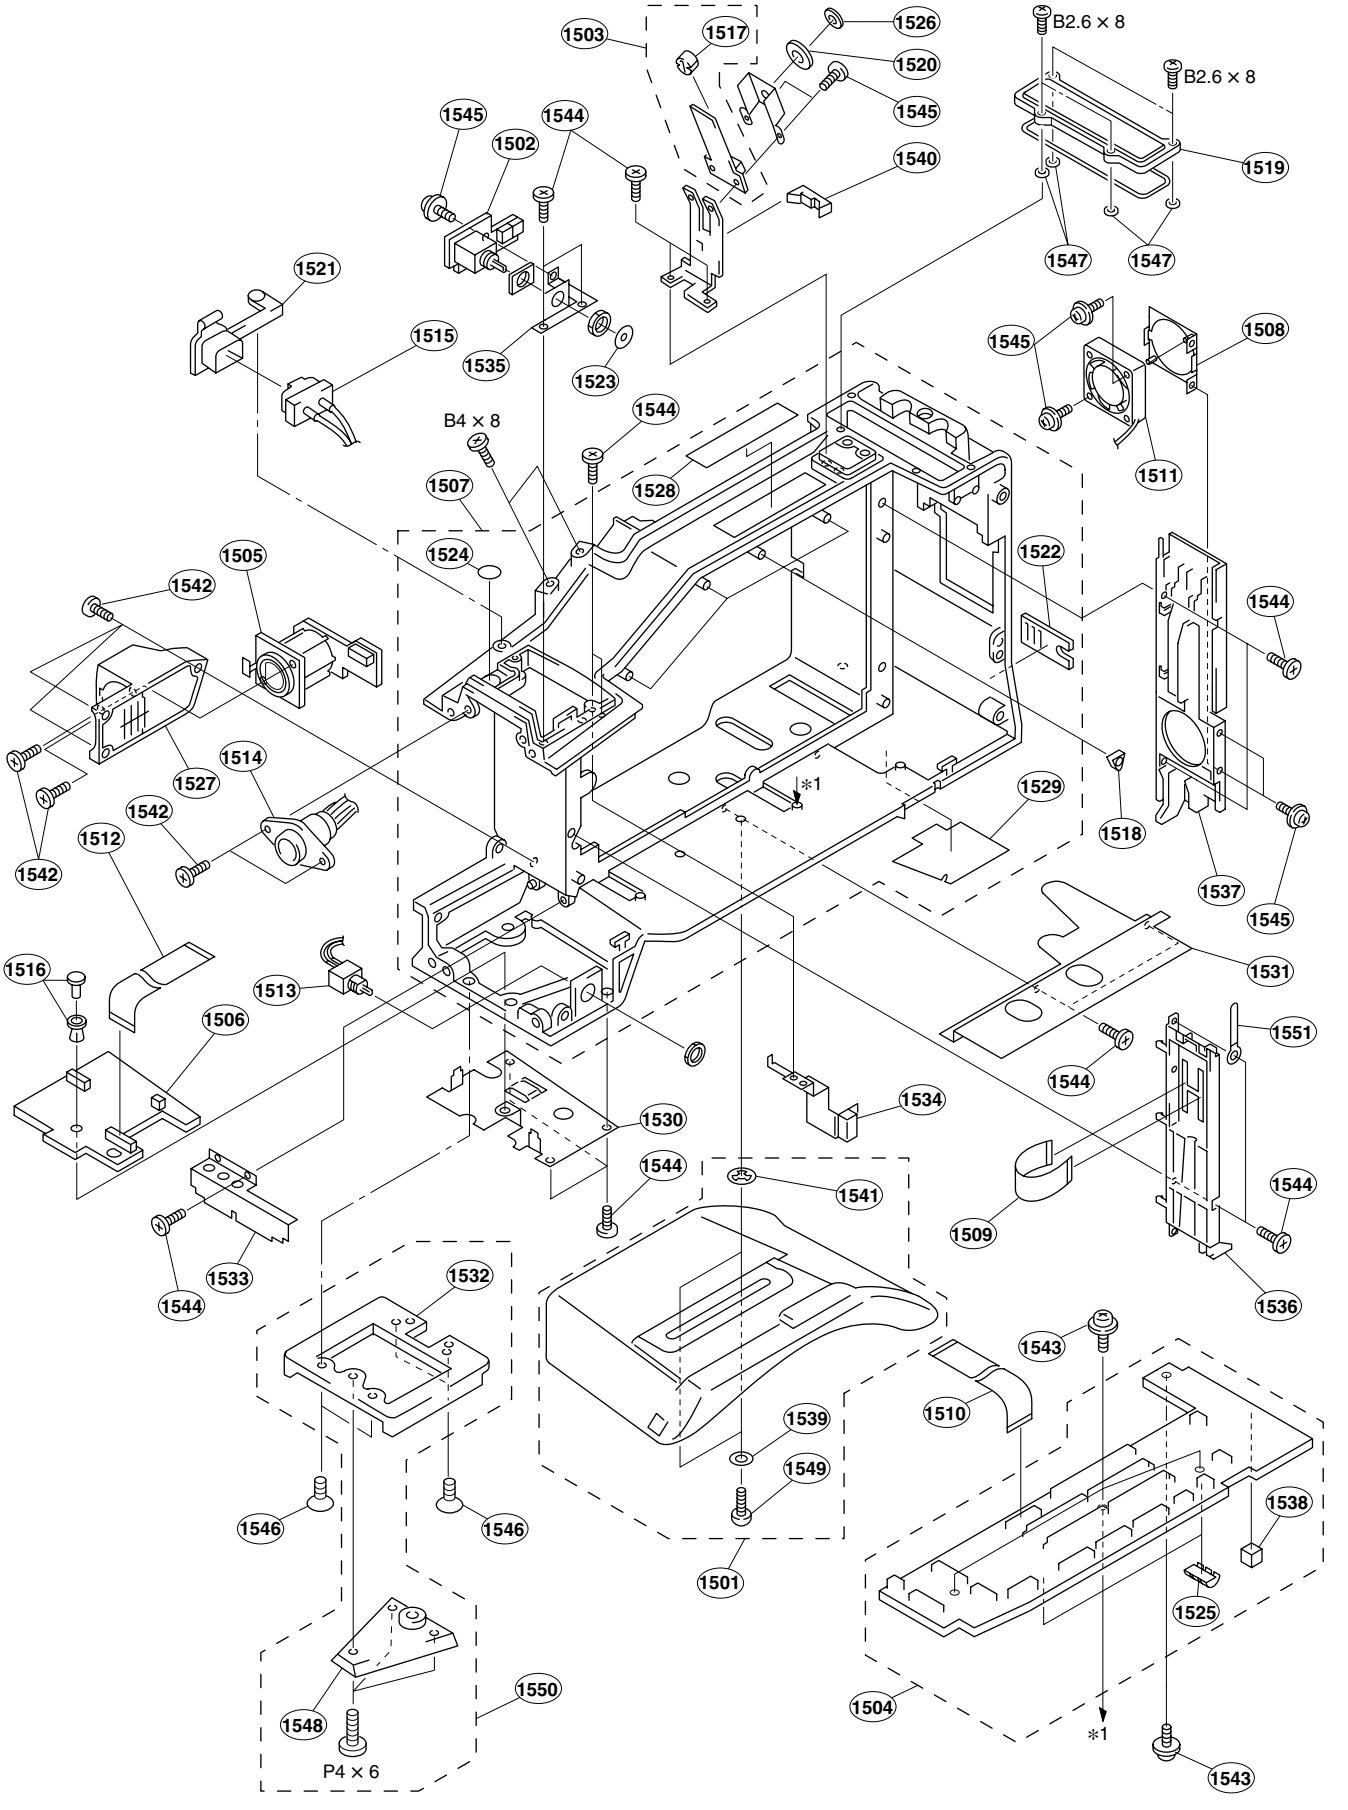
1503
1517
1526
1520
1545
1540
B2.6 × 8
B2.6 × 8
1519
1547
1547
1545
1544
1502
1521
1515
1535
1523
1545
1508
1511
B4 × 8
1544
1528
1507
1524
1505
1542
1522
1544
1527
1514
1542
1512
1542
*1
1529
1518
1537
1545
1516
1513
1506
1531
1551
1544
1534
1530
1544
1541
1509
1544
1533
1544
1536
1532
1543
1510
1539
1549
1546
1546
1538
1501
1525
1550
1548
1504
*1
P4 × 6
1543

No.	Part No.	SP	Description
1501	A-8279-485-B	o	PAD ASSY, SHOULDER
1502	A-8326-028-A	o	MOUNTED CIRCUIT BOARD, SW-1030
1503	A-8326-029-A	o	MOUNTED CIRCUIT BOARD, LP-114
1504	A-8326-083-A	o	MOUNTED CIRCUIT BOARD, MB-898
1505	A-8326-106-A	o	MOUNTED CIRCUIT BOARD, MA-103
1506	A-8326-331-A	o	MOUNTED CIRCUIT BOARD, IFA-11
1507	X-3608-111-2	o	FRAME SUB ASSY, MAIN
1508	X-3608-130-2	o	BRACKET(R) ASSY, FAN
1509	1-757-278-11	s	CABLE, FLEXIBLE FLAT (45 CORE)
1510	1-757-280-11	s	CABLE, FLEXIBLE FLAT (45 CORE)
1511	1-763-652-11	s	FAN, D.C.
1512	1-783-288-13	s	CABLE, FLEXIBLE FLAT (30 CORE)
1513	1-959-006-11	o	HARNESS, SUB (MB-PSW)
1514	1-960-866-11	o	HARNESS (VF)
1515	1-960-871-11	o	HARNESS, SUB (LIGHT/SW-PS (6P)
1516	2-279-715-11	s	RIVET, NYLON
1517	2-358-583-01	o	HOLDER, LED
1518	3-603-658-01	o	CLAMP, HARNESS
1519	A-8278-376-A	o	LID (WRR), BLIND
1520	3-603-735-01	o	DROP PROTECTION(SW) (WASHER)
1521	3-603-736-02	o	COVER, LIGHT CONNECTER
1522	3-603-739-02	o	PLATE(REAR1), ORNAMENTAL
1523	3-603-742-01	o	DROP PROTECTION(LIGHT)
1524	3-603-744-01	o	PLATE, ORNAMENTAL(TOP)
1525	3-606-303-01	s	FINGER,SHIELD
1526	3-608-318-01	o	DROP PROTECTION(TALLY)
1527	3-629-460-01	o	MIC CONNECTOR BOX
1528	3-629-467-01	o	PLATE(TOP), BLIND
1529	3-629-468-02	o	SHEET(BOTTOM), INSULATING
1530	3-629-470-02	o	BRACKET(IFA)
1531	3-629-471-01	o	PLATE(BOTTOM), BLIND
1532	3-629-479-01	s	SHOE, CAMERA
1533	3-629-484-01	o	COVER, IFA
1534	3-629-485-02	o	BRAKET(DCP)
1535	3-629-487-01	o	HOLDER, LIGHT SWITCH
1536	X-3608-155-1	o	HOLDER(F), PC BOARD
1537	3-629-735-01	o	HOLDER(R), PC BOARD
1538	3-631-516-01	o	SPACER, PC BOARD
1539	3-663-748-00	s	WASHER (STEEL)
1540	3-671-150-01	o	CLAMP (PP)
1541	3-685-166-02	o	WASHER, SCREW CLAMP
1542	3-694-181-01	s	AROCK PRECISION +P2.6 TYPE 1
1543	3-701-468-01	s	SCREW (+- 2X4), LOCK
1544	3-719-381-01	s	SCREW +P M2X4(ZNBK)(LOCK)
1545	3-729-013-41	s	SCREW(M1.4X3.5), WASHERHEAD(+P)
1546	3-729-072-01	s	SCREW +K4X8 (STEEL)
1547	3-742-004-01	s	RING, NYLON
1548	3-742-015-01	o	WEDGE (B), MOUNTING
1549	3-742-074-11	s	SCREW (3)
1550	A-8299-486-B	o	SHOE (C) ASSY, V
1551	2-277-426-01	o	CLAMP

1-3. Hardware List

No.	Part No.	SP	Description
	7-621-710-36	s	SET-SCREW, SLOT 2X4 FLAT POINT
	7-621-731-08	s	SET-SCREW, HEX 2X2.5(FLAT)
	7-621-732-09	s	SET-SCREW, HEX 2X3
	7-621-772-10	s	SCREW, +B2X4
	7-621-775-40	s	SCREW +B2.6X8
	7-623-207-22	s	SPRING WASHER (2.6MM)
	7-623-208-22	s	SPRING WASHER (3MM)
	7-623-420-07	s	WASHER LW 2
	7-624-101-04	s	E RING (1.2)
	7-624-106-04	s	RING, RETAINING, E (3MM)
	7-624-200-01	s	PLATE, NUT PUSH (1.5)
	7-627-452-38	s	SCREW, PRECISION +K 2X5
	7-627-454-38	s	SCREW +K2.6X5
	7-627-551-87	s	SCREW +P1.4X1.8
	7-627-552-07	s	SCREW +P1.7X2.5
	7-627-553-38	s	SCREW, PRECISION +P 2X3
	7-627-553-17	s	SCREW, PRECISION +P 2X2
	7-682-145-01	s	SCREW, +P 3X4
	7-682-160-09	s	SCREW +P4X6
	7-682-247-04	s	SCREW, +K3X6
	7-682-549-09	s	SCREW +B 3X10
	7-682-902-01	s	SCREW +PWH 2.6X4
	7-683-405-04	s	BOLT, HEXAGON SOCKET 3X10
	7-683-480-14	o	BOLT, HEXAGON SOCKET 2X4
	7-685-101-11	s	SCREW +P2X3 NON-SLIT TYPE2
	7-685-133-19	s	SCREW +PTP2.6X6
	7-685-134-19	s	SCREW +PTP2.6X8
	7-688-022-02	s	W2.6 SMALL
	7-627-551-47	s	SCREW +P1.4X1.4
	7-688-001-01	s	WASHER W2 SMALL
	7-682-561-09	s	SCREW +B4X8

http://getMANUAL.com

1-4. Electrical Parts List

AL-43 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-334-A	o	MOUNTED CIRCUIT BOARD, AL-43
C101	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C102	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C103	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C104	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C106	1-104-652-11	s	CAPACITOR,ELECT 470MF/10V(105)
C108	1-104-652-11	s	CAPACITOR,ELECT 470MF/10V(105)
C109	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C110	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C201	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C202	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C203	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C204	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C206	1-104-652-11	s	CAPACITOR,ELECT 470MF/10V(105)
C208	1-104-652-11	s	CAPACITOR,ELECT 470MF/10V(105)
C209	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
CN402	1-568-355-11	o	CONNECTOR,BOARD TO BOARD 12P
CN403	1-568-355-11	o	CONNECTOR,BOARD TO BOARD 12P
D101	8-719-820-41	s	DIODE 1SS302
D102	8-719-820-41	s	DIODE 1SS302
D201	8-719-820-41	s	DIODE 1SS302
D202	8-719-820-41	s	DIODE 1SS302
IC101	8-759-710-77	s	IC NJM4560MD
IC201	8-759-710-77	s	IC NJM4560MD
Q101	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q102	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q201	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q202	8-729-209-07	s	TRANSISTOR 2SC4213-B
R101	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R102	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R103	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R104	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R105	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R106	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R107	1-208-910-11	s	RESISTOR,CHIP 9.1K (1005)
R108	1-208-910-11	s	RESISTOR,CHIP 9.1K (1005)
R109	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R110	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R111	1-208-701-11	s	RESISTOR CHIP 5.6K 1/16W(1005)
R112	1-208-701-11	s	RESISTOR CHIP 5.6K 1/16W(1005)
R113	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R114	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R115	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R116	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R117	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R201	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R202	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R203	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R204	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R205	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R206	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R207	1-208-910-11	s	RESISTOR,CHIP 9.1K (1005)
R208	1-208-910-11	s	RESISTOR,CHIP 9.1K (1005)
R209	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R210	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R211	1-208-701-11	s	RESISTOR CHIP 5.6K 1/16W(1005)
R212	1-208-701-11	s	RESISTOR CHIP 5.6K 1/16W(1005)

(AL-43 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R213	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R214	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R215	1-208-935-11	s	RESISTOR, CHIP 100K (1005)

APR-59 BOARD
---

*a: Lot No. 083 - 0A2
*b: Lot No. 0A3 -
*c: Lot No. 083 - 111
*d: Lot No. 112 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8327-036-A	o	MOUNTED CIRCUIT BOARD, APR-59
C101	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C102	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C103	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C104	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C105	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C106	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C107	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C108	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C109	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C110	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C112	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C113	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C114	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C115	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C116	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C117	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C118	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C119	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C120	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C121	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C122	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C123	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C124	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C125	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C126	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C127	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C128 *c	1-127-954-11	s	CAPACITOR,CHIP FILM 0.047MF
C129 *c	1-127-952-11	s	CAPACITOR,FILM 0.022MF (3216)
C130	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C131	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C132	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C133	1-127-952-11	s	CAPACITOR,FILM 0.022MF (3216)
C134	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C135	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C136	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C137	1-127-954-11	s	CAPACITOR,CHIP FILM 0.047MF
C139	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C140	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C141	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C142	1-117-887-11	s	CAPACITOR,TANTALUM 220MF/6.3V
C143	1-117-887-11	s	CAPACITOR,TANTALUM 220MF/6.3V
C146	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C147	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C148 *b	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
*a	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C150	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
CN201	1-778-451-11	o	CONNECTOR, FPC (50P)
CN301	1-569-775-21	o	PIN, CONNECTOR 5P
E101	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E102	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
CN302	1-580-055-21	o	PIN, CONNECTOR 2P

(APR-59 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN303	1-580-055-21	o	PIN, CONNECTOR 2P
IC101	8-759-549-15	s	IC SN74LV245APWR
IC102	8-759-524-09	s	IC TC74VHC153FT (EL)
IC103	8-752-368-47	s	IC CXD206-114R
IC104	8-759-482-20	s	IC IDT71V124S15Y-TL
IC105	8-759-524-09	s	IC TC74VHC153FT (EL)
IC106	8-759-431-97	s	IC NJM386M(TE2)
IC107	8-759-523-95	s	IC TC74VHC74FT(EL)
IC108	8-759-523-95	s	IC TC74VHC74FT(EL)
IC109	8-759-394-73	s	IC NJM4562M-D-TE2
IC110	8-759-466-55	s	IC 74LCX74MTCX
IC111	8-759-389-26	s	IC 74LCX08MTCX
IC114	8-759-594-71	s	IC TC7SH14FU-TE85R
Q101	8-729-927-99	s	TRANSISTOR 2SC4617R
Q102	8-729-927-99	s	TRANSISTOR 2SC4617R
Q103 *b	8-729-105-68	s	TRANSISTOR 2SC3356-K
R101	1-208-943-11	s	RESISTOR CHIP 220K
R102	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R103	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R104	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R105	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R106	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R107	1-208-943-11	s	RESISTOR CHIP 220K
R108	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R109	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R110	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R111	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R112	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R113	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R114	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R115	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R116	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R117	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R118	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R119	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R120	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R121	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R122	1-208-943-11	s	RESISTOR CHIP 220K
R123	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R124	1-208-943-11	s	RESISTOR CHIP 220K
R125	1-208-943-11	s	RESISTOR CHIP 220K
R129	1-208-943-11	s	RESISTOR CHIP 220K
R130	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R131	1-208-943-11	s	RESISTOR CHIP 220K
R132	1-208-943-11	s	RESISTOR CHIP 220K
R133	1-208-943-11	s	RESISTOR CHIP 220K
R135	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R137 *a	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R138	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R139	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R140	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R141	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R142	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R143 *d	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
*c	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R144	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R145	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)

(APR-59 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R146	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R147	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R148	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R149	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R150	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R151	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R152	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R153 *d	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
*c	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R155 *b	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
*a	1-208-679-11	s	RESISTOR CHIP 680 1/16W
R156	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R157 *b	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
*a	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R158	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R159	1-208-943-11	s	RESISTOR CHIP 220K
R160	1-208-943-11	s	RESISTOR CHIP 220K
R161	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R162	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R163	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R165 *b	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
RB101	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB102	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RV101	1-223-684-11	s	RESISTOR, VAR, CARBON 5K
RV102	1-223-684-11	s	RESISTOR, VAR, CARBON 5K
S102	1-571-787-41	s	SWITCH,TACTIL
S103	1-571-787-41	s	SWITCH,TACTIL
S104	1-771-140-11	s	SWITCH, SLIDE
S105	1-771-141-11	s	SWITCH, SLIDE
S106	1-771-140-11	s	SWITCH, SLIDE
TP101	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP102	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP103	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP104	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP105	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP106	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP107	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP109	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP110	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP111	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP112	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP113	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)

AT-143 BOARD
---

*a: Lot No. 083 - 111
*b: Lot No. 112 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-040-A	o	MOUNTED CIRCUIT BOARD, AT-143
C1	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C2	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C3	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C4	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C5	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C6	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C7	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C8	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C9	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C10	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C11	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C12	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C13	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C15	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C16	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C17	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C18	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C19	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C20	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C21	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C22	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C23	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C24	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C26	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C27	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C28	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C30	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C31	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C32	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C33	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C34	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C35	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C36	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C37	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C38	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C39	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C40	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C41	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C42	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C43	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C44	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C45	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C46	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C47	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C48 *b	1-164-854-11	s	CAPACITOR CERAMIC 15PF/16V CH
*a	1-164-856-11	s	CAPACITOR,CERAMIC 18PF/161005
C49	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C50	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C51 *b	1-164-854-11	s	CAPACITOR CERAMIC 15PF/16V CH
*a	1-164-856-11	s	CAPACITOR,CERAMIC 18PF/161005
C52	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C53	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C54	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C55	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(AT-143 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C56	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C57	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C58	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C59	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C60	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C61	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C62	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C63	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C64	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C65	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C66	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C67	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C68	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C69	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C70	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C71	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C72	1-164-854-11	s	CAPACITOR CERAMIC 15PF/16V CH
C73	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C74	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C75	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C76	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C77 *b	1-164-854-11	s	CAPACITOR CERAMIC 15PF/16V CH
*a	1-164-856-11	s	CAPACITOR,CERAMIC 18PF/161005
C78	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C79	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C80	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C81	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C82	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C83	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C84	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C85	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C86	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C87	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C88	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C89	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C90	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C91	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C92	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C93	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C94	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C95	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C96	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C97	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C98	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C99	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C100	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C101	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C102	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C103	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C104	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C105	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C106	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C107	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C108	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C109	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C110	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C111	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C112	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C113	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(AT-143 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C114	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C115	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
CN6	1-793-093-11	o	CONNECTOR, BOARD TO BOARD 60P
D1	8-719-989-00	s	DIODE DA221
D2	8-719-989-00	s	DIODE DA221
D3	8-719-989-00	s	DIODE DA221
D5	8-719-989-00	s	DIODE DA221
D6	8-719-989-00	s	DIODE DA221
E1	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
FB1	1-469-094-11	s	FERRITE, EMI (SMD)
FB2	1-469-094-11	s	FERRITE, EMI (SMD)
FB3	1-469-094-11	s	FERRITE, EMI (SMD)
IC1	8-759-497-44	s	IC TC7WH125FU(TE12R)
IC2	8-759-594-71	s	IC TC7SH14FU-TE85R
IC3	8-759-591-61	s	IC TC7WHU04FU
IC4	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC5	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC6	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC7	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC8	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC9	8-759-594-71	s	IC TC7SH14FU-TE85R
IC11	8-759-594-71	s	IC TC7SH14FU-TE85R
IC12	8-759-564-49	s	IC TC7W53FU-TE12R
IC13	8-759-447-77	s	IC TC7WH74FU (TR12R)
IC14	8-759-564-49	s	IC TC7W53FU-TE12R
IC15	8-759-564-49	s	IC TC7W53FU-TE12R
IC16	8-759-584-32	s	IC MB86189PFV-G-BND-ER
IC17	8-759-597-82	s	IC UPD4702G-E2
IC18	8-759-566-06	s	IC TC7WH08FU(TE12R)
IC19	8-759-566-06	s	IC TC7WH08FU(TE12R)
IC21	8-759-524-50	s	IC TC74VHC541FT(EL)
IC22	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC23	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC24	8-759-475-44	s	IC TC74LCX138FT(EL)
IC25	8-759-594-71	s	IC TC7SH14FU-TE85R
IC26	8-759-591-61	s	IC TC7WHU04FU
IC27	8-759-563-84	s	IC HD6437043AP00F
IC28	8-759-561-68	s	IC AM26C31CDB-E05
IC29	8-759-159-52	s	IC NJU7024M
IC30	8-759-591-61	s	IC TC7WHU04FU
IC31	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC32 *a	8-759-594-71	s	IC TC7SH14FU-TE85R
IC34	8-759-271-86	s	IC TC7SH04FU
IC35	8-759-447-77	s	IC TC7WH74FU (TR12R)
IC36	8-759-594-71	s	IC TC7SH14FU-TE85R
IC37	8-759-486-24	s	IC SN74CBT3253PW-E20
IC38	8-759-714-17	s	IC MBM29LV160BE-90TN
IC40	8-759-447-77	s	IC TC7WH74FU (TR12R)
IC41	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC42	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC45	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC46	8-759-641-62	s	IC TC55V2161FTI-85L
IC47	8-759-641-62	s	IC TC55V2161FTI-85L
IC48	8-759-651-59	s	IC SN74CBTLV3245APWR
IC49	8-759-566-06	s	IC TC7WH08FU(TE12R)
IC50	8-752-392-03	s	IC CXD1095BR
IC51	8-759-524-51	s	IC TC74VHC573FT (EL)

(AT-143 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC52	8-759-646-59	s	IC ML60851BTB
IC54	8-759-564-49	s	IC TC7W53FU-TE12R
IC55	8-759-271-86	s	IC TC7SH04FU
IC56	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC57	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC59	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC61	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC62	8-759-442-26	s	IC MAX3222CAP
IC63	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC64	8-759-271-86	s	IC TC7SH04FU
IC65	8-759-594-17	o	IC CXD9093R
IC66	8-759-271-86	s	IC TC7SH04FU
IC67	8-759-524-10	s	IC TC74VHC157FT (EL)
IC68	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC69	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC70	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC71	8-759-683-24	s	IC MAX821RUS-T
IC72	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC73	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC74	8-759-564-49	s	IC TC7W53FU-TE12R
IC75	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC76	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC77	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC78	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC79	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC80	8-759-392-77	s	IC SN74LVC245APW (E20)
IC81	8-759-392-77	s	IC SN74LVC245APW (E20)
IC82	8-759-392-77	s	IC SN74LVC245APW (E20)
IC83	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC84	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC85	8-759-566-06	s	IC TC7WH08FU(TE12R)
IC86 *b	8-759-271-86	s	IC TC7SH04FU
IC87 *b	8-759-196-93	s	IC TC7SH00FU-TE85R
L1	1-416-344-11	s	COIL, CHOKE 10UH
L2	1-412-943-11	s	INDUCTOR 2.2UH (2520)
L3	1-414-398-11	s	INDUCTOR (SMD) 10UH
PH1	8-749-014-35	s	IC HCPL-0630-500
Q1	8-729-928-81	s	TRANSISTOR DTC144EE
Q2	8-729-928-81	s	TRANSISTOR DTC144EE
Q3	8-729-927-99	s	TRANSISTOR 2SC4617R
Q4	8-729-928-81	s	TRANSISTOR DTC144EE
Q5	8-729-927-99	s	TRANSISTOR 2SC4617R
Q6	8-729-928-81	s	TRANSISTOR DTC144EE
Q7	8-729-928-81	s	TRANSISTOR DTC144EE
Q8	8-729-928-27	s	TRANSISTOR DTA144EE
Q9	8-729-928-81	s	TRANSISTOR DTC144EE
Q10	8-729-928-81	s	TRANSISTOR DTC144EE
Q11	8-729-928-27	s	TRANSISTOR DTA144EE
Q12	8-729-041-23	s	TRANSISTOR NDS356AP
Q13	8-729-041-23	s	TRANSISTOR NDS356AP
Q14	8-729-041-24	s	TRANSISTOR NDS355AN
Q15	8-729-928-81	s	TRANSISTOR DTC144EE
Q16	8-729-928-81	s	TRANSISTOR DTC144EE
R1	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R2	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R3	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R4	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(AT-143 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R5	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R6	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R7	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R8	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R9	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R10	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R11	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R12	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R13	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R14	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R15	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R16	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R17	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R18	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R19	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R20	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R21	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R22	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R23	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R24	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R25	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R26	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R27	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R28	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R29	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R30	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R31	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R32	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R33	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R34	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R35 *b	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
*a	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R36	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R37	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R38	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R39	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R40	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R41	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R42	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R46	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R52	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R53	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R54	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R55	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R56	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R57	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R61	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R62	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R63	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R64	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R65	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R67	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R68	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R70	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R71	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R72	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R73	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R74	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R75	1-208-931-11	s	RESISTOR, CHIP 68K (1005)

(AT-143 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R76	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R77	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R78	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R79	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R83	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R84	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R85	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R86	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R87	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R88	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R89	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R90	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R91	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R92	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R95	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R96	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R97	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R98	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R99	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R100	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R101	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R102	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R103	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R104	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R105	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R106	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R107	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R108	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R109	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R110	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R111	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R112	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R113	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R114	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R115	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R116	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R117	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R118	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R119	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R120	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R121	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R122	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R123	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R124	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R125	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R126	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R127	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R128	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R129	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R130	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R131	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R132	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R133	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R134	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R135	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R136	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R137	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R138	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R139	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(AT-143 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R140	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R141	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R142	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R143	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R144	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R145	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R146	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R147	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R148	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R149	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R150	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R151	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R152	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R153	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R154	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R155	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R156	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R157	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R158	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R159	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R160	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R161	1-208-943-11	s	RESISTOR CHIP 220K
R162	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R163	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R164	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R165	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R166	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R167	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R168	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R169	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R170	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R171	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R172	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R173	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R174	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R175	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R176	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R177	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R178	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R179	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R181	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R182	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R183	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R185	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R186	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R187	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R188	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R189	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R190	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R191	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R192	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R193	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R194	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)

AXM-24 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-332-A	o	MOUNTED CIRCUIT BOARD, AXM-24
2pcs	4-937-336-21	o	HOLDER, LED
4pcs	4-937-336-42	o	HOLDER, LED
C102	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C103	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C104	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C105	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C106	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C107	1-126-405-11	s	CAPACITOR,ELECT 10MF/50V(CHIP
C108	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C109	1-107-906-11	s	CAPACITOR,ELECT 10MF/50V(105)
C110	1-107-906-11	s	CAPACITOR,ELECT 10MF/50V(105)
C111	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C112	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C113	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C114	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C115	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C116	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C118	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C202	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C203	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C204	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C205	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C206	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C207	1-126-405-11	s	CAPACITOR,ELECT 10MF/50V(CHIP
C208	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C209	1-107-906-11	s	CAPACITOR,ELECT 10MF/50V(105)
C210	1-107-906-11	s	CAPACITOR,ELECT 10MF/50V(105)
C211	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C212	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C213	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C214	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C218	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
CN101	1-573-594-21	o	CONNECTOR, XLR TYPE 3P
CN201	1-573-594-21	o	CONNECTOR, XLR TYPE 3P
CN301	1-774-795-11	s	CONNECTOR, XLR (RECEPTACLE) 5P
CN401	1-778-649-11	o	CONNECTOR, FFC (ZIF) 24P
D101	8-719-820-41	s	DIODE 1SS302
D102	8-719-820-41	s	DIODE 1SS302
D201	8-719-820-41	s	DIODE 1SS302
D202	8-719-820-41	s	DIODE 1SS302
D301	8-719-053-78	s	LED SLR-332VC3F
D401	8-719-985-00	s	LED GL451VS1
FB101	1-543-775-11	s	BEAD, FERRITE
FB102	1-543-775-11	s	BEAD, FERRITE
FB201	1-543-775-11	s	BEAD, FERRITE
FB202	1-543-775-11	s	BEAD, FERRITE
FL301	1-239-895-11	s	FILTER, EMI (SMD)
FL302	1-239-895-11	s	FILTER, EMI (SMD)
FL303	1-239-895-11	s	FILTER, EMI (SMD)
FL304	1-239-895-11	s	FILTER, EMI (SMD)
IC101	8-759-111-56	s	IC UPC4572G2
IC201	8-759-111-56	s	IC UPC4572G2
Q101	8-729-271-31	s	TRANSISTOR 2SC2713-G
Q102	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q201	8-729-271-31	s	TRANSISTOR 2SC2713-G
Q202	8-729-029-14	s	TRANSISTOR DTC144EUA-T106

(AXM-24 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q403	8-729-926-31	s	PHOTO TRANSISTOR PT483F1S
Q404	8-729-927-99	s	TRANSISTOR 2SC4617R
Q405	8-729-926-31	s	PHOTO TRANSISTOR PT483F1S
Q406	8-729-927-99	s	TRANSISTOR 2SC4617R
Q407	8-729-928-99	s	TRANSISTOR DTC143XE
R102	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R104	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R105	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R106	1-208-790-11	s	RESISTOR,CHIP 2.2K 1/10W(2012)
R107	1-208-790-11	s	RESISTOR,CHIP 2.2K 1/10W(2012)
R108	1-208-790-11	s	RESISTOR,CHIP 2.2K 1/10W(2012)
R109	1-208-790-11	s	RESISTOR,CHIP 2.2K 1/10W(2012)
R110	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R111	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R112	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R113	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R114	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R115	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R117	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R118	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R119	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R120	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R121	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W
R122	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R123	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R124	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R125	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R126	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R127	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R128	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R129	1-208-814-11	s	RESISTOR,CHIP 22K 1/10W (2012)
R130	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R131	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R132	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R133	1-218-748-11	s	RESISTOR,CHIP 220K 1/16W(1608)
R202	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R204	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R205	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R206	1-208-790-11	s	RESISTOR,CHIP 2.2K 1/10W(2012)
R207	1-208-790-11	s	RESISTOR,CHIP 2.2K 1/10W(2012)
R208	1-208-790-11	s	RESISTOR,CHIP 2.2K 1/10W(2012)
R209	1-208-790-11	s	RESISTOR,CHIP 2.2K 1/10W(2012)
R210	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R211	1-208-778-11	s	RESISTOR,CHIP 680 1/10W (2012)
R212	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R213	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R214	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R215	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R216	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R217	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R218	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R219	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R220	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R221	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R222	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R223	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W
R224	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R225	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R227	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)

(AXM-24 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R228	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R229	1-208-814-11	s	RESISTOR,CHIP 22K 1/10W (2012)
R230	1-208-818-11	s	RESISTOR,CHIP 33K 1/10W (2012)
R231	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R232	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R233	1-218-748-11	s	RESISTOR,CHIP 220K 1/16W(1608)
R301	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R304	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R402	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R403	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R404	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R405	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R406	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R407	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R408	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
S101	1-572-042-11	s	SWITCH,SLIDE (2-4-3)
S201	1-572-042-11	s	SWITCH,SLIDE (2-4-3)

BP-33 BOARD
---

*a: Lot No. 083 - 0A2
*b: Lot No. 0A3 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-087-A	o	MOUNTED CIRCUIT BOARD, BP-33
1pc	1-759-081-11	o	HOLDER, BATTERY
BT101 ⚠	1-528-229-41	s	BATTERY, LITHIUM (CR-2450)
CN303 *b	1-695-320-21	o	PIN, CONNECTOR(1.5MM)SMD 2P
*a	1-580-055-21	o	PIN, CONNECTOR 2P
R1	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

CCM-45 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-343-A	o	MOUNTED CIRCUIT BOARD, CCM-45
C101	1-164-860-11	s	CAPACITOR,CHIP CERAMIC 27PF/16
C102	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C103	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C104	1-164-860-11	s	CAPACITOR,CHIP CERAMIC 27PF/16
C105	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C106	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C107	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C108	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C109	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C110	1-164-848-11	s	CAPACITOR,CERAMIC 8PF/16V(1005
C117	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C118	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C119	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C120	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C121	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C122	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C123	1-117-808-91	s	CAPACITOR,CERAMIC 10MF/10V(B)
C125	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C126	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C128	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C129	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C130	1-117-808-91	s	CAPACITOR,CERAMIC 10MF/10V(B)
C131	1-117-808-91	s	CAPACITOR,CERAMIC 10MF/10V(B)
C132	1-117-808-91	s	CAPACITOR,CERAMIC 10MF/10V(B)
C133	1-127-738-11	s	CAPACITOR, CERAMIC 4.7MF/25V
C134	1-164-938-11	s	CAPACITOR,CERAMIC 1500PF/16VB
CN1	1-774-792-21	s	CONNECTOR, FPC/FFC (4P)
CN2	1-778-645-11	o	CONNECTOR, FFC (ZIF) 10P
CT101	1-141-345-11	s	CAPACITOR,TRIMMER(CHIP) 40PF
IC101	8-759-654-91	s	IC CXD9137R
IC102	8-759-654-92	s	IC CXA8103M-TLM
L101	1-410-378-11	s	INDUCTOR,CHIP 5.6UH (3225)
L102	1-410-378-11	s	INDUCTOR,CHIP 5.6UH (3225)
L103	1-410-369-11	s	INDUCTOR,CHIP 1UH (3225)
L104	1-410-369-11	s	INDUCTOR,CHIP 1UH (3225)
L105	1-412-056-11	s	INDUCTOR 4.7UH (3225)
L106	1-412-056-11	s	INDUCTOR 4.7UH (3225)
L107	1-412-056-11	s	INDUCTOR 4.7UH (3225)
L108	1-412-056-11	s	INDUCTOR 4.7UH (3225)
L109	1-414-398-11	s	INDUCTOR (SMD) 10UH
Q101	8-729-101-07	s	TRANSISTOR 2SB798
Q102	8-729-928-81	s	TRANSISTOR DTC144EE
Q103	8-729-101-07	s	TRANSISTOR 2SB798
Q104	8-729-928-81	s	TRANSISTOR DTC144EE
Q106	8-729-928-27	s	TRANSISTOR DTA144EE
R101	1-208-943-11	s	RESISTOR CHIP 220K
R102	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R103	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R104	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R105	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R106	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R107	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R108	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R109	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R110	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)

(CCM-45 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R111	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R113	1-208-943-11	s	RESISTOR CHIP 220K
R114	1-208-943-11	s	RESISTOR CHIP 220K
R115	1-208-943-11	s	RESISTOR CHIP 220K
R116	1-208-943-11	s	RESISTOR CHIP 220K
R117	1-208-943-11	s	RESISTOR CHIP 220K
R120	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R121	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R125	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R126	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
RB101	1-234-371-11	s	RES, NETWORK 47X4 (1005)
TP101	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP102	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP103	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
X101	1-781-977-11	s	VIBRATOR, CRYSTAL (SMD)

CI-27 BOARD
---

*a: Lot No. 0A3 -
*b: Lot No. 083 - 111
*c: Lot No. 112 -

Ref. No. or Q'ty	Part No.	SP	Description
C600	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C602	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C603	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C631	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C632	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C633	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C634	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C635	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C650	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C651	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
CN601	1-784-625-11	o	CONNECTOR, FFC (ZIF) 30P
CN602	1-784-625-11	o	CONNECTOR, FFC (ZIF) 30P
CN603	1-784-847-11	o	CONNECTOR,BOARD TO BOARD 50P
FB600 *c	1-469-134-11	s	FERRITE, EMI (SMD)
FB601 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB602 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB603 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB604 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB605 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB606 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB607 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB608 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB609 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB610 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB611 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB612 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB613 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB614 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB615 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB616 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB617 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB618 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB619 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB620 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB621 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB622 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB623 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB624 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB625 *c	1-414-864-11	s	INDUCTOR, MICRO (CHIP TYPE)
FB626 *c	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB627 *c	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB628 *c	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB629 *c	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB630 *c	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB631 *c	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB632 *c	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
IC600	8-759-475-55	s	IC TC74LCX574FT(EL)
IC601	8-759-475-55	s	IC TC74LCX574FT(EL)
IC602	8-759-475-55	s	IC TC74LCX574FT(EL)
IC630	8-759-271-86	s	IC TC7SH04FU
IC631	8-759-547-49	s	IC CDC509PWR
IC650	8-759-497-44	s	IC TC7WH125FU(TE12R)
IC651	8-759-549-15	s	IC SN74LV245APWR

(CI-27 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description	
R631 *c	1-218-945-11	s	RESISTOR,CHIP 220 1/16W	(1005)
*b	1-208-671-11	s	RESISTOR,CHIP 330 1/16W	(1005)
R632 *b	1-208-855-81	s	RESISTOR,CHIP 47 1/16W	(1005)
R650 *a	1-208-855-81	s	RESISTOR,CHIP 47 1/16W	(1005)
R651 *a	1-208-855-81	s	RESISTOR,CHIP 47 1/16W	(1005)
R652 *c	1-218-945-11	s	RESISTOR,CHIP 220 1/16W	(1005)
R653 *c	1-208-855-81	s	RESISTOR,CHIP 47 1/16W	(1005)
R654 *c	1-208-855-81	s	RESISTOR,CHIP 47 1/16W	(1005)
R655 *c	1-208-855-81	s	RESISTOR,CHIP 47 1/16W	(1005)
R656 *c	1-208-855-81	s	RESISTOR,CHIP 47 1/16W	(1005)
RB600	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB606 *b	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB607 *b	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB608 *b	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB609 *b	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB610 *b	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB611 *b	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB612	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB650	1-234-371-11	s	RES, NETWORK 47X4	(1005)

http://getMANUAL.com

CN-2037 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-016-A	o	MOUNTED CIRCUIT BOARD, CN-2037
C1	1-127-518-11	s	CAPACITOR,ELECT 100MF/16V
C2	1-113-981-11	s	CAPACITOR TANTALUM 22MF/20V
C3	1-113-981-11	s	CAPACITOR TANTALUM 22MF/20V
C4	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C5	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C6	1-113-991-11	s	CAPACITOR TANTALUM 33MF/16V
C7	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C9	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C10	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C11	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C12	1-104-913-11	s	CAPACITOR,TANTALUM 10MF/16V
C13	1-127-518-11	s	CAPACITOR,ELECT 100MF/16V
C14	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
CN1	1-778-003-11	o	CONNECTOR, BOARD TO BOARD 80P
CN2	1-785-767-21	o	CONNECTOR, FPC 30P
CN3	1-785-767-21	o	CONNECTOR, FPC 30P
CN4	1-785-767-21	o	CONNECTOR, FPC 30P
IC1	8-759-185-42	s	IC LM4040AIM3-2.5
IC2	8-759-381-53	s	IC UPC814G2-E2
Q1	8-729-117-32	s	TRANSISTOR 2SC4177
Q3	8-729-014-93	s	TRANSISTOR 2SB1440S-TX
R1	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R2	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R3	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R4	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R7	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R8	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R9	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)

CNB-15 BOARD
---

*a: Lot No. 083 - 0A2
*b: Lot No. 0A3 -
*c: Lot No. 083 - 111
*d: Lot No. 112 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-335-A	o	MOUNTED CIRCUIT BOARD, CNB-15
C101	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C103	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C104 *d	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
*c	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C105	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C108 *c	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C109	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C110	1-164-949-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C111	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C112	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F
C114	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C116	1-107-916-11	s	CAPACITOR, ELECT 3300MF/50V
C117	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C118	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C119	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C120	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C121	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C122	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C123	1-107-702-11	s	CAPACITOR ELECT 100MF/25V(BP)
C124	1-107-702-11	s	CAPACITOR ELECT 100MF/25V(BP)
C125 *b	1-125-891-11	s	CAPACITOR CERAMIC 0.47MF/10V
C126 *d	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C301	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C302	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C303	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C304	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C305	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C306	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C307	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C308	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C309	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C310	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C311	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C312	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C313	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C314	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C315	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C316	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C317	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C318	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C319	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C320	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C321 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
CN101	1-770-161-21	s	PIN, CONNECTOR (SMT) 6P
CN102	1-779-992-11	s	PRINTED WIRING BOARD, —
CN103	1-750-005-11	o	PIN,CONNECTOR 4P
CN104	1-770-160-21	s	PIN, CONNECTOR (SMT) 2P
CN105	1-766-376-11	o	PIN, CONNECTOR (1.5MM)(SMD) 9P
CN401	1-778-649-11	o	CONNECTOR, FFC (ZIF) 24P
CN402	1-568-332-51	s	CONNECTOR,12P BOARD TO BOARD
CN403	1-568-332-51	s	CONNECTOR,12P BOARD TO BOARD

(CNB-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D101	8-719-989-03	s	DIODE DAN222
D102	8-719-106-88	s	DIODE RD15M-B1
D104	8-719-989-03	s	DIODE DAN222
D105	8-719-989-03	s	DIODE DAN222
D106	8-719-066-98	s	DIODE RB051L-40
D107	8-719-066-98	s	DIODE RB051L-40
*d D108	8-719-989-03	s	DIODE DAN222
D201	8-719-989-00	s	DIODE DA221
D202	8-719-989-00	s	DIODE DA221
D203	8-719-989-00	s	DIODE DA221
D204	8-719-989-00	s	DIODE DA221
D205	8-719-989-00	s	DIODE DA221
D206	8-719-989-00	s	DIODE DA221
D301	8-719-029-63	s	DIODE RD4.3UH-T1
D302	8-719-029-63	s	DIODE RD4.3UH-T1
IC101	8-759-560-89	s	IC MB3761PF-ER
IC103	8-759-209-97	s	IC TC4S81F
IC104	8-759-209-97	s	IC TC4S81F
IC105	8-759-209-97	s	IC TC4S81F
IC106	8-759-209-57	s	IC TC4S69F
IC107	8-759-209-97	s	IC TC4S81F
IC108	8-759-475-89	s	IC LT1121CST-5-TR
IC109	8-759-588-01	s	IC LTC1473CGN-E2
IC301 *b	8-759-185-42	s	IC LM4040AIM3-2.5
*a	8-759-183-53	s	IC TL431CPK-E2
IC302	8-759-710-78	s	IC NJM082BM
L1	1-414-854-11	s	INDUCTOR (SMD) 1000UH
L301	1-410-737-31	s	INDUCTOR,CHIP 0.47UH (3225)
L302	1-410-737-31	s	INDUCTOR,CHIP 0.47UH (3225)
Q101	8-729-024-45	s	TRANSISTOR 2SK2315TY
Q103	8-729-927-99	s	TRANSISTOR 2SC4617R
Q104	8-729-927-99	s	TRANSISTOR 2SC4617R
Q107	8-729-041-24	s	TRANSISTOR NDS355AN
Q110	8-729-048-79	s	TRANSISTOR SI4466DY-T1
Q111	8-729-048-79	s	TRANSISTOR SI4466DY-T1
Q112	8-729-048-79	s	TRANSISTOR SI4466DY-T1
Q114	8-729-048-79	s	TRANSISTOR SI4466DY-T1
Q115	8-729-048-79	s	TRANSISTOR SI4466DY-T1
Q116	8-729-048-79	s	TRANSISTOR SI4466DY-T1
Q119	8-729-928-81	s	TRANSISTOR DTC144EE
Q120	8-729-048-79	s	TRANSISTOR SI4466DY-T1
Q121	8-729-048-79	s	TRANSISTOR SI4466DY-T1
Q122	8-729-048-79	s	TRANSISTOR SI4466DY-T1
Q123	8-729-048-79	s	TRANSISTOR SI4466DY-T1
Q124	8-729-048-79	s	TRANSISTOR SI4466DY-T1
Q125	8-729-048-79	s	TRANSISTOR SI4466DY-T1
Q126	8-729-928-81	s	TRANSISTOR DTC144EE
Q301	8-729-808-42	s	TRANSISTOR 2SD1624-T
Q302	8-729-020-94	s	TRANSISTOR 2SA1314C-TE12L
Q303	8-729-928-27	s	TRANSISTOR DTA144EE
Q304	8-729-928-27	s	TRANSISTOR DTA144EE
Q305	8-729-928-81	s	TRANSISTOR DTC144EE
Q306	8-729-045-28	s	TRANSISTOR SI4532DY-T1
Q307	8-729-928-81	s	TRANSISTOR DTC144EE
Q310	8-729-045-28	s	TRANSISTOR SI4532DY-T1
R101	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R105	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R106	1-208-955-11	s	RESISTOR CHIP 680K

(CNB-15 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R107	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R108	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R109	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R110	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R111	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R112	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R113	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R117	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R119	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R120	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R121	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R125	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R126	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R127	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R129	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R131 *c	1-208-943-11	s	RESISTOR CHIP 220K
R132	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R136	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R137	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R138	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R141	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R142	1-219-685-11	s	RES, CHIP (SQUARE TYPE) 0.05
R143	1-219-685-11	s	RES, CHIP (SQUARE TYPE) 0.05
R145	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R146	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R147	1-219-685-11	s	RES, CHIP (SQUARE TYPE) 0.05
R148	1-208-943-11	s	RESISTOR CHIP 220K
R149	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R150 *d	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
*c	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R151	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R152	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R154	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R301 *b	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
*a	1-208-679-11	s	RESISTOR,CHIP 680 1/16W (1005)
R302	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R303	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R304 *d	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
*c	1-208-709-11	s	RESISTOR,CHIP 33K 1/16W (1005)
R305 *d	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
*c	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R306	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R307	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R308 *d	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
*c	1-208-866-11	s	RESISTOR, CHIP 910 1/16W(1005)
R309	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R310	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R311	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R312	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R313	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R314	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R315	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R316	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R317 *d	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
THP1 ⚠	1-803-070-11	s	THERMISTOR, POSITIVE

DC-111 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-022-A	o	MOUNTED CIRCUIT BOARD, DC-111
C1	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C2	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C3	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C4	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C5	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C6	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C7	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
FB1	1-414-581-21	s	INDUCTOR, CHIP
FB2	1-414-581-21	s	INDUCTOR, CHIP
FB3	1-414-581-21	s	INDUCTOR, CHIP
FB4	1-414-581-21	s	INDUCTOR, CHIP
FL5	1-239-896-12	s	FILTER, EMI (SMD)
FL6	1-239-896-12	s	FILTER, EMI (SMD)
FL7	1-239-896-12	s	FILTER, EMI (SMD)

DCP-28 BOARD

*a: Lot No. 083 - 0A2
*b: Lot No. 0A3 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-039-A	o	MOUNTED CIRCUIT BOARD, DCP-28
1pc	8-759-586-32	s	IC AT17LV512-10JC
2pcs	3-603-737-02	o	LEVER,BOARD
3pcs	3-729-061-01	s	SCREW (M2X4.5) (TYPE 1)(STEEL)
7pcs	3-633-475-01	o	SUPPORT(7)
7pcs	3-729-013-41	s	SCREW(M1.4X3.5),WASHERHEAD(+P)
1pc	3-629-482-01	o	SHILD SHEET(DCP)
1pc	3-631-372-01	o	FINGER(DCP),SHIELD
1pc	3-629-623-01	o	HEAT SINK,DCP
1pc	3-629-624-01	o	HEAT TRANS SHEET(SCVP)
2pcs	3-729-013-41	s	SCREW(M1.4X3.5),WASHERHEAD(+P)
C1	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C2	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C101	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C102	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C103	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C104	1-113-991-11	s	CAPACITOR TANTALUM 33MF/16V
C105	1-113-991-11	s	CAPACITOR TANTALUM 33MF/16V
C106	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C107	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C108	1-113-991-11	s	CAPACITOR TANTALUM 33MF/16V
C109	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C110	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C111	1-113-991-11	s	CAPACITOR TANTALUM 33MF/16V
C112	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C113	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C114	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C115	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C116	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C117	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C118	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C119	1-128-661-11	s	CAPACITOR, CHIP CERAMIC
C120	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C121	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C122	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C123	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C124	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C125	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C126	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C127	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C128	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C129	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C130	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C131	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C132	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/16
C133	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C134	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C135	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C136	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C137	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C138	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C139	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C140	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C141	1-113-986-11	s	CAPACITOR,TANTALUM 2.2MF/25V
C142	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C143	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C144	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C145	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C201	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C202	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C203	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C204	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C205	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C206	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C207	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C211	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C212	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C213	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C214	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C215	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C216	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C217	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/16
C218	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C219	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C220	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C221	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C222	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C223	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C224	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C225	1-135-333-11	s	CAPACITOR TANTALUM 1MF/16V
C226	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C227	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C228	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C229	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C230	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C231	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C232	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C233	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C234	1-119-750-11	s	CAPACITOR,TANTALUM 22MF/6.3V
C235	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/16
C239	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C240	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C241	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C242	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C243	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C244	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C245	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/16V
C246	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/16V
C247	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/16V
C248	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C249	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C250	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C251	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C252	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C253	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C254	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C255	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C256	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C257	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C258	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C259	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C260	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C261	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C262	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C266	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C267	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C268	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C269	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C270	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C271	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C272	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C273	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C274	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C275	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C276	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C277	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C278	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C279	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C280	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C281	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C282	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C283	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C284	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C285	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C286	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C287	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/16
C288	1-135-333-11	s	CAPACITOR TANTALUM 1MF/16V
C289	1-135-333-11	s	CAPACITOR TANTALUM 1MF/16V
C290	1-135-333-11	s	CAPACITOR TANTALUM 1MF/16V
C291	1-135-333-11	s	CAPACITOR TANTALUM 1MF/16V
C292	1-135-333-11	s	CAPACITOR TANTALUM 1MF/16V
C293	1-135-333-11	s	CAPACITOR TANTALUM 1MF/16V
C294	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C295	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C296	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C297	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C298	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C299	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C300	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C301	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C302	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C303	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C304	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C305	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C306	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C307	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C308	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C309	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C310	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C311	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C312	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C313	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C314	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C315	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C316	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C317	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C318	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C319	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C320	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C321	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C322	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C323	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C324	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C325	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C326	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C327	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C328	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C329	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C330	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C331	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C332	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C333	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C334	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C335	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C336	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C337	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C338	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C339	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C340	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C341	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C342	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C343	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C344	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C345	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C346	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C347	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C348	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C349	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C350	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C351	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C352	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C353	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C354	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C355	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C356	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C357	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C358	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C359	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C360	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C361	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C362	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C363	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C364	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C365	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C366	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C367	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C368	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C369	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C370	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C371	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C372	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C373	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C374	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C375	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C376	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C377	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C378	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C379	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C380	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C381	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C382	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C383	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C384	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C385	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C386	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C387	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C388	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C389	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C390	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C391	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C392	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C393	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C394	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C395	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C396	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C397	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C398	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C399	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C400	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C401	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C402	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C403	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C404	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C411	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C412	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C413	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C414	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C415	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C416	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C417	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C418	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C419	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C420	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C421	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C422	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C423	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C424	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C425	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C426	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C427	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C428	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C429	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C430	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C431	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C432	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C433	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C434	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C435	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C436	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C437	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C438	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C439	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C440	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C441	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C442	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C443	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C444	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C445	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C446	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C447	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C448	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C449	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C450	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C451	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C452	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C453	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C454	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C455	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C456	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C457	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C458	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C459	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C460	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C461	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C462	1-110-569-11	s	CAPACITOR,TANTALUM 47MF/6.3V
C463	1-110-569-11	s	CAPACITOR,TANTALUM 47MF/6.3V
C464	1-110-569-11	s	CAPACITOR,TANTALUM 47MF/6.3V
C465	1-104-914-11	s	CAPACITOR,TANTALUM 22MF/16V
C466	1-104-914-11	s	CAPACITOR,TANTALUM 22MF/16V
C467	1-104-914-11	s	CAPACITOR,TANTALUM 22MF/16V
C468	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C469	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C470	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C471	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C472	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C473	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C474	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C475	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C476	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C477	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C478	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C479	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C480	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C481	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C482	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C483	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C484	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C485	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C486	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C487	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C488	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C489	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C490	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C491	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C492	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C493	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C494	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C495	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C496	1-104-915-11	s	CAPACITOR,CHIP 2.2MF/20V
C497	1-104-915-11	s	CAPACITOR,CHIP 2.2MF/20V
C498	1-104-915-11	s	CAPACITOR,CHIP 2.2MF/20V
C499	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C501	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C502	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C503	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C504	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C505	1-127-950-11	s	CAPACITOR,CHIP FILM 0.01MF
C506	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C507	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C508	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C509	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C510	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C511	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C512	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C513	1-127-950-11	s	CAPACITOR,CHIP FILM 0.01MF
C514	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C515	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C516	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C517	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C518	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C519	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C520	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C521	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C522	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C523	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C524	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C525	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C526	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C527	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C528	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C529	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C530	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C531	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C532	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C533	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C534	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C535	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C536	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C537	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C538	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C539	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C540	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C541	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C542	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C543	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C544	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C545	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C546	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C547	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C548	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C549	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C550	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C551	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C552	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C553	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C554	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C555	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C556	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C557	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C558	1-164-936-11	s	CAPACITOR,CHIP CERAMIC 680PF
C559	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C560	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C601	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C602	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C603	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C604	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C605	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C606	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C607	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C608	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C609	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C610	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C611	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C612	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C613	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C614	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C615	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C616	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C617	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C618	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C619	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C620	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C621	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C622	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C623	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C624	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C625	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C626	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C627	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C628	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C629	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C630	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C631	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C632	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C633	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C634	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C635	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C636	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C637	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C638	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C639	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C640	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C641	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C642	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C643	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C644	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C645	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C646	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C701	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C702	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C703	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C704	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C705	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C706	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C707	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C709	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C710	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C711	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C712	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C713	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C714	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C715	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C716	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C717	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C718	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C719	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C720	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C721	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C722	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C723	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C724	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C725	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C801	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C802	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C803	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C805	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C806	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C807	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C808	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C809	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C810	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C811	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C812	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C813	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C814	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C815	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C816	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C817	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C818	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C819	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C820	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C821	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C822	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C823	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C824	1-164-882-11	s	CAPACITOR,CERAMIC 220PF/16V CH
C825	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C826	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C827	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C828	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C829	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C830	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C831	1-104-916-11	s	CAPACITOR TANTALUM 6.8MF/20V
C832	1-110-569-11	s	CAPACITOR,TANTALUM 47MF/6.3V
C833	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C834	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C835	1-164-868-11	s	CAPACITOR,CHIP CERAMIC 56PF
C836	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C837	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/16
C838	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C839	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/16
C840	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C841	1-164-846-11	s	CAPACITOR,CHIP CERAMIC 6PF/16V
C842	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C843	1-135-145-11	s	CAPACITOR TANTALUM 0.47MF/35V
C844	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C845	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C846	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C847	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C848	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C849	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C850	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C851	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C852	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C853	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C854	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C855	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C856	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C857	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C858	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C859	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C860	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C861	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C862	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C863	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C864	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C865	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C866	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C867	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C868	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C869	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C870	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C871	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C872	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C873	1-104-913-11	s	CAPACITOR,TANTALUM 10MF/16V
C874	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C875	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C876	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C877	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C901	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C902	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C903	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C905	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C906	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C907	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C908	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C909	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C910	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C911	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C912	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C913	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C914	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C915	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C916	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C917	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C918	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C919	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C920	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C921	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C922	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C923	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C924	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C925	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C926	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C927	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C928	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C929	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C930	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C931	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C932	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C933	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C934	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C935	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C936	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C937	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C938	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C939	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C940	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1001	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1002	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1003	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1004	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1005	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1006	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1007	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1008	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1009	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1010	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1011	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1012	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1013	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1014	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1016	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C1017	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1018	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1019	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1020	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1021	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1022	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1023	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1024	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1025	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1026	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1027	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1028	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1029	1-104-914-11	s	CAPACITOR,TANTALUM 22MF/16V
C1030	1-104-914-11	s	CAPACITOR,TANTALUM 22MF/16V
C1031	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1032	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1033	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1034	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1035	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1036	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1037	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1038	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1039	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1040	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1041	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1042	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1043	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1044	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1045	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1046	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C1047	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C1048	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1049	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1050	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1051	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1052	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1053	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1054	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1055	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1056	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1057	1-104-914-11	s	CAPACITOR,TANTALUM 22MF/16V
C1102	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1103	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1106	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1107	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1108	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1109	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1110	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1111	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1113	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1114	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1115	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1116	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1117	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1118	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1119	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1120	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1121	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1122	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1123	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1124	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1125	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1126	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1127	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C1128	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C1129	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1130	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C1131	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C1132	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C1133	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C1134	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C1135	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C1136	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C1137	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1138	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1139	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1140	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1141	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1142	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1143	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1144	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1145	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1146	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1147	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1148	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1149	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1150	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1151	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1152	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1153	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1154	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1155	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1156	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1157	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1158	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1159	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1160	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1161	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1162	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1164	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1165	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1166	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1167	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1168	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1169	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1170	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1172	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1173	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C1174	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1175	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1176	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1177	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1178	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1179	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1180	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1181	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1182	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C1183	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C1184	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C1185	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1186	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1187	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1188	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1189	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C1190	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1191	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1192	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C1193	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1194	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C1195	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1196	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C1197	1-164-840-11	s	CAPACITOR,CHIP CERAMIC 1.5PF
C1198	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1199	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1200	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1201	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C1202	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C1203	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C1204	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1206	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1207	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1208	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1209	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1210	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1212	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C1213	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C1214	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C1215	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1216	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1217	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1218	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1219	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C1220	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C1221	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C1222	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C1301	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1302	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1303	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1304	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1305	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1306	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1307	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1308	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1309	1-125-990-11	s	CAPACITOR,TANTALUM 47MF/20V
C1310	1-115-581-11	s	CAPACITOR CHIP ELECT 100MF/16V
C1311	1-115-581-11	s	CAPACITOR CHIP ELECT 100MF/16V
C1312	1-117-887-11	s	CAPACITOR,TANTALUM 220MF/6.3V
C1313	1-113-500-11	s	CAPACITOR TANTALUM 100MF/10V
C1314	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1315	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C1316	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C1318	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C1319	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1320	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1321	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1322	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1323	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1324	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1325	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1326	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1327	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1328	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C1329	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1330	1-113-500-11	s	CAPACITOR TANTALUM 100MF/10V
C1331	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1332	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1333	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1334	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1335	1-115-581-11	s	CAPACITOR CHIP ELECT 100MF/16V
C1336	1-115-581-11	s	CAPACITOR CHIP ELECT 100MF/16V
C1337	1-115-581-11	s	CAPACITOR CHIP ELECT 100MF/16V
C1338	1-115-581-11	s	CAPACITOR CHIP ELECT 100MF/16V
C1339	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C1340	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C1341	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C1342	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C1343	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1344	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1345	1-113-981-11	s	CAPACITOR TANTALUM 22MF/20V
C1346	1-113-981-11	s	CAPACITOR TANTALUM 22MF/20V
C1347	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1348	1-104-914-11	s	CAPACITOR,TANTALUM 22MF/16V
C1349	1-113-987-11	s	CAPACITOR TANTALUM 4.7MF/25V
C1350	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1351	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1352	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1353	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1354	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1355	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C1358	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C1359	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
CN4	1-778-551-11	o	PIN, CONNECTOR 20P
CN105	1-778-650-11	o	CONNECTOR, FFC (ZIF) 30P
D1	8-719-991-00	s	DIODE DAP222
D2	8-719-991-00	s	DIODE DAP222
D100	8-719-989-00	s	DIODE DA221
D101	8-719-991-00	s	DIODE DAP222
D102	8-719-991-00	s	DIODE DAP222
D103	8-719-991-00	s	DIODE DAP222

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D600	8-719-989-00	s	DIODE DA221
D601	8-719-059-52	s	DIODE MA3J14300LSO
D602	8-719-059-52	s	DIODE MA3J14300LSO
D800	8-719-989-00	s	DIODE DA221
D801	8-719-989-00	s	DIODE DA221
D802	8-719-989-00	s	DIODE DA221
D803	8-719-989-00	s	DIODE DA221
D804	8-719-989-00	s	DIODE DA221
D805	8-719-989-00	s	DIODE DA221
D806	8-719-989-00	s	DIODE DA221
D807	8-719-989-00	s	DIODE DA221
D952	8-759-185-42	s	IC LM4040AIM3-2.5
D953	8-719-989-00	s	DIODE DA221
D954	8-719-989-00	s	DIODE DA221
D955	8-719-991-00	s	DIODE DAP222
D956	8-719-991-00	s	DIODE DAP222
DL100	1-416-347-11	s	DELAY LINE
DL101	1-416-347-11	s	DELAY LINE
DL102	1-416-347-11	s	DELAY LINE
FB200	1-412-390-21	s	MICRO INDUCTOR (CHIP) 21A05
FB201	1-412-390-21	s	MICRO INDUCTOR (CHIP) 21A05
FB202	1-412-390-21	s	MICRO INDUCTOR (CHIP) 21A05
FB203	1-412-390-21	s	MICRO INDUCTOR (CHIP) 21A05
FB700	1-412-390-21	s	MICRO INDUCTOR (CHIP) 21A05
FL100	1-233-943-11	s	FILTER, LOW PASS
FL101	1-233-943-11	s	FILTER, LOW PASS
FL102	1-233-943-11	s	FILTER, LOW PASS
FL103	1-233-943-11	s	FILTER, LOW PASS
FL104	1-233-943-11	s	FILTER, LOW PASS
FL105	1-233-943-11	s	FILTER, LOW PASS
FL700	1-233-996-11	s	FILTER,LOW PASS
FL701	1-233-996-11	s	FILTER,LOW PASS
FL800	1-233-997-11	s	FILTER,LOW PASS
FL801	1-233-997-11	s	FILTER,LOW PASS
FL802	1-233-997-11	s	FILTER,LOW PASS
FL803	1-234-537-21	s	FILTER, LOW PASS (SMD)
FL804	1-234-537-21	s	FILTER, LOW PASS (SMD)
FL807	1-416-703-11	s	DELAY LINE
FL808	1-416-703-11	s	DELAY LINE
FL809	1-416-703-11	s	DELAY LINE
FL810	1-233-996-11	s	FILTER,LOW PASS
FL811	1-233-996-11	s	FILTER,LOW PASS
IC1	8-759-475-36	s	IC TC74LCX08FT(EL)
IC2	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC3	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC51	8-759-571-46	s	IC STK14C88-N45I
IC52	8-752-392-03	s	IC CXD1095BR
IC53	8-752-392-03	s	IC CXD1095BR
IC54	8-759-064-36	s	IC MB88346BPFV
IC55	8-759-392-77	s	IC SN74LVC245APW (E20)
IC56	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC57	8-759-064-36	s	IC MB88346BPFV
IC58	8-759-689-06	s	IC LTC1660CGN-E2
IC59	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC61	8-759-478-92	s	IC TC7SET04FU(TE85R)
IC62	8-759-637-57	s	IC CLC450AJM5
IC63	8-759-637-57	s	IC CLC450AJM5

http://getMANUAL.com

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC65	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC66	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC68	8-759-256-90	s	IC NJU7021V (TE2)
IC69	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC70	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC71	8-759-689-06	s	IC LTC1660CGN-E2
IC100	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC101	8-759-637-57	s	IC CLC450AJM5
IC102	8-759-637-57	s	IC CLC450AJM5
IC103	8-759-637-57	s	IC CLC450AJM5
IC104	8-759-669-45	s	IC TL062CPWR-12
IC105	8-759-669-45	s	IC TL062CPWR-12
IC106	8-759-669-45	s	IC TL062CPWR-12
IC107	8-759-669-45	s	IC TL062CPWR-12
IC108	8-759-637-57	s	IC CLC450AJM5
IC109	8-759-564-49	s	IC TC7W53FU-TE12R
IC110	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC111	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC112	8-759-637-57	s	IC CLC450AJM5
IC113	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC114	8-759-564-49	s	IC TC7W53FU-TE12R
IC115	8-759-564-49	s	IC TC7W53FU-TE12R
IC118	8-759-637-57	s	IC CLC450AJM5
IC119	8-759-637-57	s	IC CLC450AJM5
IC120	8-759-637-57	s	IC CLC450AJM5
IC121	8-759-564-49	s	IC TC7W53FU-TE12R
IC122	8-759-564-49	s	IC TC7W53FU-TE12R
IC123	8-759-564-49	s	IC TC7W53FU-TE12R
IC124	8-759-271-18	s	IC NJM1496V
IC125	8-759-271-18	s	IC NJM1496V
IC126	8-759-271-18	s	IC NJM1496V
IC127	8-759-054-61	s	IC CLC505AJE
IC128	8-759-054-61	s	IC CLC505AJE
IC129	8-759-054-61	s	IC CLC505AJE
IC130	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC134	8-759-564-49	s	IC TC7W53FU-TE12R
IC135	8-759-564-49	s	IC TC7W53FU-TE12R
IC136	8-759-564-49	s	IC TC7W53FU-TE12R
IC137	8-759-669-45	s	IC TL062CPWR-12
IC138	8-759-637-57	s	IC CLC450AJM5
IC140	8-759-669-45	s	IC TL062CPWR-12
IC141	8-759-637-57	s	IC CLC450AJM5
IC143	8-759-669-45	s	IC TL062CPWR-12
IC144	8-759-637-57	s	IC CLC450AJM5
IC146	8-759-271-18	s	IC NJM1496V
IC147	8-759-271-18	s	IC NJM1496V
IC148	8-759-271-18	s	IC NJM1496V
IC149	8-759-054-61	s	IC CLC505AJE
IC150	8-759-054-61	s	IC CLC505AJE
IC151	8-759-054-61	s	IC CLC505AJE
IC152	8-759-669-72	s	IC TL064CPWR
IC153	8-759-669-72	s	IC TL064CPWR
IC154	8-759-669-72	s	IC TL064CPWR
IC158	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC160	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC162	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC173	8-759-637-57	s	IC CLC450AJM5
IC174	8-759-637-57	s	IC CLC450AJM5
IC175	8-759-637-57	s	IC CLC450AJM5

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC176	8-759-637-57	s	IC CLC450AJM5
IC177	8-759-637-57	s	IC CLC450AJM5
IC178	8-759-637-57	s	IC CLC450AJM5
IC179	8-759-669-45	s	IC TL062CPWR-12
IC180	8-759-669-45	s	IC TL062CPWR-12
IC182	8-759-564-49	s	IC TC7W53FU-TE12R
IC183	8-759-564-49	s	IC TC7W53FU-TE12R
IC184	8-759-564-49	s	IC TC7W53FU-TE12R
IC188	8-759-689-10	s	IC ADS824E/1K
IC189	8-759-689-10	s	IC ADS824E/1K
IC190	8-759-689-10	s	IC ADS824E/1K
IC194	8-759-347-09	s	IC NJU7034V (TE2)
IC195	8-759-347-09	s	IC NJU7034V (TE2)
IC198	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC200	8-759-637-57	s	IC CLC450AJM5
IC201	8-752-375-98	s	IC CXD2315Q
IC202	8-759-669-45	s	IC TL062CPWR-12
IC203	8-759-637-57	s	IC CLC450AJM5
IC204	8-759-637-57	s	IC CLC450AJM5
IC205	8-759-669-45	s	IC TL062CPWR-12
IC206	8-752-375-98	s	IC CXD2315Q
IC207	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC208	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC211	8-752-375-98	s	IC CXD2315Q
IC212	8-752-375-98	s	IC CXD2315Q
IC213	8-759-669-45	s	IC TL062CPWR-12
IC214	8-759-637-57	s	IC CLC450AJM5
IC215	8-759-637-57	s	IC CLC450AJM5
IC220	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC500	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC501	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC502	8-759-564-49	s	IC TC7W53FU-TE12R
IC503	8-759-669-72	s	IC TL064CPWR
IC504	8-759-669-72	s	IC TL064CPWR
IC506	8-759-669-72	s	IC TL064CPWR
IC507	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC508	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC511	8-759-669-72	s	IC TL064CPWR
IC519	8-759-669-72	s	IC TL064CPWR
IC521	8-759-064-36	s	IC MB88346BPFV
IC526	8-759-064-36	s	IC MB88346BPFV
IC529	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC530	8-759-669-72	s	IC TL064CPWR
IC531	8-759-064-36	s	IC MB88346BPFV
IC532	8-759-064-36	s	IC MB88346BPFV
IC537	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC539	8-759-669-72	s	IC TL064CPWR
IC542	8-759-669-72	s	IC TL064CPWR
IC549	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC550	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC551	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC552	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC600	8-759-689-06	s	IC LTC1660CGN-E2
IC601	8-759-637-57	s	IC CLC450AJM5
IC602	8-759-637-57	s	IC CLC450AJM5
IC603	8-759-674-62	s	IC MM74HCT541MTCX
IC604	8-759-523-04	s	IC TC74HC4538AFT
IC605	8-759-523-95	s	IC TC74VHC74FT(EL)
IC606	8-759-271-84	s	IC TC7SH02FU

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC607	8-759-669-75	s	IC TLC2932IPWR
IC608	8-759-491-45	s	IC TC74VHCT00AFT(EL)
IC609	8-759-980-44	s	IC TL712CPS
IC610	8-759-524-07	s	IC TC74VHC138FT(EL)
IC611	8-759-678-07	s	IC CAT24WC16JI-TE13
IC612	8-759-475-38	s	IC TC74LCX32FT(EL)
IC613	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC614	8-759-659-04	o	IC CXD9122R
IC615	8-759-475-55	s	IC TC74LCX574FT(EL)
IC616 *b	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC617	8-752-392-03	s	IC CXD1095BR
IC619	8-759-463-81	s	IC TLC2272CPW (E05)
IC620	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC621	8-759-669-45	s	IC TL062CPWR-12
IC622	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC623	8-759-669-45	s	IC TL062CPWR-12
IC625	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC626	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC627	8-759-271-86	s	IC TC7SH04FU
IC628	8-759-101-12	s	IC UPC311G2
IC629	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC630	8-759-524-07	s	IC TC74VHC138FT(EL)
IC631	8-759-637-57	s	IC CLC450AJM5
IC700	8-759-475-36	s	IC TC74LCX08FT(EL)
IC702	8-759-475-36	s	IC TC74LCX08FT(EL)
IC703	8-759-475-36	s	IC TC74LCX08FT(EL)
IC706	8-759-475-39	s	IC TC74LCX74FT(EL)
IC707	8-759-475-39	s	IC TC74LCX74FT(EL)
IC708	8-759-689-09	s	IC SN65LVDT2DBVR
IC709	8-759-547-49	s	IC CDC509PWR
IC710	8-759-475-55	s	IC TC74LCX574FT(EL)
IC711	8-759-475-55	s	IC TC74LCX574FT(EL)
IC712	8-759-637-57	s	IC CLC450AJM5
IC713	8-759-637-57	s	IC CLC450AJM5
IC714	8-759-475-55	s	IC TC74LCX574FT(EL)
IC715	8-759-637-57	s	IC CLC450AJM5
IC716	8-759-637-57	s	IC CLC450AJM5
IC717	8-759-475-35	s	IC TC74LCX04FT(EL)
IC718	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC719	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC720	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC800	8-759-637-57	s	IC CLC450AJM5
IC801	8-759-564-49	s	IC TC7W53FU-TE12R
IC802	8-759-637-57	s	IC CLC450AJM5
IC803	8-759-054-61	s	IC CLC505AJE
IC804	8-759-637-57	s	IC CLC450AJM5
IC805	8-759-054-61	s	IC CLC505AJE
IC806	8-759-637-57	s	IC CLC450AJM5
IC807	8-759-054-61	s	IC CLC505AJE
IC808	8-759-637-57	s	IC CLC450AJM5
IC809	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC810	8-759-564-49	s	IC TC7W53FU-TE12R
IC811	8-759-637-57	s	IC CLC450AJM5
IC812	8-759-637-57	s	IC CLC450AJM5
IC813	8-759-564-49	s	IC TC7W53FU-TE12R
IC814	8-759-054-61	s	IC CLC505AJE
IC815	8-759-491-47	s	IC TC74VHCT08FT (EL)
IC816	8-759-637-57	s	IC CLC450AJM5
IC817	8-759-564-49	s	IC TC7W53FU-TE12R

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC818	8-759-669-45	s	IC TL062CPWR-12
IC819	8-759-271-18	s	IC NJM1496V
IC820	8-759-637-57	s	IC CLC450AJM5
IC821	8-759-637-57	s	IC CLC450AJM5
IC822	8-759-271-86	s	IC TC7SH04FU
IC823	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC824	8-759-637-57	s	IC CLC450AJM5
IC825	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC826	8-759-637-57	s	IC CLC450AJM5
IC827	8-759-082-59	s	IC TC7W32FU
IC828	8-759-082-59	s	IC TC7W32FU
IC829	8-759-637-57	s	IC CLC450AJM5
IC830	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC831	8-759-637-57	s	IC CLC450AJM5
IC832	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC834	8-759-637-57	s	IC CLC450AJM5
IC835	8-759-637-57	s	IC CLC450AJM5
IC836	8-759-637-57	s	IC CLC450AJM5
IC846	8-759-564-49	s	IC TC7W53FU-TE12R
IC847	8-759-478-92	s	IC TC7SET04FU(TE85R)
IC950	8-759-669-72	s	IC TL064CPWR
IC951	8-759-669-72	s	IC TL064CPWR
IC952	8-759-530-05	s	IC TC4053BFT (EL.N)
IC953	8-759-209-97	s	IC TC4S81F
IC954	8-759-271-86	s	IC TC7SH04FU
IC955	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC956	8-759-669-45	s	IC TL062CPWR-12
IC957	8-759-564-49	s	IC TC7W53FU-TE12R
IC1000	8-759-271-86	s	IC TC7SH04FU
IC1001	8-759-271-86	s	IC TC7SH04FU
IC1002	8-759-564-49	s	IC TC7W53FU-TE12R
IC1003	8-759-271-86	s	IC TC7SH04FU
IC1004	8-759-524-24	o	IC TC7WT241FU(TE12R)
IC1006	8-759-637-57	s	IC CLC450AJM5
IC1007	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC1012	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC1013	8-759-689-08	s	IC SN74CBT16214DGGR
IC1014	8-759-689-07	s	IC SN74CBT16211ADGGR
IC1015	8-759-689-07	s	IC SN74CBT16211ADGGR
IC1016	8-759-689-08	s	IC SN74CBT16214DGGR
IC1018	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC1019	8-759-656-77	o	IC CXD9064R
IC2000*a	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC2002	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC2003	8-759-523-95	s	IC TC74VHC74FT(EL)
IC2004	8-759-533-95	s	IC UPD6466GS-515
IC2005	8-759-533-95	s	IC UPD6466GS-515
IC2006	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC2007	8-759-475-38	s	IC TC74LCX32FT(EL)
IC2009	8-759-714-59	o	IC AT17LV512-DCP28-V1.00
IC2010	8-759-475-36	s	IC TC74LCX08FT(EL)
IC2011	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC2012	8-759-592-49	s	IC TC7SZ125FU(TE85R)
IC2013	8-759-592-50	s	IC TC7SZ126FU(TE85R)
IS2009	1-251-093-11	s	SOCKET,IC
L1	1-412-995-31	s	INDUCTOR, SMALL TYPE 22.0UH

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q1	8-729-928-36	s	TRANSISTOR DTA114EE
Q2	8-729-928-81	s	TRANSISTOR DTC144EE
Q3	8-729-928-36	s	TRANSISTOR DTA114EE
Q50	8-729-928-27	s	TRANSISTOR DTA144EE
Q51	8-729-928-81	s	TRANSISTOR DTC144EE
Q52	8-729-045-28	s	TRANSISTOR SI4532DY-T1
Q53	8-729-403-29	s	TRANSISTOR XN6435
Q54	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q55	8-729-403-29	s	TRANSISTOR XN6435
Q56	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q57	8-729-928-81	s	TRANSISTOR DTC144EE
Q100	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q101	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q102	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q103	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q104	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q105	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q106	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q107	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q108	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q109	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q110	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q111	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q112	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q113	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q114	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q115	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q116	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q117	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q118	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q119	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q120	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q121	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q122	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q123	8-729-928-27	s	TRANSISTOR DTA144EE
Q124	8-729-928-27	s	TRANSISTOR DTA144EE
Q125	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q126	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q127	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q128	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q129	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q130	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q131	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q132	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q133	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q134	8-729-403-32	s	TRANSISTOR XN6534
Q135	8-729-403-32	s	TRANSISTOR XN6534
Q136	8-729-403-32	s	TRANSISTOR XN6534
Q137	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q138	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q139	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q140	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q141	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q142	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q143	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q144	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q145	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q146	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q147	8-729-143-07	s	TRANSISTOR 2SA1610-Y33

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q148	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q149	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q150	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q151	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q152	8-729-928-27	s	TRANSISTOR DTA144EE
Q153	8-729-928-27	s	TRANSISTOR DTA144EE
Q154	8-729-928-27	s	TRANSISTOR DTA144EE
Q155	8-729-403-29	s	TRANSISTOR XN6435
Q156	8-729-403-29	s	TRANSISTOR XN6435
Q157	8-729-403-29	s	TRANSISTOR XN6435
Q158	8-729-403-32	s	TRANSISTOR XN6534
Q159	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q160	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q161	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q162	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q163	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q164	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q165	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q166	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q167	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q168	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q200	8-729-928-27	s	TRANSISTOR DTA144EE
Q201	8-729-928-27	s	TRANSISTOR DTA144EE
Q202	8-729-928-81	s	TRANSISTOR DTC144EE
Q203	8-729-928-81	s	TRANSISTOR DTC144EE
Q204	8-729-928-27	s	TRANSISTOR DTA144EE
Q205	8-729-928-27	s	TRANSISTOR DTA144EE
Q206	8-729-928-27	s	TRANSISTOR DTA144EE
Q207	8-729-928-81	s	TRANSISTOR DTC144EE
Q208	8-729-928-27	s	TRANSISTOR DTA144EE
Q209	8-729-928-27	s	TRANSISTOR DTA144EE
Q601	8-729-928-81	s	TRANSISTOR DTC144EE
Q602	8-729-928-27	s	TRANSISTOR DTA144EE
Q603	8-729-928-81	s	TRANSISTOR DTC144EE
Q604	8-729-040-75	s	TRANSISTOR SI4953DY
Q605	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q606	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q607	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q608	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q609	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q610	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q611	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q612	8-729-928-81	s	TRANSISTOR DTC144EE
Q613	8-729-928-27	s	TRANSISTOR DTA144EE
Q614	8-729-040-75	s	TRANSISTOR SI4953DY
Q615	8-729-403-32	s	TRANSISTOR XN6534
Q616	8-729-403-29	s	TRANSISTOR XN6435
Q618	8-729-403-32	s	TRANSISTOR XN6534
Q619	8-729-403-29	s	TRANSISTOR XN6435
Q620	8-729-928-27	s	TRANSISTOR DTA144EE
Q621	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q622	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q623	8-729-045-28	s	TRANSISTOR SI4532DY-T1
Q700	8-729-403-32	s	TRANSISTOR XN6534
Q701	8-729-403-32	s	TRANSISTOR XN6534
Q702	8-729-928-27	s	TRANSISTOR DTA144EE
Q703	8-729-928-27	s	TRANSISTOR DTA144EE
Q704	8-729-928-27	s	TRANSISTOR DTA144EE
Q705	8-729-928-27	s	TRANSISTOR DTA144EE

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q706	8-729-928-81	s	TRANSISTOR DTC144EE
Q707	8-729-928-81	s	TRANSISTOR DTC144EE
Q800	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q801	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q802	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q803	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q804	8-729-403-32	s	TRANSISTOR XN6534
Q805	8-729-403-32	s	TRANSISTOR XN6534
Q806	8-729-403-32	s	TRANSISTOR XN6534
Q807	8-729-403-32	s	TRANSISTOR XN6534
Q808	8-729-403-32	s	TRANSISTOR XN6534
Q809	8-729-403-32	s	TRANSISTOR XN6534
Q810	8-729-403-32	s	TRANSISTOR XN6534
Q811	8-729-403-32	s	TRANSISTOR XN6534
Q812	8-729-403-32	s	TRANSISTOR XN6534
Q813	8-729-403-32	s	TRANSISTOR XN6534
Q814	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q816	8-729-403-32	s	TRANSISTOR XN6534
Q819	8-729-403-32	s	TRANSISTOR XN6534
Q820	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q821	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q822	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q823	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q824	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q825	8-729-928-27	s	TRANSISTOR DTA144EE
Q826	8-729-928-27	s	TRANSISTOR DTA144EE
Q827	8-729-928-81	s	TRANSISTOR DTC144EE
Q828	8-729-928-27	s	TRANSISTOR DTA144EE
Q829	8-729-928-27	s	TRANSISTOR DTA144EE
Q830	8-729-928-81	s	TRANSISTOR DTC144EE
Q831	8-729-928-81	s	TRANSISTOR DTC144EE
Q832	8-729-928-27	s	TRANSISTOR DTA144EE
Q833	8-729-928-27	s	TRANSISTOR DTA144EE
Q834	8-729-928-27	s	TRANSISTOR DTA144EE
Q835	8-729-928-27	s	TRANSISTOR DTA144EE
Q836	8-729-928-81	s	TRANSISTOR DTC144EE
Q837	8-729-045-28	s	TRANSISTOR SI4532DY-T1
Q838	8-729-928-27	s	TRANSISTOR DTA144EE
Q839	8-729-928-81	s	TRANSISTOR DTC144EE
Q840	8-729-928-27	s	TRANSISTOR DTA144EE
Q841	8-729-928-81	s	TRANSISTOR DTC144EE
Q842	8-729-928-27	s	TRANSISTOR DTA144EE
Q951	8-729-141-48	s	TRANSISTOR 2SB624-BV345
Q954	8-729-928-81	s	TRANSISTOR DTC144EE
Q955	8-729-928-81	s	TRANSISTOR DTC144EE
Q956	8-729-014-93	s	TRANSISTOR 2SB1440S-TX
Q957	8-729-928-81	s	TRANSISTOR DTC144EE
Q958	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q959	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q960	8-729-928-81	s	TRANSISTOR DTC144EE
Q961	8-729-928-81	s	TRANSISTOR DTC144EE
Q962	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q963	8-729-928-81	s	TRANSISTOR DTC144EE
Q964	8-729-014-91	s	TRANSISTOR 2SD2185S-TX
Q965	8-729-014-93	s	TRANSISTOR 2SB1440S-TX
Q966	8-729-928-81	s	TRANSISTOR DTC144EE
Q967	8-729-928-81	s	TRANSISTOR DTC144EE
Q968	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q969	8-729-928-81	s	TRANSISTOR DTC144EE

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q970	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q971	8-729-928-27	s	TRANSISTOR DTA144EE
Q972	8-729-014-91	s	TRANSISTOR 2SD2185S-TX
Q973	8-729-141-48	s	TRANSISTOR 2SB624-BV345
Q974	8-729-928-27	s	TRANSISTOR DTA144EE
Q975	8-729-928-27	s	TRANSISTOR DTA144EE
Q976	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q977	8-729-928-27	s	TRANSISTOR DTA144EE
Q978	8-729-928-27	s	TRANSISTOR DTA144EE
Q979	8-729-040-75	s	TRANSISTOR SI4953DY
Q980	8-729-928-81	s	TRANSISTOR DTC144EE
Q983	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q984	8-729-928-27	s	TRANSISTOR DTA144EE
Q985	8-729-928-81	s	TRANSISTOR DTC144EE
Q986	8-729-040-75	s	TRANSISTOR SI4953DY
Q2000	8-729-928-81	s	TRANSISTOR DTC144EE
Q2001	8-729-928-81	s	TRANSISTOR DTC144EE
Q2002	8-729-928-81	s	TRANSISTOR DTC144EE
R1	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R2	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R3	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R4	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R5	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R6	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R7	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R8	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R9	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R10	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R11	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R12	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R13	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R14	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R15	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R16	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R17	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R18	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R19	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R20	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R21	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R22	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R23	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R24	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R25	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R26	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R27	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R28	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R29	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R30	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R31	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R32	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R33	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R34	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R35	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R36	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R37	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R38	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R39	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R40	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R41	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R42	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R43	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R44	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R45	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R46	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R47	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R48	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R49	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R50	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R51	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R52	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R53 *a	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R54	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R55	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R56	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R57	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R58	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R59	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R60	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R61	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R62	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R63	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R64	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R102	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R103	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R104	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R105	1-216-791-11	s	RESISTOR,CHIP 3.3 1/16W 1608
R106	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R107	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R108	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R111	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R113	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R114	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R115	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R116	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R117	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R118	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R119	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R120	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R121	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R122	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R123	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R124	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R125	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R126	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R127	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R128	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R129	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R130	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R131	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R132	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R133	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R134	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R135	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R136	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R137	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R138	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R139	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R140	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R141	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R142	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R143	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R144	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R145	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R146	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R147	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R148	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R149	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R150	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R151	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R152	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R153	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R154	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R155	1-218-748-11	s	RESISTOR,CHIP 220K 1/16W(1608)
R156	1-216-857-11	s	RESISTOR,CHIP 1M 1/16W(1608)
R157	1-218-736-11	s	RESISTOR,CHIP 68K 1/16W(1608)
R158	1-216-855-11	s	RESISTOR, CHIP 680K 1/16W 1608
R159	1-218-752-11	s	RESISTOR,CHIP 330K 1/16W(1608)
R160	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R161	1-218-752-11	s	RESISTOR,CHIP 330K 1/16W(1608)
R162	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R201	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R202	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R203	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R204	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R205	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R206	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R207	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R208	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R209	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R210	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R211	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R212	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R213	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R214	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R215	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R216	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R217	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R218	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R219	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R220	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R221	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R222	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R223	1-216-861-11	s	RESISTOR,CHIP 2.2M 1/16W 1608
R224	1-216-861-11	s	RESISTOR,CHIP 2.2M 1/16W 1608
R225	1-216-861-11	s	RESISTOR,CHIP 2.2M 1/16W 1608
R226	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R227	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R228	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R229	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R230	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R231	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R232	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R233	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R234	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R235	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R236	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R237	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R238	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R239	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R240	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R241	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R242	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R243	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R244	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R245	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R246	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R247	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R248	1-218-736-11	s	RESISTOR,CHIP 68K 1/16W(1608)
R249	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R250	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R251	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R252	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R253	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R254	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R255	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R256	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R257	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R258	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R259	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R260	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R261	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R262	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R263	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R264	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R265	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R266	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R267	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R268	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R269	1-218-656-11	s	RESISTOR,CHIP 33 1/16W (1608)
R270	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R271	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R272	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R273	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R274	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R275	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R276	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R277	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R278	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R279	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R280	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R281	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R282	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R283	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R284	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R285	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R286	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R287	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R288	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R289	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R290	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R291	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R292	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R293	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R294	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R295	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R296	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R297	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R298	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R299	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R300	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R301	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R302	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R303	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R304	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R305	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R306	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R307	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R308	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R309	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R310	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R311	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R312	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R313	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W
R314	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R315	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W
R316	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R317	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W
R318	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R319	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R320	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R321	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R322	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R323	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R324	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R325	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R326	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R327	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W
R328	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W
R329	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W
R330	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R331	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R332	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R333	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R334	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R335	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R336	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R337	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R338	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R339	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R340	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R341	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R342	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R343	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R344	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R345	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R346	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R347	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R348	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R349	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R350	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R351	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R352	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R353	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R354	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R355	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R356	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R357	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R358	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R359	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R360	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R361	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R362	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R363	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R364	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R365	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R366	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R367	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R368	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R369	1-218-656-11	s	RESISTOR,CHIP 33 1/16W (1608)
R370	1-218-656-11	s	RESISTOR,CHIP 33 1/16W (1608)
R371	1-218-656-11	s	RESISTOR,CHIP 33 1/16W (1608)
R372	1-218-656-11	s	RESISTOR,CHIP 33 1/16W (1608)
R373	1-218-656-11	s	RESISTOR,CHIP 33 1/16W (1608)
R374	1-218-656-11	s	RESISTOR,CHIP 33 1/16W (1608)
R375	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R376	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R377	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R378	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R379	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R380	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R381	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R382	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R383	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R384	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R385	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R386	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R387	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R388	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R389	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R390	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R391	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R392	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R393	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R394	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R395	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R396	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R397	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R398	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R399	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R400	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R401	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R402	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R403	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R404	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R405	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R406	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R407	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R408	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R409	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R410	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R411	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R412	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R413	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R414	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R415	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R416	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R417	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R418	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R419	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R420	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R421	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R422	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R423	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R424	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R425	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R426	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R427	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R428	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R429	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R430	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R431	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R432	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R433	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R434	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R435	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R436	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R437	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R438	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R439	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R440	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R441	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R442	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R443	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R444	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R445	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R446	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R447	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R448	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R449	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R450	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R451	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R452	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R453	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R454	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R455	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R456	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R457	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R458	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R459	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R460	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R461	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R462	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R463	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R464	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R465	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R466	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R467	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R468	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R469	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R470	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R471	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R472	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R473	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R474	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R475	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R476	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R477	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R478	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R479	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R480	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R481	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R482	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R483	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R484	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R485	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R486	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R487	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R488	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R489	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R490	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R491	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R492	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R493	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R494	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R495	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R496	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R497	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R498	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R499	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R500	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R501	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R502	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R503	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R504	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R505	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R506	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R507	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R508	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R509	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R510	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R511	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R512	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R513	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R514	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R515	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R516	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R517	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R518	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R519	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R520	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R521	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R522	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R523	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R524	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R525	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R526	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R527	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R528	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R529	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R530	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R531	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R532	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R533	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R534	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R535	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R536	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R537	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R538	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R539	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R540	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R541	1-218-648-11	s	RESISTOR CHIP 15 1/16W(1608)
R542	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R543	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R544	1-218-648-11	s	RESISTOR CHIP 15 1/16W(1608)
R545	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R546	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R547	1-218-648-11	s	RESISTOR CHIP 15 1/16W(1608)
R548	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R549	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R550	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R551	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R552	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R553	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R554	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R555	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R556	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R557	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R558	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R559	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R560	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R564	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R565	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R566	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R567	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R568	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R569	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R570	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R571	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R572	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R573	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R574	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R575	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R576	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R577	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R578	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R579	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R580	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R581	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R582	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R583	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R584	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R585	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R586	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R587	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R588	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R589	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R590	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R591	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R592	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R593	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R594	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R595	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R596	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R597	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R598	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R599	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R600	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R601	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R602	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R603	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R604	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R605	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R606	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R607	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R608	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R609	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R610	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R611	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R615	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R616	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R617	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R621	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R623	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R624	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R626	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R627	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R628	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R630	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R631	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R632	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R633	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R634	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R635	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R636	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R637	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R638	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R639	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R640	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R641	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R642	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R643	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R644	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R645	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R646	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R647	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R648	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R649	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R650	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R651	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R652	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R653	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R654	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R655	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R656	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R657	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R658	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R659	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R660	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R661	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R662	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R663	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R664	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R665	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R666	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R667	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R668	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R669	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R670	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R671	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R672	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R673	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R674	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R675	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R676	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R677	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R678	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R682	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R683	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R684	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R685	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R686	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R687	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R688	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R689	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R690	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R701	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R702	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R703	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R704	1-216-857-11	s	RESISTOR,CHIP 1M 1/16W(1608)
R705	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R706	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R707	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R708	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R709	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R710	1-218-748-11	s	RESISTOR,CHIP 220K 1/16W(1608)
R711	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R712	1-218-748-11	s	RESISTOR,CHIP 220K 1/16W(1608)
R713	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R714	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R715	1-216-863-11	s	RESISTOR,CHIP 3.3M 1/16W 1608
R716	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R717	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R718	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R719	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R720	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R721	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R722	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R723	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R724	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R725	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R726	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R727	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R728	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R729	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R730	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R731	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R732	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R733	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R734	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R735	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R736	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R737	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R738	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R739	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R740	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W
R741	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R742	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R743	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R744	1-216-853-11	s	RESISTOR,CHIP 470K 1/16W(1608)
R745	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R746	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R747	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R748	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R749	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R750	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R751	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R752	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R753	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R754	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R755	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R756	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R757	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R758	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R759	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R760	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R761	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R762	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R763	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R764	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R765	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R766	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R767	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R768	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R769	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R770	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R771	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R772	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R773	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R774	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R775	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R776	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R777	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R778	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R779	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R780	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R781	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R782	1-216-863-11	s	RESISTOR,CHIP 3.3M 1/16W 1608
R783	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R784	1-216-863-11	s	RESISTOR,CHIP 3.3M 1/16W 1608
R785	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R786	1-216-863-11	s	RESISTOR,CHIP 3.3M 1/16W 1608
R787	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R788	1-218-736-11	s	RESISTOR,CHIP 68K 1/16W(1608)
R789	1-218-736-11	s	RESISTOR,CHIP 68K 1/16W(1608)
R790	1-218-736-11	s	RESISTOR,CHIP 68K 1/16W(1608)
R791	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R792	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R793	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R794	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R795	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R796	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R797	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R798	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R799	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R800	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R801	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R802	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R803	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R804	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R805	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R806	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R807	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R901	1-208-943-11	s	RESISTOR CHIP 220K
R902	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R903	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R904	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R905	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R906	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R907	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R908	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R909	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R910	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R911	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R912	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R913	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R914	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R915	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R916	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R917	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R918	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R919	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R920	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R921	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R922	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R923	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R924	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R925	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R926	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R927	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R928	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R929	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R930	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R931	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R932	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R933	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R934	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R935	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R936	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R937	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R938	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R939	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R940	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R941	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R942	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R943	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1001	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)

http://getMANUAL.com

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1002	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R1005	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1006	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1007	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R1009	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1010	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1011	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R1012	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R1013	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1014	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R1015	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R1016	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R1017	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R1019	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1020	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1022	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1023	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1025	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R1027	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1028	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R1029	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1030	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1031	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1032	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1033	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1034	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1035	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1036	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1037	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1040	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1041	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1042	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1043	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1044	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1045	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R1046	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R1048	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R1049	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R1050	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R1051	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1052	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1054	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1056	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1057	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1058	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R1059	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R1060	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R1061	1-218-953-11	s	RESISTOR, CHIP 1K 1/16W
R1062	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1063	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1064	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1065	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1066	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R1067	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1068	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1101	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1102	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1103	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1104	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1105	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1106	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1107	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R1108	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R1109	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R1110	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R1111	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R1112	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1113	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1114	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1115	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1116	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R1117	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1118	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1119	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1120	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1121	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1122	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1123	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1124	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1125	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1126	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1127	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1128	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1130	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1131	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1132	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1133	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1134	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1135	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1137	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1138	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1139	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1140	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1141	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1142	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1143	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1144	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1145	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1146	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R1147	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R1148	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R1149	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1151	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1152	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1153	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1154	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1155	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1156	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1157	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1158	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1159	1-218-736-11	s	RESISTOR,CHIP 68K 1/16W(1608)
R1160	1-216-857-11	s	RESISTOR,CHIP 1M 1/16W(1608)
R1161	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R1162	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1163	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1164	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1165	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1166	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1167	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1168	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1169	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R1170	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1171	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1172	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1173	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1174	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1175	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1176	1-218-752-11	s	RESISTOR,CHIP 330K 1/16W(1608)
R1177	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1178	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1179	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1180	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1181	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1182	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1183	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R1184	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1185	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1186	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1187	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1188	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1189	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R1190	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1191	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R1192	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1193	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1194	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R1195	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1196	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1197	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1198	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R1199	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1200	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1201	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R1202	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1203	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1204	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R1205	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1206	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R1207	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W
R1208	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1209	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1210	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1211	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1212	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1213	1-216-857-11	s	RESISTOR,CHIP 1M 1/16W(1608)
R1214	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1215	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1216	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1217	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1218	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1219	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1220	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1221	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1222	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1223	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1224	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R1225	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1226	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1227	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1228	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1229	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R1230	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1231	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1232	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1233	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1234	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1237	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1238	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R1239	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1244	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1246	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1247	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1248	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1249	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1250	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1251	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1252	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1253	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1254	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1255	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1256	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1257	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R1258	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1259	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1260	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1261	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1262	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1263	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1264	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1265	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1268	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1269	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1271	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1273	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1274	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W
R1301	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1302	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R1303	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1304	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R1305	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1306	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1307	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1308	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1309	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1310	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1311 *b	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
*a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1312	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1313	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1314	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1315	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1316	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1317	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1318	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1319	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1320	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1321	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1322	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1323	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1324	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1325	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1326	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1327	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1328	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1329	1-216-791-11	s	RESISTOR,CHIP 3.3 1/16W 1608
R1330	1-216-791-11	s	RESISTOR,CHIP 3.3 1/16W 1608
R1331	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1332	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1333	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R1334	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R1335	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1336	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1337	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1338	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1339	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1340	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1341	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1342	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1343	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1344	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1345	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1346	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1347	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1348	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1349	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1350	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1351	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1352	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1353	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R1354	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1355	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R1356	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R1357	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R1358	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1359	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R1360	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R1361	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R1362	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R1363	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R1364	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R1365	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R1366	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R1367	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R1368	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R1369	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R1370	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1371	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R1372	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1373	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R1374	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R1375	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1376	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1401	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R1402	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R1403	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1404	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1405	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1406	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R1407	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R1408	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R1409	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1410	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R1411	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1412	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1413	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R1414	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R1415	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1416	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R1417	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1418	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1419	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1420	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1421	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1422	1-216-861-11	s	RESISTOR,CHIP 2.2M 1/16W 1608
R1423	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1424	1-216-861-11	s	RESISTOR,CHIP 2.2M 1/16W 1608
R1425	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R1426	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R1427	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1428	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1429	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R1430	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R1431	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1432	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1433	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1434	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R1435	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R1436	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1437	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1438	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R1439	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1440	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1441	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R1442	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1443	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R1444	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R1445	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1446	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1447	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1448	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1449	1-216-861-11	s	RESISTOR,CHIP 2.2M 1/16W 1608
R1450	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1451	1-216-861-11	s	RESISTOR,CHIP 2.2M 1/16W 1608
R1452	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1453	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R1454	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R1455	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1456	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1457	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1501	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1502	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1503	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1504	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1505	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1506	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1507	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1508	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1509	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1510	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1511	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1512	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1513	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1514	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1515	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1516	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1517	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1518	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1519	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1520	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1521	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1522	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1523	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1524	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1525	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1526	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1527	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1528	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1529	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1530	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1531	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1532	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1533	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1534	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1535	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1536	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1537	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1538	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1539	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1540	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1541	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1542	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R1543	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R1544	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R1545	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1546	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1547	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1548	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1549	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1550	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1551	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1552	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1553	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1554	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1555	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1556	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1557	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1558	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1559	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1560	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1561	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1562	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1563	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1564	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1565	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1566	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1567	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1568	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1569	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1570	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1571	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1572	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1573	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1574	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1575	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1576	1-218-656-11	s	RESISTOR,CHIP 33 1/16W (1608)
R1577	1-218-656-11	s	RESISTOR,CHIP 33 1/16W (1608)
R1578	1-218-656-11	s	RESISTOR,CHIP 33 1/16W (1608)
R1579	1-218-656-11	s	RESISTOR,CHIP 33 1/16W (1608)
R1580	1-218-656-11	s	RESISTOR,CHIP 33 1/16W (1608)
R1581	1-216-857-11	s	RESISTOR,CHIP 1M 1/16W(1608)
R1582	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1583	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1584	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1585	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1586	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R1587	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R1588	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R1589	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1590	1-218-656-11	s	RESISTOR,CHIP 33 1/16W (1608)
R1591	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1592	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1594	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1595	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1597	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1598	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1599	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1600	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R1601	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R1602	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1603	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1604	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1605	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1606	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1607	1-218-656-11	s	RESISTOR,CHIP 33 1/16W (1608)
R1608	1-218-656-11	s	RESISTOR,CHIP 33 1/16W (1608)
R1609	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1610	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1611	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1612	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R1613	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1614	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1615	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1616	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R1617	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1618	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1619	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R1620	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1621	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1622	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1623	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1624	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1625	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1626	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1627	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R1628	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R1629	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1630	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1631	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1632	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1633	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1634	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1635	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1636	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1637	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R1638	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1639	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1640	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1641	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1642	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R1643	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R1644	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1645	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1646	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1647	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R1649	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1650	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1651	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1652	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1653	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1654	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R1655	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R1656	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1657	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1658	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R1659	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1660	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R1661	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1662	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1663	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R1664	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1665	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1666	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1667	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1668	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1669	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1670	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1671	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1672	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R1673	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1674	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1675	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1676	1-218-748-11	s	RESISTOR,CHIP 220K 1/16W(1608)
R1677	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R1678	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R1679	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R1680	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R1681	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R1682	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1683	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1684	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R1685	1-218-752-11	s	RESISTOR,CHIP 330K 1/16W(1608)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1686	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R1687	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R1688	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1689	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1690	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1691	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1692	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1693	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1694	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1695	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R1696	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1697	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1698	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1699	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1700	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1701	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R1702	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1703	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1704	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1705	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1706	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1707	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1708	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1709	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1710	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R1711	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1712	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R1713	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1714	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R1715	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1716	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1717	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1718	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1719	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1720	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1721	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1722	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R1723	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1724	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R1725	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R1726	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1727	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1728	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1729	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1730	1-218-748-11	s	RESISTOR,CHIP 220K 1/16W(1608)
R1731	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R1732	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R1733	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R1734	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R1801	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1802	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1803	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1804	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1805	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1806	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1807	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1808	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1809	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1810	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1812	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R1813	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R1814	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R1815	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R1816	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R1817	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R1818	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R1819	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R1820	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R1823	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1824	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1825	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1826	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R1827	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1828	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1829	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1830	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1831	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1832	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1833	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1834	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1835	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1836	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1837	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R1838	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R1839	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1840	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R1841	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1842	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R1843	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R1844	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1845	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R1846	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1847	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R1848	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R1849	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R1850	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R1851	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1852	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1853	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1854	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1855	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1856	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1857	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1858	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1859	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R1860	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R1861	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R1862	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R1863	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R1864	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R1865	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1866	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1867	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1868	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1869	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1870	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1871	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1872	1-208-935-11	s	RESISTOR, CHIP 100K (1005)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1873	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1874	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1875	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1876	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1877	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1878	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1879	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1880	1-208-943-11	s	RESISTOR CHIP 220K
R1883	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1884	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1885	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1887	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1888	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1889	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R1890	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R1891	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
RB1	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB50	1-234-372-21	s	RES, NETWORK 100X4 (1005)
RB51	1-234-372-21	s	RES, NETWORK 100X4 (1005)
RB52	1-234-372-21	s	RES, NETWORK 100X4 (1005)
RB53	1-234-372-21	s	RES, NETWORK 100X4 (1005)
RB54	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB55	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB56	1-234-380-11	s	RESISTOE,NETWORK 47KX4 (1005)
RB57	1-234-380-11	s	RESISTOE,NETWORK 47KX4 (1005)
RB58	1-234-380-11	s	RESISTOE,NETWORK 47KX4 (1005)
RB59	1-234-380-11	s	RESISTOE,NETWORK 47KX4 (1005)
RB60	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB61	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB62	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB63	1-234-380-11	s	RESISTOE,NETWORK 47KX4 (1005)
RB64	1-234-380-11	s	RESISTOE,NETWORK 47KX4 (1005)
RB65	1-234-380-11	s	RESISTOE,NETWORK 47KX4 (1005)
RB66	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB67	1-234-380-11	s	RESISTOE,NETWORK 47KX4 (1005)
RB68	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB69	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB70	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB71	1-234-379-11	s	RESISTOR,NETWORK 22KX4 (1005)
RB72	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB73	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB600	1-234-372-21	s	RES, NETWORK 100X4 (1005)
RB601	1-234-372-21	s	RES, NETWORK 100X4 (1005)
RB602	1-234-372-21	s	RES, NETWORK 100X4 (1005)
RB603	1-234-372-21	s	RES, NETWORK 100X4 (1005)
RB604	1-234-370-11	s	RES, NETWORK 22X4 (1005)
RB605	1-234-370-11	s	RES, NETWORK 22X4 (1005)
RB606	1-234-370-11	s	RES, NETWORK 22X4 (1005)
RB607	1-234-370-11	s	RES, NETWORK 22X4 (1005)
RB608	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB609	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB610	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB611	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB612	1-234-379-11	s	RESISTOR,NETWORK 22KX4 (1005)
RB614	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB615	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB616	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB617	1-234-381-21	s	RES, NETWORK 100KX4 (1005)

(DCP-28 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description	
RB620	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB621	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB622	1-234-372-21	s	RES, NETWORK 100X4	(1005)
RB623	1-234-372-21	s	RES, NETWORK 100X4	(1005)
RB700	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB701	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB702	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB1016	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB1017	1-234-372-21	s	RES, NETWORK 100X4	(1005)
RB1018	1-234-372-21	s	RES, NETWORK 100X4	(1005)
RB2002	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB2003	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB2004	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB2005	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB2006	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB2007	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB2008	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB2009	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB2010	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB2011	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RV700	1-225-785-21	s	RES, ADJ, CERMET 100	
RV801	1-225-786-11	s	RES, ADJ, CERMET 200	

DR-433 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-044-A	o	MOUNTED CIRCUIT BOARD, DR-433
C2	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C3	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C4	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C5	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C6	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C7	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C8	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C9	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C10	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C11	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C12	1-127-562-11	s	CAP,ELECT(SOLID)47MF/6.3V
C13	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C14	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C15	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C16	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C17	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C18	1-107-886-11	s	CAPACITOR ELECT 4700MF/16V(105
C19	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C20	1-127-518-11	s	CAPACITOR,ELECT 100MF/16V
C21	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C22	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C24	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C25	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C26	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C27	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C28	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C29	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C30	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C31	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C32	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C33	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C34	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C35	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C36	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C37	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C38	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C39	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C40	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C41	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C42	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C43	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C44	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C45	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C46	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C47	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C48	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C49	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C50	1-125-990-11	s	CAPACITOR,TANTALUM 47MF/20V
C51	1-125-990-11	s	CAPACITOR,TANTALUM 47MF/20V
C52	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C53	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C54	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C55	1-127-516-11	s	CAPACITOR,ELECT (SOLID)220MF
C56	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C57	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C58	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C59	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V

(DR-433 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C60	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C61	1-104-478-11	s	CAPACITOR TANTALUM 10MF/35V
C62	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C63	1-163-021-91	s	CAPACITOR, CERAMIC 0.01MF/50V
C64	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C65	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C66	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C68	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C69	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C70	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C71	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C72	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C73	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C74	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C75	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C76	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C77	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C78	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C79	1-104-850-11	s	CAPACITOR TANTALUM 6.8MF/10V
C80	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C81	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C82	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C83	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C84	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C85	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C86	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C87	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C88	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C89	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C90	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C91	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C92	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C93	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C94	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C95	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C96	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C97	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C98	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C99	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C100	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C101	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C102	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
CN1	1-784-625-11	o	CONNECTOR, FFC (ZIF) 30P
CN2	1-573-310-11	s	CONNECTOR,BOARD TO BOARD 20P
CN3	1-695-442-21	o	PIN,CONNECTOR (PC BOARD) 10P
CN4	1-573-316-21	s	CONNECTOR, BOARD TO BOARD 48P
D1	8-719-210-43	s	DIODE EC10QS06
D2	8-719-043-70	s	DIODE MA6S121-(TX)
D5	8-719-043-70	s	DIODE MA6S121-(TX)
D6	8-719-043-70	s	DIODE MA6S121-(TX)
D7	8-719-043-70	s	DIODE MA6S121-(TX)
D8	8-719-043-70	s	DIODE MA6S121-(TX)
D9	8-719-043-70	s	DIODE MA6S121-(TX)
D10	8-719-043-70	s	DIODE MA6S121-(TX)
D11	8-719-043-70	s	DIODE MA6S121-(TX)
D12	8-719-043-70	s	DIODE MA6S121-(TX)
D13	8-719-043-70	s	DIODE MA6S121-(TX)
D14	8-719-043-70	s	DIODE MA6S121-(TX)

(DR-433 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC1	8-759-669-45	s	IC TL062CPWR-12
IC2	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC3	8-759-185-42	s	IC LM4040AIM3-2.5
IC4	8-759-381-53	s	IC UPC814G2-E2
IC5	8-759-381-53	s	IC UPC814G2-E2
IC6	8-759-271-84	s	IC TC7SH02FU
IC7	8-759-064-36	s	IC MB88346BPFV
IC8	8-759-185-42	s	IC LM4040AIM3-2.5
IC9	8-759-669-72	s	IC TL064CPWR
IC10	8-759-524-51	s	IC TC74VHC573FT (EL)
IC11	8-759-524-51	s	IC TC74VHC573FT (EL)
IC12	8-759-058-58	s	IC TC7S04FU-TE85R
IC13	8-759-058-64	s	IC TC7S32FU-TE85R
IC14	8-759-475-53	s	IC TC74LCX541FT(EL)
IC15	8-759-058-64	s	IC TC7S32FU-TE85R
IC16	8-759-058-58	s	IC TC7S04FU-TE85R
IC17	8-759-475-53	s	IC TC74LCX541FT(EL)
IC18	8-759-271-84	s	IC TC7SH02FU
IC19	8-759-659-05	o	IC CXD9135R
IC20	8-759-082-58	s	IC TC7W08FU
IC21	8-759-058-58	s	IC TC7S04FU-TE85R
IC22	8-759-475-53	s	IC TC74LCX541FT(EL)
IC23	8-759-475-53	s	IC TC74LCX541FT(EL)
IC24	8-759-488-34	s	IC TLV2221CDBV2
IC25	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC26	8-759-488-34	s	IC TLV2221CDBV2
IC27	8-759-491-47	s	IC TC74VHCT08FT (EL)
IC28	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC29	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC31	8-759-696-02	s	IC CAT24WC128JI-TE13
IC32	8-759-488-29	s	IC TC7W66FU (TE12R)
IC33	8-759-561-69	s	IC PCF8574TS-T
IC34	8-759-257-96	s	IC TC7S14FU (TE85R)
IC35	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC36	8-759-196-96	s	IC TC7SH08FU (TE85R)
Q1	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q2	8-729-141-48	s	TRANSISTOR 2SB624-BV345
Q3	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q4	8-729-014-93	s	TRANSISTOR 2SB1440S-TX
Q5	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q6	8-729-014-91	s	TRANSISTOR 2SD2185S-TX
Q7	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q8	8-729-014-93	s	TRANSISTOR 2SB1440S-TX
Q9	8-729-117-16	s	TRANSISTOR 2SA1611M6
Q10	8-729-049-93	s	TRANSISTOR 2SD2098-T100R
Q11	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q12	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q13	8-729-106-60	s	TRANSISTOR 2SB1115A
Q14	8-729-421-71	s	TRANSISTOR 2SK620
Q15	8-729-117-32	s	TRANSISTOR 2SC4177
Q16	8-729-140-47	s	TRANSISTOR 2SC3735-L-B35
Q17	8-729-140-47	s	TRANSISTOR 2SC3735-L-B35
Q18	8-729-140-47	s	TRANSISTOR 2SC3735-L-B35
Q19	8-729-140-47	s	TRANSISTOR 2SC3735-L-B35
Q20	8-729-112-65	s	TRANSISTOR 2SA1462
Q21	8-729-112-65	s	TRANSISTOR 2SA1462
Q22	8-729-053-12	s	TRANSISTOR FDC6506P
Q23	8-729-053-11	s	TRANSISTOR FDC6561AN
Q24	8-729-053-12	s	TRANSISTOR FDC6506P

(DR-433 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q25	8-729-053-12	s	TRANSISTOR FDC6506P
Q26	8-729-053-12	s	TRANSISTOR FDC6506P
Q27	8-729-053-12	s	TRANSISTOR FDC6506P
Q28	8-729-053-12	s	TRANSISTOR FDC6506P
Q29	8-729-053-12	s	TRANSISTOR FDC6506P
Q30	8-729-053-12	s	TRANSISTOR FDC6506P
Q31	8-729-053-11	s	TRANSISTOR FDC6561AN
Q32	8-729-053-11	s	TRANSISTOR FDC6561AN
Q33	8-729-053-11	s	TRANSISTOR FDC6561AN
Q34	8-729-053-11	s	TRANSISTOR FDC6561AN
Q35	8-729-053-11	s	TRANSISTOR FDC6561AN
Q36	8-729-053-11	s	TRANSISTOR FDC6561AN
Q37	8-729-053-11	s	TRANSISTOR FDC6561AN
Q39	8-729-402-19	s	TRANSISTOR XN6501
Q40	8-729-402-78	s	TRANSISTOR XN6401
Q41	8-729-162-45	s	TRANSISTOR 2SB624-BV5
Q42	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q43	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
R1	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R3	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R4	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R5	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R6	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R7	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R9	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R10	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R11	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R12	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R13	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R17	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R18	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R19	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R20	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R21	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W
R22	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R24	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R25	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R26	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R27	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R29	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R30	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R31	1-218-710-11	s	RESISTOR,CHIP 5.6K 1/16W(1608)
R32	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R33	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R34	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R35	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R36	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R37	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R38	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R40	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R41	1-249-383-11	s	RES,CARBON 1.5 1/4W
R42	1-218-730-11	s	RESISTOR METAL FILM CHIP 39K
R43	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R44	1-218-682-11	s	RESISTOR,CHIP 390 1/16W (1608)
R45	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R46	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R48	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)

(DR-433 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R49	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R51	1-216-789-11	s	RESISTOR,CHIP 2.2 1/16W(1608)
R52	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R53	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R55	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R56	1-216-789-11	s	RESISTOR,CHIP 2.2 1/16W(1608)
R57	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R58	1-218-734-11	s	RESISTOR,CHIP 56K 1/16W(1608)
R59	1-218-702-11	s	RESISTOR CHIP 2.7K 1/16W(1608)
R62	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R64	1-218-718-11	s	RESISTOR CHIP 12K 1/16W (1608)
R65	1-218-722-11	s	RESISTOR, CHIP 18K 1/16W 1608
R66	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R67	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R68	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R69	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R70	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R71	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R72	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R73	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R74	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R75	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R76	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R77	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R78	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R79	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R80	1-218-648-11	s	RESISTOR CHIP 15 1/16W(1608)
R81	1-218-648-11	s	RESISTOR CHIP 15 1/16W(1608)
R82	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R83	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R84	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R85	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R86	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R88	1-218-710-11	s	RESISTOR,CHIP 5.6K 1/16W(1608)
R89	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R90	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R91	1-218-702-11	s	RESISTOR CHIP 2.7K 1/16W(1608)
R92	1-218-694-11	s	RESISTOR,CHIP 1.2K1/16W(1608)
R94	1-218-694-11	s	RESISTOR,CHIP 1.2K1/16W(1608)
R95	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R96	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R97	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R100	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R101	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R109	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R110	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R111	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R112	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R113	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R114	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R115	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R116	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R117	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R118	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R119	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R120	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R121	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R122	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W
R123	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)

(DR-433 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description	
R124	1-218-730-11	s	RESISTOR METAL FILM CHIP 39K	
R125	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)	
R126	1-218-712-11	s	RESISTOR,METAL 6.8K 1/16W	
R127	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)	
R128	1-218-730-11	s	RESISTOR METAL FILM CHIP 39K	
R129	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)	
R130	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)	
R136	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)	
R140	1-218-722-11	s	RESISTOR, CHIP 18K 1/16W 1608	
R141	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)	
R142	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)	
R143	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)	
R144	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)	
R145	1-218-644-11	s	RESISTOR,CHIP 10 1/16W	
R146	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)	
R147	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)	
R151	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)	
R152	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)	
R156	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)	
R157	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)	
R158	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)	
R159	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)	
RB1	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB2	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB4	1-234-378-21	s	RES, NETWORK 10KX4	(1005)
RB5	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB6	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB7	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB8	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB10	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB12	1-234-369-21	s	RES, NETWORK 10X4	(1005)
RB13	1-234-372-21	s	RES, NETWORK 100X4	(1005)
RB14	1-234-372-21	s	RES, NETWORK 100X4	(1005)
RB15	1-234-378-21	s	RES, NETWORK 10KX4	(1005)
RB16	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB17	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB18	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB19	1-234-381-21	s	RES, NETWORK 100KX4	(1005)
RB20	1-234-377-21	s	RES, NETWORK 4.7KX4	(1005)
RB22	1-234-372-21	s	RES, NETWORK 100X4	(1005)
RB23	1-234-378-21	s	RES, NETWORK 10KX4	(1005)
RB24	1-234-378-21	s	RES, NETWORK 10KX4	(1005)
RB25	1-234-372-21	s	RES, NETWORK 100X4	(1005)

DVP-18 BOARD
---

*a: Lot No. 083 - 0A2
*b: Lot No. 0A3 -
*c: Lot No. 112 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-326-A	o	MOUNTED CIRCUIT BOARD, DVP-18
2pcs	3-603-737-02	o	LEVER,BOARD
3pcs	3-729-061-01	s	SCREW (M2X4.5) (TYPE 1)(STEEL)
C103 *b	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/16V
C107	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C108	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C109	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C110	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C111	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C114	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C120	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C121	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C122	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C130	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C131	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C132	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C140	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C141	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C142	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C150	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C151	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C152	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C160	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C161	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C162	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C163	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C164	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C165	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C166	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C167	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C168	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C169	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C170	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C171	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C172	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C173	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C174	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C175	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C176	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C200	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C202	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C203	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C204	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C205	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C206	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C207	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C208	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C209	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C210	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C211	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C212	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C213	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C214	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C215	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

http://getMANUAL.com

(DVP-18 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C216	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C217	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C218	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C219	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C220	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C221	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C222	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C223	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C224	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C225	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C226	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C227	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C228	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C229	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C230	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C231	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C232	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C233	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C234	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C235	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C236	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C237	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C238	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C239	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C240	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C241	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C242	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C243	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C244	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C245	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C246	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C247	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C248	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C249	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C250	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C251	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C300	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C301	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C302	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C303	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C304	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C305	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C306	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C307	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C308	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C309	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C310	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C311	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C312	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C313	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C314	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C315	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C316	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C317	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C318	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C319	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C320	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C321	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C322	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DVP-18 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C323	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C324	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C325	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C326	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C350	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C351	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C352	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C353	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C354	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C355	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C356	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C357	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C358	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C359	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C360	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C361	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C362	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C363	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C364	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C365	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C366	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C367	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C368	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C369	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C370	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C371	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C372	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C373	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C374	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C400	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C401	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C402	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C403	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C404	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C405	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C406	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C407	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C408	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C409	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C410	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C411	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C412	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C413	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C414	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C415	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C416	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C417	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C418	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C419	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C420	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C421	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C422	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C423	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C424	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C425	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C426	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C500	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C501	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C502	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DVP-18 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C503	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C504	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C505	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C506	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C507	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C508	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C509	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C510	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C511	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C512	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C513	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C514	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C515	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C516	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C517	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C518	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C519	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C520	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C521	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C522	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C523	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C524	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C600	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C601	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C602	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C603	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C604	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C605	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C606	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C607	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C608	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C609	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C610	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C611	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C612	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C613	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C614	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C615	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C616	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C617	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C618	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C619	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C620	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C621	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C650	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C651	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C652	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C653	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C654	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C655	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C656	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C657	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C658	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C659	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C660	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C661	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C662	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C663	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C664	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DVP-18 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C665	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C666	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C667	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C668	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C669	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C670	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C671	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C700	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C701	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C702	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C703	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C704	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C705	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C706	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C707	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C708	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C709	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C710	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C711	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C712	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C713	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C714	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C715	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C716	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C800	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C801	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C802	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C803	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C804	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C805	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C806	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C807	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C808	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C809	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C810	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C811	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C812	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C813	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C814	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C815	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C816	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C817	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C818	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C819	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C820	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C821	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C822	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C823	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C900	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C901	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C902	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C903	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C904	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C905	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C930	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C931	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C932	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C933	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C934	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DVP-18 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C935	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C936	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C937	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C938	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C939	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C950	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C951	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C960	1-128-694-11	s	CAP, CHIP TANTALUM ELECT 22MF
C961	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C962	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C963	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C964	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C965	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C966	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C967	1-119-750-11	s	CAPACITOR,TANTALUM 22MF/6.3V
C968	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C969	1-128-694-11	s	CAP, CHIP TANTALUM ELECT 22MF
C970	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C971	1-119-750-11	s	CAPACITOR,TANTALUM 22MF/6.3V
C972	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C978	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
CN500	1-580-756-21	o	PIN, CONNECTOR 7P
E960	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E961	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E962	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E963	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E964	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E965	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E966	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E967	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
FB960	1-469-379-11	s	FERRITE, EMI (SMD)
FB961	1-469-379-11	s	FERRITE, EMI (SMD)
FB962	1-469-379-11	s	FERRITE, EMI (SMD)
FB963	1-469-379-11	s	FERRITE, EMI (SMD)
FB964	1-469-379-11	s	FERRITE, EMI (SMD)
FB965	1-469-379-11	s	FERRITE, EMI (SMD)
FB966	1-469-379-11	s	FERRITE, EMI (SMD)
FB967	1-469-379-11	s	FERRITE, EMI (SMD)
FL960	1-233-893-21	s	FILTER, CHIP EMI
FL961	1-233-893-21	s	FILTER, CHIP EMI
FL962	1-233-893-21	s	FILTER, CHIP EMI
FL963	1-233-893-21	s	FILTER, CHIP EMI
FL964	1-233-893-21	s	FILTER, CHIP EMI
FL965	1-233-893-21	s	FILTER, CHIP EMI
FL966	1-233-893-21	s	FILTER, CHIP EMI
FL967	1-233-893-21	s	FILTER, CHIP EMI
IC101	8-759-547-49	s	IC CDC509PWR
IC102	8-759-475-36	s	IC TC74LCX08FT(EL)
IC103	8-759-475-36	s	IC TC74LCX08FT(EL)
IC104	8-759-475-36	s	IC TC74LCX08FT(EL)
IC105	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC120	8-759-475-55	s	IC TC74LCX574FT(EL)
IC121	8-759-475-55	s	IC TC74LCX574FT(EL)
IC122	8-759-475-55	s	IC TC74LCX574FT(EL)
IC130	8-759-475-55	s	IC TC74LCX574FT(EL)
IC131	8-759-475-55	s	IC TC74LCX574FT(EL)

(DVP-18 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC132	8-759-475-55	s	IC TC74LCX574FT(EL)
IC140	8-759-475-55	s	IC TC74LCX574FT(EL)
IC141	8-759-475-55	s	IC TC74LCX574FT(EL)
IC142	8-759-475-55	s	IC TC74LCX574FT(EL)
IC150	8-759-559-32	s	IC 74LCX821MTCX
IC151	8-759-559-32	s	IC 74LCX821MTCX
IC153	8-759-475-55	s	IC TC74LCX574FT(EL)
IC154	8-759-271-86	s	IC TC7SH04FU
IC161	8-759-695-88	s	IC SN74CBTLV16211GR
IC162	8-759-562-60	s	IC SN74CBTS3306PWR
IC163	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC164	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC165	8-759-695-88	s	IC SN74CBTLV16211GR
IC166	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC167	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC168	8-759-271-86	s	IC TC7SH04FU
IC201	8-759-447-77	s	IC TC7WH74FU (TR12R)
IC202	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC203	8-759-547-49	s	IC CDC509PWR
IC204	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC205	8-759-475-36	s	IC TC74LCX08FT(EL)
IC206	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC207	8-759-475-36	s	IC TC74LCX08FT(EL)
IC208	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC209	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC210	8-759-491-46	s	IC TC74VHCT04AFT (EL)
IC211	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC212	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC213	8-759-271-86	s	IC TC7SH04FU
IC214	8-759-491-47	s	IC TC74VHCT08FT (EL)
IC215	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC217	8-759-440-78	s	IC SN74CBT3345PW-E05
IC218	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC219	8-759-669-73	s	IC TL082CPWR
IC220	8-759-523-81	s	IC TC74VHC08FT(EL)
IC221	8-759-549-15	s	IC SN74LV245APWR
IC222	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC223	8-759-497-44	s	IC TC7WH125FU(TE12R)
IC224	8-759-523-95	s	IC TC74VHC74FT(EL)
IC225	8-759-271-86	s	IC TC7SH04FU
IC226	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC227	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC228	8-759-549-15	s	IC SN74LV245APWR
IC229	8-759-683-81	s	IC SN74CBT1G125DCKR
IC230	8-759-523-95	s	IC TC74VHC74FT(EL)
IC231	8-759-523-95	s	IC TC74VHC74FT(EL)
IC232	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC233	8-759-447-77	s	IC TC7WH74FU (TR12R)
IC234	8-759-271-86	s	IC TC7SH04FU
IC301	8-759-835-81	s	IC MB81FL643242C-10FN
IC302	8-759-695-88	s	IC SN74CBTLV16211GR
IC303	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC304	8-759-475-55	s	IC TC74LCX574FT(EL)
IC305	8-759-475-55	s	IC TC74LCX574FT(EL)
IC351	8-759-835-81	s	IC MB81FL643242C-10FN
IC352	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC353	8-759-475-55	s	IC TC74LCX574FT(EL)
IC400	8-759-713-04	s	IC CXD9148GG
IC401	8-759-523-94	s	IC TC74VHC32FT(EL)

(DVP-18 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC402	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC403	8-759-475-55	s	IC TC74LCX574FT(EL)
IC404	8-759-475-55	s	IC TC74LCX574FT(EL)
IC405	8-759-475-55	s	IC TC74LCX574FT(EL)
IC406	8-759-497-44	s	IC TC7WH125FU(TE12R)
IC407	8-759-549-15	s	IC SN74LV245APWR
IC408	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC409	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC410	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC411	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC501	8-759-689-07	s	IC SN74CBT16211ADGGR
IC502	8-759-695-89	s	IC XC9572XL-10VQ64C
IC503	8-759-683-81	s	IC SN74CBT1G125DCKR
IC504	8-759-497-44	s	IC TC7WH125FU(TE12R)
IC505	8-759-271-86	s	IC TC7SH04FU
IC506	8-759-695-88	s	IC SN74CBTLV16211GR
IC507	8-759-695-88	s	IC SN74CBTLV16211GR
IC508	8-759-835-81	s	IC MB81FL643242C-10FN
IC509	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC601	8-759-835-81	s	IC MB81FL643242C-10FN
IC651	8-759-835-81	s	IC MB81FL643242C-10FN
IC701	8-759-835-81	s	IC MB81FL643242C-10FN
IC800	8-759-392-77	s	IC SN74LVC245APW (E20)
IC801	8-752-392-03	s	IC CXD1095BR
IC802	8-759-392-77	s	IC SN74LVC245APW (E20)
IC805	8-759-475-44	s	IC TC74LCX138FT(EL)
IC806	8-759-475-44	s	IC TC74LCX138FT(EL)
IC807	8-759-549-15	s	IC SN74LV245APWR
IC808	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC809	8-759-523-81	s	IC TC74VHC08FT(EL)
IC810	8-759-523-94	s	IC TC74VHC32FT(EL)
IC811	8-759-440-78	s	IC SN74CBT3345PW-E05
IC812	8-759-440-78	s	IC SN74CBT3345PW-E05
IC813	8-759-440-78	s	IC SN74CBT3345PW-E05
IC814	8-759-440-78	s	IC SN74CBT3345PW-E05
IC815	8-759-549-15	s	IC SN74LV245APWR
IC816	8-759-549-15	s	IC SN74LV245APWR
IC817	8-759-440-78	s	IC SN74CBT3345PW-E05
IC818	8-759-440-78	s	IC SN74CBT3345PW-E05
IC819	8-759-440-78	s	IC SN74CBT3345PW-E05
IC820	8-759-683-81	s	IC SN74CBT1G125DCKR
IC821	8-759-440-78	s	IC SN74CBT3345PW-E05
IC822	8-759-549-15	s	IC SN74LV245APWR
IC823	8-759-549-15	s	IC SN74LV245APWR
IC824	8-759-523-94	s	IC TC74VHC32FT(EL)
IC825	8-759-523-94	s	IC TC74VHC32FT(EL)
IC826	8-759-271-86	s	IC TC7SH04FU
IC827	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC828	8-759-566-06	s	IC TC7WH08FU(TE12R)
IC829	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC830	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC900	8-759-549-01	s	IC SN74LV125APWR
IC901	8-759-482-59	s	IC CXD8591AQ
IC902	8-759-482-59	s	IC CXD8591AQ
IC903	8-759-497-44	s	IC TC7WH125FU(TE12R)
IC904	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC905	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC930	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC931	8-759-546-74	s	IC TC7WH157FU(TE12R)

(DVP-18 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC932	8-759-392-77	s	IC SN74LVC245APW (E20)
IC933	8-759-549-01	s	IC SN74LV125APWR
IC934	8-759-549-01	s	IC SN74LV125APWR
IC935	8-759-549-01	s	IC SN74LV125APWR
IC936	8-759-549-01	s	IC SN74LV125APWR
IC937	8-759-549-01	s	IC SN74LV125APWR
IC938	8-759-549-01	s	IC SN74LV125APWR
IC939	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC940	8-759-549-15	s	IC SN74LV245APWR
IC950	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC960	8-759-696-35	s	IC TPS7101QDR
IC961	8-759-696-35	s	IC TPS7101QDR
IC962	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC963	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC964	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC965	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC966	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC967	8-759-196-97	s	IC TC7SH32FU (TE85R)
Q101	8-729-928-19	s	TRANSISTOR 2SA1774R
Q200	8-729-928-81	s	TRANSISTOR DTC144EE
Q201	8-729-928-81	s	TRANSISTOR DTC144EE
Q202	8-729-928-27	s	TRANSISTOR DTA144EE
Q203	8-729-928-27	s	TRANSISTOR DTA144EE
Q204	8-729-928-19	s	TRANSISTOR 2SA1774R
Q400	8-729-928-27	s	TRANSISTOR DTA144EE
Q401	8-729-928-27	s	TRANSISTOR DTA144EE
Q402	8-729-928-27	s	TRANSISTOR DTA144EE
Q403	8-729-928-27	s	TRANSISTOR DTA144EE
Q500	8-729-928-27	s	TRANSISTOR DTA144EE
Q930	8-729-928-81	s	TRANSISTOR DTC144EE
Q931	8-729-928-27	s	TRANSISTOR DTA144EE
Q950	8-729-928-27	s	TRANSISTOR DTA144EE
Q951	8-729-024-50	s	TRANSISTOR SI9936DY
Q952	8-729-928-81	s	TRANSISTOR DTC144EE
Q953	8-729-024-50	s	TRANSISTOR SI9936DY
Q954	8-729-928-81	s	TRANSISTOR DTC144EE
Q960	8-729-928-81	s	TRANSISTOR DTC144EE
Q961	8-729-928-81	s	TRANSISTOR DTC144EE
Q962	8-729-928-81	s	TRANSISTOR DTC144EE
Q963	8-729-928-81	s	TRANSISTOR DTC144EE
Q964	8-729-928-81	s	TRANSISTOR DTC144EE
Q965	8-729-024-50	s	TRANSISTOR SI9936DY
Q966	8-729-024-50	s	TRANSISTOR SI9936DY
Q967	8-729-024-50	s	TRANSISTOR SI9936DY
Q968	8-729-024-50	s	TRANSISTOR SI9936DY
Q969	8-729-024-50	s	TRANSISTOR SI9936DY
Q970	8-729-024-50	s	TRANSISTOR SI9936DY
Q971	8-729-928-81	s	TRANSISTOR DTC144EE
Q972	8-729-928-81	s	TRANSISTOR DTC144EE
Q973	8-729-928-81	s	TRANSISTOR DTC144EE
Q974	8-729-928-81	s	TRANSISTOR DTC144EE
Q975	8-729-928-81	s	TRANSISTOR DTC144EE
R102	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R104	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R107	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R108	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R109	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R110	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)

(DVP-18 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R111	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R112	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R113	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R114	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R115	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R141	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R150	1-208-943-11	s	RESISTOR CHIP 220K
R152	1-208-943-11	s	RESISTOR CHIP 220K
R153	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R154	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R155	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R156	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R157	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R158	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R159	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R162	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R163	1-208-943-11	s	RESISTOR CHIP 220K
R165	1-208-943-11	s	RESISTOR CHIP 220K
R166	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R201	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R204	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R206	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R207	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R209	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R210	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R211	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R212	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R213	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R214	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R215	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R216	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R217	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R218	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R219	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R220	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R223	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R224	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R226	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R227	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R228	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R229	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R230	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R231	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R232	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R233	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R234	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R235	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R236	1-208-943-11	s	RESISTOR CHIP 220K
R237	1-208-943-11	s	RESISTOR CHIP 220K
R238	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R239	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R240 *b	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
*a	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R241 *b	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
*a	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R244	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R247	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R248	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R249	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)

(DVP-18 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R250	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R251	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R252	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R253	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R256	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R257	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R258	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R259	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R260	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R261	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R264	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R265	1-208-943-11	s	RESISTOR CHIP 220K
R266	1-208-943-11	s	RESISTOR CHIP 220K
R267	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R268	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R269	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R270	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R271	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R272	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R273	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R274	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R275	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R302	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R303	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R305	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R306	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R307	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R308	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R350	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R351	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R353	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R354	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R355	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R356	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R400	1-208-943-11	s	RESISTOR CHIP 220K
R401	1-208-943-11	s	RESISTOR CHIP 220K
R402	1-208-943-11	s	RESISTOR CHIP 220K
R403	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R404	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R405	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R407	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R408	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R409	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R410	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R411	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R412	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R413	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R414	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R415	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R440	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R442	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R443	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R501	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R504	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R505	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R506	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R507	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R508	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R509	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)

(DVP-18 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R510	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R512	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R514	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R516	1-208-943-11	s	RESISTOR CHIP 220K
R601	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R602	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R603	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R604	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R605	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R606	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R607	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R608	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R609	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R610	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R611	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R612	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R613	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R614	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R615	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R616	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R620	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R621	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R651	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R652	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R653	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R654	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R655	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R656	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R657	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R658	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R659	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R660	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R661	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R662	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R663	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R664	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R665	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R666	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R670	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R671	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R701	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R702	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R703	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R704	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R709	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R710	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R800	1-208-943-11	s	RESISTOR CHIP 220K
R801	1-208-943-11	s	RESISTOR CHIP 220K
R802	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R803	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R806	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R808	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R810	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R812	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R814	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R818	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R819	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R820	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R821	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

(DVP-18 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R826	1-208-943-11	s	RESISTOR CHIP 220K
R827	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R828	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R829	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R830	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R835	1-208-943-11	s	RESISTOR CHIP 220K
R900	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R901	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R904	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R905	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R908	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R909	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R910	1-208-943-11	s	RESISTOR CHIP 220K
R911	1-208-943-11	s	RESISTOR CHIP 220K
R912	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R917	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R918	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R930	1-208-943-11	s	RESISTOR CHIP 220K
R931	1-208-943-11	s	RESISTOR CHIP 220K
R932	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R933	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R934	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R935	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R936	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R941	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R943	1-208-943-11	s	RESISTOR CHIP 220K
R945	1-208-943-11	s	RESISTOR CHIP 220K
R946	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R947	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R950	1-208-943-11	s	RESISTOR CHIP 220K
R951	1-208-943-11	s	RESISTOR CHIP 220K
R952	1-208-943-11	s	RESISTOR CHIP 220K
R953	1-208-943-11	s	RESISTOR CHIP 220K
R954	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R962	1-208-943-11	s	RESISTOR CHIP 220K
R963	1-208-943-11	s	RESISTOR CHIP 220K
R964	1-208-943-11	s	RESISTOR CHIP 220K
R965	1-208-943-11	s	RESISTOR CHIP 220K
R966	1-208-943-11	s	RESISTOR CHIP 220K
R967	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R968	1-208-943-11	s	RESISTOR CHIP 220K
R969	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R970	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R971	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R972	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R974	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R977	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R979	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R980	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R981	1-208-943-11	s	RESISTOR CHIP 220K
R982	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R984	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R985	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R986	1-208-943-11	s	RESISTOR CHIP 220K
R987	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R988	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R989	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R990	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R991	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

(DVP-18 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description	
R992	1-208-943-11	s	RESISTOR CHIP 220K	
R993	1-218-990-11	s	RESISTOR,CHIP 0 1/16W	(1005)
R994	1-208-943-11	s	RESISTOR CHIP 220K	
R995	1-218-990-11	s	RESISTOR,CHIP 0 1/16W	(1005)
R996	1-208-943-11	s	RESISTOR CHIP 220K	
R997	1-218-990-11	s	RESISTOR,CHIP 0 1/16W	(1005)
R998	1-208-943-11	s	RESISTOR CHIP 220K	
RB100	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB101	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB102	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB103	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB104	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB105	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB120	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB121	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB122	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB128	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB129	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB130	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB131	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB132	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB133	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB134	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB135	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB136	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB150	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB151	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB152	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB153	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB154	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB160	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB161	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB200	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB201	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB202	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB300	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB301	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB302	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB303	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB304	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB305	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB306	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB307	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB308	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB350	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB351	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB352	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB353	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB354	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB355	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB356	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB400	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB401	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB402	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB403	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB404	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB405	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB500	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)

(DVP-18 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description	
RB501	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB502	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB503	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB504	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB505	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB600	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB601	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB602	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB650	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB651	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB652	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB800	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB801	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB802	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB803	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB804	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB805	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB806	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB807	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB808	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB809	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB810	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB811	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB812	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB813	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB814	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB815	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB816	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB817	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB818	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB819	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB820	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB821	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB822	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB823	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB824	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB825	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB826	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB827	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB828	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB829	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB830	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB831	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB832	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB833	1-234-371-11	s	RES, NETWORK 47X4	(1005)
RB900	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB930	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB931	1-234-371-11	s	RES, NETWORK 47X4	(1005)
X200	1-767-278-21	s	OSCILLATOR, CRYSTAL	
X201	1-781-496-11	s	OSCILLATOR, CRYSTAL	
X202	1-767-694-11	s	OSCILLATOR, CRYSTAL	
X400	1-795-048-11	s	OSCILLATOR, CRYSTAL (SMD)	
X402	1-767-484-11	s	OSCILLATOR, CRYSTAL	

ENC-61 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-097-A	o	MOUNTED CIRCUIT BOARD, ENC-61
C1	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C2	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C3	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
CN203	1-573-290-21	s	PIN,CONNECTOR (4P)(SMD)(1.5MM)
EN1	1-467-973-11	s	ENCODER, ROTARY(SWITCH)

EQ-88 BOARD

*a: Lot No. 083 - 0A2
*b: Lot No. 0A3 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-251-A	o	MOUNTED CIRCUIT BOARD, EQ-88
1pc	3-629-797-02	o	HEAT SINK(1),EQ
1pc	3-629-798-03	o	HEAT SINK(2),EQ
2pcs	3-629-799-01	o	SPACER
3pcs	3-631-336-02	o	RETAINER,PLATE
2pcs	7-682-145-01	s	SCREW,+P 3X4(EP-FE/ZN/CM2)
C101	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C102	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C103	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C104	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C105	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C106	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C108 *b	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C109	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C110	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C111	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C112	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C201	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C202	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C203	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C204	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C205	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C206	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C207	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C208	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C209	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C210	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C211	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C212	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C213	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C214	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C215	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C216	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C217	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C218	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C301	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C302	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C303	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C304	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C305	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C306	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C307	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C308	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C309	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C310	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C311	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C401	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C402	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C403	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C404	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C405	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C406	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C407	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C408	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C409	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(EQ-88 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C501	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C502	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C503	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C504	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C505	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C506	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C507	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C508	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C509	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C510	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C511	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C512	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C513	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C514	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C515	1-164-934-11	s	CAPACITOR CERAMIC 330PF/16V(B)
C516	1-127-772-11	s	CAPACTOR C,CERAMIC 33000PF B
C517	1-127-772-11	s	CAPACTOR C,CERAMIC 33000PF B
C518	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C519	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C520	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C521 *a	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C601	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C602	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C603	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C604	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C605	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C606	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C607	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C608	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C609	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C610	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C611	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C612	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C613	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C614	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C615	1-164-934-11	s	CAPACITOR CERAMIC 330PF/16V(B)
C616	1-127-772-11	s	CAPACTOR C,CERAMIC 33000PF B
C617	1-127-772-11	s	CAPACTOR C,CERAMIC 33000PF B
C618	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C619	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C620	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C701	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C702	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C703	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C704	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C705	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C706	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C707	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C708	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C709	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C710	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C711	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C712	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C713	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C714	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C715	1-164-934-11	s	CAPACITOR CERAMIC 330PF/16V(B)
C716	1-127-772-11	s	CAPACTOR C,CERAMIC 33000PF B
C717	1-127-772-11	s	CAPACTOR C,CERAMIC 33000PF B
C718	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(EQ-88 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C719	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C720	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C721 *a	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C801	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C802	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C803	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C804	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C805	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C806	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C807	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C808	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C809	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C810	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C811	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C812	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C813	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C814	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C815	1-164-934-11	s	CAPACITOR CERAMIC 330PF/16V(B)
C816	1-127-772-11	s	CAPACTOR C,CERAMIC 33000PF B
C817	1-127-772-11	s	CAPACTOR C,CERAMIC 33000PF B
C818	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C819	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C820	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C911	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C912	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C913	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C914	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C915	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C916	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C917	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C918	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C919	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C920	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C931	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C932	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C933	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C1001	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1002	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1003	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1004	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1005	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1006	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1007	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1008	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1009	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C1010	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C1031	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C1032	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1033	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C1103 *b	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
*a	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1104 *b	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
*a	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1105 *b	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
*a	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1106 *b	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
*a	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1107 *b	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
*a	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(EQ-88 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1108 *b	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
*a	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1109	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1110	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C1111	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C1112	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C1113	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C1114	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C1115	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C1116	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1117	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C1118	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C1119	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1120	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C1121	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C1122	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1123	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1125	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1126	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1127	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1129	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1501	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1502	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1503	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1504	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1505	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C1506	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C1507	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1508	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1509	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1510	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1511	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1512	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1513	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C1514	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1515	1-164-934-11	s	CAPACITOR CERAMIC 330PF/16V(B)
C1516	1-127-772-11	s	CAPACTOR C,CERAMIC 33000PF B
C1517	1-127-772-11	s	CAPACTOR C,CERAMIC 33000PF B
C1518	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1519	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1520	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1601	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1602	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1603	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1604	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1605	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C1606	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C1607	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1608	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1609	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1610	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1611	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1612	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1613	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C1614	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1615	1-164-934-11	s	CAPACITOR CERAMIC 330PF/16V(B)
C1616	1-127-772-11	s	CAPACTOR C,CERAMIC 33000PF B
C1617	1-127-772-11	s	CAPACTOR C,CERAMIC 33000PF B
C1618	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(EQ-88 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C1619	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1620	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1701	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1702	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1703	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1704	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1705	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C1706	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C1707	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1708	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1709	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1710	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1711	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1712	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1713	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C1714	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1715	1-164-934-11	s	CAPACITOR CERAMIC 330PF/16V(B)
C1716	1-127-772-11	s	CAPACTOR C,CERAMIC 33000PF B
C1717	1-127-772-11	s	CAPACTOR C,CERAMIC 33000PF B
C1718	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1719	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1720	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1801	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1802	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1803	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1804	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1805	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C1806	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C1807	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1808	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1809	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1810	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1811	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1812	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1813	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C1814	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1815	1-164-934-11	s	CAPACITOR CERAMIC 330PF/16V(B)
C1816	1-127-772-11	s	CAPACTOR C,CERAMIC 33000PF B
C1817	1-127-772-11	s	CAPACTOR C,CERAMIC 33000PF B
C1818	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1819	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C1820	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
CN101	1-778-535-11	o	CONNECTOR, FFC (ZIF) 45P
CN102	1-695-223-21	o	PIN,CONNECTOR (SMD) 10P
CN103	1-695-223-21	o	PIN,CONNECTOR (SMD) 10P
CN1100	1-580-756-21	o	PIN, CONNECTOR 7P
D1101	8-719-989-03	s	DIODE DAN222
D1102	8-719-989-03	s	DIODE DAN222
D1103	8-719-064-52	s	DIODE CL-191YG-CD-T
D1104	8-719-064-52	s	DIODE CL-191YG-CD-T
D1105	8-719-064-52	s	DIODE CL-191YG-CD-T
D1106	8-719-064-52	s	DIODE CL-191YG-CD-T
E101	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E301	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E901	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E1001	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E1101	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)

http://getMANUAL.com

(EQ-88 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
F101	⚠ 1-576-270-11	s	FUSE CHIP 4A/125V (6125)
F102	⚠ 1-576-270-11	s	FUSE CHIP 4A/125V (6125)
F103	⚠ 1-576-270-11	s	FUSE CHIP 4A/125V (6125)
IC101	8-759-390-93	s	IC CXD8979R
IC102	8-759-523-94	s	IC TC74VHC32FT(EL)
IC103	8-759-523-94	s	IC TC74VHC32FT(EL)
IC104	8-759-524-10	s	IC TC74VHC157FT (EL)
IC105	8-759-524-10	s	IC TC74VHC157FT (EL)
IC201	8-759-656-76	o	IC CXD9132R
IC202	8-759-523-94	s	IC TC74VHC32FT(EL)
IC203	8-759-523-94	s	IC TC74VHC32FT(EL)
IC204	8-759-447-77	s	IC TC7WH74FU (TR12R)
IC205	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC206	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC301	8-759-064-36	s	IC MB88346BPFV
IC302	8-752-093-54	s	IC CXA3513R
IC410	8-752-093-54	s	IC CXA3513R
IC501	8-752-095-78	s	IC CXA3550R
IC601	8-752-095-78	s	IC CXA3550R
IC701	8-752-095-78	s	IC CXA3550R
IC801	8-752-095-78	s	IC CXA3550R
IC901	8-759-640-94	o	IC CXD9096R
IC931	8-759-337-40	s	IC NJM2904V(TE2)
IC1001	8-759-640-94	o	IC CXD9096R
IC1031	8-759-337-40	s	IC NJM2904V(TE2)
IC1101	8-759-538-30	s	IC HD64F3437TFLH16
IC1102	8-759-530-05	s	IC TC4053BFT (EL.N)
IC1103	8-759-524-27	s	IC TC74VHC244FT(EL)
IC1104	8-759-670-06	s	IC NM24C16ULEM8X
IC1105	8-759-524-27	s	IC TC74VHC244FT(EL)
IC1110	8-759-523-81	s	IC TC74VHC08FT(EL)
IC1111	8-759-523-78	s	IC TC74VHC00FT(EL)
IC1113	8-759-337-40	s	IC NJM2904V(TE2)
IC1114	8-759-009-05	s	IC MC14051BF
IC1115	8-759-169-45	s	IC TA78L12F
IC1116	8-759-523-95	s	IC TC74VHC74FT(EL)
IC1117	8-759-549-01	s	IC SN74LV125APWR
IC1501	8-752-095-78	s	IC CXA3550R
IC1601	8-752-095-78	s	IC CXA3550R
IC1701	8-752-095-78	s	IC CXA3550R
IC1801	8-752-095-78	s	IC CXA3550R
Q301	8-729-928-19	s	TRANSISTOR 2SA1774R
Q302	8-729-928-19	s	TRANSISTOR 2SA1774R
Q303	8-729-928-27	s	TRANSISTOR DTA144EE
Q304	8-729-928-27	s	TRANSISTOR DTA144EE
Q305	8-729-928-19	s	TRANSISTOR 2SA1774R
Q306	8-729-928-19	s	TRANSISTOR 2SA1774R
Q307	8-729-928-27	s	TRANSISTOR DTA144EE
Q308	8-729-928-27	s	TRANSISTOR DTA144EE
Q401	8-729-928-19	s	TRANSISTOR 2SA1774R
Q402	8-729-928-19	s	TRANSISTOR 2SA1774R
Q403	8-729-928-27	s	TRANSISTOR DTA144EE
Q404	8-729-928-27	s	TRANSISTOR DTA144EE
Q405	8-729-928-19	s	TRANSISTOR 2SA1774R
Q406	8-729-928-19	s	TRANSISTOR 2SA1774R
Q407	8-729-928-27	s	TRANSISTOR DTA144EE
Q408	8-729-928-27	s	TRANSISTOR DTA144EE
Q501	8-729-024-50	s	TRANSISTOR SI9936DY

(EQ-88 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q502	8-729-928-81	s	TRANSISTOR DTC144EE
Q701	8-729-024-50	s	TRANSISTOR SI9936DY
Q702	8-729-928-81	s	TRANSISTOR DTC144EE
Q1101	8-729-928-99	s	TRANSISTOR DTC143XE
Q1102	8-729-039-35	s	TRANSISTOR SI9435DY-T1
R117	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R118	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R119	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R120	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R121	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R122 *a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R123 *a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R201 *a	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R202	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R203	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R204	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R205	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R206	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R207	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R208 *a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R209	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R210	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R211	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R212	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R213	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R214	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R215	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R216	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R217	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R218	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R219	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R220 *a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R221 *a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R222	1-208-943-11	s	RESISTOR CHIP 220K
R227 *a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R228	1-208-943-11	s	RESISTOR CHIP 220K
R229	1-208-943-11	s	RESISTOR CHIP 220K
R305	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R306	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R307	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R308	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R309	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R310	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R311	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R312	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R313	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R314	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R315	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R316	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R317	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R318	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R319	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R320	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R321	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R322	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R323	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R324	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R325	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R326	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)

(EQ-88 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R327	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R328	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R329	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R330	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R331	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R332	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R333	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R334	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R335	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R336	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R337	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
*a R338	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R339	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R341	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R342	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R343	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R346	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
*a R347	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R348	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R349	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R350	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R351	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R352	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R353	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R354	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R355	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R356	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R361	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R362	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R363	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R364	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R365	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R366	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R367	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R368	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R369	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R370	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R371	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R372	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R373	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R374	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R375	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R376	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R377	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R378	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R379	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R381	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R382	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R383	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R384	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R405	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R406	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R407	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R408	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R409	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R410	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R411	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R412	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R413	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)

(EQ-88 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R414	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R415	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R416	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R417	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R418	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R419	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
*a R420	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R421	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R423	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R424	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R425	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R428	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
*a R429	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R430	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R431	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R432	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R433	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R434	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R435	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R436	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R437	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R438	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R443	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R444	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R445	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R446	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R447	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R448	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R449	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R450	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R451	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R452	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R453	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R454	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R455	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R456	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R457	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R501	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R502	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R503	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R504	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R505	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R506	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R507	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R508	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R509	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
*a R511	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
*a R513	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R514	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R515	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R516	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
*b R518	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
*a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R519	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R520	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R601	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R602	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R603	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R604	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)

(EQ-88 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R605	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R606	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R607	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R608	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R609	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R610 *a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R613 *a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R614	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R615	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R616	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R618	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R701	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R702	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R703	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R704	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R705	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R706	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R707	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R708	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R709	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R714	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R715	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R716	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R718 *b	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
*a	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R719	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R720	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R801	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R802	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R803	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R804	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R805	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R806	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R807	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R808	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R809	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R811 *a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R812 *a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R814	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R815	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R816	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R818	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R907	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R908	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R909	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R910	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R911	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R912	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R931	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R932	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R933	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R934	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R935	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R936	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R937	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R938	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R939	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1001	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R1002	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)

(EQ-88 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1003	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1004	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1005	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1006	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1031	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R1032	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1033	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1034	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1035	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1036	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1037	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1038	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1039	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1106	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1107	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1114	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1115	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1116	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1117	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1118	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1119	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1120	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1121	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1122	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1123	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1124	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1125	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1126	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1127	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1128	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1129	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R1130	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1131	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1132	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R1133	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1134	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1135	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1136	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1137	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1138	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1139	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1140	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1142	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1146	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1152	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1154	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1155	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R1159 *a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1501	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1502	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1503	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R1504	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1505	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R1506	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1507	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1508	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1509	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R1513 *a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1514	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(EQ-88 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R1515	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R1516	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1518	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1601	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1602	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1603	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R1604	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1605	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R1606	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1607	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1608	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1609	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R1611 *a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1614	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1615	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R1616	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1618	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1701	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1702	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1703	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R1704	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1705	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R1706	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1707	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1708	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1709	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R1710 *a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1714	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1715	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R1716	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1718	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1801	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1802	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1803	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R1804	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1805	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R1806	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R1807	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R1808	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1809	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R1812 *a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1814	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R1815	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R1816	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1818	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
RB101	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB102	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB103	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB104	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB1101	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB1102	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB1103	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB1104	1-234-387-11	s	RESISTOR,NETWORK 330X4
S1101	1-572-473-11	s	SWITCH, TACTIL
TP101	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP102	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP103	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP104	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)

(EQ-88 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
TP105	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP106	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP107	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP108	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP501	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP601	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP701	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP801	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP1501	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP1601	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP1701	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP1801	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
X1101	1-767-464-11	s	VIBRATOR, CRYSTAL

FP-121 BOARD
---

*a: Lot No. 083 - 0A2
*b: Lot No. 0A3 -
*c: Lot No. 083 - 111
*d: Lot No. 112 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-328-B	o	MOUNTED CIRCUIT BOARD, FP-121
C1	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C2	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C4	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C5	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C7	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C8	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C10	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C11	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C12	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C13	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C14	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C15	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C19	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C20	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C29	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C30	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C31	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C32	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C33 *b	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
*a	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C34	1-107-820-11	s	CAPACITOR,CHIP CERAMIC 0.1MF F
C39	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C40	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C43	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C44	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C46	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C47	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C48	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C49	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C50	1-107-820-11	s	CAPACITOR,CHIP CERAMIC 0.1MF F
C51	1-107-820-11	s	CAPACITOR,CHIP CERAMIC 0.1MF F
C52	1-107-820-11	s	CAPACITOR,CHIP CERAMIC 0.1MF F
C53	1-107-820-11	s	CAPACITOR,CHIP CERAMIC 0.1MF F
C54	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/16
C57	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/16
C61	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C62	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C63	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C64	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C65	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C66	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C67	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C68	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C69	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C70	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C71	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C72	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C73	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C74	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C75	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C76	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C101 *b	1-113-642-11	s	CAPACITOR, TANTALUM 47MF/10V
*a	1-115-152-11	s	CAPACITOR,ELECT 22MF/6.3V(BP)

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C102	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C103	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C104	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C105	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C106	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C107	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C108	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C109	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/16
C110	1-117-370-11	s	CAPASITER CERAMIC 10MF (3216)
C111	1-115-566-11	s	CAPACITOR,CERAMIC 4.7MF B/6.3V
C112	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C113	1-110-569-11	s	CAPACITOR,TANTALUM 47MF/6.3V
C114	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C115	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C116 *b	1-113-642-11	s	CAPACITOR, TANTALUM 47MF/10V
*a	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C117	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C118 *b	1-127-953-11	s	CAPACITOR,FILM 0.033MF (3216)
*a	1-104-557-11	s	CAPACITOR, CHIP FILM 0.033MF
C119	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C120	1-164-882-11	s	CAPACITOR,CERAMIC 220PF/16V CH
C121	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C122	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C123	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C124	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C125	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C126	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C127	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C128	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C129	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C130	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C131	1-164-942-11	s	CAPACITOR CERAMIC 6800PF/16VB
C132	1-164-942-11	s	CAPACITOR CERAMIC 6800PF/16VB
C133	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C134	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C135	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C136	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C137	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C138	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C139	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C140	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C141	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C142	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C143	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C144	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C145	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C146	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C150	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C151	1-128-661-11	s	CAPACITOR, CHIP CERAMIC
C152	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C153	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C154	1-128-661-11	s	CAPACITOR, CHIP CERAMIC
C155	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C156	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C157	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C201 *b	1-113-642-11	s	CAPACITOR, TANTALUM 47MF/10V
*a	1-115-152-11	s	CAPACITOR,ELECT 22MF/6.3V(BP)
C202	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C203	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C204	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C205	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C206	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C207	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C208	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C209	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/16
C210	1-117-370-11	s	CAPASITER CERAMIC 10MF (3216)
C211	1-115-566-11	s	CAPACITOR,CERAMIC 4.7MF B/6.3V
C212	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C213	1-110-569-11	s	CAPACITOR,TANTALUM 47MF/6.3V
C214	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C215	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C216 *b	1-113-642-11	s	CAPACITOR, TANTALUM 47MF/10V
*a	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C217	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C218	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C219 *b	1-127-953-11	s	CAPACITOR,FILM 0.033MF (3216)
*a	1-104-557-11	s	CAPACITOR, CHIP FILM 0.033MF
C220	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C221	1-164-882-11	s	CAPACITOR,CERAMIC 220PF/16V CH
C222	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C223	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C224	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C225	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C226	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C227	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C228	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C251	1-128-661-11	s	CAPACITOR, CHIP CERAMIC
C254	1-128-661-11	s	CAPACITOR, CHIP CERAMIC
C255	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C256	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C305	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C307	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C308	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C309	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C318	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C319	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/16
C320	1-117-370-11	s	CAPASITER CERAMIC 10MF (3216)
C321	1-115-566-11	s	CAPACITOR,CERAMIC 4.7MF B/6.3V
C322	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C323	1-110-569-11	s	CAPACITOR,TANTALUM 47MF/6.3V
C324	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C325	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C326	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C327 *b	1-127-953-11	s	CAPACITOR,FILM 0.033MF (3216)
*a	1-104-557-11	s	CAPACITOR, CHIP FILM 0.033MF
C328	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C329	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C330	1-164-882-11	s	CAPACITOR,CERAMIC 220PF/16V CH
C331	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C332	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C333	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C334	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C335	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C336	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C337	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C338	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C339	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C340	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C341	1-164-942-11	s	CAPACITOR CERAMIC 6800PF/16VB
C342	1-164-942-11	s	CAPACITOR CERAMIC 6800PF/16VB
C343	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C344	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C345	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C346	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C347	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C348	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C349	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C350	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C351	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C352	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C353	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C354	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C355	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C402	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C403	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C404	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C405	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C406	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C407	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/16
C408	1-117-370-11	s	CAPASITER CERAMIC 10MF (3216)
C409	1-115-566-11	s	CAPACITOR,CERAMIC 4.7MF B/6.3V
C410	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C411	1-110-569-11	s	CAPACITOR,TANTALUM 47MF/6.3V
C412	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C413	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C414	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C415	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C416 *b	1-127-953-11	s	CAPACITOR,FILM 0.033MF (3216)
*a	1-104-557-11	s	CAPACITOR, CHIP FILM 0.033MF
C417	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C418	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C419	1-164-882-11	s	CAPACITOR,CERAMIC 220PF/16V CH
C420	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C421	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C422	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C423	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C424	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C425	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C426	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C427	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C428	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C429	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C430	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C431	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C432	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C433	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C501	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C502	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C503	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C504	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C505	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C506	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C507	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C508	1-127-959-11	s	CAPACIOTR,CHIP FILM 100PF
C509	1-127-959-11	s	CAPACIOTR,CHIP FILM 100PF
C510	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C511	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C512	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C513	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C514	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C515	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C516	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C517	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C518	1-127-959-11	s	CAPACIOTR,CHIP FILM 100PF
C519	1-127-959-11	s	CAPACIOTR,CHIP FILM 100PF
C520	1-127-967-11	s	CAPACITOR,FILM 0.0022MF (2012)
C521	1-127-965-11	s	CAPACITOR,CHIP FILM 0.001MF
C522	1-127-967-11	s	CAPACITOR,FILM 0.0022MF (2012)
C523	1-127-965-11	s	CAPACITOR,CHIP FILM 0.001MF
C524	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C525	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C526	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C527	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C528	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C529	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C530	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C531	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C532	1-127-959-11	s	CAPACIOTR,CHIP FILM 100PF
C533	1-127-959-11	s	CAPACIOTR,CHIP FILM 100PF
C534	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C535	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C538	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C539	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C540	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C541	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C542 *a	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C543 *a	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C544	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C545	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C548	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C549	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C550 *b	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
*a	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C551	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C552	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C553	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/16V
C554	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/16V
C555	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C556	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C557	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C558	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C559	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C560	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C561	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C562	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C563	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C564	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C565	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/16
C566	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/16
C567 *a	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C568	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C569	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C570	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C571	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C572	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C573	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C574	1-115-566-11	s	CAPACITOR,CERAMIC 4.7MF B/6.3V
C575	1-115-566-11	s	CAPACITOR,CERAMIC 4.7MF B/6.3V
C576	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C577	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C578	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C579	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C580	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C581	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C582	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C583	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C584	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C585	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C586	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C587	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C588	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C589	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C590	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C591	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C594 *b	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
*a	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C595 *a	1-164-862-11	s	CAPACITOR,CHIP CERAMIC 33PF/16
C596	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/16
C597	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/16
C598	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C599	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C600	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C601	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C602	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C603	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C604	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C605	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C606	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C607	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C608	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C609 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C610 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C611 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C612 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C613 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C614 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C615 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C616 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C617 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C618 *b	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C619 *b	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C620 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C621 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C622 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C623 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C624 *b	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C625 *b	1-104-912-11	s	CAPACITOR TANTALUM 3.3MF/16V
C626 *b	1-104-912-11	s	CAPACITOR TANTALUM 3.3MF/16V
C627 *d	1-127-949-21	s	CAPACITOR,FILM 0.0068MF/16V
*c	1-127-970-21	s	CAPACITOR,CHIP FILM 0.0068MF
C628 *d	1-127-949-21	s	CAPACITOR,FILM 0.0068MF/16V
*c	1-127-970-21	s	CAPACITOR,CHIP FILM 0.0068MF
C629 *b	1-127-949-21	s	CAPACITOR,FILM 0.0068MF/16V
C701	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C702	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C703	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C704	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C705	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C706	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C707	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C708	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C709	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C710	1-128-394-11	s	CAPACITOR,ELECT 220MF/10V
C711	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C712	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C713	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C714	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C715	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C716 *a	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C717 *a	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C718	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C719	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C720	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C721	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C722 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C723 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C801	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C802	1-126-398-11	s	CAPACITOR ELECT 4.7MF/35V(CHIP
C803	1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V
C804	1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V
C805	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C806	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C807 *b	1-163-809-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
*a	1-123-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C808 *b	1-107-417-11	s	CAPACITOR ELECT 33MF/25V(105C)
*a	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C809	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C810	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C811 *b	1-107-417-11	s	CAPACITOR ELECT 33MF/25V(105C)
*a	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)
C812	1-107-682-11	s	CAPACITOR,CHIP 1MF/16V (3216)
C813	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C814	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C816	1-162-918-11	s	CAPACITOR,CERAMIC 18PF/50V CH
C817	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C818	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C819	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C820	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C821	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C822	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C823	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C824	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C825	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C826	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C827	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C828	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C829 *b	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C830 *b	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C831	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C832	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C833	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C834	1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V
C835	1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V
C836	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description	
C837	1-115-566-11	s	CAPACITOR,CERAMIC 4.7MF B/6.3V	
C838	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V	
C839	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V	
C840	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V	
C841 *b	1-107-820-11	s	CAPACITOR,CHIP CERAMIC 0.1MF F	
*a	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V	
C842	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V	
C843 *b	1-107-417-11	s	CAPACITOR ERECT 33MF/25V(105C)	
*a	1-126-400-11	s	CAPACITOR ELECT 22MF/35V(CHIP)	
C844	1-115-156-11	s	CAPACITOR,CERAMIC 1MF/10V(1608	
C845	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F	
C999 *b	1-135-341-11	s	CAPACITOR,SOLID ELECT 330MF	
C1000 *b	1-164-156-11	s	CAPACITOR,CERAMIC 0.1MF/25V F	
C1001 *b	1-107-417-11	s	CAPACITOR ERECT 33MF/25V(105C)	
C1002 *d	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V	
C1003 *d	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V	
CN105	1-778-535-11	o	CONNECTOR, FFC (ZIF) 45P	
CN106	1-778-535-11	o	CONNECTOR, FFC (ZIF) 45P	
CN107	1-778-535-11	o	CONNECTOR, FFC (ZIF) 45P	
CN201	1-778-451-11	o	CONNECTOR, FPC (50P)	
CN202	1-691-372-21	s	CONNECTOR, FFC/FPC 8P	
CN203	1-580-057-11	o	PIN,CONNECTOR 4P	
CN204	1-764-007-11	o	PIN, CONNECTOR (SMD) 12P	
CN205	1-580-789-21	o	PIN,CONNECTOR (SMD) 6P	
CN206	1-580-055-21	o	PIN, CONNECTOR 2P	
CN207	1-778-645-11	o	CONNECTOR, FFC (ZIF) 10P	
CN208	1-573-290-21	s	PIN,CONNECTOR (4P)(SMD)(1.5MM)	
CN303 *b	1-580-055-21	o	PIN, CONNECTOR 2P	
CT801	1-141-345-11	s	CAPACITOR,TRIMMER(CHIP) 40PF	
D101	8-719-941-23	s	DIODE DA204U	
D102 *b	8-719-991-00	s	DIODE DAP222	
*a	8-719-941-09	s	DIODE DA202U	
D103 *b	8-719-991-00	s	DIODE DAP222	
*a	8-719-941-09	s	DIODE DA202U	
D201	8-719-941-23	s	DIODE DA204U	
D302	8-719-941-23	s	DIODE DA204U	
D303 *b	8-719-991-00	s	DIODE DAP222	
*a	8-719-941-09	s	DIODE DAP202U	
D304 *b	8-719-991-00	s	DIODE DAP222	
*a	8-719-941-09	s	DIODE DAP202U	
D401	8-719-941-23	s	DIODE DA204U	
D501	8-719-941-23	s	DIODE DA204U	
D502	8-719-941-23	s	DIODE DA204U	
D701	8-719-941-23	s	DIODE DA204U	
D702	8-719-029-63	s	DIODE RD4.3UH-T1	
D703	8-719-029-63	s	DIODE RD4.3UH-T1	
D704	8-719-974-51	s	DIODE SB20-03P	
D705	8-719-157-36	s	DIODE RD6.8M-B	
D706 *b	8-719-989-03	s	DIODE DAN222	
*a	8-719-941-86	s	DIODE DAN202U	
D707 *b	8-719-989-03	s	DIODE DAN222	
*a	8-719-941-86	s	DIODE DAN202U	
D708	8-719-989-22	s	LED CL-150R-CD	
D801	8-719-938-75	s	DIODE SB05-05CP	(RECTI)
D802 *a	8-719-989-04	s	DIODE DAN202U	
D803	8-719-989-00	s	DIODE DA221	
D804 *d	8-719-938-75	s	DIODE SB05-05CP	(RECTI)
*c	8-719-991-00	s	DIODE DAP222	
D805	8-719-991-00	s	DIODE DAP222	

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D806 *b	8-719-938-75	s	DIODE SB05-05CP (RECTI)
*a	8-719-991-00	s	DIODE DAP222
D807 *d	8-719-938-75	s	DIODE SB05-05CP (RECTI)
*c	8-719-991-00	s	DIODE DAP222
D808	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D809	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D810	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D811	8-719-991-00	s	DIODE DAP222
D812	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D813	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D814 *d	8-719-071-10	s	DIODE CL-191HR-CD-T
*c	8-719-989-22	s	LED CL-150R-CD
D815	8-719-032-78	s	LED GL3UR8
D816	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D817	8-719-991-00	s	DIODE DAP222
D818	8-719-991-00	s	DIODE DAP222
D819 *b	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D820 *b	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D821 *d	8-719-064-52	s	DIODE CL-191YG-CD-T
E501	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E502 *d	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
FB601 *b	1-543-775-11	s	BEAD, FERRITE
FB602 *b	1-543-775-11	s	BEAD, FERRITE
FB603 *b	1-543-775-11	s	BEAD, FERRITE
FB701	1-469-134-11	s	FERRITE, EMI (SMD)
FB702	1-469-134-11	s	FERRITE, EMI (SMD)
FB703	1-469-134-11	s	FERRITE, EMI (SMD)
IC1	8-759-111-56	s	IC UPC4572G2
IC2	8-759-111-56	s	IC UPC4572G2
IC5	8-759-833-99	s	IC MC74HC4052ADTR2
IC6	8-759-833-99	s	IC MC74HC4052ADTR2
IC7	8-759-833-99	s	IC MC74HC4052ADTR2
IC8	8-759-833-99	s	IC MC74HC4052ADTR2
IC11	8-759-327-01	s	IC NJM062V-TE2
IC12	8-759-596-41	s	IC THAT2181SB-TE2
IC13	8-759-596-41	s	IC THAT2181SB-TE2
IC14	8-759-111-56	s	IC UPC4572G2
IC15	8-759-327-01	s	IC NJM062V-TE2
IC16	8-759-524-09	s	IC TC74VHC153FT (EL)
IC17	8-759-833-99	s	IC MC74HC4052ADTR2
IC101	8-759-833-99	s	IC MC74HC4052ADTR2
IC102	8-759-394-73	s	IC NJM4562M-D-TE2
IC103	8-759-394-73	s	IC NJM4562M-D-TE2
IC104	8-759-669-73	s	IC TL082CPWR
IC105	8-759-394-73	s	IC NJM4562M-D-TE2
IC106	8-759-462-08	s	IC AK5352-VF (E2)
IC107	8-759-523-95	s	IC TC74VHC74FT(EL)
IC108	8-759-394-73	s	IC NJM4562M-D-TE2
IC109	8-759-394-73	s	IC NJM4562M-D-TE2
IC160	8-759-669-73	s	IC TL082CPWR
IC201	8-759-833-99	s	IC MC74HC4052ADTR2
IC202	8-759-394-73	s	IC NJM4562M-D-TE2
IC203	8-759-394-73	s	IC NJM4562M-D-TE2
IC204	8-759-669-73	s	IC TL082CPWR
IC205	8-759-394-73	s	IC NJM4562M-D-TE2
IC206	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC301	8-759-394-73	s	IC NJM4562M-D-TE2

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC302	8-759-394-73	s	IC NJM4562M-D-TE2
IC303	8-759-669-73	s	IC TL082CPWR
IC304	8-759-394-73	s	IC NJM4562M-D-TE2
IC305	8-759-462-08	s	IC AK5352-VF (E2)
IC402	8-759-394-73	s	IC NJM4562M-D-TE2
IC403	8-759-669-73	s	IC TL082CPWR
IC404	8-759-394-73	s	IC NJM4562M-D-TE2
IC405	8-759-394-73	s	IC NJM4562M-D-TE2
IC501	8-759-523-95	s	IC TC74VHC74FT(EL)
IC503 *b	8-759-523-02	s	IC TC74HC4053AFT(EL)
*a	8-759-530-05	s	IC TC4053BFT (EL.N)
IC504	8-759-394-73	s	IC NJM4562M-D-TE2
IC505	8-759-394-73	s	IC NJM4562M-D-TE2
IC506	8-759-394-73	s	IC NJM4562M-D-TE2
IC507	8-759-833-99	s	IC MC74HC4052ADTR2
IC508 *b	8-759-594-77	s	IC CS4338KS
*a	8-759-523-01	s	IC TC74HC4052AFT(EL)
IC510	8-759-369-96	s	IC M5203FP (600D)
IC512	8-759-394-73	s	IC NJM4562M-D-TE2
IC513	8-759-669-73	s	IC TL082CPWR
IC514	8-759-394-73	s	IC NJM4562M-D-TE2
IC515	8-759-394-73	s	IC NJM4562M-D-TE2
IC516	8-759-669-73	s	IC TL082CPWR
IC517	8-759-394-73	s	IC NJM4562M-D-TE2
IC518	8-759-327-01	s	IC NJM062V-TE2
IC519	8-759-327-01	s	IC NJM062V-TE2
IC520	8-759-369-96	s	IC M5203FP (600D)
IC521	8-759-344-16	s	IC AK4319-VM (E2)
IC522	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC523	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC524 *b	8-759-547-54	s	IC TC7SET00FU(TE85R)
IC525 *b	8-759-570-08	s	IC TC7SET32FU(TE85R)
IC526	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC527	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC528 *b	8-759-547-54	s	IC TC7SET00FU(TE85R)
IC529 *b	8-759-547-54	s	IC TC7SET00FU(TE85R)
IC701	8-759-185-42	s	IC LM4040AIM3-2.5
IC702	8-759-669-73	s	IC TL082CPWR
IC703	8-759-561-69	s	IC PCF8574TS-T
IC704	8-759-561-69	s	IC PCF8574TS-T
IC705	8-759-549-15	s	IC SN74LV245APWR
IC707 *b	8-759-058-56	s	IC TC7S02FU(TE85R)
IC801	8-759-696-56	s	IC HD64F2144TE20
IC802	8-759-349-55	s	IC RH5VL25AA-T1
IC803	8-759-477-41	s	IC RH5RL53AA-T1
IC804	8-759-442-54	s	IC RH5RL50AA-T1
IC805	8-759-442-54	s	IC RH5RL50AA-T1
IC806	8-759-431-95	s	IC S-81230SGUP-DQB-T1
IC807	8-759-444-93	s	IC RH5RL33AA-T1
IC808	8-759-349-55	s	IC RH5VL25AA-T1
IC809	8-759-071-01	s	IC UPD4991AGS
IC811	8-759-598-35	s	IC NJM2119M(TE2)
IC812	8-759-701-01	s	IC NJM2904M
IC813	8-759-701-01	s	IC NJM2904M
IC814	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC815	8-759-549-15	s	IC SN74LV245APWR
IC817	8-759-442-26	s	IC MAX3222CAP
IC819	8-759-523-02	s	IC TC74HC4053AFT(EL)
IC820	8-759-490-42	s	IC TC74VHCT574AFT(EL)

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC821	8-759-490-42	s	IC TC74VHCT574AFT(EL)
IC822	8-759-475-55	s	IC TC74LCX574FT(EL)
IC823	8-759-490-42	s	IC TC74VHCT574AFT(EL)
IC824	8-759-490-42	s	IC TC74VHCT574AFT(EL)
IC825	8-759-490-42	s	IC TC74VHCT574AFT(EL)
IC826	8-759-490-42	s	IC TC74VHCT574AFT(EL)
IC830	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC831	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC832	8-759-490-42	s	IC TC74VHCT574AFT(EL)
IC841 *b	8-759-349-55	s	IC RH5VL25AA-T1
IC842 *d	8-759-523-95	s	IC TC74VHC74FT(EL)
IC843 *d	8-759-196-97	s	IC TC7SH32FU (TE85R)
L701	1-412-170-11	s	MICRO INDUCTOR 0.47UH
L702	1-412-170-11	s	MICRO INDUCTOR 0.47UH
L703	1-412-170-11	s	MICRO INDUCTOR 0.47UH
L704	1-412-170-11	s	MICRO INDUCTOR 0.47UH
L705	1-412-170-11	s	MICRO INDUCTOR 0.47UH
L706	1-412-170-11	s	MICRO INDUCTOR 0.47UH
L801	1-409-722-11	s	COIL, CHOKE 220UH
L802 *b	1-412-170-11	s	MICRO INDUCTOR 0.47UH
ND801	1-810-586-11	s	LCD MODULE
Q102	8-729-014-86	s	TRANSISTOR 2SC4207-YGR-TE85L
Q103	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q104	8-729-427-72	s	TRANSISTOR XP4501-TXE
Q105	8-729-427-72	s	TRANSISTOR XP4501-TXE
Q109	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q110	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q111	8-729-928-19	s	TRANSISTOR 2SA1774R
Q112	8-729-012-35	s	TRANSISTOR 2SK711-BL
Q114	8-729-928-27	s	TRANSISTOR DTA144EE
Q115	8-729-928-81	s	TRANSISTOR DTC144EE
Q116	8-729-045-28	s	TRANSISTOR SI4532DY-T1
Q117	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q150	8-729-230-63	s	TRANSISTOR 2SC4116-YG
Q151	8-729-230-63	s	TRANSISTOR 2SC4116-YG
Q202	8-729-014-86	s	TRANSISTOR 2SC4207-YGR-TE85L
Q203	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q204	8-729-427-72	s	TRANSISTOR XP4501-TXE
Q205	8-729-427-72	s	TRANSISTOR XP4501-TXE
Q209	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q210	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q211	8-729-012-35	s	TRANSISTOR 2SK711-BL
Q217	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q310	8-729-014-86	s	TRANSISTOR 2SC4207-YGR-TE85L
Q312	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q313	8-729-427-72	s	TRANSISTOR XP4501-TXE
Q316	8-729-427-72	s	TRANSISTOR XP4501-TXE
Q319	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q320	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q321	8-729-928-19	s	TRANSISTOR 2SA1774R
Q322	8-729-012-35	s	TRANSISTOR 2SK711-BL
Q324	8-729-928-27	s	TRANSISTOR DTA144EE
Q325	8-729-928-81	s	TRANSISTOR DTC144EE
Q326	8-729-045-28	s	TRANSISTOR SI4532DY-T1
Q401	8-729-014-86	s	TRANSISTOR 2SC4207-YGR-TE85L
Q402	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q403	8-729-427-72	s	TRANSISTOR XP4501-TXE

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q405	8-729-427-72	s	TRANSISTOR XP4501-TXE
Q408	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q409	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q410	8-729-012-35	s	TRANSISTOR 2SK711-BL
Q411	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q412	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q501	8-729-928-27	s	TRANSISTOR DTA144EE
Q502	8-729-928-81	s	TRANSISTOR DTC144EE
Q503	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q504	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q505	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q506	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q507	8-729-014-86	s	TRANSISTOR 2SC4207-YGR-TE85L
Q508	8-729-014-86	s	TRANSISTOR 2SC4207-YGR-TE85L
Q509	8-729-927-99	s	TRANSISTOR 2SC4617R
Q510	8-729-927-99	s	TRANSISTOR 2SC4617R
Q511	8-729-427-72	s	TRANSISTOR XP4501-TXE
Q512	8-729-427-72	s	TRANSISTOR XP4501-TXE
Q516	8-729-928-27	s	TRANSISTOR DTA144EE
Q517	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q518	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q519	8-729-928-81	s	TRANSISTOR DTC144EE
Q520	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q521	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q522	8-729-928-19	s	TRANSISTOR 2SA1774R
Q525	8-729-045-28	s	TRANSISTOR SI4532DY-T1
Q619	8-729-045-28	s	TRANSISTOR SI4532DY-T1
Q620	8-729-928-81	s	TRANSISTOR DTC144EE
Q621	8-729-928-81	s	TRANSISTOR DTC144EE
Q622	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q623	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q624 *b	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q625 *b	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q626 *b	8-729-427-74	s	TRANSISTOR XP4601-TXE
Q701	8-729-020-94	s	TRANSISTOR 2SA1314C-TE12L
Q702	8-729-808-42	s	TRANSISTOR 2SD1624-T
Q703	8-729-928-19	s	TRANSISTOR 2SA1774R
Q704	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q705 *b	8-729-907-00	s	TRANSISTOR DTC114EU
*a	8-729-928-81	s	TRANSISTOR DTC144EE
Q706 *b	8-729-141-48	s	TRANSISTOR 2SB624-BV345
Q707 *a	8-729-928-27	s	TRANSISTOR DTA144EE
Q708	8-729-928-27	s	TRANSISTOR DTA144EE
Q709	8-729-928-81	s	TRANSISTOR DTC144EE
Q802	8-729-928-81	s	TRANSISTOR DTC144EE
Q803	8-729-928-81	s	TRANSISTOR DTC144EE
Q804	8-729-142-90	s	TRANSISTOR 2SK853-K5
Q806	8-729-928-81	s	TRANSISTOR DTC144EE
Q807	8-729-928-81	s	TRANSISTOR DTC144EE
Q808	8-729-928-81	s	TRANSISTOR DTC144EE
Q812	8-729-928-19	s	TRANSISTOR 2SA1774R
Q813	8-729-039-07	s	TRANSISTOR SI6943DQ
Q814	8-729-927-99	s	TRANSISTOR 2SC4617R
Q815	8-729-927-99	s	TRANSISTOR 2SC4617R
Q816	8-729-928-19	s	TRANSISTOR 2SA1774R
Q817	8-729-020-94	s	TRANSISTOR 2SA1314C-TE12L
Q818 *b	8-729-928-81	s	TRANSISTOR DTC144EE
Q819 *b	8-729-928-81	s	TRANSISTOR DTC144EE
Q820 *b	8-729-928-27	s	TRANSISTOR DTA144EE

http://getMANUAL.com

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q821	*b 8-729-928-81	s	TRANSISTOR DTC144EE
R1	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R2	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R3	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R4	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R5	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R6	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R7	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R8	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R9	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R10	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R11	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R12	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R13	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R14	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R15	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R16	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R17	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R18	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R19	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R20	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R21	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R22	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R23	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R24	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R25	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R26	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R27	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R28	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R29	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R35	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R36	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R37	*d 1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
	*c 1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R38	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R39	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R40	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R41	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R42	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R43	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R44	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R45	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R46	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R47	*b 1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
	*a 1-208-689-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R48	*b 1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
	*a 1-208-689-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R51	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R52	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R53	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R54	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R55	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R56	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R57	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R61	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R62	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R63	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R65	*b 1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
	*a 1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R67	1-208-943-11	s	RESISTOR CHIP 220K
R68	1-208-943-11	s	RESISTOR CHIP 220K
R69	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R70	*b 1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
	*a 1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R72	1-208-943-11	s	RESISTOR CHIP 220K
R73	1-208-943-11	s	RESISTOR CHIP 220K
R74	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R75	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R76	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R77	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R78	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R79	*d 1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
	*c 1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R80	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R81	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R82	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R83	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R84	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R85	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R86	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R87	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R88	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R89	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R90	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R91	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R92	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R93	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R94	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R95	*b 1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
	*a 1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R96	*b 1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
	*a 1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R97	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R98	*d 1-208-713-11	s	RESISTOR CHIP 18K 1/16W (1005)
R99	*d 1-208-713-11	s	RESISTOR CHIP 18K 1/16W (1005)
R103	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R104	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R105	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R106	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R107	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R108	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R109	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R110	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R113	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R114	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R115	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R116	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R117	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R118	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R119	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R120	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R121	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R122	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R123	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R124	1-208-943-11	s	RESISTOR CHIP 220K
R125	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R126	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R127	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R128	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R129	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R130	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R131	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R132	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R133	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R134	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R135	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R136	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R137	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R138	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R139	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R140	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R141	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R142	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R143	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R144	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R145 *b	1-208-713-11	s	RESISTOR CHIP 18K 1/16W (1005)
*a	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R146	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R147	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R148	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R149	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R150	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R151	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R152	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R153	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R154	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R155	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R156	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R157	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R158	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R159	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R160	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R162	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R163	1-208-943-11	s	RESISTOR CHIP 220K
R164	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R165	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R166	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R167	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R168	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R169	1-208-943-11	s	RESISTOR CHIP 220K
R170	1-208-947-11	s	RESISTOR CHIP 330K 1/16W(1005)
R171	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R172	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R173	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R174	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R175	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R176	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R177	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R178	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R179	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R180	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R181	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R182	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R183 *d	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
*c	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R184	1-208-947-11	s	RESISTOR CHIP 330K 1/16W(1005)
R185	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R186	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R187	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R203	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R204	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R205	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R206	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R207	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R208	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R209	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R210	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R213	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R214	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R215	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R216	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R217	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R218	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R219	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R220	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R221	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R222	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R223	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R224	1-208-943-11	s	RESISTOR CHIP 220K
R225	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R226	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R227	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R228	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R229	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R230	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R231	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R232	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R233	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R234	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R235	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R236	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R237	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R238	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R239	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R240	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R241	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R242	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R243	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R244	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R245	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R246	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R247	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R248	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R249	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R250	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R251	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R252	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R253	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R254	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R255	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R256	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R257	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R263	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R265	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R274	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R275	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R276	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R277	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R278	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R279	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R280	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R281	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R282	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R283 *d	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
*c	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R284	1-208-943-11	s	RESISTOR CHIP 220K
R285	1-208-943-11	s	RESISTOR CHIP 220K
R286	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R287	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R288	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R289	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R290	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R291	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R292	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R293	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R296 *d	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R297 *d	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R301	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R302	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R303	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R304	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R318	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R319	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R320	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R321	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R327	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R340	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R342	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R359	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R360	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R361	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R362	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R363	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R364	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R365	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R366	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R367	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R368	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R369	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R370	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R371	1-208-943-11	s	RESISTOR CHIP 220K
R372	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R373	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R374	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R375	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R376	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R377	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R378	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R379	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R380	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R381	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R382	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R383	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R384	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R385	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R386	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R387	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R388	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R389	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R390	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R391	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R392 *b	1-208-713-11	s	RESISTOR CHIP 18K 1/16W (1005)
*a	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R393	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R394	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R395	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R396	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R397	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R398	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R399	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R400	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R401	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R402	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R403	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R404	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R405	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R406	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R407	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R409	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R410	1-208-943-11	s	RESISTOR CHIP 220K
R411	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R412	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R413	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R414	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R415	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R416	1-208-943-11	s	RESISTOR CHIP 220K
R417	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R418	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R419	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R420	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R421	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R423	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R425	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R426	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R427	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R428	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R429	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R430	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R431	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R432	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R433	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R434	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R435	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R436	1-208-943-11	s	RESISTOR CHIP 220K
R437	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R438	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R439	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R440	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R441	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R442	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R443	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R444	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R445	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R446	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R447	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R448	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R449	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R450	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R451	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R452	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R453	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R454	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R455	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R456	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R457	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R458	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R459	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R460	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R461	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R462	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R463	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R464	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R465	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R466	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R467	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R468	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R469	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R473	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R475	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R477	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R480	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R481	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R482	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R483	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R484	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R485	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R486	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R487	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R488	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R489	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R490	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R491	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R492	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R493	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R494	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R495	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R496	1-208-943-11	s	RESISTOR CHIP 220K
R497	1-208-943-11	s	RESISTOR CHIP 220K
R501	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R502	1-208-943-11	s	RESISTOR CHIP 220K
R503	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R504	1-208-943-11	s	RESISTOR CHIP 220K
R505	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
*a R506	1-208-935-11	s	RESISTOR CHIP 100K (1005)
R507	1-208-943-11	s	RESISTOR CHIP 220K
*a R508	1-208-935-11	s	RESISTOR CHIP 100K (1005)
R509	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R510	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R511	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R512	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R513	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R514	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R515	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R516	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R517	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R518	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R519	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R520	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
*b R521	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
*a	1-218-977-11	s	RESISTOR,CHIP 100K 1/16W(1005)
R522	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R523	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R524	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R525	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R526	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R527	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R528	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R529	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R530	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R531	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R532	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R533	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R534	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R535	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R536	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R537	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R538	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R539	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R540	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R541	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R542	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R543	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R544	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R545	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R546	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R547	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R548	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R549	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R550	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R551	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R552	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R553	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R554	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R555	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R556	1-208-943-11	s	RESISTOR CHIP 220K
R557	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R558	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R559	1-208-943-11	s	RESISTOR CHIP 220K
R560	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R561	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
*b R562	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R563	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R564	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R565	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R566	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
*b R567	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R568	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
*b R569	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
*b R570	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
*a	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
*b R571	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
*a	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R572	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R573	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R574 *b	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R575	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R576 *b	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
*a	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R577	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R578	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R579	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R580	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R581	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R582	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R583	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R584	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R585	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R586	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R587	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R588	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R589	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R590	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R591	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R592	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R593 *b	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
*a	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R594 *b	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
*a	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R595	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R596	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R597 *b	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R598	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R599	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R600	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R601	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R602	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R603	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R604	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R605	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R606	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R607	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R608	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R609	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R610	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R611	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R612	1-208-943-11	s	RESISTOR CHIP 220K
R613	1-208-943-11	s	RESISTOR CHIP 220K
R614	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R615	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R616	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R617	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R618	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R619	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R620	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R621	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R622	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R623	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R624	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R625	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R626	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R627	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R628	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R629	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R630	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R631	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R632 *b	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
*a	1-218-977-11	s	RESISTOR,CHIP 100K 1/16W(1005)
R633	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R634	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R635	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R636	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R637	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R638	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R639	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R640	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R641	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R642	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R643	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R644	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R645	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R646	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R647	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R648	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R649	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R650	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R651	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R652	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R653	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R654	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R655	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R656	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R657	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R658	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R659	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R660	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R661	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R662	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R663	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R664 *b	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R665 *b	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
*a	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R666 *b	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R667 *b	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R668	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R669	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R670 *b	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R671	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R672	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R673	1-208-943-11	s	RESISTOR CHIP 220K
R674	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R675	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R676	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R677	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R678	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R679	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R680	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R681	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R682	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R683	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R684	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R685	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R686	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R687	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R688 *b	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R689 *b	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R690 *b	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R691 *b	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R692 *b	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R693 *b	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R694 *b	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R695 *b	1-208-943-11	s	RESISTOR CHIP 220K
R696 *b	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R697 *b	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R699 *b	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R701 *b	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
*a	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R702	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R703	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R704	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R705	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R706	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R707	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R708	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R709	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R710	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R711	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R712	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R713	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R714	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R715	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R716 *a	1-218-977-11	s	RESISTOR,CHIP 100K 1/16W(1005)
R717	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R718	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R719	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R720	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R721	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R722	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R723	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R724	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R725	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R726	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R727	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R728	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R729	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R730	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R731	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R732	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R733	1-208-943-11	s	RESISTOR CHIP 220K
R734	1-208-943-11	s	RESISTOR CHIP 220K
R735	1-208-943-11	s	RESISTOR CHIP 220K
R736	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R737	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R740	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R742	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R750 *b	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R751 *b	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R752 *b	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R753	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R754 *b	1-208-935-11	s	RESISTOR, CHIP 100K (1005)

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R760 *b	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R761 *b	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R762 *b	1-208-943-11	s	RESISTOR CHIP 220K
R801 *b	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
*a	1-218-929-11	s	RESISTOR,CHIP 10 1/16W (1005)
R802	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R803 *b	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
*a	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R804 *b	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
*a	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R806	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R807	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R808	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R809	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R810	1-208-943-11	s	RESISTOR CHIP 220K
R811	1-208-943-11	s	RESISTOR CHIP 220K
R812	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R813	1-208-943-11	s	RESISTOR CHIP 220K
R814	1-208-943-11	s	RESISTOR CHIP 220K
R815	1-208-943-11	s	RESISTOR CHIP 220K
R816	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R817	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R818 *b	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
*a	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R819	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R820	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R821	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R822	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R824	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R825	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R827	1-208-943-11	s	RESISTOR CHIP 220K
R828	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R829	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R830	1-208-943-11	s	RESISTOR CHIP 220K
R832	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R833	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R834	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R835	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R836	1-208-943-11	s	RESISTOR CHIP 220K
R842	1-208-943-11	s	RESISTOR CHIP 220K
R844	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R845	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R858	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R859	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R860	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R861	1-208-943-11	s	RESISTOR CHIP 220K
R862 *b	1-208-943-11	s	RESISTOR CHIP 220K
R863	1-208-943-11	s	RESISTOR CHIP 220K
R864	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R865	1-208-943-11	s	RESISTOR CHIP 220K
R866 *b	1-208-943-11	s	RESISTOR CHIP 220K
*a	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R871	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R872	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R891	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R892	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R898	1-208-943-11	s	RESISTOR CHIP 220K
R908	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R909 *b	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R912	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R921	1-208-943-11	s	RESISTOR CHIP 220K
R924	1-208-943-11	s	RESISTOR CHIP 220K
R925	1-208-943-11	s	RESISTOR CHIP 220K
R926	1-208-943-11	s	RESISTOR CHIP 220K
R927	1-208-943-11	s	RESISTOR CHIP 220K
R928	1-208-943-11	s	RESISTOR CHIP 220K
R929	1-208-943-11	s	RESISTOR CHIP 220K
R930	1-208-943-11	s	RESISTOR CHIP 220K
R931	1-208-943-11	s	RESISTOR CHIP 220K
R932	1-208-943-11	s	RESISTOR CHIP 220K
R933	1-208-943-11	s	RESISTOR CHIP 220K
R934	1-218-748-11	s	RESISTOR,CHIP 220K 1/16W(1608)
R935 *c	1-208-943-11	s	RESISTOR CHIP 220K
R936	1-208-943-11	s	RESISTOR CHIP 220K
R937	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R938	1-208-943-11	s	RESISTOR CHIP 220K
R939	1-208-943-11	s	RESISTOR CHIP 220K
R940	1-208-943-11	s	RESISTOR CHIP 220K
R941	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R942	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R943	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R944	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R945	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R946	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R947	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R948	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R949	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R955	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R956	1-208-943-11	s	RESISTOR CHIP 220K
R957	1-208-943-11	s	RESISTOR CHIP 220K
R959	1-208-943-11	s	RESISTOR CHIP 220K
R961	1-208-943-11	s	RESISTOR CHIP 220K
R963	1-208-943-11	s	RESISTOR CHIP 220K
R964	1-208-943-11	s	RESISTOR CHIP 220K
R965 *c	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R966 *c	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R967 *c	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R968 *c	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R969 *c	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R970 *c	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R971 *c	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R972 *c	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R974	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R975	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R976 *b	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
*a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R978	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R979	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R981	1-208-943-11	s	RESISTOR CHIP 220K
R982	1-208-943-11	s	RESISTOR CHIP 220K
R983	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R987 *a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R988	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R989	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R990	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R991	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R992	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R995	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R996	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R997	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R998 *b	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
*a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R999	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R1001 *b	1-208-943-11	s	RESISTOR CHIP 220K
R1002 *b	1-208-943-11	s	RESISTOR CHIP 220K
R1004 *b	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1005 *d	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1006 *b	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1007 *b	1-208-943-11	s	RESISTOR CHIP 220K
R1008 *b	1-208-943-11	s	RESISTOR CHIP 220K
R1009 *b	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R1011 *b	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1012 *d	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1014 *d	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R1015 *d	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
RB1	1-234-398-11	s	NETWORK, RES (8 GANG) 220K
RB701	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB702	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB703	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB704	1-239-389-11	s	RESISTOR,NETWORK 47K (1608)
RB801	1-239-310-11	s	RESISTOR ARRAY, CHIP 220K
RB802	1-239-310-11	s	RESISTOR ARRAY, CHIP 220K
RB803	1-239-310-11	s	RESISTOR ARRAY, CHIP 220K
RB804	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB805	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB806	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB807	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB808	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB809	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB810	1-239-310-11	s	RESISTOR ARRAY, CHIP 220K
RB811	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB812	1-234-375-21	s	RES, NETWORK 1KX4 (1005)
RB813	1-234-372-21	s	RES, NETWORK 100X4 (1005)
RV2	1-227-248-11	s	RESISTOR,VAR.CARBON 5K
RV3	1-227-248-11	s	RESISTOR,VAR.CARBON 5K
RV10	1-225-788-21	s	RES, ADJ, CERMET 1K
RV11	1-225-788-21	s	RES, ADJ, CERMET 1K
RV12 *b	1-225-787-21	s	RES, ADJ, CERMET 500
*a	1-225-788-21	s	RES, ADJ, CERMET 1K
RV13	1-225-792-21	s	RES, ADJ, CERMET 10K
RV20	1-225-788-21	s	RES, ADJ, CERMET 1K
RV22 *b	1-225-787-21	s	RES, ADJ, CERMET 500
*a	1-225-788-21	s	RES, ADJ, CERMET 1K
RV23	1-225-792-21	s	RES, ADJ, CERMET 10K
RV150	1-225-796-11	s	RESISTOR,ADJ.CERMET 100K
RV151	1-225-788-21	s	RES, ADJ, CERMET 1K
RV152	1-225-788-21	s	RES, ADJ, CERMET 1K
RV153	1-225-796-11	s	RESISTOR,ADJ.CERMET 100K
RV501	1-225-788-21	s	RES, ADJ, CERMET 1K
RV502	1-225-788-21	s	RES, ADJ, CERMET 1K
RV503 *b	1-225-793-11	s	RES, ADJ, CERMET 20K
*a	1-225-791-21	s	RES, ADJ, CERMET 5K
S1	1-570-834-11	s	SWITCH,SLIDE (2-2-3)
S2	1-570-834-11	s	SWITCH,SLIDE (2-2-3)
S3	1-570-834-11	s	SWITCH,SLIDE (2-2-3)
S4	1-570-834-11	s	SWITCH,SLIDE (2-2-3)
S101	1-570-842-11	s	SWITCH,SLIDE (2-2-2)

(FP-121 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
S102	1-571-275-31	s	SWITCH,SLIDE (1-1-2)
S201	1-570-842-11	s	SWITCH,SLIDE (2-2-2)
S202	1-571-275-31	s	SWITCH,SLIDE (1-1-2)
S501	1-571-275-31	s	SWITCH,SLIDE (1-1-2)
S502	1-571-275-31	s	SWITCH,SLIDE (1-1-2)
S503	1-570-852-11	s	SWITCH, SLIDE
S504	1-571-275-31	s	SWITCH,SLIDE (1-1-2)
S505	1-571-275-31	s	SWITCH,SLIDE (1-1-2)
S801	1-570-852-11	s	SWITCH, SLIDE
S802	1-570-852-11	s	SWITCH, SLIDE
S803	1-570-852-11	s	SWITCH, SLIDE
S804	1-570-852-11	s	SWITCH, SLIDE
S805	1-572-725-11	s	SWITCH,TACTILE
S806	1-572-725-11	s	SWITCH,TACTILE
S807	1-572-725-11	s	SWITCH,TACTILE
S808	1-572-725-11	s	SWITCH,TACTILE
S810	1-570-861-11	s	SWITCH,SLIDE (1-1-2)
S814	1-692-270-41	s	SWITCH, SLIDE
THP1	1-810-106-11	s	THERMISTOR, POSITIVE LINEAR
THP2	1-810-106-11	s	THERMISTOR, POSITIVE LINEAR
TP1	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP2	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP3	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP4	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP5 *b	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP6 *b	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP101	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP102	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP201	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP202	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP302	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP401	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP501	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP502	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP801	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP802	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP803	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP804	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP805	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP806	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP807	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP808	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP809	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP810	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP811	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP812	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP813	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP814	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP815	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP816 *d	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP817 *d	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
X801	1-760-622-21	s	VIBRATOR, CRYSTAL
X802	1-579-843-11	s	OSCILLATOR, CRYSTAL

HN-277 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-110-A	o	MOUNTED CIRCUIT BOARD, HN-277
1pc	3-629-755-02	o	SUPPORT,PWB
CN203	1-778-645-11	o	CONNECTOR, FFC (ZIF) 10P

HP-103 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-099-A	o	MOUNTED CIRCUIT BOARD, HP-103
C1	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C2	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
CN301	1-569-775-21	o	PIN, CONNECTOR 5P
FL1	1-239-895-11	s	FILTER, EMI (SMD)
J1	1-507-980-41	s	JACK
L1	1-410-389-31	s	INDUCTOR,CHIP 47UH (3225)
L2	1-410-389-31	s	INDUCTOR,CHIP 47UH (3225)
Q1	8-729-013-26	s	TRANSISTOR HN1C03FU-TE85R
R1	1-218-648-11	s	RESISTOR CHIP 15 1/16W(1608)
R2	1-218-648-11	s	RESISTOR CHIP 15 1/16W(1608)
R3	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R4	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)

HP-104 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-100-A	o	MOUNTED CIRCUIT BOARD, HP-104
C1	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C2	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
CN205	1-580-789-21	o	PIN,CONNECTOR (SMD) 6P
CN206	1-794-945-11	s	JACK, SMALL TYPE (WITH SWITCH)
FL1	1-239-895-11	s	FILTER, EMI (SMD)
L3	1-412-170-11	s	MICRO INDUCTOR 0.47UH
Q1	8-729-013-26	s	TRANSISTOR HN1C03FU-TE85R
R1	1-218-648-11	s	RESISTOR CHIP 15 1/16W(1608)
R2	1-218-648-11	s	RESISTOR CHIP 15 1/16W(1608)
R3	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R4	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)

IF-794 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-342-A	o	MOUNTED CIRCUIT BOARD, IF-794
2pcs	3-629-766-01	o	BLACKET,PC BOARD
4pcs	3-729-013-21	s	SCREW(M1.4X2.5),WASHER HEAD(ST
C100	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C101	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C102	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C103	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C104	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C105	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C106	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C107	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C108	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C109	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C110	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C111	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C112	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C113	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C114	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C115	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C116	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C117	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C118	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C119	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C120	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C121	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C122	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C123	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C124	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C131	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C132	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C133	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C134	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C135	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C160	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C161	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C162	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
CN501	1-784-625-11	o	CONNECTOR, FFC (ZIF) 30P
CN502	1-784-625-11	o	CONNECTOR, FFC (ZIF) 30P
FB101	1-469-134-11	s	FERRITE, EMI (SMD)
IC130	8-759-547-49	s	IC CDC509PWR
IC131	8-759-271-86	s	IC TC7SH04FU
IC163	8-759-475-55	s	IC TC74LCX574FT(EL)
IC164	8-759-475-55	s	IC TC74LCX574FT(EL)
IC165	8-759-475-55	s	IC TC74LCX574FT(EL)
R100	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R101	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R102	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R103	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R104	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R105	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R106	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R107	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R108	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R109	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R110	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R111	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R112	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)

(IF-794 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R113	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R114	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R115	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R116	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R117	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R118	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R119	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R120	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R121	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R122	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R123	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R124	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R131	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R132	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R152	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R153	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R154	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R155	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R156	1-208-943-11	s	RESISTOR CHIP 220K
RB141	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)

IFA-11 BOARD
---

*a: Lot No. 083 - 0A2
*b: Lot No. 0A3 -
*c: Lot No. 083 - 111
*d: Lot No. 112 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-331-A	o	MOUNTED CIRCUIT BOARD, IFA-11
C101	1-126-405-11	s	CAPACITOR,ELECT 10MF/50V(CHIP
C102	1-126-405-11	s	CAPACITOR,ELECT 10MF/50V(CHIP
C103	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C104	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C105 *d	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
*c	1-126-405-11	s	CAPACITOR, ELECT 10MF/50V(CHIP)
C106 *d	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
*c	1-126-405-11	s	CAPACITOR, ELECT 10MF/50V(CHIP)
C107 *d	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
*c	1-126-405-11	s	CAPACITOR, ELECT 10MF/50V(CHIP)
C108 *d	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
*c	1-126-405-11	s	CAPACITOR, ELECT 10MF/50V(CHIP)
C109	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C110	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C111	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C112	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C113	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C114	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C115	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C116	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C117	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C118	1-117-370-11	s	CAPASITER CERAMIC 10MF (3216)
C119	1-117-370-11	s	CAPASITER CERAMIC 10MF (3216)
C120	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C121	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C122	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C123	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C124	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C125	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C126	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C127	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C128	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C129	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C130	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C131	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C132	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C133	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C134 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C201	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C202	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C203	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C204	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C205	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C206	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
CN120	1-778-650-11	o	CONNECTOR, FFC (ZIF) 30P
CN501	1-566-761-11	o	PIN,CONNECTOR (PC BOARD) 6P
CN502	1-580-536-11	s	PIN, CONNECTOR (PC BOARD) 14P
CN503	1-506-488-11	o	PIN,CONNECTOR 9P
CN504	1-566-757-11	s	PIN, CONNECTOR (PC BOARD) 2P
CP201	1-239-210-11	s	EMIFIL ARRAY, CHIP
D101	8-719-820-41	s	DIODE 1SS302

(IFA-11 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D102	8-719-820-41	s	DIODE 1SS302
D103	8-719-820-41	s	DIODE 1SS302
D104	8-719-820-41	s	DIODE 1SS302
D105	8-719-029-63	s	DIODE RD4.3UH-T1
D106	8-719-029-63	s	DIODE RD4.3UH-T1
D108 *b	8-719-989-03	s	DIODE DAN222
D201 *b	8-719-989-03	s	DIODE DAN222
*a	8-719-800-76	s	DIODE 1SS226
FB101 *d	1-543-775-11	s	BEAD, FERRITE
FB102 *d	1-543-775-11	s	BEAD, FERRITE
FB201 *d	1-543-775-11	s	BEAD, FERRITE
FB202 *d	1-543-775-11	s	BEAD, FERRITE
FL201	1-233-288-11	s	FILTER, EMI (SMD)
IC101	8-759-111-56	s	IC UPC4572G2
IC102	8-759-111-56	s	IC UPC4572G2
IC103	8-759-710-78	s	IC NJM082BM
IC104 *b	8-759-185-42	s	IC LM4040AIM3-2.5
*a	8-759-710-89	s	IC NJM431U (TE1)
IC201	8-759-561-69	s	IC PCF8574TS-T
IC202	8-759-678-08	s	IC CAT24WC02PI
IC203	8-759-700-07	s	IC NJM2903M
IS202	1-526-652-21	o	SOCKET, IC 8P
L101	1-412-170-11	s	MICRO INDUCTOR 0.47UH
L102	1-412-170-11	s	MICRO INDUCTOR 0.47UH
Q101	8-729-928-81	s	TRANSISTOR DTC144EE
Q102	8-729-045-28	s	TRANSISTOR SI4532DY-T1
Q103	8-729-271-31	s	TRANSISTOR 2SC2713-G
Q104	8-729-271-31	s	TRANSISTOR 2SC2713-G
Q105	8-729-928-19	s	TRANSISTOR 2SA1774R
Q106	8-729-012-35	s	TRANSISTOR 2SK711-BL
Q107	8-729-012-35	s	TRANSISTOR 2SK711-BL
Q108 *b	8-729-928-27	s	TRANSISTOR DTA144EE
*a	8-729-928-81	s	TRANSISTOR DTC144EE
Q109 *b	8-729-928-81	s	TRANSISTOR DTC144EE
*a	8-729-928-27	s	TRANSISTOR DTA144EE
Q110	8-729-808-42	s	TRANSISTOR 2SD1624-T
Q111	8-729-020-94	s	TRANSISTOR 2SA1314C-TE12L
Q201	8-729-928-27	s	TRANSISTOR DTA144EE
R101 *d	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
*c	1-218-970-11	s	RESISTOR CHIP 27K 1/16W (1005)
R102 *d	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
*c	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R103	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R104	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R105 *b	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
*a	1-208-711-11	s	RESISTOR,CHIP 15K 1/16W (1005)
R106	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R107	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R108	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R109	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R110	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R111	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R112	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R113	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R114	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R115	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)

http://getMANUAL.com

(IFA-11 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R116	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R117	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R118	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R119	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R120	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R121	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R122	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R123 *b	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
*a	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R124 *b	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
*a	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R125	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R126	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R127	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R128	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R129	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R130	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R131	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R132	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R133	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R134	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R135	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R136	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R137	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R138	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R139	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R140	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R141	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R142 *d	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
*c	1-218-886-11	s	RESISTOR,CHIP 43K 1/16W (1608)
R143	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R144 *d	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
*c	1-208-711-11	s	RESISTOR,CHIP 15K 1/16W (1005)
R145 *d	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
*c	1-208-709-11	s	RESISTOR,CHIP 12K 1/16W (1005)
R146	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R147	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R148 *b	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
*a	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R149	1-208-943-11	s	RESISTOR CHIP 220K
R150 *d	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R201	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R202	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R203	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R204	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R205	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R206	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R207	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R208	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R209	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R210	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R211	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R212	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R213	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R214	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R215	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R216	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R217	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R218	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R219	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)

IO-202 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-102-A	o	MOUNTED CIRCUIT BOARD, IO-202
1pc	3-603-545-02	o	SUPPORT A,BNC CONNECTOR
C1	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C2	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C3	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C4	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C5	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
CN101	1-766-380-11	s	CONNECTOR, COAXIAL (BNC TIPE)
CN102	1-766-381-11	s	CONNECTOR, COAXIAL (BNC TYPE)
CN103	1-766-381-11	s	CONNECTOR, COAXIAL (BNC TYPE)
CN104	1-766-381-11	s	CONNECTOR, COAXIAL (BNC TYPE)
CN105	1-565-881-11	s	PIN, CONNECTOR (PC BOARD) 9P
FL1	1-239-897-12	s	FILTER, EMI (SMD)
FL2	1-239-896-12	s	FILTER, EMI (SMD)
FL3	1-239-896-12	s	FILTER, EMI (SMD)
FL4	1-239-896-12	s	FILTER, EMI (SMD)
FL5	1-239-896-12	s	FILTER, EMI (SMD)
R1	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R2	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R3	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
VDR1	1-801-429-11	s	VARISTOR TNR5V220K

KY-475 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-095-A	o	MOUNTED CIRCUIT BOARD, KY-475
CN1	1-778-645-11	o	CONNECTOR, FFC (ZIF) 10P
D1	8-719-026-39	s	LED CL-150UR-CD
D2	8-719-026-39	s	LED CL-150UR-CD
D3	8-719-026-39	s	LED CL-150UR-CD
Q1	8-729-928-99	s	TRANSISTOR DTC143XE
Q2	8-729-928-99	s	TRANSISTOR DTC143XE
Q3	8-729-928-99	s	TRANSISTOR DTC143XE
R1	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R2	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R3	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
S1	1-572-725-11	s	SWITCH,TACTILE
S2	1-572-725-11	s	SWITCH,TACTILE
S3	1-572-725-11	s	SWITCH,TACTILE
S4	1-572-725-11	s	SWITCH,TACTILE
S5	1-572-725-11	s	SWITCH,TACTILE

LP-114 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-029-A	o	MOUNTED CIRCUIT BOARD, LP-114
1pc	2-358-583-01	o	HOLDER,LED
C1	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
CN116	1-565-874-11	s	PIN, CONNECTOR (PC BOARD) 2P
D1	8-719-032-78	s	LED GL3UR8
R1	1-216-619-11	s	RESISTOR CHIP 47 1/10W(2012)
S1	1-570-608-11	s	SWITCH,TOGGLE

MA-103 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-106-A	o	MOUNTED CIRCUIT BOARD, MA-103
C1	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C2	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C3	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C4	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C5	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C6	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C7	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C8	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
CN1	1-784-602-11	s	CONNECTOR, XLR (RECEPTACLE) 5P
L1	1-414-521-11	s	INDUCTOR, SMALL TYPE 10.0UH
L2	1-414-521-11	s	INDUCTOR, SMALL TYPE 10.0UH
L3	1-414-521-11	s	INDUCTOR, SMALL TYPE 10.0UH
L4	1-414-521-11	s	INDUCTOR, SMALL TYPE 10.0UH

MB-898 BOARD
---

*a: Lot No. 083 - 0A2
*b: Lot No. 0A3 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-083-A	o	MOUNTED CIRCUIT BOARD, MB-898
6pcs	3-729-061-01	s	SCREW (M2X4.5) (TYPE 1)(STEEL)
2pcs	3-606-303-01	s	FINGER, SHIELD
1pc	3-631-516-01	o	SPACER,PC BOARD
C1	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C2	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C3	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C4	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C5	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C6	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C7	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C8	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C9	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C10	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C11	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C12	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C13	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C14	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C15	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C101	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C102	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C103	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C104	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C105	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C106	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C107	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C108	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C109	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C110	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C111	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C112	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C113	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C114	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C115	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C116	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C117	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V

(MB-898 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C118	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C119	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C120	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C121	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C122	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C123	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
C124	*b 1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
	*a 1-125-777-11	s	CAPACITOR,CERAMIC 0.1MF/10V
CN101	1-778-534-11	o	CONNECTOR, FFC (ZIF) 45P
CN102	1-778-533-11	o	CONNECTOR, BOARD TO BOARD 140P
CN105	1-778-534-11	o	CONNECTOR, FFC (ZIF) 45P
CN106	1-778-534-11	o	CONNECTOR, FFC (ZIF) 45P
CN107	1-778-534-11	o	CONNECTOR, FFC (ZIF) 45P
CN108	1-778-646-11	o	CONNECTOR, FFC (ZIF) 10P
CN110	1-774-254-11	s	CONNECTOR, BOARD TO BOARD 50P
CN111	1-774-254-11	s	CONNECTOR, BOARD TO BOARD 50P
CN114	1-691-551-11	o	PIN, CONNECTOR (SMD) 8P
CN115	1-580-056-21	o	PIN,CONNECTOR 3P
CN116	1-695-320-21	o	PIN, CONNECTOR(1.5MM)SMD 2P
CN117	1-778-647-11	o	CONNECTOR, FFC (ZIF) 15P
CN118	1-764-007-11	o	PIN, CONNECTOR (SMD) 12P
CN119	1-695-223-21	o	PIN,CONNECTOR (SMD) 10P
CN120	1-784-625-11	o	CONNECTOR, FFC (ZIF) 30P
CN121	1-691-550-11	s	PIN,CONNECTOR (3P)(SMD)(1.5MM)
CN122	1-691-591-11	o	PIN,CONNECTOR (8P)(SMD)(1.5MM)
CN201	1-695-320-21	o	PIN, CONNECTOR(1.5MM)SMD 2P

MDC-13 BOARD
---

*a: Lot No. 083 - 0A2
*b: Lot No. 0A3 -
*c: Lot No. 083 - 111
*d: Lot No. 112 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-333-A	o	MOUNTED CIRCUIT BOARD, MDC-13
2pcs	3-629-224-01	o	SPACER,GP2S09
C101	1-164-866-11	s	CAPACITOR,CHIP CERAMIC 47PF/16
C102	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C103	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C104	1-164-882-11	s	CAPACITOR,CERAMIC 220PF/16V CH
C105	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C106	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C107	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C108	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C109	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C110	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C111	1-107-417-11	s	CAPACITOR ERECT 33MF/25V(105C)
C112	1-107-417-11	s	CAPACITOR ERECT 33MF/25V(105C)
C113	1-107-823-11	s	CAPACITOR,CERAMIC 0.47MF/16V
C114	1-107-823-11	s	CAPACITOR,CERAMIC 0.47MF/16V
C115	1-109-892-11	s	CAPACITOR ERECT 47MF/25V(105C)
C116	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C117	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C118	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C119	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C120	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C121	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C122	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C123	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C124	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C201	1-135-212-21	s	CAPACITOR TANTALUM 2.2MF/35V
C202	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C203	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C204	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C205	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C206	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C207	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C208	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C210	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C211	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C212	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C213	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C215	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C216	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C217	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C218	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C219	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C220	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C221	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C222	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C223	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C224	1-117-808-91	s	CAPACITOR,CERAMIC 10MF/10V(B)
C225	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C301	1-115-419-11	s	CAPACITOR,CHIP CERAMIC3300PF
C302	1-115-419-11	s	CAPACITOR,CHIP CERAMIC3300PF
C303	1-115-419-11	s	CAPACITOR,CHIP CERAMIC3300PF
C304	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF

(MDC-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C305	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C306	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C307	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C308	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C309	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C310	1-164-882-11	s	CAPACITOR,CERAMIC 220PF/16V CH
C311	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C401	1-117-808-91	s	CAPACITOR,CERAMIC 10MF/10V(B)
C402	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C403	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C404	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C405	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C406	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C407	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C502	1-117-808-91	s	CAPACITOR,CERAMIC 10MF/10V(B)
C503	1-117-808-91	s	CAPACITOR,CERAMIC 10MF/10V(B)
C504	1-117-808-91	s	CAPACITOR,CERAMIC 10MF/10V(B)
C507	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C508	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C509	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C602	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C604	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C605	1-107-823-11	s	CAPACITOR,CERAMIC 0.47MF/16V
C606	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C608	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C609	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C610	1-107-823-11	s	CAPACITOR,CERAMIC 0.47MF/16V
C611	1-115-419-11	s	CAPACITOR,CHIP CERAMIC3300PF
C612	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C613	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C614	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C615	1-164-858-11	s	CAPACITOR,CERAMIC 22PF/16V
C616	1-117-808-91	s	CAPACITOR,CERAMIC 10MF/10V(B)
C617	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C618	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C619	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C620	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C621	1-109-899-11	s	CAPACITOR,CHIP CERAMIC 330PF
C622	1-162-959-11	s	CAPACITOR,CERAMIC 330PF/50V SL
C623	1-117-808-91	s	CAPACITOR,CERAMIC 10MF/10V(B)
C624 *b	1-109-906-11	s	CAPACITOR,CERAMIC 220PF/500V
*a	1-125-816-11	s	CAPACITOR,CHIP CERAMIC 100PF
C625	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C626	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C627	1-109-900-11	s	CAPACITOR, CHIP CERAMIC 470PF
C628	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C629	1-164-878-11	s	CAPACITOR, CHIP CERAMIC 150PF
C630	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C631	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C632	1-107-823-11	s	CAPACITOR,CERAMIC 0.47MF/16V
C633	1-117-808-91	s	CAPACITOR,CERAMIC 10MF/10V(B)
C634	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C635	1-162-959-11	s	CAPACITOR,CERAMIC 330PF/50V SL
C637	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C638	1-117-808-91	s	CAPACITOR,CERAMIC 10MF/10V(B)
C639	1-117-808-91	s	CAPACITOR,CERAMIC 10MF/10V(B)
C640	1-117-808-91	s	CAPACITOR,CERAMIC 10MF/10V(B)
C641	1-117-808-91	s	CAPACITOR,CERAMIC 10MF/10V(B)
C642	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(MDC-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C643	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C644	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C645	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C646	1-164-941-11	s	CAPACITOR,CHIP CERAMIC 4700/16
C647	1-164-939-11	s	CAPACITOR,CHIP CERAMIC 2200PF
C648	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C649	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C650	1-164-245-11	s	CAPACITOR,CERAMIC 0.015MF/25V
C651	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C652	1-117-808-91	s	CAPACITOR,CERAMIC 10MF/10V(B)
C653	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C654	1-117-808-91	s	CAPACITOR,CERAMIC 10MF/10V(B)
C655	1-164-941-11	s	CAPACITOR,CHIP CERAMIC 4700/16
C656	1-164-941-11	s	CAPACITOR,CHIP CERAMIC 4700/16
C657	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C658	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C659	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C660	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C661	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C662	1-164-870-11	s	CAPACITOR,CHIP CERAMIC 68PF/16
C663	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C664	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C665	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C666	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C667	1-126-395-11	s	CAPACITOR,ELECT 22MF/16V(CHIP)
C668	1-164-941-11	s	CAPACITOR,CHIP CERAMIC 4700/16
C669	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C670	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C671	1-109-898-11	s	CAPACITOR,CHIP CERAMIC 18000PF
C672	1-109-897-11	s	CAPACITOR,CHIP CERAMIC 0.015MF
C673	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C674	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C675	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C676	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C677	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C678 *b	1-162-959-11	s	CAPACITOR,CERAMIC 330PF/50V SL
*a	1-115-412-11	s	CAPACITOR,CERAMIC 680PF/25V CH
C679	1-162-959-11	s	CAPACITOR,CERAMIC 330PF/50V SL
C680 *c	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C681	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C682 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C683 *d	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C684 *d	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
CN101	1-778-534-11	o	CONNECTOR, FFC (ZIF) 45P
CN201	1-778-534-11	o	CONNECTOR, FFC (ZIF) 45P
CN202	1-778-534-11	o	CONNECTOR, FFC (ZIF) 45P
CN501	1-695-320-21	o	PIN, CONNECTOR(1.5MM)SMD 2P
CN502	1-695-209-21	s	PIN, CONNECTOR (PC BOARD) 15P
CN503	1-778-534-11	o	CONNECTOR, FFC (ZIF) 45P
CN504	1-691-550-11	s	PIN,CONNECTOR (3P)(SMD)(1.5MM)
CN505	1-573-290-21	s	PIN,CONNECTOR (4P)(SMD)(1.5MM)
CN506	1-573-290-21	s	PIN,CONNECTOR (4P)(SMD)(1.5MM)
CN507	1-691-550-11	s	PIN,CONNECTOR (3P)(SMD)(1.5MM)
CN508	1-695-320-21	o	PIN, CONNECTOR(1.5MM)SMD 2P
CN509	1-695-320-21	o	PIN, CONNECTOR(1.5MM)SMD 2P
CN510	1-695-320-21	o	PIN, CONNECTOR(1.5MM)SMD 2P
CN511	1-580-055-21	o	PIN, CONNECTOR 2P
CN512	1-695-320-21	o	PIN, CONNECTOR(1.5MM)SMD 2P

(MDC-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN901	1-565-876-11	o	PIN,CONNECTOR 4P
CN902	1-569-775-21	o	PIN, CONNECTOR 5P
CN903	1-691-551-11	o	PIN, CONNECTOR (SMD) 8P
D101	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D102	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D103	8-719-106-88	s	DIODE RD15M-B1
D401	8-719-064-52	s	DIODE CL-191YG-CD-T
D402	8-719-071-10	s	DIODE CL-191HR-CD-T
D403	8-719-064-52	s	DIODE CL-191YG-CD-T
D404	8-719-071-10	s	DIODE CL-191HR-CD-T
D601	8-719-989-03	s	DIODE DAN222
D602	8-719-989-03	s	DIODE DAN222
D603 *a	8-719-989-00	s	DIODE DA222
D604 *b	8-719-989-03	s	DIODE DAN222
D605 *b	8-719-989-03	s	DIODE DAN222
E201	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E301	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E501	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E502	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E601	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
IC101	8-759-371-43	s	IC SI9145BQ-T1
IC102	8-759-399-64	s	IC LB1857M-TE-L
IC106	8-759-189-47	s	IC MC34151DR2
IC107	8-759-594-71	s	IC TC7SH14FU-TE85R
IC201	8-759-111-56	s	IC UPC4572G2
IC202	8-759-338-95	s	IC NJM2903V (TE2)
IC203	8-759-669-66	s	IC TLC272CPWR
IC204	8-759-273-87	s	IC NJM2901V (TE2)
IC205	8-759-549-15	s	IC SN74LV245APWR
IC206	8-759-337-40	s	IC NJM2904V(TE2)
IC301	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC302	8-759-530-05	s	IC TC4053BFT (EL.N)
IC303	8-759-273-87	s	IC NJM2901V (TE2)
IC304	8-759-805-32	s	IC LA7205M
IC305	8-759-523-84	s	IC TC74VHC14FT (EL)
IC401	8-759-710-89	s	IC NJM431U (TE1)
IC402	8-759-166-93	s	IC LB1843V-TLM
IC403	8-759-468-72	s	IC AK6420AM (E2)
IC501	8-759-491-50	s	IC TC74VHCT244AFT(EL)
IC502	8-759-549-15	s	IC SN74LV245APWR
IC601	8-759-564-49	s	IC TC7W53FU-TE12R
IC602	8-759-271-86	s	IC TC7SH04FU
IC603	8-759-082-60	s	IC TC7S66FU
IC604	8-759-082-60	s	IC TC7S66FU
IC605 *b	8-759-598-35	s	IC NJM2119M(TE2)
*a	8-759-702-02	s	IC NJM062M
IC606	8-759-523-78	s	IC TC74VHC00FT(EL)
IC607	8-759-702-02	s	IC NJM062M
IC608	8-759-598-35	s	IC NJM2119M(TE2)
IC609	8-759-491-46	s	IC TC74VHCT04AFT (EL)
IC610	8-759-530-05	s	IC TC4053BFT (EL.N)
IC612	8-759-598-35	s	IC NJM2119M(TE2)
IC613	8-759-338-95	s	IC NJM2903V (TE2)
IC614	8-759-530-05	s	IC TC4053BFT (EL.N)
IC616	8-759-598-35	s	IC NJM2119M(TE2)
IC617	8-759-338-95	s	IC NJM2903V (TE2)
L101	1-424-642-11	s	COIL, CHOKE 47UH
L102	1-409-722-11	s	COIL, CHOKE 220UH

(MDC-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L401	1-411-460-21	s	COIL, CHOKE 10UH
L402	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L403	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L501	1-414-398-11	s	INDUCTOR (SMD) 10UH
L502	1-411-460-21	s	COIL, CHOKE 10UH
L503	1-411-460-21	s	COIL, CHOKE 10UH
L602	1-414-852-31	s	INDUCTOR (SMD) 470.0UH
L603	1-414-402-11	s	INDUCTOR (SMD) 47UH
L604	1-424-642-11	s	COIL, CHOKE 47UH
LV601	1-410-853-21	s	COIL, VARIABLE
PH301	8-719-988-15	s	PHOTO REFRECTOR PR-11-C
PH302	8-719-988-15	s	PHOTO REFRECTOR PR-11-C
PH303	8-719-988-15	s	PHOTO REFRECTOR PR-11-C
PH304	8-719-988-15	s	PHOTO REFRECTOR PR-11-C
PH305	8-719-939-23	s	PHOTO SENSOR GP2S09C
PH306	8-719-939-23	s	PHOTO SENSOR GP2S09C
PH307	8-749-010-00	s	PHOTO INTERRUPTER GP1S33
Q101	8-729-928-81	s	TRANSISTOR DTC144EE
Q102	8-729-045-28	s	TRANSISTOR SI4532DY-T1
Q103	8-729-145-14	s	FET 2SK1483
Q104	8-729-808-42	s	TRANSISTOR 2SD1624-T
Q105	8-729-118-56	s	TRANSISTOR 2SK852-X2
Q106	8-729-928-81	s	TRANSISTOR DTC144EE
Q107	8-729-928-81	s	TRANSISTOR DTC144EE
Q301	8-729-927-99	s	TRANSISTOR 2SC4617R
Q302	8-729-927-99	s	TRANSISTOR 2SC4617R
Q303	8-729-927-99	s	TRANSISTOR 2SC4617R
Q304	8-729-927-99	s	TRANSISTOR 2SC4617R
Q305	8-729-927-99	s	TRANSISTOR 2SC4617R
Q306	8-729-927-99	s	TRANSISTOR 2SC4617R
Q307	8-729-927-99	s	TRANSISTOR 2SC4617R
Q401	8-729-928-81	s	TRANSISTOR DTC144EE
Q402	8-729-928-81	s	TRANSISTOR DTC144EE
Q403	8-729-928-81	s	TRANSISTOR DTC144EE
Q404	8-729-808-42	s	TRANSISTOR 2SD1624-T
Q405	8-729-928-81	s	TRANSISTOR DTC144EE
Q406	8-729-824-34	s	TRANSISTOR 2SJ187
Q407	8-729-928-81	s	TRANSISTOR DTC144EE
Q408	8-729-928-81	s	TRANSISTOR DTC144EE
Q409	8-729-928-81	s	TRANSISTOR DTC144EE
Q410	8-729-928-81	s	TRANSISTOR DTC144EE
Q501	8-729-928-27	s	TRANSISTOR DTA144EE
Q502	8-729-928-81	s	TRANSISTOR DTC144EE
Q503	8-729-039-07	s	TRANSISTOR SI6943DQ
Q601	8-729-928-27	s	TRANSISTOR DTA144EE
Q602	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q603	8-729-020-94	s	TRANSISTOR 2SA1314C-TE12L
Q604	8-729-105-08	s	TRANSISTOR 2SA1330-06
Q605	8-729-928-81	s	TRANSISTOR DTC144EE
Q606	8-729-105-37	s	TRANSISTOR 2SC3360
Q607	8-729-105-37	s	TRANSISTOR 2SC3360
Q608	8-729-824-34	s	TRANSISTOR 2SJ187
Q609	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q610	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q611	8-729-105-37	s	TRANSISTOR 2SC3360
Q612	8-729-105-37	s	TRANSISTOR 2SC3360
Q613	8-729-209-07	s	TRANSISTOR 2SC4213-B

(MDC-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q614	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q615	8-729-927-99	s	TRANSISTOR 2SC4617R
Q616	8-729-928-19	s	TRANSISTOR 2SA1774R
Q617	8-729-927-99	s	TRANSISTOR 2SC4617R
Q618	8-729-928-19	s	TRANSISTOR 2SA1774R
Q619	8-729-928-27	s	TRANSISTOR DTA144EE
Q620 *b	8-729-904-54	s	TRANSISTOR DTB143EK
*a	8-729-928-19	s	TRANSISTOR 2SA1774R
Q621	8-729-928-81	s	TRANSISTOR DTC144EE
Q622 *b	8-729-045-28	s	TRANSISTOR SI4532DY-T1
*a	8-729-824-34	s	TRANSISTOR 2SJ187
Q623	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q624	8-729-209-07	s	TRANSISTOR 2SC4213-B
Q625	8-729-928-27	s	TRANSISTOR DTA144EE
Q626 *b	8-729-928-27	s	TRANSISTOR DTA144EE
Q627 *b	8-729-928-27	s	TRANSISTOR DTA144EE
Q628 *b	8-729-928-81	s	TRANSISTOR DTC144EE
R101	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R102	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R103	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R104	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R105	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R106	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R107	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R108	1-208-943-11	s	RESISTOR CHIP 220K
R109	1-208-943-11	s	RESISTOR CHIP 220K
R110	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R111	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R112	1-208-943-11	s	RESISTOR CHIP 220K
R113	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R114	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R115	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R116	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R117	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R118	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R119	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R120	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R121	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R122	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R123	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R124	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R125	1-216-793-11	s	RESISTOR,CHIP 4.7 1/16W 1608
R126	1-216-793-11	s	RESISTOR,CHIP 4.7 1/16W 1608
R127	1-216-793-11	s	RESISTOR,CHIP 4.7 1/16W 1608
R128	1-208-943-11	s	RESISTOR CHIP 220K
R129	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R130	1-208-943-11	s	RESISTOR CHIP 220K
R201	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R202	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R203	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R204	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R205	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R206	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R207	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R208	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R209	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R212	1-208-947-11	s	RESISTOR CHIP 330K 1/16W(1005)
R213	1-208-947-11	s	RESISTOR CHIP 330K 1/16W(1005)
R215	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)

(MDC-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R216	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R217	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R219	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R220	1-208-943-11	s	RESISTOR CHIP 220K
R221	1-208-943-11	s	RESISTOR CHIP 220K
R222	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R223	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R224	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R225	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R226	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R227	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R228	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R229	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R232	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R233	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R234	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R235	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R236	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R237	1-208-947-11	s	RESISTOR CHIP 330K 1/16W(1005)
R238	1-208-947-11	s	RESISTOR CHIP 330K 1/16W(1005)
R239	1-208-943-11	s	RESISTOR CHIP 220K
R240	1-208-943-11	s	RESISTOR CHIP 220K
R241	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R243	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R246	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R247	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R250	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R251	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R301	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R302	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R307	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R308	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R309	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R310	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R311	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R312	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R313	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R314	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R315	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R316	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R317	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R318	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R319	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R320	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R321	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R322	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R323	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R324	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R325	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R326	1-208-947-11	s	RESISTOR CHIP 330K 1/16W(1005)
R327	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R328	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R329	1-208-943-11	s	RESISTOR CHIP 220K
R330	1-208-943-11	s	RESISTOR CHIP 220K
R331	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R332	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R333	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R334	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R335	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005

(MDC-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R336	1-208-955-11	s	RESISTOR CHIP 680K
R337	1-208-955-11	s	RESISTOR CHIP 680K
R338	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R401	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R402	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R403	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R404	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R405	1-219-797-11	s	RESISTOR,METAL FILM(SMO)0.33
R406	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R407	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R408	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R409	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
*b R410	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
*a	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R411	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R412	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R413	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R414	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R415	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
*b R416	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
*b R417	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R502	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R507	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R601	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R602	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R603	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R604	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R605	1-208-943-11	s	RESISTOR CHIP 220K
R606	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R607	1-208-943-11	s	RESISTOR CHIP 220K
R608	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R610	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R611	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R612	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R613	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R614	1-208-943-11	s	RESISTOR CHIP 220K
R615	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
*d R616	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
*c	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R617	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R618	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R619	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R620	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R621	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R622	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R623	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R624	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R625	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R626	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R627	1-208-955-11	s	RESISTOR CHIP 680K
R628	1-208-943-11	s	RESISTOR CHIP 220K
R629	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R630	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R631	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R632	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R633	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R634	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R635	1-216-789-11	s	RESISTOR,CHIP 2.2 1/16W(1608)
R636	1-216-789-11	s	RESISTOR,CHIP 2.2 1/16W(1608)

(MDC-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R637	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R638	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R640	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R642	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R643	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R644	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R645	1-208-943-11	s	RESISTOR CHIP 220K
R646	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R647	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R649	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R651	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R653	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R654	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R656	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R657	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R658	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R659	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R660	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R661	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R662	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R663	1-218-985-11	s	RESISTOR CHIP 470K 1/16W(1005)
R664	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R665	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R666	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R667	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
*a R668	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R669	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R670	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R671	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R672	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R673	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R674	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R675	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R676	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R677	1-208-947-11	s	RESISTOR CHIP 330K 1/16W(1005)
R678	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R679	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R680	1-208-943-11	s	RESISTOR CHIP 220K
R681	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R682	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R683	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R684	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R685	1-208-943-11	s	RESISTOR CHIP 220K
R686	1-216-789-11	s	RESISTOR,CHIP 2.2 1/16W(1608)
R687	1-216-789-11	s	RESISTOR,CHIP 2.2 1/16W(1608)
R688	1-208-947-11	s	RESISTOR CHIP 330K 1/16W(1005)
R689	1-208-943-11	s	RESISTOR CHIP 220K
R690	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R691	1-216-789-11	s	RESISTOR,CHIP 2.2 1/16W(1608)
R692	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R693	1-216-789-11	s	RESISTOR,CHIP 2.2 1/16W(1608)
R694	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R695	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R696	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R697	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R698	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R699	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R700	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R701	1-208-935-11	s	RESISTOR, CHIP 100K (1005)

(MDC-13 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R702	1-208-943-11	s	RESISTOR CHIP 220K
R703	1-208-943-11	s	RESISTOR CHIP 220K
R704	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R705 *b	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
*a	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R706	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R707	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R708	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R709	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R710	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R711	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R712 *b	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R713 *b	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R714 *b	1-208-947-11	s	RESISTOR CHIP 330K 1/16W(1005)
R715 *b	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R716 *d	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
RB201	1-234-378-21	s	RES, NETWORK 10KX4 (1005)
RB301	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB302	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB401	1-234-380-11	s	RESISTOE,NETWORK 47KX4 (1005)
RB402	1-234-374-11	s	RES, NETWORK 470X4 (1005)
RB501	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB502	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB503	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RV401	1-237-039-11	s	RESISTOR,ADJ,CERMET 100K
RV602	1-241-263-11	s	RESISTOR ADJ 5K (CERMET)
RV603	1-241-266-11	s	RESISTOR ADJ 50K (CERMET)
RV604	1-241-263-11	s	RESISTOR ADJ 5K (CERMET)
RV605	1-241-263-11	s	RESISTOR ADJ 5K (CERMET)
S301	1-572-719-11	s	SWITCH,PUSH(1 KEY)
S302	1-572-719-11	s	SWITCH,PUSH(1 KEY)
S303	1-572-719-11	s	SWITCH,PUSH(1 KEY)
S304	1-572-719-11	s	SWITCH,PUSH(1 KEY)
S305	1-572-719-11	s	SWITCH,PUSH(1 KEY)
S308	1-572-719-11	s	SWITCH,PUSH(1 KEY)
S401	1-572-473-11	s	SWITCH, TACTIL
S402	1-572-473-11	s	SWITCH, TACTIL
S403	1-692-270-41	s	SWITCH, SLIDE
T601	1-426-884-11	s	TRANSFORMER, BIAS OSCILLATION
T602	1-424-511-11	s	TRANSFORMER,FE
TP101	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP102	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP201	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP202	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP203	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP204	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP301	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP302	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP601	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP602	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP603	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP604	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP605	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP606	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)

MDR-14 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-337-A	o	MOUNTED CIRCUIT BOARD, MDR-14
C1	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C2	1-162-923-11	s	CAPACITOR,CERAMIC 47PF/50V CH
C3	1-127-573-11	s	CAPACITOR,.CERAMIC 1MFB(2012)
C4	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C5	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C6	1-127-573-11	s	CAPACITOR,.CERAMIC 1MFB(2012)
C7	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C8	1-162-966-11	s	CAPACITOR,CERAMIC 2200PF/50V B
C9	1-127-573-11	s	CAPACITOR,.CERAMIC 1MFB(2012)
C10	1-164-882-11	s	CAPACITOR,CERAMIC 220PF/16V CH
C11	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C12	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C13	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C14	1-107-823-11	s	CAPACITOR,CERAMIC 0.47MF/16V
C15	1-107-823-11	s	CAPACITOR,CERAMIC 0.47MF/16V
C16	1-109-892-11	s	CAPACITOR ERECT 47MF/25V(105C)
C17	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C18	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C19	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C20	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C21	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C22	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C23	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
CN1	1-562-772-11	o	CONNECTOR (PC BOARD)(F)12P
CN2	1-794-943-11	s	HOUSING, CONNECTOR (PC BOARD)
CN3	1-778-535-11	o	CONNECTOR, FFC (ZIF) 45P
CN4	1-778-534-11	o	CONNECTOR, FFC (ZIF) 45P
D1	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D2	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D3	8-719-029-77	s	DIODE ZENER RD15UJN-T1
IC1	8-759-399-64	s	IC LB1857M-TE-L
IC2	8-759-371-43	s	IC SI9145BQ-T1
IC3	8-759-189-47	s	IC MC34151DR2
IC4	8-759-356-70	s	IC CXA1512N-4
L1	1-409-722-11	s	COIL, CHOKE 220UH
Q1	8-729-045-28	s	TRANSISTOR SI4532DY-T1
Q2	8-729-118-56	s	TRANSISTOR 2SK852-X2
Q3	8-729-808-42	s	TRANSISTOR 2SD1624-T
R1	1-218-831-11	s	RESISTOR, CHIP 220 1/16W(1608)
R2	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R3	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R4	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R5	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R6	1-218-883-11	s	RESISTOR,CHIP 33K 1/16W (1608)
R7	1-218-823-11	s	RESISTOR,CHIP 100 1/16W (1608)
R8	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R9	1-218-903-11	s	RESISTOR,CHIP 220K 1/16W(1608)
R10	1-218-899-11	s	RESISTOR,CHIP 150K 1/16W(1608)
R11	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R12	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R13	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R14	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R15	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R16	1-211-985-11	s	RESISTOR,CHIP 47 1/16W (1608)
R17	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)

(MDR-14 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R18	1-218-871-11	s	RESISTOR,CHIP 10K 1/16W (1608)
R19	1-218-899-11	s	RESISTOR,CHIP 150K 1/16W(1608)
R20	1-218-887-11	s	RESISTOR,CHIP 47K 1/16W (1608)
R21	1-216-793-11	s	RESISTOR,CHIP 4.7 1/16W 1608
R22	1-216-793-11	s	RESISTOR,CHIP 4.7 1/16W 1608
R23	1-216-793-11	s	RESISTOR,CHIP 4.7 1/16W 1608
R24	1-218-847-11	s	RESISTOR, CHIP 1K 1/16W (1608)
R25	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R26	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R27	1-208-939-11	s	RESISTOR, CHIP 150K (1005)
R28	1-218-903-11	s	RESISTOR,CHIP 220K 1/16W(1608)

PA-253 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-042-A	o	MOUNTED CIRCUIT BOARD, PA-253
C1	1-127-532-11	s	CAPACITOR,ELECT (SOLID)47M/20V
C2	1-127-532-11	s	CAPACITOR,ELECT (SOLID)47M/20V
C3	1-111-253-11	s	CAPACITOR TANTALUM 100MF/6.3V
C4	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C6	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C7	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C8	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C9	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C11	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C100	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C101	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C102	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C103	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C104	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C105	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C106	1-162-922-11	s	CAPACITOR,CERAMIC 39PF/50V CH
C107	1-162-922-11	s	CAPACITOR,CERAMIC 39PF/50V CH
C108	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C109	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C110	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C111	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C112	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C113	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C114	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C115	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C116	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C200	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C201	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C202	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C203	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C204	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C205	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C206	1-162-922-11	s	CAPACITOR,CERAMIC 39PF/50V CH
C207	1-162-922-11	s	CAPACITOR,CERAMIC 39PF/50V CH
C208	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C209	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C210	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C211	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C212	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C213	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C214	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C215	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C216	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C300	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C301	1-113-985-11	s	CAPACITOR,TANTALUM 10MF/20V
C302	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C303	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C304	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C305	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C306	1-162-922-11	s	CAPACITOR,CERAMIC 39PF/50V CH
C307	1-162-922-11	s	CAPACITOR,CERAMIC 39PF/50V CH
C308	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C309	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C310	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C311	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C312	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C313	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH

(PA-253 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C314	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C315	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C316	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C400	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C401	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C402	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C403	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C404	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C405	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C406	1-119-750-11	s	CAPACITOR,TANTALUM 22MF/6.3V
C407	1-119-750-11	s	CAPACITOR,TANTALUM 22MF/6.3V
C408	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C409	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C410	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C411	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C412	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C413	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C414	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C415	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C416	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C417	1-162-909-11	s	CAPACITOR,CERAMIC 4PF/50V CH
C418	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C419	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C420	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C422	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C423	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C424	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C425	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C426	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C427	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C428	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C429	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C430	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C431	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C432	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C500	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C501	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C502	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C503	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C504	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C505	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C506	1-119-750-11	s	CAPACITOR,TANTALUM 22MF/6.3V
C507	1-119-750-11	s	CAPACITOR,TANTALUM 22MF/6.3V
C508	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C509	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C510	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C511	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C512	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C513	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C514	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C515	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C516	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C517	1-162-909-11	s	CAPACITOR,CERAMIC 4PF/50V CH
C518	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C519	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C520	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C522	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C523	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C524	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V

(PA-253 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C525	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C526	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C527	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C528	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C529	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C530	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C531	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C532	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C600	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C601	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C602	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C603	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C604	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C605	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C606	1-119-750-11	s	CAPACITOR,TANTALUM 22MF/6.3V
C607	1-119-750-11	s	CAPACITOR,TANTALUM 22MF/6.3V
C608	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C609	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C610	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C611	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C612	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C613	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C614	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C615	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C616	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C617	1-162-909-11	s	CAPACITOR,CERAMIC 4PF/50V CH
C618	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C619	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C620	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C622	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C623	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C624	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C625	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C626	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C627	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C628	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C629	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C630	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C631	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C632	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C633	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C634	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C635	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C636	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C637	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C638	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
CN101	1-695-207-21	o	PIN, CONNECTOR (PC BOARD) 6P
CN102	1-695-207-21	o	PIN, CONNECTOR (PC BOARD) 6P
CN103	1-695-207-21	o	PIN, CONNECTOR (PC BOARD) 6P
CN104	1-573-316-21	s	CONNECTOR, BOARD TO BOARD 48P
D400	8-719-820-41	s	DIODE 1SS302
D500	8-719-820-41	s	DIODE 1SS302
D600	8-719-820-41	s	DIODE 1SS302
DL7	1-415-886-11	s	DELAY LINE
DL100	1-406-742-11	s	DELAY LINE
DL101	1-406-742-11	s	DELAY LINE
DL102	1-406-742-11	s	DELAY LINE
DL103	1-406-742-11	s	DELAY LINE

http://getMANUAL.com

(PA-253 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
DL104	1-406-742-11	s	DELAY LINE
DL200	1-406-742-11	s	DELAY LINE
DL201	1-406-742-11	s	DELAY LINE
DL202	1-406-742-11	s	DELAY LINE
DL203	1-406-742-11	s	DELAY LINE
DL204	1-406-742-11	s	DELAY LINE
DL300	1-406-742-11	s	DELAY LINE
DL301	1-406-742-11	s	DELAY LINE
DL302	1-406-742-11	s	DELAY LINE
DL303	1-406-742-11	s	DELAY LINE
DL304	1-406-742-11	s	DELAY LINE
IC1	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC5	8-759-575-66	s	IC NC7SZ86P5
IC7	8-759-637-57	s	IC CLC450AJM5
IC100	8-759-683-81	s	IC SN74CBT1G125DCKR
IC101	8-759-683-81	s	IC SN74CBT1G125DCKR
IC102	8-759-054-61	s	IC CLC505AJE
IC103	8-759-054-61	s	IC CLC505AJE
IC200	8-759-683-81	s	IC SN74CBT1G125DCKR
IC201	8-759-683-81	s	IC SN74CBT1G125DCKR
IC202	8-759-054-61	s	IC CLC505AJE
IC203	8-759-054-61	s	IC CLC505AJE
IC300	8-759-683-81	s	IC SN74CBT1G125DCKR
IC301	8-759-683-81	s	IC SN74CBT1G125DCKR
IC302	8-759-054-61	s	IC CLC505AJE
IC303	8-759-054-61	s	IC CLC505AJE
IC400	8-759-054-61	s	IC CLC505AJE
IC401	8-759-054-61	s	IC CLC505AJE
IC402	8-759-054-61	s	IC CLC505AJE
IC403	8-759-054-61	s	IC CLC505AJE
IC404	8-759-683-81	s	IC SN74CBT1G125DCKR
IC405	8-759-683-82	s	IC SN74CBT3126PWR
IC406	8-759-475-45	s	IC TC74LCX157FT(EL)
IC407	8-759-637-57	s	IC CLC450AJM5
IC408	8-759-475-36	s	IC TC74LCX08FT(EL)
IC409	8-759-637-57	s	IC CLC450AJM5
IC410	8-759-683-82	s	IC SN74CBT3126PWR
IC500	8-759-054-61	s	IC CLC505AJE
IC501	8-759-054-61	s	IC CLC505AJE
IC502	8-759-054-61	s	IC CLC505AJE
IC503	8-759-054-61	s	IC CLC505AJE
IC504	8-759-683-81	s	IC SN74CBT1G125DCKR
IC505	8-759-683-82	s	IC SN74CBT3126PWR
IC506	8-759-475-45	s	IC TC74LCX157FT(EL)
IC507	8-759-637-57	s	IC CLC450AJM5
IC508	8-759-475-36	s	IC TC74LCX08FT(EL)
IC509	8-759-637-57	s	IC CLC450AJM5
IC510	8-759-683-82	s	IC SN74CBT3126PWR
IC600	8-759-054-61	s	IC CLC505AJE
IC601	8-759-054-61	s	IC CLC505AJE
IC602	8-759-054-61	s	IC CLC505AJE
IC603	8-759-054-61	s	IC CLC505AJE
IC604	8-759-683-81	s	IC SN74CBT1G125DCKR
IC605	8-759-683-82	s	IC SN74CBT3126PWR
IC606	8-759-475-45	s	IC TC74LCX157FT(EL)
IC607	8-759-637-57	s	IC CLC450AJM5
IC608	8-759-475-36	s	IC TC74LCX08FT(EL)
IC609	8-759-637-57	s	IC CLC450AJM5

(PA-253 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC610	8-759-683-82	s	IC SN74CBT3126PWR
LV400	1-406-878-11	s	COIL
LV500	1-406-878-11	s	COIL
LV600	1-406-878-11	s	COIL
Q11	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q100	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q101	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q102	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q103	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q104	8-729-802-80	s	TRANSISTOR 2SC3661
Q105	8-729-802-80	s	TRANSISTOR 2SC3661
Q106	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q107	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q108	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q109	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q110	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q111	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q200	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q201	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q202	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q203	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q204	8-729-802-80	s	TRANSISTOR 2SC3661
Q205	8-729-802-80	s	TRANSISTOR 2SC3661
Q206	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q207	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q208	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q209	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q210	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q211	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q300	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q301	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q302	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q303	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q304	8-729-802-80	s	TRANSISTOR 2SC3661
Q305	8-729-802-80	s	TRANSISTOR 2SC3661
Q306	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q307	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q308	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q309	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q310	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
Q311	8-729-143-07	s	TRANSISTOR 2SA1610-Y33
R1	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R2	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R5	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R6	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R7	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R8	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R9	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R10	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R11	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R12	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R13	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R14	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R15	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R16	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R17	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R102	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)

(PA-253 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R103	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R104	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R105	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R106	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R107	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R108	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R109	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R110	1-218-694-11	s	RESISTOR,CHIP 1.2K1/16W(1608)
R111	1-218-694-11	s	RESISTOR,CHIP 1.2K1/16W(1608)
R112	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R113	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R116	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R117	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R118	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R119	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R120	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R121	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R122	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R123	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R124	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R125	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R126	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R127	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R128	1-218-738-11	s	RESISTOR,CHIP 82K 1/16W(1608)
R129	1-218-738-11	s	RESISTOR,CHIP 82K 1/16W(1608)
R130	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R131	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R132	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R133	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R134	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R135	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R136	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R137	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R138	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R139	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R140	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R141	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R142	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R143	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R144	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R145	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R146	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R147	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R148	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R149	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R150	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R151	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R152	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R153	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R202	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R203	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R204	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R205	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R206	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R207	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R208	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R209	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R210	1-218-694-11	s	RESISTOR,CHIP 1.2K1/16W(1608)
R211	1-218-694-11	s	RESISTOR,CHIP 1.2K1/16W(1608)

(PA-253 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R212	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R213	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R216	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R217	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R218	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R219	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R220	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R221	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R222	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R223	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R224	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R225	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R226	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R227	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R228	1-218-738-11	s	RESISTOR,CHIP 82K 1/16W(1608)
R229	1-218-738-11	s	RESISTOR,CHIP 82K 1/16W(1608)
R230	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R231	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R232	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R233	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R234	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R235	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R236	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R237	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R238	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R239	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R240	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R241	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R242	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R243	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R244	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R245	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R246	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R247	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R248	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R249	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R250	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R251	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R252	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R253	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R302	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R303	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R304	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R305	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R306	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R307	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R308	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R309	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R310	1-218-694-11	s	RESISTOR,CHIP 1.2K1/16W(1608)
R311	1-218-694-11	s	RESISTOR,CHIP 1.2K1/16W(1608)
R312	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R313	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R316	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R317	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R318	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R319	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R320	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R321	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R322	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)

(PA-253 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R323	1-218-678-11	s	RESISTOR CHIP 270 1/16W (1608)
R324	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R325	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R326	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R327	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R328	1-218-738-11	s	RESISTOR,CHIP 82K 1/16W(1608)
R329	1-218-738-11	s	RESISTOR,CHIP 82K 1/16W(1608)
R330	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R331	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R332	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R333	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R334	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R335	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R336	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R337	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R338	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R339	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R340	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R341	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R342	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R343	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R344	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R345	1-218-706-11	s	RESISTOR,CHIP 3.9K 1/16W(1608)
R346	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R347	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R348	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R349	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R350	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R351	1-218-664-11	s	RESISTOR,CHIP 68 1/16W (1608)
R352	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R353	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R400	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R401	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R402	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R403	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R404	1-218-690-11	s	RESISTOR,CHIP 820 1/16W (1608)
R405	1-218-690-11	s	RESISTOR,CHIP 820 1/16W (1608)
R406	1-218-742-11	s	RESISTOR,METAL 120K 1/16
R407	1-218-742-11	s	RESISTOR,METAL 120K 1/16
R408	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R409	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R410	1-218-690-11	s	RESISTOR,CHIP 820 1/16W (1608)
R411	1-218-690-11	s	RESISTOR,CHIP 820 1/16W (1608)
R412	1-218-742-11	s	RESISTOR,METAL 120K 1/16
R413	1-218-742-11	s	RESISTOR,METAL 120K 1/16
R414	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R417	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R418	1-218-674-11	s	RESISTOR CHIP 180 1/16W (1608)
R419	1-218-736-11	s	RESISTOR,CHIP 68K 1/16W(1608)
R421	1-218-702-11	s	RESISTOR CHIP 2.7K 1/16W(1608)
R422	1-218-702-11	s	RESISTOR CHIP 2.7K 1/16W(1608)
R423	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R424	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R425	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R426	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R427	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R428	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R429	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R430	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)

(PA-253 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R431	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R432	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R433	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R434	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R435	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R436	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R437	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R438	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R500	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R501	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R502	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R503	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R504	1-218-690-11	s	RESISTOR,CHIP 820 1/16W (1608)
R505	1-218-690-11	s	RESISTOR,CHIP 820 1/16W (1608)
R506	1-218-742-11	s	RESISTOR,METAL 120K 1/16
R507	1-218-742-11	s	RESISTOR,METAL 120K 1/16
R508	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R509	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R510	1-218-690-11	s	RESISTOR,CHIP 820 1/16W (1608)
R511	1-218-690-11	s	RESISTOR,CHIP 820 1/16W (1608)
R512	1-218-742-11	s	RESISTOR,METAL 120K 1/16
R513	1-218-742-11	s	RESISTOR,METAL 120K 1/16
R514	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R517	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R518	1-218-674-11	s	RESISTOR CHIP 180 1/16W (1608)
R519	1-218-736-11	s	RESISTOR,CHIP 68K 1/16W(1608)
R521	1-218-702-11	s	RESISTOR CHIP 2.7K 1/16W(1608)
R522	1-218-702-11	s	RESISTOR CHIP 2.7K 1/16W(1608)
R523	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R524	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R525	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R526	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R527	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R528	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R529	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R530	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R531	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R532	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R533	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R534	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R535	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R536	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R537	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R538	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R600	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R601	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R602	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R603	1-218-688-11	s	RESISTOR,CHIP 680 1/16W(1608)
R604	1-218-690-11	s	RESISTOR,CHIP 820 1/16W (1608)
R605	1-218-690-11	s	RESISTOR,CHIP 820 1/16W (1608)
R606	1-218-742-11	s	RESISTOR,METAL 120K 1/16
R607	1-218-742-11	s	RESISTOR,METAL 120K 1/16
R608	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R609	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R610	1-218-690-11	s	RESISTOR,CHIP 820 1/16W (1608)
R611	1-218-690-11	s	RESISTOR,CHIP 820 1/16W (1608)
R612	1-218-742-11	s	RESISTOR,METAL 120K 1/16
R613	1-218-742-11	s	RESISTOR,METAL 120K 1/16
R614	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)

(PA-253 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R617	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R618	1-218-674-11	s	RESISTOR CHIP 180 1/16W (1608)
R619	1-218-736-11	s	RESISTOR,CHIP 68K 1/16W(1608)
R621	1-218-702-11	s	RESISTOR CHIP 2.7K 1/16W(1608)
R622	1-218-702-11	s	RESISTOR CHIP 2.7K 1/16W(1608)
R623	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R624	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R625	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R626	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R627	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R628	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R629	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R630	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R631	1-218-698-11	s	RESISTOR,CHIP 1.8K 1/16W(1608)
R632	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R633	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R634	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R635	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R636	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R637	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R638	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
RB400	1-234-372-21	s	RES, NETWORK 100X4 (1005)
RB500	1-234-372-21	s	RES, NETWORK 100X4 (1005)
RB600	1-234-372-21	s	RES, NETWORK 100X4 (1005)
RV400	1-225-787-21	s	RES, ADJ, CERMET 500
RV401	1-225-787-21	s	RES, ADJ, CERMET 500
RV402	1-225-787-21	s	RES, ADJ, CERMET 500
RV403	1-225-787-21	s	RES, ADJ, CERMET 500
RV500	1-225-787-21	s	RES, ADJ, CERMET 500
RV501	1-225-787-21	s	RES, ADJ, CERMET 500
RV502	1-225-787-21	s	RES, ADJ, CERMET 500
RV503	1-225-787-21	s	RES, ADJ, CERMET 500
RV600	1-225-787-21	s	RES, ADJ, CERMET 500
RV601	1-225-787-21	s	RES, ADJ, CERMET 500
RV602	1-225-787-21	s	RES, ADJ, CERMET 500
RV603	1-225-787-21	s	RES, ADJ, CERMET 500

PS-595 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-038-A	o	MOUNTED CIRCUIT BOARD, PS-595
2pcs	2-389-320-01	o	CUSHION (SILICONE RBR)
C101	1-115-783-11	s	CAPACITOR,ELECT 220MF/25V 105C
C102	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C103	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C104	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C105	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C106	1-127-520-11	s	CAPACITOR,ELECT (SOLID) 68MF
C107	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C108	1-163-009-11	s	CAPACITOR,CERAMIC 1000PF/50V
C109	1-107-690-11	s	CAPACITOR TANTALUM 6.8MF/35V
C110	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C111	1-165-176-11	s	CAPACITOR,CERAMIC 47000PF/16V
C112	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C113	1-164-227-11	s	CAPACITOR,CERAMIC 0.022MF/25V
C114	1-164-004-11	s	CAPACITOR,CERAMIC 0.1MF/25V
C115	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1001	1-117-193-11	s	CAPACITOR,3 TERMINAL 1.5MF/50V
CN101	1-750-005-11	o	PIN,CONNECTOR 4P
CN102	1-770-161-21	s	PIN, CONNECTOR (SMT) 6P
D101	8-719-023-54	s	DIODE EA60QC06-F
D103	8-719-941-86	s	DIODE DAN202U
IC101	8-759-521-35	s	IC TL5001CD
IC102	8-759-701-36	s	IC NJM3403AM
L101	1-421-459-21	s	COIL,CHOKE
L102	1-411-968-11	s	COIL, CHOKE 33UH
Q101	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q102	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q103	8-729-117-32	s	TRANSISTOR 2SC4177
Q104	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q105	8-729-141-75	s	TRANSISTOR 2SD596DV345
Q106	8-729-117-32	s	TRANSISTOR 2SC4177
Q107	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q113	8-729-043-74	s	TRANSISTOR SI4435DY-T1-REVA
Q115	8-729-043-74	s	TRANSISTOR SI4435DY-T1-REVA
R101	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R102	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R103	1-216-675-11	s	RESISTOR,CHIP 10K 1/10W(2012)
R104	1-218-656-11	s	RESISTOR,CHIP 33 1/16W (1608)
R105	1-219-684-11	s	RESISTOR, CHIP 0.01 1W
R106	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R107	1-216-631-11	s	RESISTOR,CHIP 150 1/10W (2012)
R108	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R109	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R110	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R111	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R112	1-218-748-11	s	RESISTOR,CHIP 220K 1/16W(1608)
R113	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R114	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R115	1-218-748-11	s	RESISTOR,CHIP 220K 1/16W(1608)
R116	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R117	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R118	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R119	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R121	1-218-656-11	s	RESISTOR,CHIP 33 1/16W (1608)

(PS-595 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R122	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R123	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)

RE-186 BOARD
---

*a: Lot No. 083 - 111
*b: Lot No. 112 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-338-A	o	MOUNTED CIRCUIT BOARD, RE-186
C101	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C102	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C103	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C104	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C105	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C106	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C107	1-107-687-11	s	CAPACITOR TANTALUM 3.3MF/20V
C108	1-107-687-11	s	CAPACITOR TANTALUM 3.3MF/20V
C109	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C110	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C111	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C112	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C113	1-135-602-11	s	CAP, ELECT 15MF
C114	1-135-602-11	s	CAP, ELECT 15MF
C115	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C116	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C117	1-135-346-11	s	CAP, SOLID ELECT 39MF 16V
C118	1-131-998-11	s	CAP, SOLID ELECT 82MF 6.3 V
C119	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C120	1-135-347-11	s	CAP, SOLID ELECT 82MF
C121	1-135-341-11	s	CAPACITOR,SOLID ELECT 330MF
C201	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C202	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C203	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C204	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C205	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C206	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C207	1-164-315-11	s	CAPACITOR,CERAMIC 470PF/50V CH
C208	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C209	1-107-687-11	s	CAPACITOR TANTALUM 3.3MF/20V
C210	1-107-687-11	s	CAPACITOR TANTALUM 3.3MF/20V
C211	1-107-419-11	s	CAPACITOR,ELECT 22MF/35V
C212	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C213	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C214	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C215	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C216	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C217	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C218	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C219	1-135-602-11	s	CAP, ELECT 15MF
C220	1-135-602-11	s	CAP, ELECT 15MF
C221	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C222	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C223	1-131-998-11	s	CAP, SOLID ELECT 82MF 6.3 V
C224	1-131-998-11	s	CAP, SOLID ELECT 82MF 6.3 V
C225	1-135-341-11	s	CAPACITOR,SOLID ELECT 330MF
C226	1-135-341-11	s	CAPACITOR,SOLID ELECT 330MF
C301	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C302	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C303	1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C304	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C306	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C307	1-107-687-11	s	CAPACITOR TANTALUM 3.3MF/20V
C308	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V

(RE-186 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C309	1-107-419-11	s	CAPACITOR,ELECT 22MF/35V
C310	1-107-687-11	s	CAPACITOR TANTALUM 3.3MF/20V
C311 *b	1-126-405-11	s	CAPACITOR,ELECT 10MF/50V(CHIP
*a	1-137-827-11	s	CAPACITOR,ELECT 22MF
C312	1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V
C313	1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V
C314	1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V
C315	1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V
C316	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C317	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C318	1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C319	1-135-602-11	s	CAP, ELECT 15MF
C320	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C321	1-131-998-11	s	CAP, SOLID ELECT 82MF 6.3 V
C322	1-135-341-11	s	CAPACITOR,SOLID ELECT 330MF
C330	1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
CN1	1-779-746-21	s	CONNECTOR, BOARD TO BOARD 50P
D101	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D102	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D103	8-719-048-17	s	DIODE MBRS130LT3
D104	8-719-991-00	s	DIODE DAP222
D201	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D202	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D203	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D204	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D205	8-719-991-00	s	DIODE DAP222
D301	8-719-989-93	s	DIODE SB01-15CP
D302	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D303	8-719-938-75	s	DIODE SB05-05CP (RECTI)
D304	8-719-991-00	s	DIODE DAP222
IC101 *b	8-759-669-64	s	IC TL1451ACPWR-12
*a	8-759-261-48	s	IC TL1451ACPW (R)
IC201	8-759-371-78	s	IC LT1431CS8-E1
IC202 *b	8-759-669-64	s	IC TL1451ACPWR-12
*a	8-759-261-48	s	IC TL1451ACPW (R)
IC301 *b	8-759-669-64	s	IC TL1451ACPWR-12
*a	8-759-261-48	s	IC TL1451ACPW (R)
L101	1-424-643-11	s	COIL, CHOKE 10UH
L102	1-409-579-11	s	COIL, CHOKE 8.2UH
L103	1-409-722-11	s	COIL, CHOKE 220UH
L104	1-411-967-11	s	COIL, CHOKE 33UH
L105	1-424-643-11	s	COIL, CHOKE 10UH
L106	1-409-579-11	s	COIL, CHOKE 8.2UH
L201	1-409-579-11	s	COIL, CHOKE 8.2UH
L202	1-409-579-11	s	COIL, CHOKE 8.2UH
L203	1-411-967-11	s	COIL, CHOKE 33UH
L204	1-411-967-11	s	COIL, CHOKE 33UH
L205	1-409-579-11	s	COIL, CHOKE 8.2UH
L206	1-409-579-11	s	COIL, CHOKE 8.2UH
L301	1-424-643-11	s	COIL, CHOKE 10UH
L302	1-424-642-11	s	COIL, CHOKE 47UH
L303	1-409-579-11	s	COIL, CHOKE 8.2UH
L304	1-411-967-11	s	COIL, CHOKE 33UH
L305	1-409-579-11	s	COIL, CHOKE 8.2UH
Q101	8-729-928-81	s	TRANSISTOR DTC144EE
Q102	8-729-929-26	s	TRANSISTOR DTC114TE
Q103	8-729-929-26	s	TRANSISTOR DTC114TE
Q104	8-729-012-35	s	TRANSISTOR 2SK711-BL

(RE-186 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
Q105	8-729-927-99	s	TRANSISTOR 2SC4617R
Q106	8-729-928-19	s	TRANSISTOR 2SA1774R
Q107	8-729-927-99	s	TRANSISTOR 2SC4617R
Q108	8-729-928-19	s	TRANSISTOR 2SA1774R
Q109	8-729-045-53	s	TRANSISTOR SI4431DY-T1
Q110	8-729-045-53	s	TRANSISTOR SI4431DY-T1
Q111	8-729-031-39	s	TRANSISTOR MTD20N03HDL
Q201	8-729-929-26	s	TRANSISTOR DTC114TE
Q202	8-729-929-26	s	TRANSISTOR DTC114TE
Q203	8-729-012-35	s	TRANSISTOR 2SK711-BL
Q204	8-729-012-35	s	TRANSISTOR 2SK711-BL
Q205	8-729-927-99	s	TRANSISTOR 2SC4617R
Q206	8-729-928-19	s	TRANSISTOR 2SA1774R
Q207	8-729-927-99	s	TRANSISTOR 2SC4617R
Q208	8-729-928-19	s	TRANSISTOR 2SA1774R
Q209	8-729-045-53	s	TRANSISTOR SI4431DY-T1
Q210	8-729-045-53	s	TRANSISTOR SI4431DY-T1
Q211	8-729-031-39	s	TRANSISTOR MTD20N03HDL
Q212	8-729-031-39	s	TRANSISTOR MTD20N03HDL
Q301	8-729-928-27	s	TRANSISTOR DTA144EE
Q302	8-729-929-26	s	TRANSISTOR DTC114TE
Q303	8-729-927-99	s	TRANSISTOR 2SC4617R
Q304	8-729-927-99	s	TRANSISTOR 2SC4617R
Q305	8-729-928-19	s	TRANSISTOR 2SA1774R
Q306	8-729-929-26	s	TRANSISTOR DTC114TE
Q307	8-729-040-83	s	TRANSISTOR SI4450DY-T1
Q308	8-729-012-35	s	TRANSISTOR 2SK711-BL
Q309	8-729-927-99	s	TRANSISTOR 2SC4617R
Q310	8-729-928-19	s	TRANSISTOR 2SA1774R
Q311	8-729-045-53	s	TRANSISTOR SI4431DY-T1
Q312	8-729-031-39	s	TRANSISTOR MTD20N03HDL
R101	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R102	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R103	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R104	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R105	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R106	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R107	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R108	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R109	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R110	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R111	1-208-943-11	s	RESISTOR CHIP 220K
R112	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R113	1-208-943-11	s	RESISTOR CHIP 220K
R114	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R115	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R116	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R117	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R118	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R119	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R120	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R121	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R122	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R123	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R124	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R125	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R126	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R127	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)

(RE-186 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R128	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R129	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R130	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R131	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R201	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R202	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R203 *b	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
*a	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R204 *b	1-208-713-11	s	RESISTOR CHIP 18K 1/16W (1005)
*a	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R205	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R206	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R207	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R208	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R209	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R210	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R211	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R212	1-208-943-11	s	RESISTOR CHIP 220K
R213	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R214	1-208-943-11	s	RESISTOR CHIP 220K
R215	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R216	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R217	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R218	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R219	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R220	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R221	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R222	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R223	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R224	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R225	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R226	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R227	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R228	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R229	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R230	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R231	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R232	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R233	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R234	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R235	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R236	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R237	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R238	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R301	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R302	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R303	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R304	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R305	1-208-943-11	s	RESISTOR CHIP 220K
R306	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R307	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R308	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R309	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R310	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R311	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R312	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R313	1-208-943-11	s	RESISTOR CHIP 220K
R314	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R316	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)

(RE-186 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R317	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R318	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R319	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R320	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R321	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R322	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R323	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R324	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R325	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R326	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R327	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R328	1-208-943-11	s	RESISTOR CHIP 220K
R329	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R330	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R331	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R332	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R333	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R334	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R335	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R336	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R337	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R343	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R344	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R345	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R346	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R347	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R348	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R349	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R350	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R351	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R352	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)

RE-187 BOARD
---

*a: Lot No. 083 - 111
*b: Lot No. 112 -

Ref. No. or Q'ty		Part No.	SP	Description
1pc	*b	A-8326-339-B	o	MOUNTED CIRCUIT BOARD, RE-187
	*a	A-8326-339-A	o	MOUNTED CIRCUIT BOARD, RE-187
C101		1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C102		1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C103		1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C104		1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C105		1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C106		1-164-941-11	s	CAPACITOR,CHIP CERAMIC 4700/16
C107		1-164-941-11	s	CAPACITOR,CHIP CERAMIC 4700/16
C108		1-107-419-11	s	CAPACITOR,ELECT 22MF/35V
C109		1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C110		1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C111		1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C112		1-104-607-11	s	CAPACITOR ERECT 47MF/16V(105C)
C113		1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C114		1-119-923-11	s	CAPACITOR,CHIP CERAMIC 0.047MF
C115		1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C116		1-135-347-11	s	CAP, SOLID ELECT 82MF
C117		1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C118		1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C119		1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C120		1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C121		1-107-687-11	s	CAPACITOR TANTALUM 3.3MF/20V
C122		1-107-687-11	s	CAPACITOR TANTALUM 3.3MF/20V
C123		1-107-687-11	s	CAPACITOR TANTALUM 3.3MF/20V
C124		1-107-687-11	s	CAPACITOR TANTALUM 3.3MF/20V
C125		1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C126		1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C127		1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C128		1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C129		1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C130		1-107-819-11	s	CAP,CERAMIC 22000PF/16V(1005)
C131		1-135-602-11	s	CAP, ELECT 15MF
C132		1-135-602-11	s	CAP, ELECT 15MF
C133		1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C134		1-135-342-11	s	CAPACITOR,SOLID ELECT 56MF
C135		1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C136		1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C137		1-135-342-11	s	CAPACITOR,SOLID ELECT 56MF
C138		1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C139		1-135-341-11	s	CAPACITOR,SOLID ELECT 330MF
C140		1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C141		1-135-341-11	s	CAPACITOR,SOLID ELECT 330MF
C143		1-135-341-11	s	CAPACITOR,SOLID ELECT 330MF
C145		1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C148		1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C149		1-135-602-11	s	CAP, ELECT 15MF
C150		1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C151		1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C152		1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C153		1-107-418-11	s	CAPACITOR,CHIP ELECT 10MF 35V
C154		1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C155		1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V
C156		1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C157		1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V

(RE-187 BOARD)

Ref. No. or Q'ty		Part No.	SP	Description	
C158		1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V	
C159	*b	1-126-405-11	s	CAPACITOR,ELECT 10MF/50V(CHIP	
	*a	1-137-827-11	s	CAPACITOR,ELECT 22MF	
C160		1-135-347-11	s	CAP, SOLID ELECT 82MF	
C161		1-107-417-11	s	CAPACITOR ERECT 33MF/25V(105C)	
C164		1-107-417-11	s	CAPACITOR ERECT 33MF/25V(105C)	
C165	*b	1-126-405-11	s	CAPACITOR,ELECT 10MF/50V(CHIP	
	*a	1-137-827-11	s	CAPACITOR,ELECT 22MF	
C167		1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V	
C168		1-109-892-11	s	CAPACITOR ERECT 47MF/25V(105C)	
C169		1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V	
C170		1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V	
C171		1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V	
C172		1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V	
C173		1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V	
C174		1-135-348-11	s	CAPACITOR,SOLID ELECT 150MF	
C177		1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V	
C178		1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF	
C179		1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V	
C180		1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V	
C181		1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V	
C182		1-125-827-11	s	CAPACITOR,CERAMIC 1MF/25V	
C184		1-115-339-11	s	CAPACITOR,CERAMIC 0.1MF/50V	
C185		1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V	
C186		1-127-692-11	s	CAP, CHIP CERAMIC 10MF B 3216	
CN1		1-779-746-21	s	CONNECTOR, BOARD TO BOARD 50P	
D101		8-719-066-98	s	DIODE RB051L-40	
D103		8-719-938-75	s	DIODE SB05-05CP	(RECTI)
D104		8-719-938-75	s	DIODE SB05-05CP	(RECTI)
D105		8-719-938-75	s	DIODE SB05-05CP	(RECTI)
D106		8-719-938-75	s	DIODE SB05-05CP	(RECTI)
D107		8-719-991-00	s	DIODE DAP222	
D108		8-719-989-93	s	DIODE SB01-15CP	
D109		8-719-938-72	s	DIODE SB01-05CP	(RECTI)
D110		8-719-991-00	s	DIODE DAP222	
D111		8-719-066-98	s	DIODE RB051L-40	
D112		8-719-029-79	s	DIODE RD18UJN-T1	
D113		8-719-991-00	s	DIODE DAP222	
D114		8-719-991-00	s	DIODE DAP222	
D115		8-719-991-00	s	DIODE DAP222	
IC102	*b	8-759-669-64	s	IC TL1451ACPWR-12	
	*a	8-759-261-48	s	IC TL1451ACPW (R)	
IC103	*b	8-759-669-64	s	IC TL1451ACPWR-12	
	*a	8-759-261-48	s	IC TL1451ACPW (R)	
IC105		8-759-560-89	s	IC MB3761PF-ER	
IC106		8-759-700-07	s	IC NJM2903M	
IC107		8-759-371-78	s	IC LT1431CS8-E1	
L101		1-424-643-11	s	COIL, CHOKE 10UH	
L102		1-409-722-11	s	COIL, CHOKE 220UH	
L103		1-424-643-11	s	COIL, CHOKE 10UH	
L104		1-409-579-11	s	COIL, CHOKE 8.2UH	
L105		1-409-579-11	s	COIL, CHOKE 8.2UH	
L106		1-411-967-11	s	COIL, CHOKE 33UH	
L107		1-411-967-11	s	COIL, CHOKE 33UH	
L108		1-409-579-11	s	COIL, CHOKE 8.2UH	
L109		1-409-579-11	s	COIL, CHOKE 8.2UH	
L110		1-409-579-11	s	COIL, CHOKE 8.2UH	
L112		1-424-643-11	s	COIL, CHOKE 10UH	

(RE-187 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
L113	1-424-643-11	s	COIL, CHOKE 10UH
L114	1-424-643-11	s	COIL, CHOKE 10UH
Q101	8-729-927-99	s	TRANSISTOR 2SC4617R
Q102	8-729-045-53	s	TRANSISTOR SI4431DY-T1
Q103	8-729-928-19	s	TRANSISTOR 2SA1774R
Q104	8-729-928-81	s	TRANSISTOR DTC144EE
Q105	8-729-929-26	s	TRANSISTOR DTC114TE
Q106	8-729-929-26	s	TRANSISTOR DTC114TE
Q107	8-729-929-26	s	TRANSISTOR DTC114TE
Q108	8-729-929-26	s	TRANSISTOR DTC114TE
Q109	8-729-012-35	s	TRANSISTOR 2SK711-BL
Q110	8-729-012-35	s	TRANSISTOR 2SK711-BL
Q111	8-729-927-99	s	TRANSISTOR 2SC4617R
Q112	8-729-928-19	s	TRANSISTOR 2SA1774R
Q113	8-729-927-99	s	TRANSISTOR 2SC4617R
Q114	8-729-928-19	s	TRANSISTOR 2SA1774R
Q115	8-729-045-53	s	TRANSISTOR SI4431DY-T1
Q116	8-729-045-53	s	TRANSISTOR SI4431DY-T1
Q117	8-729-031-39	s	TRANSISTOR MTD20N03HDL
Q118	8-729-031-39	s	TRANSISTOR MTD20N03HDL
Q120	8-729-927-99	s	TRANSISTOR 2SC4617R
Q121	8-729-012-35	s	TRANSISTOR 2SK711-BL
Q122	8-729-927-99	s	TRANSISTOR 2SC4617R
Q123	8-729-928-19	s	TRANSISTOR 2SA1774R
Q125	8-729-045-53	s	TRANSISTOR SI4431DY-T1
Q126	8-729-927-99	s	TRANSISTOR 2SC4617R
Q127	8-729-928-27	s	TRANSISTOR DTA144EE
Q128	8-729-052-69	s	TRANSISTOR 2SJ325-Z-E2
Q129	8-729-106-60	s	TRANSISTOR 2SB1115A
Q130	8-729-927-99	s	TRANSISTOR 2SC4617R
Q131	8-729-927-99	s	TRANSISTOR 2SC4617R
Q132	8-729-927-99	s	TRANSISTOR 2SC4617R
Q133	8-729-928-19	s	TRANSISTOR 2SA1774R
Q134	8-729-928-27	s	TRANSISTOR DTA144EE
R101	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R102	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R103	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R104	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R105	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R106 *b	1-208-869-11	s	RES, CHIP 180 (1005)
*a	1-208-643-11	s	RESISTOR,CHIP 22 1/16W (1005)
R107	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R108	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R109	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R110 *b	1-208-920-11	s	RESISTOR,CHIP 24K 1/16W(1005)
*a	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R111	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R112	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R113	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R114	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R115	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R116	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R117	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R118	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R119 *b	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
*a	1-208-691-11	s	RESISTOR,CHIP 2.2K 1/16W (1005)
R120 *b	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
*a	1-208-691-11	s	RESISTOR,CHIP 2.2K 1/16W (1005)

(RE-187 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R121	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R122	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R123	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R124	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R125	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R126	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R128	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R130	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R131	1-208-943-11	s	RESISTOR CHIP 220K
R132	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R133	1-208-943-11	s	RESISTOR CHIP 220K
R134	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R135	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R136	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R137	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R138	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R139	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R140	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R141	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R142	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R143	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R144	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R145	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R146	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R147	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R148	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R149	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R150	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R151	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R152	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R153	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R154	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R155	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R156	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R157	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R158	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R159	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R160	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R161	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R162	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R164	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R166	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R167	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R169	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R170	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R171	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R172	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R173	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R174	1-208-933-11	s	RESISTOR CHIP 82K
R175	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R176	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R177	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R178	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R179	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R180	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R181	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R182	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R183	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R184	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)

(RE-187 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R185	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R186	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R187	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R188	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R189	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R190	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R191 *b	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
*a	1-208-935-11	s	RESISTOR,CHIP 100K (1005)
R192 *b	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
*a	1-208-695-11	s	RESISTOR,CHIP 3.3K 1/16W (1005)
R193	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R194	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R195	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R196	1-208-943-11	s	RESISTOR CHIP 220K
R197	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R198	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R199	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R200	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R201	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R202	1-208-635-11	s	RESISTOR CHIP 10 1/16W (1005)
R203	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R204	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R206	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R207	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R210	1-208-943-11	s	RESISTOR CHIP 220K
R211	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R212	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R213	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R214	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R215 *a	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R216 *b	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R217	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R219	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R220	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R221	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R222	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R223	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R224	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R225	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R226	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
T101	1-435-762-11	s	TRANSFORMER, DC-DC CONVERTER

RM-188 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-030-A	o	MOUNTED CIRCUIT BOARD, RM-188
CN1	1-766-696-11	o	CONNECTOR, ROUND TYPE 8P
CN114	1-691-551-11	o	PIN, CONNECTOR (SMD) 8P
FB1	1-469-133-11	o	FERRITE, EMI (SMD)
FB2	1-469-133-11	o	FERRITE, EMI (SMD)
FB3	1-469-133-11	o	FERRITE, EMI (SMD)
FB4	1-469-133-11	o	FERRITE, EMI (SMD)
FB5	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB6	1-414-772-11	s	INDUCTOR,MICRO(CHIP TYPE) 2012
FB7	1-469-133-11	o	FERRITE, EMI (SMD)
FB8	1-469-133-11	o	FERRITE, EMI (SMD)

RX-54 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-107-A	o	MOUNTED CIRCUIT BOARD, RX-54
C101	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C102	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C103	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C104	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C105	1-125-817-11	s	CAPACITOR, CERAMIC 10MF/6.3V
C106	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
CN10	1-568-230-11	o	SOCKET,CONNECTOR 15P
CN117	1-785-840-21	o	CONNECTOR, FFC (ZIF) 15P
IC101	8-759-598-35	s	IC NJM2119M(TE2)
R101	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R102	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R103	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R104	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R105	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R106	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R107	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R108	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R109	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R110	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R111	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R112	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R113	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R114	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)

SE-613 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-155-A	o	MOUNTED CIRCUIT BOARD, SE-613
CN1	1-691-550-11	s	PIN,CONNECTOR (3P)(SMD)(1.5MM)
S1	1-572-719-11	s	SWITCH,PUSH(1 KEY)
S2	1-572-719-11	s	SWITCH,PUSH(1 KEY)

http://getMANUAL.com

SS-92 BOARD
---

*a: Lot No. 083 - 0A2
*b: Lot No. 0A3 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-336-A	o	MOUNTED CIRCUIT BOARD, SS-92
2pcs	3-729-061-01	s	SCREW (M2X4.5) (TYPE 1)(STEEL)
C1	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C2	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C3	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C4	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C5	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C6	1-164-935-11	s	CAPACITOR,CHIP CERAMIC 470PF
C7	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C8	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C9	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C10	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C11	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C12	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C13	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C14	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C15	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C16	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C17	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C18 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C20 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C21 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C22 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C23 *b	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C101	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C102	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C103	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C104	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C105	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C106	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C107	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C108	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C109	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C110	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C111	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C112	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C113	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C114	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C115	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C116	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C117	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C118	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C119	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C120	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C121	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C122	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C123	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C201	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C202	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C203	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C204	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C205	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C206	1-127-675-11	s	CAPACITOR,CHIP CERAMIC 22MF B
C207	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C208	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(SS-92 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C209	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C210	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C211	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C212	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C213	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C214	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C215	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C216	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C217	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C218	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C219	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C220	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C221	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C222	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C223	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C224	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C225	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C226	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C227	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C228	1-164-874-11	s	CAPACITOR,CHIP CERAMIC 100PF
C229	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C230	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C231	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C232	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C233	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C234	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C235	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C236	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C237	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C238	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C239	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C240	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C241	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C242	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C243	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C244	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C245	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C246	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C247	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C248	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C249	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C250	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C251	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C252	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C253	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C254	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C257	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C258	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C259	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C260	1-164-943-11	s	CAPACITOR,CHIP CERAMIC 0.01MF
C261	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C262	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
CN2	1-573-290-21	s	PIN,CONNECTOR (4P)(SMD)(1.5MM)
CN3	1-774-391-11	o	CONNECTOR, BOARD TO BOARD 60P
CN102	1-784-200-11	o	CONNECTOR, BOARD TO BOARD 140P
CN201	1-778-535-11	o	CONNECTOR, FFC (ZIF) 45P
CN202	1-778-535-11	o	CONNECTOR, FFC (ZIF) 45P
D1 *a	8-719-071-10	s	DIODE CL-191HR-CD-T

(SS-92 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
D101	8-719-989-00	s	DIODE DA221
D102	8-719-989-00	s	DIODE DA221
D103	8-719-029-57	s	DIODE ZENER RD2.4UH-T1
D104	8-719-029-57	s	DIODE ZENER RD2.4UH-T1
D105	8-719-989-00	s	DIODE DA221
D106	8-719-989-00	s	DIODE DA221
D201	8-719-989-00	s	DIODE DA221
D202	8-719-989-00	s	DIODE DA221
D203	8-719-989-00	s	DIODE DA221
D204	8-719-989-00	s	DIODE DA221
D205	8-719-989-00	s	DIODE DA221
D206	8-719-989-00	s	DIODE DA221
E101	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E102	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E103	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E201	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E202	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
IC2	8-759-549-15	s	IC SN74LV245APWR
IC3	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC4	8-759-544-01	s	IC S-80828ANNP-EDR-T2
IC5	8-759-271-86	s	IC TC7SH04FU
IC6 *a	8-759-713-79	s	IC MB81F643242C-10FN
IC7	8-759-523-94	s	IC TC74VHC32FT(EL)
IC8	8-759-689-92	s	IC MBM29LV160BE90TN
IC9	8-759-549-15	s	IC SN74LV245APWR
IC10	8-759-549-15	s	IC SN74LV245APWR
IC11	8-759-549-15	s	IC SN74LV245APWR
IC12	8-759-523-83	s	IC TC74VHC11FT(EL)
IC13	8-759-695-53	s	IC XCS05XL-4VQ100C
IC14	8-759-271-86	s	IC TC7SH04FU
IC15	8-759-564-49	s	IC TC7W53FU-TE12R
IC16	8-759-564-49	s	IC TC7W53FU-TE12R
IC17	8-759-327-01	s	IC NJM062V-TE2
IC18	8-759-082-60	s	IC TC7S66FU
IC19	8-759-710-28	s	IC NJM4565M-A
IC20	8-759-549-01	s	IC SN74LV125APWR
IC21	8-759-549-01	s	IC SN74LV125APWR
IC22	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC23	8-759-491-50	s	IC TC74VHCT244AFT(EL)
IC24	8-759-549-15	s	IC SN74LV245APWR
IC25	8-759-491-50	s	IC TC74VHCT244AFT(EL)
IC26	8-759-564-49	s	IC TC7W53FU-TE12R
IC27	8-759-327-01	s	IC NJM062V-TE2
IC28	8-759-523-00	s	IC TC74HC4051AFT(EL)
IC29	8-759-327-01	s	IC NJM062V-TE2
IC30	8-759-327-01	s	IC NJM062V-TE2
IC31	8-759-327-01	s	IC NJM062V-TE2
IC32	8-759-564-49	s	IC TC7W53FU-TE12R
L201	1-414-398-11	s	INDUCTOR (SMD) 10UH
L202	1-414-398-11	s	INDUCTOR (SMD) 10UH
PS201 ⚠	1-576-259-11	s	LINK,IC 0.6A (3225)
PS202 ⚠	1-576-259-11	s	LINK,IC 0.6A (3225)
Q1 *b	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
*a	8-729-928-81	s	TRANSISTOR DTC144EE
Q2 *b	8-729-928-81	s	TRANSISTOR DTC144EE
R1	1-208-943-11	s	RESISTOR CHIP 220K

(SS-92 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R2	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R3	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R4	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R5	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R6	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R7	1-208-943-11	s	RESISTOR CHIP 220K
R8	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R9	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R10	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R11	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R12	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R13 *b	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
*a	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R14	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R15 *b	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R16 *b	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R17 *b	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R18 *b	1-208-943-11	s	RESISTOR CHIP 220K
R25 *b	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R26 *b	1-208-943-11	s	RESISTOR CHIP 220K
R101	1-208-943-11	s	RESISTOR CHIP 220K
R102	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R103	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R104	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R105	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R106	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R107	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R108	1-208-943-11	s	RESISTOR CHIP 220K
R110	1-208-943-11	s	RESISTOR CHIP 220K
R111	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R112	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R113	1-208-943-11	s	RESISTOR CHIP 220K
R114	1-208-943-11	s	RESISTOR CHIP 220K
R115	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R117	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R118	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R119	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R120	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R121	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R122	1-218-720-11	s	RESISTOR,CHIP 15K 1/16W(1608)
R123	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R124	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R125	1-218-696-11	s	RESISTOR,CHIP 1.5K 1/16W(1608)
R126	1-208-943-11	s	RESISTOR CHIP 220K
R127	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R128	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R129	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R130	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R131	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R132	1-218-672-11	s	RESISTOR,CHIP 150 1/16W(1608)
R133	1-208-943-11	s	RESISTOR CHIP 220K
R134	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R135	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R136	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R201	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R202	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R203	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R204	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R205	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)

(SS-92 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description	
R206	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W	(1005)
R207	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W	(1608)
R208	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W	(1608)
R209	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W	(1608)
R210	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W	(1608)
R211 *b	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W	(1608)
*a	1-218-698-11	s	RESISTOR CHIP 1.8K 1/16W	(1608)
R212 *b	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W	(1608)
*a	1-218-698-11	s	RESISTOR CHIP 1.8K 1/16W	(1608)
R213 *b	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W	(1608)
*a	1-218-698-11	s	RESISTOR CHIP 1.8K 1/16W	(1608)
R214 *b	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W	(1608)
*a	1-218-698-11	s	RESISTOR CHIP 1.8K 1/16W	(1608)
R215	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W	(1608)
R217	1-208-943-11	s	RESISTOR CHIP 220K	
R218	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W	(1005)
R219	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W	(1005)
R220	1-216-864-11	s	RESISTOR,CHIP 0 1/16W	(1608)
R221	1-218-941-11	s	RESISTOR,CHIP 100 1/16W	(1005)
R222	1-218-941-11	s	RESISTOR,CHIP 100 1/16W	(1005)
R223	1-218-941-11	s	RESISTOR,CHIP 100 1/16W	(1005)
R224	1-218-941-11	s	RESISTOR,CHIP 100 1/16W	(1005)
R225	1-218-941-11	s	RESISTOR,CHIP 100 1/16W	(1005)
R226	1-218-941-11	s	RESISTOR,CHIP 100 1/16W	(1005)
R227	1-208-683-11	s	RESISTOR CHIP 1K 1/16W	(1005)
R228	1-208-683-11	s	RESISTOR CHIP 1K 1/16W	(1005)
R229	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W	(1608)
R230	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W	(1608)
R231	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W	(1608)
R232	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W	(1608)
R233	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W	(1608)
R234	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W	(1608)
R235	1-208-943-11	s	RESISTOR CHIP 220K	
R236 *b	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W	(1005)
R237 *b	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W	(1005)
R238 *b	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W	(1005)
R239 *b	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W	(1005)
RB1	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB2	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB3	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB4	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB5	1-234-375-21	s	RES, NETWORK 1KX4	(1005)
RB6	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB7	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB8	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB9	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB10	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB11	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB12	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB13	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB14	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB15	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB16	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB17	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB18	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB19	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB20	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB21	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB22	1-234-370-11	s	RES, NETWORK 22X4	(1005)

(SS-92 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description	
RB23	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB24	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB25	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB26	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB27	1-239-711-11	s	NETWORK, RESISTOR 0	(1608)
RB28	1-239-711-11	s	NETWORK, RESISTOR 0	(1608)
RB29	1-239-711-11	s	NETWORK, RESISTOR 0	(1608)
RB30	1-239-711-11	s	NETWORK, RESISTOR 0	(1608)
RB101	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB102	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB103	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB104	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB105	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB106	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB107	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB108	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB109	1-234-375-21	s	RES, NETWORK 1KX4	(1005)
RB110	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB111	1-234-375-21	s	RES, NETWORK 1KX4	(1005)
RB112	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB113	1-234-375-21	s	RES, NETWORK 1KX4	(1005)
RB114	1-234-375-21	s	RES, NETWORK 1KX4	(1005)
RB115	1-234-375-21	s	RES, NETWORK 1KX4	(1005)
RB116	1-234-375-21	s	RES, NETWORK 1KX4	(1005)
RB117	1-234-375-21	s	RES, NETWORK 1KX4	(1005)
RB118	1-234-375-21	s	RES, NETWORK 1KX4	(1005)
RB119	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB120	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB121	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB122	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB123	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB124	1-234-375-21	s	RES, NETWORK 1KX4	(1005)
RB125	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB126	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB127	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB201	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB202	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB203	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB204	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB205	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB206	1-234-375-21	s	RES, NETWORK 1KX4	(1005)
RB207	1-234-375-21	s	RES, NETWORK 1KX4	(1005)
RB208	1-234-375-21	s	RES, NETWORK 1KX4	(1005)
RB209	1-234-375-21	s	RES, NETWORK 1KX4	(1005)
RB210	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB211	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB212	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB213	1-234-370-11	s	RES, NETWORK 22X4	(1005)
RB214	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB215	1-234-382-11	s	RESISTOR,NETWORK 220KX4	(1005)
RB216	1-234-370-11	s	RES, NETWORK 22X4	(1005)
S101	1-692-271-31	s	SWITCH, SLIDE	
TP101	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)	
TP102	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)	
TP103	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)	
TP104	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)	
TP105	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)	

(SS-92 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
TP106	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP107	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP108	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP109	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP110	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP201	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP202	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP203	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP204	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
X1	1-781-810-21	s	OSCILLATOR, CRYSTAL (SMD)

SW-1030 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-028-A	o	MOUNTED CIRCUIT BOARD, SW-1030
CN1	1-564-718-11	o	PIN,CONNECTOR (2P)
CN121	1-565-875-11	o	PIN,CONNECTOR(PC BOARD)3P
S1	1-762-002-11	s	SWITCH, TOGGLE

SW-1031 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-031-A	o	MOUNTED CIRCUIT BOARD, SW-1031
C1	1-163-009-11	s	CAPACITOR,CERAMIC 1000PF/50V
C2	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C3	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C4	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C5	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C6	1-163-251-11	s	CAPACITOR CERAMIC 100PF/50V
C7	1-163-009-11	s	CAPACITOR,CERAMIC 1000PF/50V
C8	1-163-009-11	s	CAPACITOR,CERAMIC 1000PF/50V
CN1	1-569-335-11	s	CONNECTOR,BOARD TO BOARD 9P
R1	1-216-627-11	s	RESISTOR,CHIP 100 1/10W (2012)
RV1	1-223-686-11	s	RESISTOR, VAR, CARBON 5K/5K
S1	1-570-995-11	s	SWITCH, KEY BOARD
S2	1-571-679-11	s	SWITCH,TOGGLE
S3	1-571-416-11	s	SWITCH,TOGGLE

SW-1038 BOARD

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-098-A	o	MOUNTED CIRCUIT BOARD, SW-1038
1pc	3-629-445-01	o	BRACKET,SW
1pc	3-629-459-03	o	PLATE,GROUND
1pc	3-729-013-41	s	SCREW(M1.4X3.5),WASHERHEAD(+P)
C1	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C2	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C3	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C4	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
CN204	1-565-884-11	o	PIN, CONNECTOR (PC BOARD) 12P
S1	1-762-001-11	s	SWITCH, TOGGLE
S2	1-762-000-11	s	SWITCH, TOGGLE
S3	1-762-000-11	s	SWITCH, TOGGLE
S4	1-762-000-11	s	SWITCH, TOGGLE
S5	1-762-488-11	s	SWITCH, TOGGLE
S6	1-762-019-11	s	SWITCH, TOGGLE

TG-219 BOARD
---

*a: Lot No. 083 - 0A2
*b: Lot No. 0A3 -

Ref. No. or Q'ty	Part No.	SP	Description
1pc	A-8326-037-A	o	MOUNTED CIRCUIT BOARD, TG-219
C1	1-162-964-11	s	CAPACITOR,CERAMIC 1000PF/50V B
C3 *b	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C4 *b	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C5	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C6	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C7	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C8	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C9	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C10	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C11	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C12	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C13	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C14	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C15	1-162-915-11	s	CAPACITOR,CERAMIC 10PF/50V CH
C16	1-135-177-21	s	CAPACITOR TANTALUM 1MF/25V
C17	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C18	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C19	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C20	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C21	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C22	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C23	1-127-564-11	s	CAPACITOR ELECT 150MF/6.3V
C24	1-162-910-11	s	CAPACITOR,CERAMIC 5PF/50V (1608)
C25	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C26	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C27	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C28 *b	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C29	1-162-970-11	s	CAPACITOR CERAMIC 0.01MF/25V B
C30	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C31	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C32	1-164-230-11	s	CAPACITOR,CERAMIC 220PF/50V
C33	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C34	1-162-919-11	s	CAPACITOR,CERAMIC 22PF/50V CH
C35	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C38	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C41	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C42	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C43	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C44	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C48	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C49	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C50	1-119-750-11	s	CAPACITOR,TANTALUM 22MF/6.3V
C51	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C53 *b	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
*a	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C54 *b	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
*a	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C55	1-162-917-11	s	CAPACITOR,CERAMIC 15PF/50V CH
CN1	1-573-344-21	s	CONNECTOR,BOARD TO BOARD 48P
CN2	1-573-344-21	s	CONNECTOR,BOARD TO BOARD 48P
IC1	8-759-488-34	s	IC TLV2221CDBV2
IC2	8-759-381-53	s	IC UPC814G2-E2
IC3	8-759-592-48	s	IC TC7SZ32FU(TE85R)

(TG-219 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC4	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC5	8-759-185-42	s	IC LM4040AIM3-2.5
IC6	8-759-659-05	o	IC CXD9135R
IC7	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC8	8-759-475-39	s	IC TC74LCX74FT(EL)
IC9 *b	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC10	8-759-185-42	s	IC LM4040AIM3-2.5
IC11	8-759-381-53	s	IC UPC814G2-E2
IC12	8-759-463-81	s	IC TLC2272CPW (E05)
IC13	8-759-531-92	s	IC TC7WH04FU(TE12R)
IC14	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC16	8-759-475-43	s	IC TC74LCX125FT(EL)
IC17	8-759-683-80	s	IC SN65LVDS1DBVR
IC18	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC19	8-759-592-48	s	IC TC7SZ32FU(TE85R)
L1	1-410-737-31	s	INDUCTOR,CHIP 0.47UH (3225)
Q1	8-729-014-93	s	TRANSISTOR 2SB1440S-TX
Q2	8-729-117-32	s	TRANSISTOR 2SC4177
Q3	8-729-044-07	f	TRANSISTOR SI3443DV-T1
Q4	8-729-143-14	s	TRANSISTOR 2SC4176-B35
Q5	8-729-014-93	s	TRANSISTOR 2SB1440S-TX
Q6	8-729-044-07	f	TRANSISTOR SI3443DV-T1
Q7	8-729-140-63	s	TRANSISTOR 2SA1611-M5M6
Q8	8-729-014-91	s	TRANSISTOR 2SD2185S-TX
Q9	8-729-141-48	s	TRANSISTOR 2SB624-BV345
Q10	8-729-141-48	s	TRANSISTOR 2SB624-BV345
R1	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R2	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R3	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R8	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R9	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R10	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R11	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R12 *b	1-218-684-11	s	RESISTOR,CHIP 470 1/16W (1608)
R15	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R16	1-218-704-11	s	RESISTOR,CHIP 3.3K 1/16W(1608)
R17	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R20	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R23	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R24	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R26	1-218-744-11	s	RESISTOR,CHIP 150K 1/16W
R27	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R28	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R30	1-218-728-11	s	RESISTOR,CHIP 33K 1/16W
R32 *a	1-216-656-11	s	RESISTOR,CHIP 33 1/16W (1608)
R33 *b	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R34	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R36	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R38	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R41	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R42	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R43	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R44	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R45	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R46	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R48	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R50	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R51	1-218-682-11	s	RESISTOR,CHIP 390 1/16W (1608)

1-5. Frame List

(TG-219 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R52	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R53	1-218-742-11	s	RESISTOR,METAL 120K 1/16
R54	1-218-740-11	s	RESISTOR,CHIP 100K 1/16W(1608)
R55	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R56	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R57	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R58	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R59	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R61	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R62	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R64	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R65	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R66 *b	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
*a	1-218-676-11	s	RESISTOR,CHIP 220 1/16W(1608)
R67	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R68	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R69	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R70	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R71	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R72	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R74	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R77	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R78	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R79	1-218-708-11	s	RESISTOR,CHIP 4.7K 1/16W(1608)
R80	1-218-710-11	s	RESISTOR,CHIP 5.6K 1/16W(1608)
R81	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R82	1-218-716-11	s	RESISTOR,CHIP 10K 1/16W(1608)
R83	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R84	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R85	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R86	1-218-680-11	s	RESISTOR,CHIP 330 1/16W(1608)
R87	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R88	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R90	1-218-682-11	s	RESISTOR,CHIP 390 1/16W (1608)
R91	1-218-700-11	s	RESISTOR,CHIP 2.2K 1/16W(1608)
R92	1-218-668-11	s	RESISTOR,CHIP 100 1/16W (1608)
R94	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R97	1-218-652-11	s	RESISTOR,CHIP 22 1/16W (1608)
R99 *b	1-218-644-11	s	RESISTOR,CHIP 10 1/16W
R100 *b	1-218-654-11	s	RESISTOR CHIP 27 1/16W (1608)
*a	1-218-660-91	s	RESISTOR,CHIP 47 1/16W (1608)
R101 *b	1-218-670-11	s	RESISTOR,CHIP 120 1/16W (1608)
*a	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
X1	1-781-830-11	s	OSCILLATOR, CRYSTAL
X2	1-781-831-11	s	OSCILLATOR, CRYSTAL

FRAME

Ref. No. or Q'ty	Part No.	SP	Description
1pc	1-504-977-11	s	SPEAKER (3.6CM)
1pc	1-673-614-11	s	PRINTED WIRING BOARD, FP-84
CN1	1-766-377-12	s	CONNECTOR, BATTERY
CN2	1-785-593-11	s	CONNECTOR, MEMORY STICK
FAN101	1-763-652-11	s	FAN, D.C.
FAN201	1-763-652-11	s	FAN, D.C.
HN101	----------		HARNESS, SUB (BI-G)
(To CN2/BI-147(R) board)			
1pc	1-695-212-11	o	HOUSING, CONNECTOR 6P
6pcs	1-695-215-11	o	TERMINAL, SOLDERLESS
(To CN101/PA-253 board)			
1pc	1-695-212-11	o	HOUSING, CONNECTOR 6P
6pcs	1-695-215-11	o	TERMINAL, SOLDERLESS
HN102	----------		HARNESS, SUB (BI-G)
(To CN2/BI-147(G) board)			
1pc	1-695-212-11	o	HOUSING, CONNECTOR 6P
6pcs	1-695-215-11	o	TERMINAL, SOLDERLESS
(To CN102/PA-253 board)			
1pc	1-695-212-11	o	HOUSING, CONNECTOR 6P
6pcs	1-695-215-11	o	TERMINAL, SOLDERLESS
HN103	----------		HARNESS, SUB (BI-G)
(To CN2/BI-147(B) board)			
1pc	1-695-212-11	o	HOUSING, CONNECTOR 6P
6pcs	1-695-215-11	o	TERMINAL, SOLDERLESS
(To CN103/PA-253 board)			
1pc	1-695-212-11	o	HOUSING, CONNECTOR 6P
6pcs	1-695-215-11	o	TERMINAL, SOLDERLESS
HN104	1-960-866-11	o	HARNESS, SUB (VF)
(To CN4/DCP-28 board)			
20pcs	1-778-554-11	o	TERMINAL, SOLDERLESS
(To VF)			
1pc	1-565-051-21	o	CONNECTOR, ROUND (WITH C) 20P
HN105	1-757-273-11	s	CABLE, FLEXIBLE FLAT (30 CORE)
(CN1/DR-433 board to CN105/DCP-28 board)			
HN106	----------		HARNESS, SUB (MB898-DR430)
(CN118/MB-898 board to CN9/DR-433 board)			
HN107	----------		HARNESS, SUB (DR430MB898)
(CN10/DR-433 board to CN119/MB-898 board)			
HN108	----------		HARNESS, SUB (PA294-DCP28)
(To CN303/PA-253 board)			
6pcs	1-565-977-11	s	TERMINAL, SOLDERLESS
1pc	1-565-978-11	o	HOUSING, CONNECTOR 6P
(To CN3/DCP-28 board)			
6pcs	1-565-977-11	s	TERMINAL, SOLDERLESS
1pc	1-565-978-11	o	HOUSING, CONNECTOR 6P
HN109	1-960-871-11	o	HARNESS, SUB (LIGHT/SW-PS(6P))
(To FB)			
1pc	1-543-157-11	s	BEAD, FERRITE
(To CN102/PS-595 board)			
6pcs	1-562-643-11	o	TERMINAL, SOLDERLESS
1pc	1-562-648-11	o	SOCKET, CONNECTOR 6P
(To CN1/SW-1030 board)			
1pc	1-562-252-00	o	HOUSING, CONNECTOR 2P
2pcs	1-562-260-11	o	CONTACT, SOCKET
HN110	1-960-885-11	o	HARNESS, SUB (HP103)
(CN301/HP-103 board to CN301/APR-59 board)			

(FRAME)

Ref. No. or Q'ty	Part No.	SP	Description
HN111	1-960-882-11	o	HARNESS, SUB (SPEAKER)
(To CN302/APR-59 board)			
2pcs	1-565-977-11	s	TERMINAL, SOLDERLESS
1pc	1-569-617-11	o	HOUSING, CONNECTOR 2P
HN112	1-960-888-11	o	HARNESS, SUB (BP)
(CN303/BP-33 board to CN303/APR-59 board ; SUFFIX-11)			
(CN303/BP-33 board to CN303/FP-121 board ; SUFFIX-12 and higher)			
HN113	1-960-876-12	o	HARNESS, SUB (SW1030-MB898)
(CN121/SW-1030 board to CN121/MB-898 board)			
HN114	1-757-279-11	s	CABLE, FLEXIBLE FLAT (45 CORE)
(CN105/MB-898 board to CN105/FP-121 board)			
HN115	1-777-867-12	s	CABLE, FLEXIBLE FLAT (50 CORE)
(CN201/FP-121 board to CN201/APR-59 board)			
HN116	1-960-887-11	s	HARNESS, SUB (MA)
(CN501/MA-103 board to CN501/IFA-11 board)			
HN117	1-757-279-11	s	CABLE, FLEXIBLE FLAT (45 CORE)
(CN106/MB-898 board to CN106/FP-121 board)			
HN118	1-960-883-11	s	HARNESS, SUB (ENC61)
(CN203/ENC-61 board to CN203/FP-121 board)			
HN119	1-783-288-13	s	CABLE, FLEXIBLE FLAT (30 CORE)
(CN120/MB-898 board to CN120/IFA-11 board)			
HN120	1-960-886-11	o	HARNESS, SUB (SW1038)
(CN204/SW-1038 board to CN204/FP-121 board)			
HN121	1-757-276-11	s	CABLE, FLEXIBLE FLAT (10 CORE)
(CN1/KY-475 board to CN207/FP-121 board)			
HN122	1-757-279-11	s	CABLE, FLEXIBLE FLAT (45 CORE)
(CN107/MB-898 board to CN107/FP-121 board)			
HN123	1-960-884-11	o	HARNESS, SUB (HP104)
(CN205/HP-104 board to CN205/FP-121 board)			
HN124	1-959-401-11	o	HARNESS (LENS)
(To LENS)			
1pc	1-695-841-12	o	CONNECTOR (ROUND TYPE)(R-F) 12P
(To CN502/IFA-11 board)			
1pc	1-580-583-11	o	HOUSING, CONNECTOR 14P
12pcs	1-580-599-11	o	TERMINAL, SOLDERLESS
HN125	1-959-006-11	o	HARNESS, SUB (MB-PSW)
(To POWER SW)			
1pc	1-771-491-11	s	SWITCH, TOGGLE
(To CN504/IFA-11 board)			
2pcs	1-565-977-11	s	TERMINAL, SOLDERLESS
1pc	1-569-617-11	o	HOUSING, CONNECTOR 2P
HN201	1-757-430-11	s	CABLE ASSEMBLY, COAXIAL
(CN201/TX-78 board to HD SDI OUT)			
1pc	1-784-240-11	s	CONVERTER, COAXIAL CONNECTOR
HN301	1-757-278-11	s	CABLE, FLEXIBLE FLAT (45 CORE)
(CN4/MDR-14 board to CN101/EQ-88 board)			
HN302	1-783-287-13	s	CABLE, FLEXIBLE FLAT (45 CORE)
(CN503/MDC-13 board to CN3/MDR-14 board)			
HN303	----------		HARNESS, SUB (SV702-L MOTOR)
(To CN501/MDC-13 board)			
2pcs	1-565-977-11	s	TERMINAL, SOLDERLESS
1pc	1-569-617-11	o	HOUSING, CONNECTOR 2P

(FRAME)

Ref. No. or Q'ty	Part No.	SP	Description
HN304	----------		HARNESS, SUB (CAP1-MDC502)
(To CN502/MDC-13 board)			
1pc	1-695-214-11	o	HOUSING, CONNECTOR 15P
15pcs	1-695-215-11	o	TERMINAL, SOLDERLESS
(To CAPSTAN MOTOR)			
1pc	1-695-214-11	o	HOUSING, CONNECTOR 15P
15pcs	1-695-215-11	o	TERMINAL, SOLDERLESS
HN305	1-960-878-11	o	HARNESS, SUB (MDC-UDR)
(To CN507/MDC-13 board)			
3pcs	1-565-977-11	s	TERMINAL, SOLDERLESS
1pc	1-569-618-11	o	HOUSING, CONNECTOR 3P
(To CN1/UDR-32 board)			
3pcs	1-565-977-11	s	TERMINAL, SOLDERLESS
1pc	1-569-618-11	o	HOUSING, CONNECTOR 3P
HN306	----------		HARNESS, SUB (FE/CTL-MDC505)
(To CN505/MDC-13 board)			
4pcs	1-565-977-11	s	TERMINAL, SOLDERLESS
1pc	1-569-619-11	o	HOUSING, CONNECTOR 4P
HN307	1-960-877-11	o	HARNESS, SUB (CUE-MDC)
(To CN506/MDC-13 board)			
4pcs	1-565-977-11	s	TERMINAL, SOLDERLESS
1pc	1-569-619-11	o	HOUSING, CONNECTOR 4P
HN308	----------		HARNESS, SUB (SV703-T/E S)
(To CN508/MDC-13 board)			
2pcs	1-565-977-11	s	TERMINAL, SOLDERLESS
1pc	1-569-617-11	o	HOUSING, CONNECTOR 2P
HN309	----------		HARNESS, SUB (SV703-T/E S)
(To CN509/MDC-13 board)			
2pcs	1-565-977-11	s	TERMINAL, SOLDERLESS
1pc	1-569-617-11	o	HOUSING, CONNECTOR 2P
HN310	----------		HARNESS, DEW1 SENSOR
1pc	1-810-599-11	s	SENSOR, DEW CONDENSATION
HN311	----------		HARNESS, DEW2 SENSOR
1pc	1-810-599-11	s	SENSOR, DEW CONDENSATION
HN312	----------		HARNESS, SUB (TAPE SENSOR)
(To CN512/MDC-13 board)			
2pcs	1-565-977-11	s	TERMINAL, SOLDERLESS
1pc	1-569-617-11	o	HOUSING, CONNECTOR 2P
(To FULL TOP SENSOR)			
1pc	1-543-316-21	s	HEAD, SENSING (SMALL TYPE)
HN313	1-783-287-13	s	CABLE, FLEXIBLE FLAT (45 CORE)
(CN201/MDC-13 board to CN201/SS-92 board)			
HN314	1-960-879-11	o	HARNESS, SUB (MDC-SE)
(To CN504/MDC-13 board)			
3pcs	1-565-977-11	s	TERMINAL, SOLDERLESS
1pc	1-569-618-11	o	HOUSING, CONNECTOR 3P
(To CN1/SE-613 board)			
3pcs	1-565-977-11	s	TERMINAL, SOLDERLESS
1pc	1-569-618-11	o	HOUSING, CONNECTOR 3P
HN315	1-783-287-13	s	CABLE, FLEXIBLE FLAT (45 CORE)
(CN202/MDC-13 board to CN202/SS-92 board)			
HN316	1-757-280-11	s	CABLE, FLEXIBLE FLAT (45 CORE)
(CN101/MDC-13 board to CN101/MB-898 board)			
HN317	1-960-875-12	o	HARNESS, SUB (LP114-MB898)
(CN116/LP-114 board to CN116/MB-898 board)			

(FRAME)

Ref. No. or Q'ty	Part No.	SP	Description
HN401	1-783-288-13	s	CABLE, FLEXIBLE FLAT (30 CORE) (CN601/CI-27 board to CN501/IF-794 board)
HN402	1-757-276-11	s	CABLE, FLEXIBLE FLAT (10 CORE) (CN203/HN-277 board to CN2/CCM-45 board)
HN403	1-757-277-11	s	CABLE, FLEXIBLE FLAT (30 CORE) (CN602/CI-27 board to CN502/IF-794 board)
HN404	1-960-868-12	o	HARNESS, SUB (MB898-DC111) (To CN115/MB-898 board)
3pcs	1-565-977-11	s	TERMINAL, SOLDERLESS
1pc	1-569-618-11	o	HOUSING, CONNECTOR 3P
HN405	1-960-870-11	o	HARNESS, SUB (CNB15-DC111) (To CN101/CNB-15 board)
6pcs	1-562-643-11	o	TERMINAL, SOLDERLESS
1pc	1-562-648-11	o	SOCKET, CONNECTOR 6P
HN406	1-960-869-11	o	HARNESS, SUB (PS595-CNB15) (To CN101/PS-595 board)
4pcs	1-562-643-11	o	TERMINAL, SOLDERLESS
1pc	1-562-646-11	o	SOCKET, CONNECTOR 4P (To CN103/CNB-15 board)
4pcs	1-562-643-11	o	TERMINAL, SOLDERLESS
1pc	1-562-646-11	o	SOCKET, CONNECTOR 4P
HN407	1-956-448-11	o	HARNESS, SUB (CNB108-IO1) (CN105/CNB-15 board to CN105/IO-202 board)
HN408	1-960-874-11	o	HARNESS, SUB (RM188-MB898) (CN1/RM-188 board to CN114/MB-898 board)
HN409	1-757-274-11	s	CABLE, FLEXIBLE FLAT (15 CORE) (CN117/MB-898 board to CN117/RX-54 baord)
HN410	1-757-275-11	s	CABLE, FLEXIBLE FLAT (24 CORE) (CN401/MB-898 board to CN401/AXM-24 baord)
HN411	1-960-880-11	o	HARNESS, SUB (EXT DC IN) (To CN102/CNB-15 board)
8pcs	1-562-643-11	o	TERMINAL, SOLDERLESS
1pc	1-562-650-11	o	SOCKET, CONNECTOR 8P (To DC IN)
1pc	1-500-111-11	s	CORE
1pc	1-564-603-11	o	CONNECTOR (WITH DC SW) 4P
HN412	1-960-881-11	o	HARNESS, SUB (DC OUT) (To CN104/CNB-15 board)
2pcs	1-562-643-11	o	TERMINAL, SOLDERLESS
1pc	1-562-644-11	s	SOCKET, CONNECTOR 2P (To DC OUT)
1pc	1-565-072-11	s	CONNECTOR (RF), ROUND

1-6. Packing Materials & Supplied Accessories

Ref. No. or Q'ty	Part No.	SP	Description
*a: Lot No. 083 - 122			
*b: Lot No. 123 -			
1pc	A-6772-374-C	s	BELT ASSY, SHOULDER
1pc *a	A-8277-622-A	o	ARM ASSY, SLIDE
1pc *b	1-542-456-11	s	MICROPHONE (STEREO)
1pc *a	2-381-631-01	o	SPRING (STEEL)
1pc *a	2-381-632-02	o	ARM, LOCKER
1pc *a	2-381-635-01	o	LEVER,LOCK
1pc *a	2-381-636-01	o	KNOB
1pc *a	2-381-637-02	o	SPRING
1pc *a	2-381-637-11	o	SPRING
1pc *a	2-381-638-03	o	SPRING
1pc *a	2-381-640-02	o	DOG
1pc *a	2-381-641-01	o	DOG COLLAR
1pc *a	2-381-642-02	o	MOUNT
1pc *a	2-381-648-03	o	INSULATOR, KNOB
1pc *a	2-381-648-11	o	INSULATOR, KNOB
1pc *a	2-381-652-01	o	SPRING, TENSION (COIL) (STEEL)
1pc *a	3-191-064-01	o	COVER, RAIN
1pc	3-631-457-01	o	STOPPER,MOUNT
1pc *a	3-678-704-00	o	SPACER
1pc *a	3-701-443-01	s	WASHER PLASTIC (5.2X0.13)
1pc *b	3-709-606-02	o	SCREEN (ST), WINDOW
1pc *a	3-713-786-51	s	SCREW (M2X3)
1pc *a	3-720-906-01	o	LID (S),REAR
1pc *a	3-720-907-03	o	PIN (S), REAR
1pc *a	3-720-908-01	o	TABLE (S),PIN,REAR
1pc *a	3-720-909-01	o	KNOB,CRANK
1pc *a	3-720-910-03	o	SHEET, SLIDE
1pc *a	3-720-911-01	o	BASE,TRIPOD FITTING SCREW
1pc *a	3-720-912-11	o	FRAME (S)
2pcs	3-741-726-01	o	CAP (2),XLR
2pcs	3-741-727-01	o	CAP (1),XLR
6pcs *a	7-623-210-22	s	SPRING WASHER (4MM)
1pc *a	7-626-314-01	s	SPRING PIN 2X5
2pcs *a	7-682-249-04	s	SCREW +K 3X10(EP-FE/CU,NI,CR)
7pcs *a	7-682-262-04	s	SCREW +K 4X10(EP-FE/CU,NI,CR)
10pcs *a	7-682-547-09	s	SCREW +B3X6
2pcs *a	7-682-548-09	s	SCREW +B 3X8
1pc *a	7-683-408-04	s	BOLT,HEXAGON-SOCKET 3X16(EP-FE
6pcs *a	7-683-421-04	o	BOLT,HEXAGON-SOCKET 4X12
1pc *a	7-684-023-04	s	NUT M3 TYPE2
1pc *a	7-688-001-01	s	WASHER W2 SMALL
3pcs *a	7-688-003-11	s	WASHER W3, MIDDLE

1-7. Optional Fixtures List

Part No.	SP	Description
A-8315-553-B	o	ASSY, HN-255
A-8326-017-A	s	MOUNTED C. BOARD ROM-28
A-8327-453-A	o	MOUNTED C. BOARD EX-784
A-8327-454 A	o	MOUNTED C. BOARD EX-785
A-8327-457-A	o	MOUNTED C. BOARD EX-764
A-8327-636-A	o	100P-EXT ASSY
A-8327-637-A	o	SS-EXT ASSY
A-8327-706-A	o	EXTENSION ASSY, DCP-DVP
A-8327-707-A	o	EXTENSION ASSY, DR
A-8327-708-A	o	EXTENSION ASSY, AT-DC
A-8327-709-A	o	EXTENSION ASSY, RP
A-8328-404-A	s	JIG ASSY, COMPONENT
J-6001-820-A	s	DRUM ECCENTRICITY GAUGE (3)
J-6001-830-A	s	DRUM ECCENTRICITY GAUGE (2)
J-6026-110-A	o	BURST CHART
J-6026-130-B	o	GRAY SCALE CHART (PLA)
J-6029-140-B	o	PATTERN BOX PTB-500
J-6035-070-A	o	EXTRACTION TOOL, IC (CT-2101)
J-6080-840-A	s	MIRROR (SMALL OVAL TYPE)
J-6152-450-A	s	WIRE CLEARANCE CHECK GAUGE
J-6322-420-B	o	DRIVER (TOOL), TG ADJUSTMENT
J-6323-530-A	o	STOP WASHER FASTENING TOOL
J-6323-890-A	o	TORQUE CASSETTE (FWD BACK TEN.)
J-6324-150-A	o	REEL TABLE HEIGHT ADJUSTMENT TOOL
J-6325-110-A	o	BIT FOR TORQUE DRIVER (M1.4)
J-6325-360-B	o	FLATNESS CHECK JIG
J-6325-380-A	o	BIT FOR TORQUE DRIVER (M2)
J-6325-400-A	o	TORQUE DRIVER (3KG)
J-6325-530-A	o	DRUM ECCENTRICITY ADJ.JIG
J-6326-120-A	o	HEXAGON BIT (FOR TORQUE DRIVER)
J-6394-080-A	o	GRAY SCALE CHART (16:9)
J-6531-100-A	o	JIG ASSY, SENSOR MCB (DF-110)
J-6531-110-A	o	DRUM INSTALL PLATE DJH-27A
J-7032-610-C	o	CASSETTE REFERENCE PLATE
1-757-490-11	s	CABLE, FLEXIBLE FLAT (30 CORE, 250mm)
1-757-491-11	s	CABLE, FLEXIBLE FLAT (45 CORE, 250mm)
1-783-253-11	s	CABLE ASSEMBLY, COAXIAL
1-783-282-14	s	CABLE, FLEXIBLE FLAT (50 CORE)
3-184-527-01	s	CLOTH, CLEANING (150MM X 150MM)
7-432-114-11	s	THREE BOND-1401B
7-432-950-03	o	SEALANT (TSE-392W)
7-651-000-10	s	SONY GREASE (SGL-601/50G)
7-651-000-11	s	SONY GREASE (SGL-801/50G)
7-661-018-18	s	OIL, MITSUBISHI DIAMOND (NT-68)
7-700-736-05	s	L SHAPED HEX. WRENCH (1.5MM)
7-700-736-06	s	L SHAPED HEX. WRENCH (0.89MM)
8-960-076-01	s	TAPE, ALIGNMENT HR5-1A
8-960-076-11	s	TAPE, ALIGNMENT HR2-1A
9-919-573-01	s	HEAD CLEANING LIQUID

COMMERCIALLY AVAILABLE:

GRAY SCALE CHART (REFLECTIVE TYPE) (4:3)
CLEANING TAPE, BCT-HD12CL
BLANK TAPE, BCT-40HD
SONY MEMORY LABEL, MLB-1M-100
MEMORY STICK

1-8. HKDW-702

DC-110 BOARD
---

*a: Lot No. 083 - 0A2
*b: Lot No. 0A3 -

Ref. No. or Q'ty	Part No.	SP	Description
C1	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C2	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C3	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C4	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C5	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C6	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C7	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C8	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C9	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C10	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C11	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C12	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C13	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C14	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C15	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C16	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C20	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C21	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C22	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C23	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C25	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C26	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C27	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C28	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C29	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C30	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C31	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C32	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C33	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C34	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C35	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C36	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C37	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C38	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C39	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C40	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C41	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C42	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C43	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C44	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C45	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C46	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C47	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C48	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C49	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C50	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C51	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C52	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C53	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C54	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C55	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C56	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C57	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C58	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C59	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C60	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C61	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C62	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C63	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C64	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C65	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C66	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C67	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C68	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C69	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C201	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C202	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C203	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C204	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C205	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C206	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C207	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C208	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C209	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C210	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C211	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C212	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C213	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C214	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C215	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C216	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C217	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C218	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C219	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C220	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C221	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C222	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C223	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C224	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C225	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C226	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C227	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C228	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C229	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C230	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C231	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C232	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C233	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C234	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C235	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C236	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C237	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C238	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C239	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C240	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C241	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C242	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C243	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C244	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C245	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C246	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C247	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C248	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C249	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C250	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C251	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C252	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C253	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C254	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C255	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C256	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C257	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C258	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C259	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C260	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C261	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C262	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C263	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C264	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C265	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C266	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C267	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C268	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C269	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C270	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C271	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C272	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C273	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C274	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C275	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C276	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C280	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C281	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C282	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C283	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C284	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C285	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C286	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C287	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C288	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C289	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C290	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C291	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C292	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C293	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C294	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C295	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C296	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C297	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C298	1-115-467-11	s	CAPACITOR CERAMIC 0.22MF/10V B
C305	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C306	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C307	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C308	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C309	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C310	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C400	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C401	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C402	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C403	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C404	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C405	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C406	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

http://getMANUAL.com

(DC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C407	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C408	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C409	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C410	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C411	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C412	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C413	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C414	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C415	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C416	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C417	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C418	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C419	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C420	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C421	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C422	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C423	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C424	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C425	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C426	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C427	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C428	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C429	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C430	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C431	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C432	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C433	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C434	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C435	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C436	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C437	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C438	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C439	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C440	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C441	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C442	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C443	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C444	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C445	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C446	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C447	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C448	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C449	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C450	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C451	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C452	1-104-851-11	s	CAPACITOR,TANTALUM 10MF/10V
C453	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C454	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C455	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C456	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C457	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C458	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C459	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C460	1-164-845-11	s	CAPACITOR,CERAMIC 5PF/16V(1005
C461	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C462	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C463	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C464	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C465	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V

(DC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C466	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C467	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C468	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C469	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C471	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C472	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C473	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C474	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C475	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C476	1-164-882-11	s	CAPACITOR,CERAMIC 220PF/16V CH
C477	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C478	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C600	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C601	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C602	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C603	1-113-991-11	s	CAPACITOR TANTALUM 33MF/16V
C604	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C605	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C606	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C607	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C608	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C609	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C610	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C611	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C612	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C613	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C614	1-107-854-11	s	CAPACITOR TANTALUM 68MF/6.3V
C615	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C616	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C617	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C619	1-107-854-11	s	CAPACITOR TANTALUM 68MF/6.3V
C620	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C621	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C622	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C623	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C624	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C625	1-107-686-11	s	CAPACITOR,TANTALUM 4.7MF/16V
C626	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C627	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C629	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C630	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C631	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C632	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C633	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C634	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C635	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C636	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C637	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C638	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C639	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C640	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C641	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C642	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C643	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C644	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C645	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C646	1-164-850-11	s	CAPACITOR,CERAMIC 10PF/16V CH
C648	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C649	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V

(DC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C650	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C651	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C653	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C654	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C655	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C656	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C658	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C659	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C660	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C661	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C662	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C663	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C664	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C666	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C667	1-164-937-11	s	CAPACITOR,CHIP CERAMIC 1000PF
C668	1-135-145-11	s	CAPACITOR TANTALUM 0.47MF/35V
C669	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C670	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C671	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C672	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C700	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C701	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C702	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C703	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C704	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C705	1-115-581-11	s	CAPACITOR CHIP ELECT 100MF/16V
C706	1-115-581-11	s	CAPACITOR CHIP ELECT 100MF/16V
C707	1-113-500-11	s	CAPACITOR TANTALUM 100MF/10V
C708	1-113-642-11	s	CAPACITOR, TANTALUM 47MF/10V
C709	1-111-253-11	s	CAPACITOR TANTALUM 100MF/6.3V
C710	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C711	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C712	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C713	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C714	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C715	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C716	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C717	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C718	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C719	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C720	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C721	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C722	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C723	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C724	1-113-991-11	s	CAPACITOR TANTALUM 33MF/16V
C725	1-113-682-11	s	CAPACITOR,TANTALUM 33MF/10V
C726	1-113-682-11	s	CAPACITOR,TANTALUM 33MF/10V
C727	1-107-689-21	s	CAPACITOR,TANTALUM 1MF/35V
C728	1-113-991-11	s	CAPACITOR TANTALUM 33MF/16V
C729	1-113-682-11	s	CAPACITOR,TANTALUM 33MF/10V
C730	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C731	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C732	1-119-751-11	s	CAPACITOR,TANTALUM 22MF/16V
C733	1-104-852-11	s	CAPACITOR,TANTALUM 22MF/10V
C734	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C735	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C736	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
CN1	1-764-243-11	o	CONNECTOR (COAXIAL)

(DC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
CN6	1-785-845-11	o	CONNECTOR, BOARD TO BOARD 100P
D200	8-719-989-00	s	DIODE DA221
D600 *a	8-719-991-00	s	DIODE DAP222
E1	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E2	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E200	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E201	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E400	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
FB200	1-469-094-11	s	FERRITE, EMI (SMD)
FB400	1-469-094-11	s	FERRITE, EMI (SMD)
FB401	1-469-094-11	s	FERRITE, EMI (SMD)
FB402	1-469-094-11	s	FERRITE, EMI (SMD)
FB403	1-469-094-11	s	FERRITE, EMI (SMD)
FB404	1-469-094-11	s	FERRITE, EMI (SMD)
FB600	1-469-094-11	s	FERRITE, EMI (SMD)
FB601	1-469-094-11	s	FERRITE, EMI (SMD)
FL200	1-233-740-11	s	FILTER, LOW PASS
FL201	1-233-740-11	s	FILTER, LOW PASS
FL202	1-233-740-11	s	FILTER, LOW PASS
FL600	1-233-740-11	s	FILTER, LOW PASS
IC1	8-759-475-55	s	IC TC74LCX574FT(EL)
IC2	8-759-475-55	s	IC TC74LCX574FT(EL)
IC3	8-759-475-55	s	IC TC74LCX574FT(EL)
IC4	8-759-475-54	s	IC TC74LCX573FT(EL)
IC5	8-759-475-43	s	IC TC74LCX125FT(EL)
IC6	8-759-475-54	s	IC TC74LCX573FT(EL)
IC7	8-759-392-77	s	IC SN74LVC245APW (E20)
IC8	8-759-475-54	s	IC TC74LCX573FT(EL)
IC9	8-759-523-94	s	IC TC74VHC32FT(EL)
IC10	8-759-271-86	s	IC TC7SH04FU
IC11	8-759-271-86	s	IC TC7SH04FU
IC12	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC13	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC14	8-759-196-93	s	IC TC7SH00FU-TE85R
IC15	8-759-251-40	s	IC MB88E346PFV-G-BND-ER
IC19	8-759-546-74	s	IC TC7WH157FU(TE12R)
IC20	8-759-491-46	s	IC TC74VHCT04AFT (EL)
IC21	8-752-386-51	s	IC CXD3122R
IC23	8-759-687-72	s	IC CXD9092AGB
IC24	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC25	8-759-196-93	s	IC TC7SH00FU-TE85R
IC26	8-759-713-79	s	IC MB81F643242C-10FN
IC27	8-759-271-84	s	IC TC7SH02FU
IC28	8-759-594-71	s	IC TC7SH14FU-TE85R
IC29	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC30	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC201	8-759-475-55	s	IC TC74LCX574FT(EL)
IC202	8-759-654-93	s	IC CXD9100AR
IC203	8-752-363-60	s	IC CXD2307R-T4
IC204	8-759-637-57	s	IC CLC450AJM5
IC205	8-759-637-57	s	IC CLC450AJM5
IC206	8-759-637-57	s	IC CLC450AJM5
IC207	8-759-488-34	s	IC TLV2221CDBV2
IC208	8-759-488-34	s	IC TLV2221CDBV2
IC209	8-759-488-34	s	IC TLV2221CDBV2
IC210	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC400	8-759-524-50	s	IC TC74VHC541FT(EL)

(DC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC401	8-752-386-51	s	IC CXD3122R
IC402	8-752-386-51	s	IC CXD3122R
IC403	8-759-519-12	s	IC CXD8281Q
IC404	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC405	8-759-490-41	s	IC TC74VHCT541AFT(EL)
IC406	8-759-172-73	s	IC CXD8385Q
IC407	8-759-271-86	s	IC TC7SH04FU
IC408	8-759-592-10	s	IC TC7WH00FU-TE12R
IC409	8-759-690-54	s	IC CXD8953AQ
IC410	8-759-524-50	s	IC TC74VHC541FT(EL)
IC411	8-759-524-50	s	IC TC74VHC541FT(EL)
IC412	8-752-078-32	s	IC CXB1341R
IC413	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC414	8-759-488-34	s	IC TLV2221CDBV2
IC415	8-759-564-49	s	IC TC7W53FU-TE12R
IC416	8-759-054-61	s	IC CLC505AJE
IC417	8-759-547-54	s	IC TC7SET00FU(TE85R)
IC418	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC419	8-759-488-34	s	IC TLV2221CDBV2
IC420	8-759-271-86	s	IC TC7SH04FU
IC421	8-759-523-95	s	IC TC74VHC74FT(EL)
IC422	8-759-447-77	s	IC TC7WH74FU (TR12R)
IC423	8-759-586-19	s	IC TC7WH123FU(TE12R)
IC424	8-759-196-97	s	IC TC7SH32FU (TE85R)
IC600	8-759-475-54	s	IC TC74LCX573FT(EL)
IC601	8-759-475-54	s	IC TC74LCX573FT(EL)
IC602	8-752-392-03	s	IC CXD1095BR
IC603	8-759-271-86	s	IC TC7SH04FU
IC604	8-759-271-86	s	IC TC7SH04FU
IC605	8-759-669-75	s	IC TLC2932IPWR
IC606	8-759-271-86	s	IC TC7SH04FU
IC607	8-759-637-57	s	IC CLC450AJM5
IC608	8-759-488-34	s	IC TLV2221CDBV2
IC609	8-759-271-86	s	IC TC7SH04FU
IC610	8-759-497-44	s	IC TC7WH125FU(TE12R)
IC611	8-752-386-51	s	IC CXD3122R
IC612	8-759-475-38	s	IC TC74LCX32FT(EL)
IC616	8-759-491-46	s	IC TC74VHCT04AFT (EL)
IC617	8-759-592-44	s	IC TC7SZ04FU(TE85R)
IC618	8-759-524-18	s	IC TC74VHC163FT(EL)
IC619	8-759-524-18	s	IC TC74VHC163FT(EL)
IC620	8-759-524-18	s	IC TC74VHC163FT(EL)
IC621	8-759-524-18	s	IC TC74VHC163FT(EL)
IC622	8-759-271-84	s	IC TC7SH02FU
IC623	8-759-488-34	s	IC TLV2221CDBV2
IC624	8-759-669-75	s	IC TLC2932IPWR
IC625	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC626	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC627	8-759-466-55	s	IC 74LCX74MTCX
IC629	8-759-463-81	s	IC TLC2272CPW (E05)
IC631	8-759-466-27	s	IC LMC6032IMX
IC632	8-759-447-77	s	IC TC7WH74FU (TR12R)
IC633	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC634	8-759-592-48	s	IC TC7SZ32FU(TE85R)
IC635	8-759-592-42	s	IC TC7SZ00FU(TE85R)
IC636	8-759-592-47	s	IC TC7SZ08FU(TE85R)
IC637	8-759-447-77	s	IC TC7WH74FU (TR12R)
IC700	8-759-485-79	s	IC TC7SET08FU (TE85L)
IC701	8-759-185-42	s	IC LM4040AIM3-2.5

(DC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
IC702	8-759-564-49	s	IC TC7W53FU-TE12R
IC703	8-759-463-81	s	IC TLC2272CPW (E05)
IC704	8-759-463-81	s	IC TLC2272CPW (E05)
L200	1-412-058-11	s	INDUCTOR,SMALL TYPE 10UH
Q200	8-729-927-99	s	TRANSISTOR 2SC4617R
Q201	8-729-927-99	s	TRANSISTOR 2SC4617R
Q202	8-729-927-99	s	TRANSISTOR 2SC4617R
Q203	8-729-109-44	s	TRANSISTOR 2SK94
Q204	8-729-109-44	s	TRANSISTOR 2SK94
Q205	8-729-109-44	s	TRANSISTOR 2SK94
Q206	8-729-141-48	s	TRANSISTOR 2SB624-BV345
Q207	8-729-141-48	s	TRANSISTOR 2SB624-BV345
Q208	8-729-141-75	s	TRANSISTOR 2SD596DV345
Q209	8-729-141-75	s	TRANSISTOR 2SD596DV345
Q210	8-729-928-27	s	TRANSISTOR DTA144EE
Q211	8-729-928-19	s	TRANSISTOR 2SA1774R
Q212	8-729-928-27	s	TRANSISTOR DTA144EE
Q400	8-729-928-81	s	TRANSISTOR DTC144EE
Q401	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q402	8-729-041-24	s	TRANSISTOR NDS355AN
Q403	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q404	8-729-117-73	s	TRANSISTOR 2SC4178-F14
Q405	8-729-105-68	s	TRANSISTOR 2SC3356-K
Q406	8-729-117-73	s	TRANSISTOR 2SC4178-F14
Q407	8-729-928-81	s	TRANSISTOR DTC144EE
Q408	8-729-041-23	s	TRANSISTOR NDS356AP
Q409	8-729-204-07	s	TRANSISTOR 3SK151-S
Q410	8-729-928-19	s	TRANSISTOR 2SA1774R
Q600	8-729-141-75	s	TRANSISTOR 2SD596DV345
Q601	8-729-928-27	s	TRANSISTOR DTA144EE
Q602	8-729-141-48	s	TRANSISTOR 2SB624-BV345
Q603 *a	8-729-927-99	s	TRANSISTOR 2SC4617R
Q604	8-729-141-48	s	TRANSISTOR 2SB624-BV345
Q605	8-729-141-48	s	TRANSISTOR 2SB624-BV345
Q607	8-729-014-93	s	TRANSISTOR 2SB1440S-TX
Q608	8-729-014-93	s	TRANSISTOR 2SB1440S-TX
Q700	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q701	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q702	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q703	8-729-028-91	s	TRANSISTOR DTA144EUA-T106
Q704	8-729-029-14	s	TRANSISTOR DTC144EUA-T106
Q705	8-729-141-75	s	TRANSISTOR 2SD596DV345
Q706	8-729-045-28	s	TRANSISTOR SI4532DY-T1
Q707	8-729-040-75	s	TRANSISTOR SI4953DY
Q708	8-729-040-75	s	TRANSISTOR SI4953DY
Q709	8-729-014-93	s	TRANSISTOR 2SB1440S-TX
Q710	8-729-014-93	s	TRANSISTOR 2SB1440S-TX
R1	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R2	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R3	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R4	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R5	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R6	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R7	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R8	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R9	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R10	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)

(DC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R11	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R12	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R13	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R14	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R15	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R16	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R17	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R18	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R19	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R20	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R23	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R28	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R29	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R31	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R33	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R39	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R40	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R41	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R42	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R43	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R44	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R45	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R46	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R47	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R48	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R49	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R50	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R51	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R52	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R53	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R54	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R55	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R56	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R57	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R58	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R59	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R60	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R61	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R62	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R63	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R64	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R65	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R66	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R67	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R68	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R69	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R70	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R72	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R73	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R74	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R94	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R95	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R96	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R101	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R102	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R105	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R106	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R107	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R108	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

(DC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R201	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R202	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R203	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R205	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R206	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R207	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R208	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R209	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R210	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R211	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R212	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R215	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R216	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R217	1-208-931-11	s	RESISTOR, CHIP 68K (1005)
R218	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R219	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R220	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R221	1-218-958-11	s	RESISTOR,CHIP 2.7K 1/16W(1005)
R222	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R223	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R224	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R225	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R226	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R228	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R229	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R230	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R231	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R233	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R234	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R236	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R237	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R238	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R239	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R240	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R241	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R243	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R245	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R246	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R248	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R249	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R250	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R251	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R252	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R253	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R254	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R255	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R256	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R257	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R258	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R259	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R260	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R261	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R262	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R263	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R264	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R265	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R266	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R267	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R268	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)

(DC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R269	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R270	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R271	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R272	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R273	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R274	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R275	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R276	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R277	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R278	1-208-663-11	s	RESISTOR CHIP 150 1/16W (1005)
R279	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R280	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R281	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R282	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R283	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R284	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R285	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R286	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R287	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R288	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R289	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R290	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R291	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R292	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R293	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R297	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R298	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R299	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R300	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R301	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R302	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R303	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R304	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R305	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R306	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R307	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R308	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R309	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R310	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R311	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R312	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R313	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R314	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R315	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R316	1-208-671-11	s	RESISTOR CHIP 330 1/16W (1005)
R317	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R318	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R323	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R324	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R325	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R326	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R327	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R328	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R329	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R330	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R331	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R332	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R333	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R334	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)

(DC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R335	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R336	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R337	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R338	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R339	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R340	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R341	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R342	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R343	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R344	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R345	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R346	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R348	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R350	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R400	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R401	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R402	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R403	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R404	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R405	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R406	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R407	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R408	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R409	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R410	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R413	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R414	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R415	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R416	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R417	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R418	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R419	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R420	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R421	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R422	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R423	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R424	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R425	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R426	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R427	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R428	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R429	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R430	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R431	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R432	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R433	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R434	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R435	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R436	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R438	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R440	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R441	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R442	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R444	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R446	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R450	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R453	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R454	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R455	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)

(DC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R456	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R457	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R458	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R459	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R460	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R461	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R462	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R463	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R464	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R465	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R466	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R467	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R468	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R469	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R470	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R471	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R472	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R473	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R474	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R475	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R476	1-220-874-11	s	RES, CHIP 15 (1005)
R477	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R478	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R479	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R480	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R481	1-220-874-11	s	RES, CHIP 15 (1005)
R482	1-208-647-11	s	RESISTOR CHIP 33 1/16W (1005)
R483	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R484	1-208-679-11	s	RESISTOR CHIP 680 1/16W (1005)
R485	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R486	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R487	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R488	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R489	1-218-939-11	s	RESISTOR, CHIP 68 1/16W (1005)
R490	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R491	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R492	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R493	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R494	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R495	1-208-947-11	s	RESISTOR CHIP 330K 1/16W(1005)
R496	1-208-943-11	s	RESISTOR CHIP 220K
R497	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R498	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R499	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R500	1-216-624-11	s	RESISTOR,CHIP 75 1/10W(2012)
R501	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R502	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R503	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R504	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R505	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R506	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R507	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R509	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R510	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R511	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R512	1-208-947-11	s	RESISTOR CHIP 330K 1/16W(1005)
R513	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R514	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R515	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)

(DC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R600	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R601	1-208-943-11	s	RESISTOR CHIP 220K
R602	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R603	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R604	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R605	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R606	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R607	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R608	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R609	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R610	1-208-675-11	s	RESISTOR CHIP 470 1/16W (1005)
R611	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R612	1-208-643-11	s	RESISTOR CHIP 22 1/16W (1005)
R614	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R615	1-218-989-11	s	RESISTOR,CHIP 1M 1/16W (1005)
R616	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R617	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R618	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R619 *a	1-208-687-11	s	RESISTOR CHIP 1.5K 1/16W (1005
R620	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R621	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R622	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R623	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R624	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R625	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R626 *b	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
*a	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W (1005)
R627 *b	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
*a	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W (1005)
R628	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R630	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R631	1-218-941-11	s	RESISTOR,CHIP 100 1/16W (1005)
R632	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R633	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R634	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R635	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R636	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R637	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R638	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R641	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R642	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R643	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R644	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R647	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R648	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R649	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R650	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R651	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R652	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R653	1-208-691-11	s	RESISTOR CHIP 2.2K 1/16W(1005)
R654	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R655	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R656	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R657	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R658	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R659	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R660	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R661	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R662	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)

(DC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R663	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R664	1-218-732-11	s	RESISTOR,CHIP 47K 1/16W(1608)
R665	1-218-724-11	s	RESISTOR,CHIP 22K 1/16W(1608)
R666	1-216-864-11	s	RESISTOR,CHIP 0 1/16W (1608)
R667	1-218-692-11	s	RESISTOR,CHIP 1.0K 1/16W(1608)
R668	1-218-748-11	s	RESISTOR,CHIP 220K 1/16W(1608)
R669	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R670	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R671	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R672	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R673	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R674	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R676	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R677	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R681	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R684	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R686	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R687	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R689	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R691	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R692	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R695	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R696 *b	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R697 *b	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R700	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R701	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R702	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R703	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R705	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R706	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R707	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R708	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R709	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R710	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R711	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R712	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R713	1-208-935-11	s	RESISTOR, CHIP 100K (1005)
R714	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R715	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R716	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R717	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R718	1-208-711-11	s	RESISTOR CHIP 15K 1/16W (1005)
R719	1-208-927-11	s	RESISTOR, CHIP 47K 1/16W(1005)
R720	1-208-719-11	s	RESISTOR CHIP 33K 1/16W (1005)
R721	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R722	1-208-695-11	s	RESISTOR CHIP 3.3K 1/16W(1005)
R723	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R724	1-208-703-11	s	RESISTOR,CHIP 6.8K 1/16W(1005)
R725	1-218-945-11	s	RESISTOR,CHIP 220 1/16W(1005)
R726	1-208-715-11	s	RESISTOR,CHIP 22K 1/16W (1005)
R727	1-208-707-11	s	RESISTOR,CHIP 10K 1/16W (1005)
R1001	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1002	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R1005	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R2000	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R2001	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R2002	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
RB1	1-234-371-11	s	RES, NETWORK 47X4 (1005)

(DC-110 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
RB2	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB3	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB4	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB5	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB6	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB7	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB8	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB9	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB10	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB11	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB13	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB14	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB15	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB16	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB17	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB18	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB400	1-234-381-21	s	RES, NETWORK 100KX4 (1005)
RB600	1-234-372-21	s	RES, NETWORK 100X4 (1005)
RB601	1-234-372-21	s	RES, NETWORK 100X4 (1005)
RB602	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB603	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB604	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
TP1	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP200	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP201	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP202	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP400	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP600	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP601	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
X600	1-767-618-11	s	OSCILLATOR, CRYSTAL
X601	1-767-696-11	s	OSCILLATOR, CRYSTAL
X602	1-767-695-21	s	OSCILLATOR, CRYSTAL

1-9. HKDW-703

```
-----
FRAME
-----
 Ref. No.
 or Q'ty  Part No.    SP Description

 HN202    1-783-252-11 s CABLE ASSEMBLY, COAXIAL
 (CN1/DC-110 board to VBS/SDI OUT)
 1pc      1-784-240-11 s CONVERTER, COAXIAL CONNECTOR



----------------------------------------
PACKING MATERIALS & SUPPLIED ACCESSORIES
----------------------------------------
 Ref. No.
 or Q'ty  Part No.    SP Description

 1pc      1-783-252-11 s CABLE ASSEMBLY, COAXIAL
 1pc      1-784-240-11 s CONVERTER, COAXIAL CONNECTOR
 1pc      3-629-625-01 o SHILD SHEET(DC)
 1pc      3-629-741-01 o BRACKET,OPTION OUT
 1pc      3-629-742-01 o BRACKET(2),BNC

 1pc      3-631-795-01 o LABEL,VBS/SDI OUT
 2pcs     3-694-181-01 s AROCK PRECISION +P2.6 TYPE 1
 2pcs     3-719-381-01 s SCREW +P M2X4 (ZNBK)(LOCK )
 5pcs     3-729-013-41 s SCREW(M1.4X3.5),WASHERHEAD(+P)
```

```
-----------
MY-99 BOARD
-----------

*a: Lot No. 083 - 0A2
*b: Lot No. 0A3 -

 Ref. No.
 or Q'ty  Part No.    SP Description

 2pcs     3-629-775-01 o SUPPORT(MY)
 2pcs     3-719-381-01 s SCREW +P M2X4 (ZNBK)(LOCK )

 C104     1-164-935-11 s CAPACITOR,CHIP CERAMIC 470PF
 C107     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C141     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C142     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C143     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V

 C144     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C146     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C147     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C181     1-119-751-11 s CAPACITOR,TANTALUM 22MF/16V
 C182     1-119-751-11 s CAPACITOR,TANTALUM 22MF/16V

 C183  *a 1-164-943-11 s CAPACITOR,CHIP CERAMIC 0.01MF
 C201     1-164-935-11 s CAPACITOR,CHIP CERAMIC 470PF
 C202     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C203     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C204     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V

 C205     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C206     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C207     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C208     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C209     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V

 C210     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C211     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C212     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C213     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C214     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V

 C215     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C216     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C217     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C301     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C302     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V

 C303     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C304     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C305     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C306     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C307     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V

 C308     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C309     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C310     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C311     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C312     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V

 C313     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C314     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C315     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C316     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C317     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V

 C318     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C319     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C320     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C321     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C322     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V

 C323     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
 C324     1-125-777-11 s CAPACITOR CERAMIC 0.1MF/10V
```

(MY-99 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
C325	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C326	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C327	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C328	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C329	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C330	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C331	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
C332	1-125-777-11	s	CAPACITOR CERAMIC 0.1MF/10V
CN102 *b	1-580-756-21	o	PIN, CONNECTOR 7P
E141 *a	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
E201	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
IC103	8-752-392-03	s	IC CXD1095BR
IC141	8-759-547-49	s	IC CDC509PWR
IC142	8-759-678-90	s	IC XC18V02VQ44C
IC143 *b	8-759-549-01	s	IC SN74LV125APWR
IC144 *b	8-759-196-96	s	IC TC7SH08FU (TE85R)
IC202	8-759-440-78	s	IC SN74CBT3345PW-E05
IC203	8-759-271-86	s	IC TC7SH04FU
IC204	8-759-440-78	s	IC SN74CBT3345PW-E05
IC206	8-759-271-86	s	IC TC7SH04FU
IC207	8-759-549-01	s	IC SN74LV125APWR
IC301	8-759-835-37	s	IC HY57V281620ALT-PTR
IC302	8-759-835-37	s	IC HY57V281620ALT-PTR
IC303	8-759-835-37	s	IC HY57V281620ALT-PTR
IC304	8-759-835-37	s	IC HY57V281620ALT-PTR
IC305	8-759-835-37	s	IC HY57V281620ALT-PTR
IC306	8-759-835-37	s	IC HY57V281620ALT-PTR
IC307	8-759-835-37	s	IC HY57V281620ALT-PTR
IC308	8-759-835-37	s	IC HY57V281620ALT-PTR
IC309	8-759-713-79	s	IC MB81F643242C-10FN
IC310	8-759-713-79	s	IC MB81F643242C-10FN
L181	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L182	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L183	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
L184	1-414-392-31	s	INDUCTOR (SMD) 1.0UH
Q181	8-729-928-27	s	TRANSISTOR DTA144EE
Q182	8-729-928-81	s	TRANSISTOR DTC144EE
Q183	8-729-023-16	s	TRANSISTOR SI9953DY-T1
Q184 *b	8-729-928-27	s	TRANSISTOR DTA144EE
R101	1-208-943-11	s	RESISTOR CHIP 220K
R102	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R141	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R142	1-208-943-11	s	RESISTOR CHIP 220K
R143	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R144	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R145	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R146	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R147	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R148	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R149	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R150	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R151	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R152	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R153	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R181	1-208-943-11	s	RESISTOR CHIP 220K
R182	1-208-943-11	s	RESISTOR CHIP 220K
R183 *b	1-208-943-11	s	RESISTOR CHIP 220K

(MY-99 BOARD)

Ref. No. or Q'ty	Part No.	SP	Description
R184 *b	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R185 *b	1-208-943-11	s	RESISTOR CHIP 220K
R201	1-208-943-11	s	RESISTOR CHIP 220K
R202	1-208-943-11	s	RESISTOR CHIP 220K
R204	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R205	1-208-943-11	s	RESISTOR CHIP 220K
R207	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R208	1-208-683-11	s	RESISTOR CHIP 1K 1/16W (1005)
R209	1-208-943-11	s	RESISTOR CHIP 220K
R211	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R212	1-208-699-11	s	RESISTOR,CHIP 4.7K 1/16W(1005)
R213	1-208-943-11	s	RESISTOR CHIP 220K
R214	1-208-943-11	s	RESISTOR CHIP 220K
R218	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
R219	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R220	1-208-855-81	s	RESISTOR,CHIP 47 1/16W (1005)
R221	1-218-990-11	s	RESISTOR,CHIP 0 1/16W (1005)
RB101 *b	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
*a	1-234-398-11	s	NETWORK,RES (8 GANG) 220K
RB102 *b	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
*a	1-234-398-11	s	NETWORK,RES (8 GANG) 220K
RB103	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB104	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB105 *a	1-234-398-11	s	NETWORK,RES (8 GANG) 220K
RB106	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB107 *a	1-234-398-11	s	NETWORK,RES (8 GANG) 220K
RB108	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB109 *b	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB110 *b	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB111 *b	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB112 *b	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB113 *b	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB114 *b	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB201 *a	1-234-398-11	s	NETWORK,RES (8 GANG) 220K
RB202 *a	1-234-398-11	s	NETWORK,RES (8 GANG) 220K
RB203	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB204	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB205	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB206	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB207	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB208	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB209	1-239-711-11	s	NETWORK, RESISTOR 0 (1608)
RB210	1-234-371-11	s	RES, NETWORK 47X4 (1005)
RB211 *b	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB212 *b	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB213 *b	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
RB214 *b	1-234-382-11	s	RESISTOR,NETWORK 220KX4 (1005)
TP141 *a	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP142 *a	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP143 *a	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP144 *a	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP145 *a	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)
TP181	1-535-757-11	s	CHIP, CHECKER (CONNECTOR)

http://getMANUAL.com

Section 2
Semiconductor Pin Assignments

The following describes the semiconductor types used in this unit.
For semiconductors marked with page numbers in the index, refer to the corresponding pages in this section. However, in some cases incompatible types are also listed, therefore, when a part is to be replaced, also refer to the Spare Parts section.
In addition, for semiconductors with ID Nos., refer to the separate CD-ROM titled “Semiconductor Pin Assignments” (Sony Part No. 9-968-546-xx) that allows searching for parts by semiconductor type or ID No.
The semiconductors in the manual or on the CD-ROM are listed by equivalent types. Thus the external view or the index mark indication may differ from the actual type.
Pin assignments and block diagrams are based on the IC manufacturer’s data book.

本機に使用されている半導体型名の一覧を下記に示します。
索引中，ページが記載されている半導体は，本章の該当ページを参照してください。ただし，互換性のない型名を併記している場合がありますので，部品を交換するときは，Spare Partsの章を参照してください。
また，ID番号が記載されている半導体は，別途発行の “Semiconductor Pin Assignments” CD-ROM版 (ソニー部品番号：9-968-546-xx)を参照してください。
半導体型名またはID番号から検索ができます。
マニュアルまたはCD-ROMに掲載されている半導体は，それぞれの機能を等価的に表わしたものです。
外観やインデックスマークの表示方法が実物と異なる場合があります。
ピン配置およびブロック図はICメーカーのデータブックに従いました。

DIODE	Page or ID No.
1SS123-T1	DC001-01
1SS226	DC001-01
1SS302	DC001-01
1SS302-TE85L	DC001-01
DA204U	DC001-01
DA204UT106	DC001-01
DA221	DC001-01
DA221-TL	DC001-01
DAN202U	DC001-03
DAN202UT106	DC001-03
DAN222	DC001-03
DAN222-TL	DC001-03
EA60QC06-TE16F2	DC015-01
EC10QS-06	DC007-01
EC10QS-06-TE12L	DC007-01
MA3J142E0LSO	DC001-03
MA3J14300LSO	DC001-01
MA6S121-(TX)	DC005-07
MA728	DC008-01
MA728-TX	DC008-01
MBRS130LT3	DC013-01
RB051L-40	DC007-01
RB051L-40TE25	DC007-01
RD15M-B1	DC001-04
RD15M-T1B	DC001-04
RD15UJN-T1	DC008-04
RD18UJN-T1	DC008-04
RD2.4UH-T1	DC008-04
RD4.3UH-T1	DC008-04
RD6.8M-T1B	DC001-04

DIODE	Page or ID No.
SB01-05CP	DC001-06
SB01-05CP-TB	DC001-06
SB01-15CP	DC001-06
SB01-15CP-TB	DC001-06
SB05-05CP	DC001-16
SB05-05CP-TB	DC001-16
SB20-03P	DC002-03
SB20-03P-TD	DC002-03

LED	Page or ID No.
CL-150R-CD	LC001-01
CL-150R-CD-T	LC001-01
CL-150UR-CD-T	LC001-01
CL-191HR-CD-T	LC004-02
CL-191YG-CD-T	LC004-01
GL3UR8	LR002-01
GL451V	2-6
GL451VS1	2-6
SLR-332VC3F	LR001-01

Index

TRANSISTOR	Page or ID No.
2SA1213Y-TE12L	TC002-01
2SA1314C-TE12L	TC002-01
2SA1330-06	TC001-01
2SA1330-T1O6	TC001-01
2SA1462	TC001-01
2SA1462-T1Y34	TC001-01
2SA1610-T1Y33	TC001-01
2SA1610-Y33	TC001-01
2SA1611-M5M6	TC001-01
2SA1611-M6	TC001-01
2SA1611-T1M7	TC001-01
2SA1611T1-M5M6	TC001-01
2SA1774R	TC001-01
2SA1774TL-QR	TC001-01
2SB1114-T1ZL	TC002-01
2SB1115-T1YL	TC002-01
2SB1115A-YQ	TC002-01
2SB1440S-TX	TC002-01
2SB624-BV345	TC001-01
2SB624-BV5	TC001-01
2SB624-T1BV4	TC001-01
2SB624-T1BV5	TC001-01
2SB798-DL	TC002-01
2SC2713-G	TC001-02
2SC2713G-TE85L	TC001-02
2SC3356-K	TC001-02
2SC3356-T1K	TC001-02
2SC3360-N16	TC001-02
2SC3360-T1N16	TC001-02
2SC3661	TC001-02
2SC3661-TB	TC001-02
2SC3735-L-B35	TC001-02
2SC3735-T1B-B35	TC001-02
2SC4116-YG	TC001-02
2SC4116YG-TE85L	TC001-02
2SC4176-B35	TC001-02
2SC4176-T1B35	TC001-02
2SC4177-L6	TC001-02
2SC4177-T1L5L6	TC001-02
2SC4178-F13F14-T1	TC001-02
2SC4178-F14	TC001-02
2SC4207-YGRTE85L	TC008-11
2SC4213-B	TC001-02
2SC4213B-TE85L	TC001-02
2SC4617R	TC001-02
2SC4617TL-QR	TC001-02
2SD1624-T	TC002-02
2SD1624-T-TD	TC002-02
2SD2098-T100R	TC002-02
2SD2185S-TX	TC002-02
2SD596DV345	TC001-02
2SD596T1-DV345	TC001-02
2SJ187	TC002-06
2SJ187-TD	TC002-06
2SJ325-Z-E2	TC010-05
2SK1483	TC002-08
2SK1483-T1	TC002-08
2SK2315TY	TC002-08
2SK2315TYTR	TC002-08

TRANSISTOR	Page or ID No.
2SK508-K51	TC001-05
2SK508-T1K51	TC001-05
2SK620	TC001-07
2SK620-TX	TC001-07
2SK711-BL	TC001-05
2SK711-BL(TE85L)	TC001-05
2SK852-T1X2	TC001-05
2SK852-X2	TC001-05
2SK853-K5	TC001-05
2SK853-T1K5	TC001-05
2SK94-T1X2	TC001-05
2SK94-X4	TC001-05
3SK151-S	TC003-02
3SK151S-TE85L	TC003-02
DTA114EE	TC001-04
DTA114EE-TL	TC001-04
DTA144EE	TC001-04
DTA144EE-TL	TC001-04
DTA144EUA-T106	TC001-04
DTB143EK	TC001-04
DTB143EK-T-146	TC001-04
DTC114EUA-T106	TC001-03
DTC114TE	2-6
DTC114TE-TL	2-6
DTC143XE	TC001-03
DTC143XE-TL	TC001-03
DTC144EE	TC001-03
DTC144EE-TL	TC001-03
DTC144EUA-T106	TC001-03
FDC6506P	2-6
FDC6561AN	2-6
HN1B04FU-YGR-TE85R	TC006-08
HN1C01FU-TE85R	TC006-03
HN1C03FU-TE85R	2-6
MTD20N03HDL	TC010-01
MTD20N03HDL-T4	TC010-01
NDS355AN	TC001-07
NDS356AP	TC001-20
PT483F1	TR037-01
PT483F1S	TR037-01
SI3443DV-T1	TC005-17
SI4431DY-T1	TC012-04
SI4435DY-T1-REVA	TC012-04
SI4450DY-T1	TC012-06
SI4466DY-T1	TC012-06
SI4532DY-T1	TC012-03
SI4953DY-T1	TC012-02
SI6943DQ	TC013-05
SI6943DQ-T1	TC013-05
SI9435DY-T1	TC012-04
SI9936DY	TC012-01

TRANSISTOR	Page or ID No.
SI9936DY-T1	TC012-01
SI9953DY-T1	TC012-02
XN6401	TC006-01
XN6401-TW	TC006-01
XN6435	TC006-01
XN6435-TW	TC006-01
XN6501	TC006-02
XN6501-TW	TC006-02
XN6534	TC006-02
XN6534-TW	TC006-02
XP4501-TXE	TC006-03
XP4601-TXE	TC006-08

IC	Page or ID No.
74LCX08MTCX	TC74HC08P
74LCX74MTCX	TC74HC74P
74LCX821MTCX	V74ACT821
ADS824E/1K	2-6
AK4319-VM-E2	AK4319-VM-E2
AK5352-VF-E2	AK5352-VF-E2
AK6420AM-E2	2-6
AM26C31CDB-E05	DS26C31CM
AT17LV512-10JC	2-7
AT27C512R-12JC	AT27C512R-15JC
CAT24WC02PI	2-7
CAT24WC128JI-TE13	2-7
CAT24WC16JI-TE13	2-7
CDC509PWR	CDC509PWR
CLC450AJM5	AD8055ART-REEL7
CLC505AJE	CLC505AJE
CLC505AJE-T	CLC505AJE
CXA1512N-4	2-7
CXA3513R	2-8
CXB1341R	CXB1341R
CXD1095BR	CXD1095AR
CXD206-114R	CXD206-114R
CXD2307R-T6	CXD2307R
CXD2315Q	CXD2306Q
CXD3122R	CXD3122R
CXD3122R-T4	CXD3122R
CXD8281Q	CXD8281Q
CXD8385Q	CXD8385Q
CXD8591AQ	CXD8591AQ
CXD8953Q	CXD8953Q
CXD8979R	CXD8979R
CXD9017BR	CXD9017BR
CXD9064R	2-9
CXD9092AGB	CXD9092GB
CXD9093R	CXD9093R
CXD9096R	2-10
CXD9100AR	CXD9100R
CXD9107R	CXD9107R
CXD9122R	2-12
CXD9123R	2-12
CXD9130GB	2-13
CXD9132R	2-14
CXD9135R	2-15
CXD9144R	CXD9000CR
HD6437043AP00F	HD6437043AP00F
HD6475328F10	HD6475328F10
HD64F2144TE20	2-15
HD64F3437TFLH16	HD64F3434-F16
HN58V66AFP-10Z	2-16
HY57V281620ALT-PTR	TC59S6416BFTL-10
HY57V651620BTC-10P-TR	TC59S6416BFTL-10
IDT71V124S15Y-TL	HM62W8127HJP-27
LA7205M	LA7205M
LA7205M-TE-L	LA7205M

IC	Page or ID No.
LB1843V-TLM	LB1843V-TLM
LB1857M-TE-L	LB1857M-TE-L
LC35256DT-70-TLM	CXK58257ATM
LM4040AIM3-2.5	LM4040BIM3
LT1121CST-5-TR	LT1121CST-5-TR
LT1431CS8-E1	LT1431CS8-E1
LTC1458CG-E2	LTC1458CG-E2
LTC1473CGN-E2	LTC1473CGN-E2
LTC1660CGN-E2	2-16
M5203FP600D	M5201P
MAX3222CAP	MAX3222CAP
MAX3222CAP-TE2	MAX3222CAP
MAX821RUS-T	2-16
MB3761PF-ER	MB3761PF
MB811643242A-100FN	MB811643242A-100FN
MB81F643242C-10FN	MB811643242A-100FN
MB81FL643242C-10FN	MB811643242A-100FN
MB86189PFV-G-BND-ER	MB86189PFV-G-BND-ER
MB88346BPFV	MB88346APF
MB88346BPFV-EF	MB88346APF
MB88E346PFV-G-BND-ER	MB88E346PFV-G-BND-ER
MBM29LV160BE-90TN	MBM29LV160B-90PTFN
MBM29LV160BE90TN	MBM29LV160B-90PTFN
MC14051BF	MC74HC4051N
MC34151DR2	MC34151DR2
ML60851BTB	2-16
ML60851CTB	2-16
NC7SZ86P5	TC7S86FU
NJM062M	RC4558
NJM062M-TE2	RC4558
NJM062V(TE2)	RC4558
NJM082BM	RC4558
NJM082BM(TE2)	RC4558
NJM1496V-TE2	MC1496P
NJM2119M(TE2)	RC4558
NJM2901V(TE2)	NJM2901N
NJM2903M	UA393DC
NJM2903M-TE2	UA393DC
NJM2903V(TE2)	UA393DC
NJM2904M	RC4558
NJM2904M(TE2)	RC4558
NJM2904V(TE2)	RC4558
NJM3403AM	XRA10324AF
NJM3403AM(TE2)	XRA10324AF
NJM386M(TE2)	NJM386D-E
NJM431U-TE1	NJM431U
NJM4560M-D(TE2)	RC4558
NJM4562M-D-TE2	RC4558
NJM4565M-A	RC4558
NJM4565M-A(TE2)	RC4558
NJU7021V-TE2	NJU7021V-TE2
NJU7024M	NJU7024M
NJU7024V-TE2	NJU7024M
NJU7034V-TE2	NJU7024M
NJU7211U40(TE1)	S-80250AG-GB
NM24C16ULEM8X	2-17

IC	Page or ID No.
PCF8574TS-T	2-17
RH5RL33AA-T1	NJU7201U50
RH5RL50AA-T1	NJU7201U50
RH5RL53AA-T1	NJU7201U50
RH5VL25AA-T1	RH5VL25AA-T1
S-80828ANNP-EDR-T2	S-80820ANNP-EDH-T2
S-81230SGUP-DQB-T1	S-81225AG-RH
SI9145BQ-T1	2-17
SN65LVDS1DBVR	2-18
SN65LVDT2DBVR	2-18
SN74CBT16211ADGGR	2-18
SN74CBT16214DGGR	2-18
SN74CBT1G125DCKR	2-18
SN74CBT3126PWR	2-19
SN74CBT3253PW-E05	SN74CBT3253PW-E20
SN74CBT3253PW-E20	SN74CBT3253PW-E20
SN74CBT3306PWR-12	SN74CBT3306PWR
SN74CBT3345PW-E05	SN74CBT3345
SN74CBTLV16211GR	2-18
SN74CBTLV3245APWR	SN74CBTLV3245PW-E05
SN74CBTS3306PWR	SN74CBT3306PWR
SN74HCT541APWR	MC74HC541N
SN74LV125APWR	MC74HC125N
SN74LV245APWR	TC74HC245P
STK14C88-N45I	STK14C88-N45I
TA78L12F	NJM78L12UA
TA78L12F-TE12L	NJM78L12UA
TC4051BFT(EL,N)	MC74HC4051N
TC4053BFN)	2-19
TC4053BFT(EL,N)	2-19
TC4S69F	TC7S04F
TC4S69F(TE85R)	TC7S04F
TC4S81F(TE85R)	TC7S08F
TC55V2161FTI-85L	2-19
TC74ACT04F-EL	TC74HC04P
TC74HC4051AFT(EL)	MC74HC4051N
TC74HC4052AFT(EL)	MC74HC4052N
TC74HC4053AFT(EL)	MC74HC4053F
TC74HC4538AFT(EL)	MC74HC4538N
TC74LCX04FT(EL)	TC74HC04P
TC74LCX08FT(EL)	TC74HC08P
TC74LCX125FT(EL)	MC74HC125N
TC74LCX138FT(EL)	TC74HC138P
TC74LCX157FT(EL)	TC74HC157P
TC74LCX245FT(EL)	TC74HC245P
TC74LCX32FT(EL)	TC74HC32P
TC74LCX541FT(EL)	MC74HC541N
TC74LCX573FT(EL)	TC74HC573F
TC74LCX574FT(EL)	TC74HC574P
TC74LCX74FT(EL)	TC74HC74P
TC74VHC00FT(EL)	TC74HC00P
TC74VHC04FT(EL)	TC74HC04P
TC74VHC08FT(EL)	TC74HC08P
TC74VHC11FT(EL)	TC74HC11P
TC74VHC125FT(EL)	MC74HC125N

IC	Page or ID No.
TC74VHC138FT(EL)	TC74HC138P
TC74VHC14FT(EL)	TC74HC14P
TC74VHC153FT(EL)	TC74HC153P
TC74VHC157FT(EL)	TC74HC157P
TC74VHC163FT(EL)	TC74HC163P
TC74VHC244FT(EL)	TC74HC244P
TC74VHC32FT(EL)	TC74HC32P
TC74VHC541FT(EL)	MC74HC541N
TC74VHC573FT(EL)	TC74HC573F
TC74VHC74FT(EL)	TC74HC74P
TC74VHCT00AFT(EL)	TC74HC00P
TC74VHCT08AFT(EL)	TC74HC08P
TC74VHCT244AFT(EL)	TC74HC244P
TC74VHCT541AFT(EL)	MC74HC541N
TC74VHCT574AFT(EL)	TC74HC574P
TC7S02FU(TE85R)	TC4S01F
TC7S04FU(TE85R)	TC7S04F
TC7S14FU(TE85R)	TC7S14FU
TC7S32FU(TE85R)	TC7S32F
TC7S66FU	SC14S66F
TC7S66FU(TE85R)	SC14S66F
TC7SET00FU(TE85R)	TC7S00F
TC7SET04FU(TE85R)	TC7S04F
TC7SET08FU(TE85R)	TC7S08F
TC7SET32FU(TE85R)	TC7S32F
TC7SH00FU-TE85R	TC7S00F
TC7SH02FU	TC4S01F
TC7SH02FU-TE85R	TC4S01F
TC7SH04FU	TC7S04F
TC7SH04FU-TE85R	TC7S04F
TC7SH08FU-TE85R	TC7S08F
TC7SH14FU-TE85R	TC7S14FU
TC7SH32FU-TE85R	TC7S32F
TC7SZ00FU(TE85R)	TC7S00F
TC7SZ02FU(TE85R)	TC4S01F
TC7SZ04FU(TE85R)	TC7S04F
TC7SZ08FU(TE85R)	TC7S08F
TC7SZ125FU(TE85R)	NC7SZ125P5
TC7SZ126FU(TE85R)	NC7SZ126P5
TC7SZ32FU(TE85R)	TC7S32F
TC7W08FU	TC7W08F
TC7W08FU(TE12R)	TC7W08F
TC7W32FU	TC7W32FU
TC7W32FU(TE12R)	TC7W32FU
TC7W53FU(TE12R)	TC4W53FU
TC7W66FU(TE12R)	TC4W66F
TC7WH00FU(TE12R)	TC7W00F
TC7WH00FU-TE12R	TC7W00F
TC7WH04FU(TE12R)	TC7W04F
TC7WH08FU(TE12R)	TC7W08F
TC7WH123FU(TE12R)	2-19
TC7WH125FU(TE12R)	TC7W125FU
TC7WH157FU(TE12R)	2-19
TC7WH74FU(TE12R)	TC7W74FU
TC7WH74FU(TR12R)	TC7W74FU
TC7WHU04FU	TC7W04F
TC7WHU04FU(TE12R)	TC7W04F
TC7WT241FU(TE12R)	TC7W241FU

IC	Page or ID No.
THAT2181SB-TE2	THAT2181SB-TE2
TL062CPW-E20	RC4558
TL062CPWR-12	RC4558
TL064CPWR	XRA10324AF
TL082CPWR	RC4558
TL1451ACPWR-12	TL1451CNS
TL5001CD	TL5001
TL5001CDR	TL5001
TL712CPS	TL712CP
TL712CPSR	TL712CP
TL7705CPS-B	TL7705CP
TL7705CPS-B-E20	TL7705CP
TLC2272CPW-E05	RC4558
TLC272CPWR	RC4558
TLC2932IPW-E20	TLC2932IPW
TLC2932IPWR	TLC2932IPW
TLC2933IPW-E20	TLC2933IPWR
TLC2933IPWR	TLC2933IPWR
TLV2221CDBV	TA75S01F
UPA102G-E1	UPA102G
UPC311G2	UPC311C
UPC311G2-E2	UPC311C
UPC4572G2-E2	RC4558
UPC814G2-E2	RC4558
UPD4702G-E2	2-20
UPD4991AGS	UPD4991AGS
UPD4991AGS-E2	UPD4991AGS
UPD6466GS-515	UPD6466GS-502-E2
XC18V02VQ44C	2-20
XC9572XL-10VQ64C	2-20
XCS05XL-4VQ100C	2-21
XCS40XL-4PQ208C	XCS40XL-4PQ208C

OTHERS	Page or ID No.
GP1S33	MR010-08
GP2S09-C	MA013-01
HCPL-0630-500	MA009-01
PR-11-C	MA020-01
PR-11-C-T	MA020-01

DIODE

GL451VS1
GL451V



TRANSISTOR

—TOP VIEW—

DTC114TE (R1=10K)
DTC114TE-TL



—TOP VIEW—

FDC6506P



—TOP VIEW—

FDC6561AN



—TOP VIEW—

HN1C03FU-TE85R
(TOSHIBA)



IC

ADS824E/1K (BURR-BROWN)

10-BIT A/D CONVERTER
—TOP VIEW—

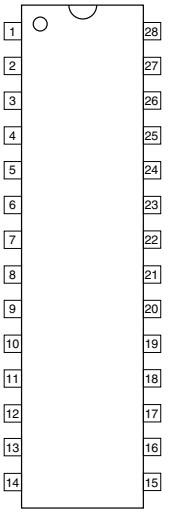

INPUTS

BYB	:	BOTTOM LADDER BYPASS
BYT	:	TOP LADDER BYPASS
CLK	:	CONVERT CLOCK
IN	:	ANALOG(+)
$\overline{IN}$	:	COMPLEMENTARY(–)
$\overline{INT}$/EXT	:	REFERENCE SELECT
$\overline{OE}$	:	OUTPUT ENABLE
PD	:	POWER DOWN
REFB	:	BOTTOM REFERENCE
REFT	:	TOP REFERENCE
RSEL	:	INPUT RANGE SELECT
VDRV	:	OUTPUT LOGIC DRIVER SUPPLY VOLTAGE

OUTPUTS

BIT1 - BIT10	:	DATA BIT
CM	:	COMMON MODE VOLTAGE

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	GND	8	O	BIT7	15	—	Vcc	22	I	REFT
2	O	BIT1(MSB)	9	O	BIT8	16	—	GND	23	O	CM
3	O	BIT2	10	O	BIT9	17	I	RSEL	24	I	$\overline{IN}$
4	O	BIT3	11	O	BIT10(LSB)	18	I	$\overline{INT}$/EXT	25	I	IN
5	O	BIT4	12	I	$\overline{OE}$	19	I	REFB	26	—	GND
6	O	BIT5	13	I	PD	20	I	BYB	27	—	Vcc
7	O	BIT6	14	I	CLK	21	I	BYT	28	I	VDRV

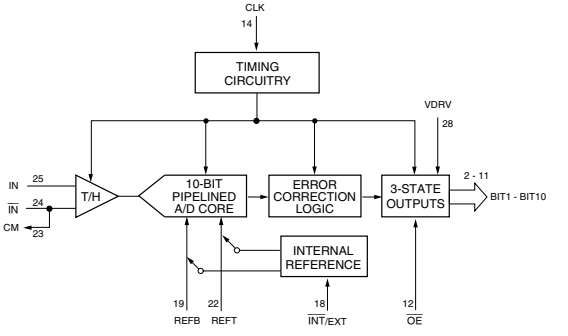

AK6420AM-E2 (ASAHIKASEI ELECT)

2K (128 × 16)-BIT SERIAL EEPROM
—TOP VIEW—



INPUTS

$\overline{CS}$	:	CHIP SELECT
DI	:	SERIAL DATA
RESET	:	RESET
$\overline{SK}$	:	SERIAL CLOCK

OUTPUTS

DO	:	SERIAL DATA
RDY/$\overline{BUSY}$	:	READY/BUSY

AT17LV512-10JC (ATMEL)

CONFIGURATION EEPROM
—TOP VIEW—



INPUTS
A2 : DEVICE SELECT
$\overline{CE}$: CHIP ENABLE
CLK : CLOCK
RESET/$\overline{OE}$: RESET/OUTPUT ENABLE (WHEN $\overline{SER\_EN}$ IS HIGH)
$\overline{SER\_EN}$: SERIAL ENABLE
WP1, WP2 : WRITE PROTECT

OUTPUTS
$\overline{CEO}$: CHIP ENABLE
READY : OPEN COLLECTOR RESET STATE INDICATOR

INPUT/OUTPUT
DATA : THREE STATE DATA

OTHER
NC : NO CONNECTION

CXA1512N-4 (SONY)

MOTOR SENSOR AMPLIFIER
—TOP VIEW—

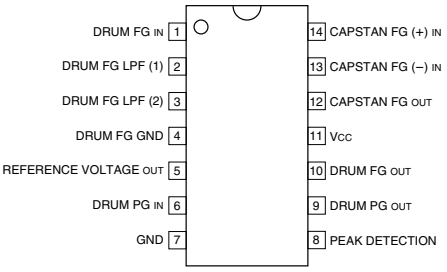

INPUTS
CAPSTAN FG (–) : CAPSTAN FG (–) (SINE WAVE)
CAPSTAN FG (+) : CAPSTAN FG (+) (SINE WAVE)
DRUM FG : DRUM FG (SINE WAVE)
DRUM PG : DRUM PG (INTERMITTENT HALF-WAVE SINE WAVE)

OUTPUTS
CAPSTAN FG : CAPSTAN FG BLOCK
DRUM FG : DRUM FG BLOCK
DRUM PG : DRUM PG BLOCK

OTHERS
DRUM FG GND : GND PIN OF DRUM FG BLOCK
SUPPLIED FROM REFERENCE VOLTAGE
DRUM FG LPF (1), DRUM FG LPF (2) : CONNECT TO THE CAPACITOR
PEAK DETECTION : CONNECT TO THE CAPACITOR
REFERENCE VOLTAGE : 2.0V REFERENCE VOLTAGE/
GROUND VOLTAGE OF DRUM FG AND DRUM PG

CAT24WC02PI (CATARYST)
CAT24WC16JI-TE13 (CATARYST)

SERIAL EEPROM
—TOP VIEW—



INPUTS
A0 - A2 : ADDRESS
SCL : SERIAL CLOCK
$\overline{WC}$: WRITE CONTROL
WP : WRITE PROTECT

INPUT/OUTPUT
SDA : SERIAL DATA

OTHERS
NC : NO CONNECTION
TEST : TEST PIN

※NOTE :

TYPE	MEMORY	PIN 7
NM24C16	16 K	NC
X24C02 S-24C02	2 K	$\overline{WC}$
CAT24WC02	2 K	WP
X24C04	4 K	TEST
X24C08	8 K	TEST
CAT24WC16	16 K	WP

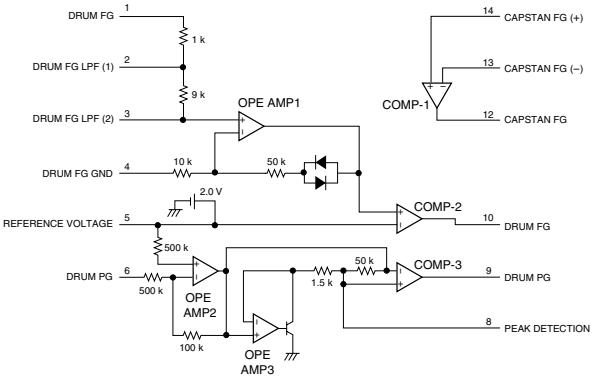

CAT24WC128JI-TE13 (CATARYST)

128K-BIT SERIAL EEPROM
—TOP VIEW—



INPUTS
SCL : SERIAL CLOCK
WP : WRITE PROTECT

INPUT/OUTPUT
SDA : SERIAL DATA/ADDRESS

OTHER
NC : NO CONNECTION

CXA3513R (SONY)

REC DRIVER

—TOP VIEW—



PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I	PRBIAS	13	—	GND	25	I	GUP	37	I	BG23
2	I	THL	14	O	D4X	26	I	SWA	38	—	Vcc
3	I	VIN1	15	O	D4Y	27	I	SWB	39	—	VEE
4	I	VIN2A	16	—	GND	28	O	PBOUT1	40	—	GND
5	I	VIN2B	17	O	D3X	29	O	PBOUT2	41	I	IN1
6	I	VIN3A	18	O	D3Y	30	I	REN4	42	I	IN2
7	I	VIN3B	19	O	D2X	31	I	REN3	43	I	IN3
8	I	VIN4	20	O	D2Y	32	I	REN2	44	I	IN4
9	O	PBOUT3	21	—	GND	33	I	REN1	45	—	GND
10	O	PBOUT4	22	O	D1X	34	I	SCKX	46	—	VEE
11	I	SUP	23	O	D1Y	35	I	SCKY	47	—	Vcc
12	I	EORSW	24	—	GND	36	I	BG14	48	—	Vcc

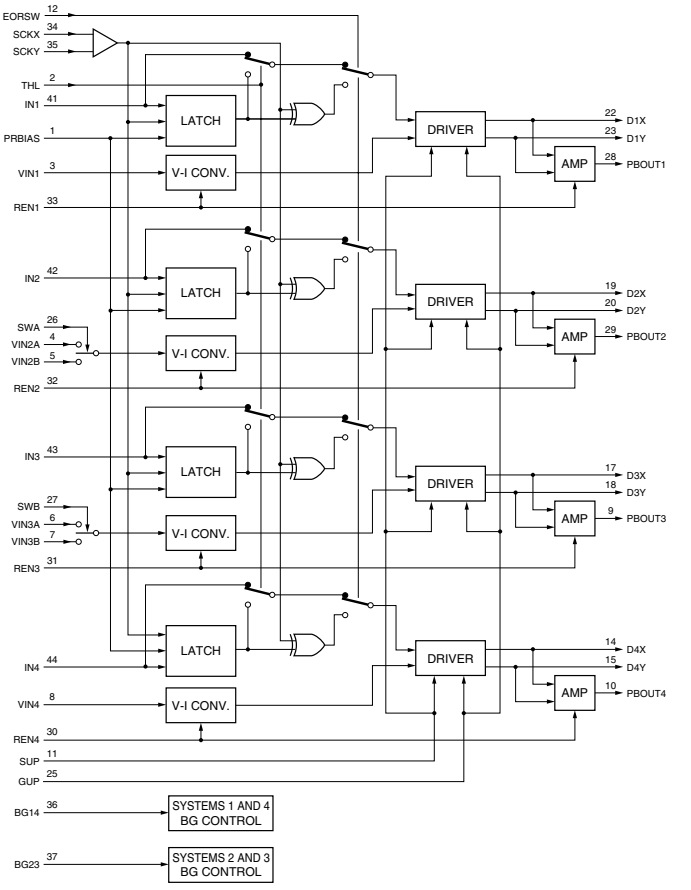

INPUTS

BG14 : BAND GAP ENABLE CH-1/CH4 (H : POWER SAVE, L : ENABLE)
BG23 : BAND GAP ENABLE CH-2/CH3 (H : POWER SAVE, L : ENABLE)
EORSW : MODE SELECT (H: BI-PHASE, L : CXA3054 COMPATIBLE)
GUP : MODE SELECT
(H: GENERATE DOUBLE OUTPUT CURRENT, L : CXA3054 COMPATIBLE)
IN1 : DATA INPUT CH-1
IN2 : DATA INPUT CH-2
IN3 : DATA INPUT CH-3
IN4 : DATA INPUT CH-4
PRBIAS : PR DATA BIAS
REN1 - REN4 : DRIVE/RF PB SELECT (H : RF PB, L : DRIVE)
SCKX : DATA LATCH CLOCK (X)
SCKY : DATA LATCH CLOCK (Y)
SUP : MODE SELECT (H: SPEED UP, L : NORMAL)
SWA : DRIVE CURRENT OUTPUT SELECT (H : VIN2A, L : VIN2B)
SWB : DRIVE CURRENT OUTPUT SELECT (H : VIN3A, L : VIN3B)
THL : PR THROUGH/LATCH CONTROL (H : LATCH, L : THROUGH)
VIN1, VIN4 : DC BIAS
VIN2A, VIN2B : DC BIAS
VIN3A, VIN3B : DC BIAS

OUTPUTS

D1X - D4X : DRIVE CURRENT (X)
D1Y - D4Y : DRIVE CURRENT (Y)
PBOUT1 - PBOUT4 : PB RF SIGNAL

OTHER

NC : NO CONNECTION

CXD9064R (SONY)

CAMERA VIDEO PROCESSOR

—TOP VIEW—

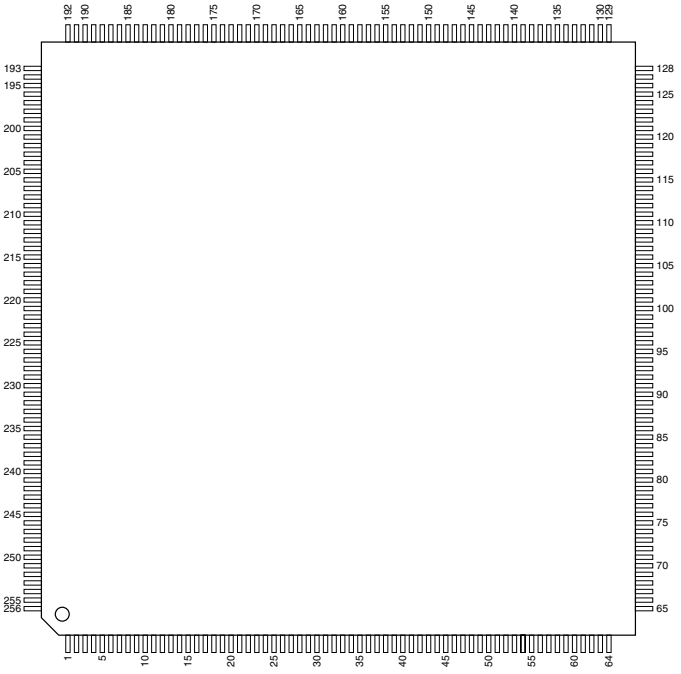

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	GND	65	—	Vcc	129	—	GND	193	—	Vcc
2	—	GND	66	—	Vcc	130	—	GND	194	—	Vcc
3	I	AMC	67	O	AFV1	131	I	RTEB	195	O	YO4
4	I	SCX	68	O	AFV0	132	I	RTIN	196	O	YO3
5	I	SMC	69	O	SKD	133	I	CLK2	197	O	YO2
6	I	SIN	70	O	BO9	134	I	TMOD0B	198	O	YO1
7	O	SOT	71	—	Vcc	135	I	TMOD1B	199	—	GND
8	—	Vcc	72	—	GND	136	I	TMOD2B	200	—	Vcc
9	I	CMN	73	O	BO8	137	O	TOUTB	201	O	YO0
10	I	CMP	74	O	BO7	138	I	F2	202	O	FBRC
11	I	HDI	75	O	BO6	139	I	H2	203	O	FBRS
12	I	VDI	76	O	BO5	140	—	Vcc	204	O	FBGC
13	—	GND	77	—	GND	141	O	VTR27	205	—	GND
14	I	CLK1	78	—	Vcc	142	O	VTR26	206	O	FBGS
15	I	TMOD0A	79	O	BO4	143	O	VTR25	207	O	FBBC
16	I	TMOD1A	80	O	BO3	144	—	GND	208	O	FBBS
17	I	TMOD2A	81	O	BO2	145	—	Vcc	209	—	Vcc
18	O	TOUTA	82	—	GND	146	O	VTR24	210	I	BI11
19	I	BLKG1	83	O	BO1	147	O	VTR23	211	I	BI10
20	I	PBLKG	84	O	BO0	148	O	VTR22	212	I	BI09
21	—	GND	85	—	GND	149	—	GND	213	—	GND
22	—	Vcc	86	—	Vcc	150	—	Vcc	214	—	Vcc
23	—	Vcc	87	—	Vcc	151	—	Vcc	215	—	Vcc
24	I	PRST	88	O	GO9	152	O	VTR21	216	I	BI08
25	I	RDB	89	O	GO8	153	O	VTR20	217	I	BI07
26	I	WRB	90	O	GO7	154	O	VTR17	218	I	BI06
27	I	CEB	91	O	GO6	155	—	GND	219	I	BI05
28	I	ADR1	92	—	GND	156	O	VTR16	220	I	BI04
29	I	ADR0	93	—	Vcc	157	O	VTR15	221	I	BI03
30	—	Vcc	94	O	GO5	158	O	VTR14	222	—	Vcc
31	—	GND	95	O	GO4	159	—	GND	223	—	GND
32	I/O	DIO7	96	O	GO3	160	—	Vcc	224	I	BI02
33	I/O	DIO6	97	O	GO2	161	O	VTR13	225	I	BI01
34	I/O	DIO5	98	—	GND	162	O	VTR12	226	I	BI00
35	I/O	DIO4	99	O	GO1	163	O	VTR11	227	I	GI11
36	—	GND	100	O	GO0	164	O	VTR10	228	I	GI10
37	I/O	DIO3	101	O	RO9	165	—	GND	229	I	GI09
38	I/O	DIO2	102	O	RO8	166	O	VTRH	230	I	GI08
39	I/O	DIO1	103	—	Vcc	167	O	HO	231	I	GI07
40	I/O	DIO0	104	O	RO7	168	O	FO	232	I	GI06
41	I	TEST1	105	O	RO6	169	—	Vcc	233	I	GI05
42	I	TEST0	106	—	Vcc	170	—	Vcc	234	—	Vcc
43	—	Vcc	107	—	Vcc	171	—	Vcc	235	—	Vcc
44	—	GND	108	—	GND	172	—	GND	236	—	GND
45	—	Vcc	109	O	RO5	173	O	PBRO9	237	I	GI04
46	O	TDO	110	O	RO4	174	O	PBRO8	238	I	GI03
47	I	TCK	111	O	RO3	175	O	PBRO7	239	I	GI02
48	I	TDI	112	O	RO2	176	O	PBRO6	240	I	GI01
49	I	TMS	113	—	GND	177	O	PBRO5	241	I	GI00
50	I	TRST	114	—	Vcc	178	—	GND	242	I	RI11
51	—	GND	115	O	RO1	179	O	PBRO4	243	I	RI10
52	—	Vcc	116	O	RO0	180	O	PBRO3	244	I	RI09
53	O	AFV9	117	O	VFD7	181	O	PBRO2	245	—	Vcc
54	O	AFV8	118	O	VFD6	182	O	PBRO1	246	—	GND
55	O	AFV7	119	O	VFD5	183	O	PBRO0	247	I	RI08
56	O	AFV6	120	—	GND	184	—	GND	248	I	RI07
57	—	GND	121	—	Vcc	185	—	Vcc	249	I	RI06
58	O	AFV5	122	O	VFD4	186	O	YO9	250	I	RI05
59	O	AFV4	123	O	VFD3	187	O	YO8	251	I	RI04
60	O	AFV3	124	O	VFD2	188	O	YO7	252	I	RI03
61	O	AFV2	125	O	VFD1	189	O	YO6	253	I	RI02
62	—	Vcc	126	O	VFD0	190	O	YO5	254	I	RI01
63	—	GND	127	—	Vcc	191	—	GND	255	I	RI00
64	—	GND	128	—	Vcc	192	—	GND	256	—	Vcc

CXD9096R (SONY)

ECC INNER DECODER AND VITERBI DECODER

—TOP VIEW—

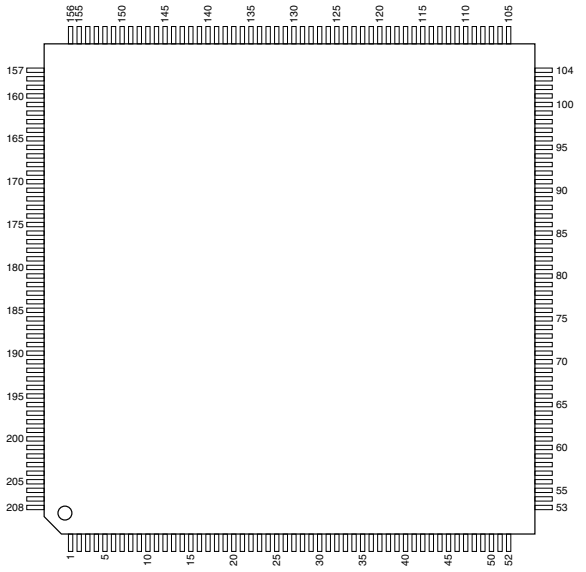

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I	I SWD	53	—	A.Vcc	105	O	O PERA0	157	O	O GERB0
2	I	I PBDTCD	54	O	O MON0	106	O	O PERA1	158	O	O GERB1
3	—	GND	55	O	O MON1	107	—	GND	159	O	O XTOPY
4	—	A.Vcc	56	O	O MON2	108	O	O PERA2	160	O	O DATAY0
5	I	I EXTD	57	O	O MON3	109	O	O PERA3	161	O	O DATAY1
6	I	I PBD0	58	O	O MON4	110	—	A.Vcc	162	O	O DATAY2
7	I	I PBD1	59	O	O MON5	111	I	I SWA	163	O	O DATAY3
8	I	I PBD2	60	—	GND	112	I	I PBDTCA	164	—	GND
9	I	I PBD3	61	—	Vcc	113	—	A.GND	165	—	Vcc
10	—	Vcc	62	O	O MON6	114	—	Vcc	166	O	O DATAY4
11	I	I PBD4	63	O	O MON7	115	I	I EXTA	167	O	O DATAY5
12	I	I PBD5	64	O	O MON8	116	I	I PBA0	168	O	O DATAY6
13	I	CLK PBDI	65	O	O MON9	117	I	I PBA1	169	O	O DATAY7
14	I	VPP2	66	O	O MON10	118	I	I PBA2	170	O	CLK MO
15	—	GND	67	I/O	B CPUAD0	119	—	GND	171	O	O PARITY
16	—	A.Vcc	68	I/O	B CPUAD1	120	I	I PBA3	172	O	O NOSIG
17	I	CLK PBCI	69	I/O	B CPUAD2	121	I	I PBA4	173	—	A.Vcc
18	I	I PBC0	70	I/O	B CPUAD3	122	I	I PBA5	174	—	A.GND
19	—	Vcc	71	—	A.Vcc	123	—	Vcc	175	I	RESET2
20	I	I PBC1	72	—	GND	124	I	CLK PBAI	176	—	GND
21	I	I PBC2	73	—	Vcc	125	—	A.GND	177	—	Vcc
22	I	I PBC3	74	I/O	B CPUAD4	126	I	VPP1	178	—	A.Vcc
23	I	I PBC4	75	I/O	B CPUAD5	127	I	CLK PBBI	179	I	TRST
24	I	I PBC5	76	I/O	B CPUAD6	128	I	I PBB0	180	I	TDI
25	I	I EXTC	77	I/O	B CPUAD7	129	I	I PBB1	181	I	RESET
26	—	GND	78	—	A.Vcc	130	—	GND	182	—	A.Vcc
27	—	Vcc	79	—	Vcc	131	—	Vcc	183	—	Vcc
28	I	I EEDX	80	—	A.GND	132	I	I PBB2	184	—	A.GND
29	I	I EEDY	81	I	I CPUSTAT0	133	I	I PBB3	185	I	CLK MI
30	I	BIAS2	82	I	I CPUSTAT1	134	I	I PBB4	186	I	VPD
31	I	I EECX	83	I	CLK CPUI	135	I	I PBB5	187	I	TMS
32	I	I EECY	84	—	A.Vcc	136	I	I EXTB	188	I	TCK
33	—	A.GND	85	—	GND	137	—	A.GND	189	—	GND
34	—	Vcc	86	—	Vcc	138	—	Vcc	190	—	Vcc
35	—	A.Vcc	87	I	I XCPUCS	139	I	CLK EEIX	191	—	A.Vcc
36	I	I PBDTCC	88	I	I XCPUSTRB	140	I	CLK EEIY	192	O	O XTOPX
37	I	I SWC	89	—	A.Vcc	141	I	BIAS1	193	O	O DATAX0
38	—	GND	90	—	A.GND	142	—	GND	194	O	O DATAX1
39	O	O PERC0	91	O	O CPUBUSY	143	I	I EEBY	195	O	O DATAX2
40	O	O PERC1	92	O	O TRREF	144	I	I EEBX	196	O	O DATAX3
41	O	O PERC2	93	O	O ERRA	145	I	I EEAY	197	O	O DATAX4
42	O	O PERC3	94	O	O ERRB	146	I	I EEAX	198	O	O DATAX5
43	—	Vcc	95	O	O ERRC	147	—	Vcc	199	O	O DATAX6
44	O	O GERC0	96	—	GND	148	I	I PBDTCB	200	—	GND
45	O	O GERC1	97	—	Vcc	149	I	I SWB	201	—	Vcc
46	I	I JUMP	98	O	O ERRD	150	—	A.Vcc	202	O	O DATAX7
47	I	I REV	99	O	O SYNCA	151	O	TDO	203	O	O PERD0
48	I	I CHIPID	100	O	O SYNCB	152	O	O PERB0	204	O	O PERD1
49	I	I CPTEST0	101	O	O SYNCC	153	O	O PERB1	205	O	O PERD2
50	—	GND	102	O	O SYNCD	154	—	GND	206	O	O PERD3
51	I	I CPTEST1	103	O	O GERA0	155	O	O PERB2	207	O	O GERD0
52	I	I CPTEST2	104	O	O GERA1	156	O	O PERB3	208	O	O GERD1

INPUTS

BIAS1, BIAS2	: REFERENCE INPUT
CLK CPUI	: CPU CLOCK (33 M)
CLK EEIX, CLK EEIY	: EE CLOCK INPUT
CLK MI	: MAIN CLOCK INPUT
CLK PBAI, CLK PBBI, CLK PBCI, CLK PBDI	: RF CLOCK
I CHIPID	: 0: MAIN, 1: SUB
I CPTEST0 - I CPTEST2	: TEST MODE IN (FOR DEBUG)
I CPUSTAT0, I CPUSTAT1	: CPU STATUS
I EEAY, I EEAX	: EE DATA
I EEBY, I EEBX, I EECX, I EECY, I EEDX, I EEDY	
I EXTA, I EXTB, I EXTC, I EXTD	: EXTRA DATA INPUT
I JUMP	: 1: SAME FRAME DATA
I PBA0 - I PBA5	: PB DATA (A/D OUT)
I PBB0 - I PBB5, I PBC0 - I PBC5, I PBD0 - I PBD5,	
I PBDTCA, I PBDTCB, I PBDTCC, I PBDTCD	: PB SIGNAL DETECT
I REV	: REV/FWD 0: REVERSE
I SWA, I SWB, I SWC, I SWD	: SWITCHING PULSE
I XCPUCS	: CPU CHIP SELECT
I XCPUSTRB	: CPU STROBE
RESET, RESET2	: RESET
TCK	: TEST CLOCK
TDI	: TEST DATA
TMS	: TEST MODE SELECT
TRST	: TEST RESET
VPD	: FEEDTHROUGH CURRENT PROTECTOR
VPP1, VPP2	: REFERENCE INPUT

OUTPUTS

CLK MO	: MAIN CLOCK OUTPUT
O CPUBUSY	: CPU BUSY
O DATAX0 - O DATAX7	: DATA OUT (FOR ADAM OR SX OUTER)
O DATAY0 - O DATAY7	: DATA OUT (FOR ADAM)
O ERRA	: PB ERROR FLAG (CH0)
O ERRB	: PB ERROR FLAG (CH1)
O ERRC	: PB ERROR FLAG (CH2)
O ERRD	: PB ERROR FLAG (CH3)
O GERA0, O GERA1, O GERB0, O GERB1, O GERC0, O GERC1, O GERD0, O GERD1	: GAIN ERROR INFORMATION
O MON0	: VIDEO OUTER PARITY FLAG (CH0)
O MON1	: VIDEO OUTER PARITY INFO (CH0)
O MON2	: VIDEO OUTER PARITY FLAG (CH2)
O MON3	: VIDEO OUTER PARITY INFO (CH2)
O MON4 - O MON10	: MONITOR OUT (FOR DEBUG)
O NOSIG	: NO SIGNAL INFORMATION
O PARITY	: PARITY BIT (FOR ADAM OR SX OUTER)
O PERA0 - O PERA3	: PHASE ERROR INFORMATION
O PERB0 - O PERB3, O PERC0 - O PERC3, O PERD0 - O PERD3	
O SYNCA	: SYNC PULSE (CH0)
O SYNCB	: SYNC PULSE (CH1)
O SYNCC	: SYNC PULSE (CH2)
O SYNCD	: SYNC PULSE (CH3)
O TRREF	: TRACKING REFERENCE (A HEAD)
O XTOPX	: SYNC OUT (FOR ADAM OR SX OUTER)
O XTOPY	: SYNC OUT (FOR ADAM)
TDO	: TEST DATA

INPUTS/OUTPUTS

B CPUAD0 - B CPUAD7	: CPU ADDRESS/DATA MUX BUS

http://getMANUAL.com

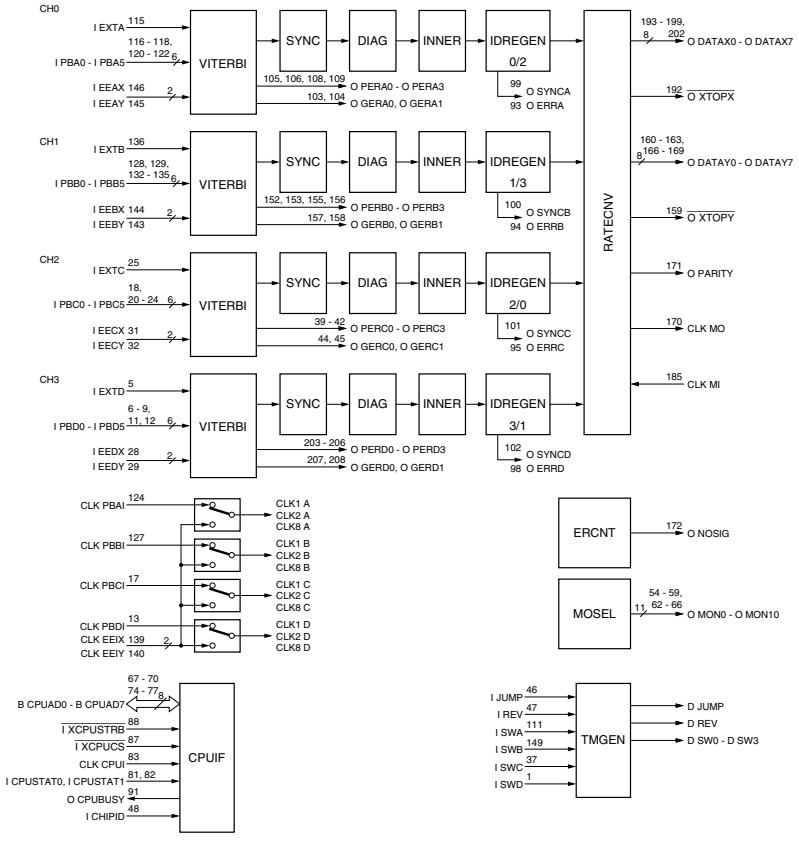

CXD9122R (SONY)

SYNC GENERATOR
—TOP VIEW—

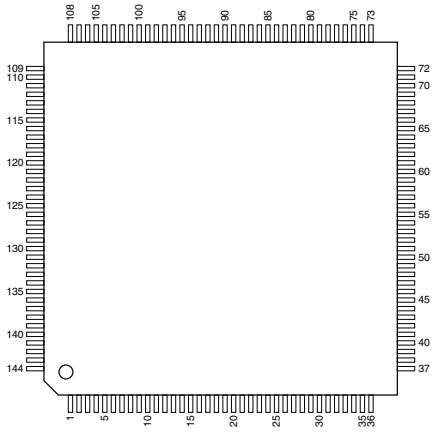

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	Vcc	37	—	GND	73	—	Vcc	109	—	GND
2	I	MAKERH	38	—	GND	74	O	OPTIONH1	110	—	GND
3	I	MAKERF	39	O	CHRCLK	75	O	OPTIONH2	111	I	CLK74A
4	I	SYNCH	40	O	CHRHD	76	O	OPTIONH3	112	I	CLK74B
5	I	SYNCF	41	O	CHRVD	77	O	OPTIONH4	113	I	CLK371
6	I	MTRIGCN	42	O	CHRBLKG	78	O	OPTIONV1	114	I	HRST1
7	I	STRIGCN	43	O	MOD43	79	O	OPTIONV2	115	I	HRST2
8	I	CPUMODE	44	O	MAKER	80	O	OPTIONV3	116	I	FRST1
9	I	A0	45	O	WINDOW	81	O	OPTIONV4	117	I	HRST2EN
10	I	A1	46	O	ZEBRA1	82	—	GND	118	I	BYPASS
11	I	A2	47	O	ZEBRA2	83	O	CVPHD	119	I	ON256
12	I	A3	48	—	GND	84	O	CVPV	120	O	CLK256A
13	I	A4	49	O	TESTLOW	85	O	CVPF	121	O	CLK256B
14	I	A5	50	O	TESTRI	86	O	CVPBLKG	122	O	CLK370
15	I	A6	51	O	TESTSAW	87	O	FILH	123	—	Vcc
16	I	A7	52	O	CHUCLP	88	O	FILF	124	I	HSINGLE
17	I	A8	53	O	SYSBLKG	89	—	Vcc	125	I	EXTHEN
18	I/O	D0	54	—	Vcc	90	O	OHBHRST	126	I	FRSTSEL
19	I/O	D1	55	O	SW0	91	O	OHBVD	127	I	FSINGLE
20	I/O	D2	56	O	SW1	92	O	OHBFRST	128	I	EXTFEN
21	I/O	D3	57	O	SW2	93	O	OHBBLKG	129	I	LDEN
22	I/O	D4	58	O	SW3	94	—	GND	130	I	LOOPOPEN
23	I/O	D5	59	O	SW4	95	O	REF1125	131	I	IN525 1125
24	I/O	D6	60	O	SW5	96	O	REF525	132	I	PAL NTSC
25	I/O	D7	61	O	SW6	97	O	OHBREF	133	I	CCUEXT
26	I	WRB	62	O	SW7	98	O	PLLREF	134	I	CCUF
27	I	REB	63	—	GND	99	O	PEDCLP	135	I	SMC
28	I	CSB	64	O	VTRH1	100	O	SYNCOE	136	I	AMC
29	O	HD1	65	O	VTRH2	101	—	GND	137	I	PROGINT
30	O	VD1	66	O	VTRF1	102	O	SYNC1U	138	I	EXTINTI
31	O	FIELD1	67	O	VTRF2	103	O	SYNC1D	139	O	EXTINTO
32	O	OPBCLP	68	O	VTRF3	104	O	SYNC2U	140	I	SYNC525
33	O	CAMBLKG1	69	O	COPROH	105	O	SYNC2D	141	I	SYNC1125
34	O	CAMBLKG2	70	O	COPROF	106	O	SYNC3U	142	I	POWRESET
35	O	AUDIOH	71	—	GND	107	O	SYNC3D	143	—	GND
36	—	Vcc	72	—	GND	108	—	Vcc	144	—	GND

CXD9123R (SONY)

DIGITAL VIDEO PROCESSOR
—TOP VIEW—

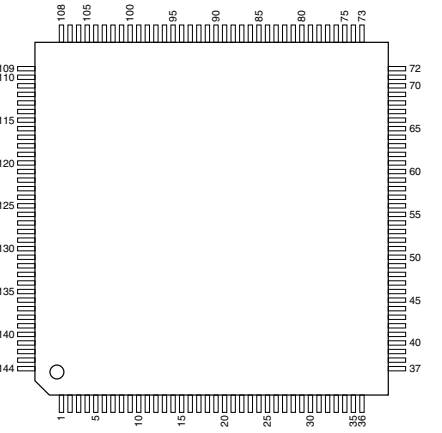

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	Vcc	37	—	GND	73	—	Vcc	109	—	GND
2	O	RO11	38	—	GND	74	I	GI0	110	—	GND
3	O	RO10	39	O	BO11	75	I	GI1	111	I	CK74MI
4	O	RO9	40	O	BO10	76	I	GI2	112	—	GND
5	O	RO8	41	O	BO9	77	I	GI3	113	I	SCK
6	O	RO7	42	O	BO8	78	I	GI4	114	I	HDI
7	O	RO6	43	O	BO7	79	I	GI5	115	I	VD
8	—	GND	44	O	BO6	80	I	GI6	116	I	CVPHDI
9	O	RO5	45	—	GND	81	I	GI7	117	I	CVPBLI
10	O	RO4	46	O	BO5	82	I	GI8	118	I	CVPPBI
11	O	RO3	47	O	BO4	83	I	GI9	119	—	NC
12	O	RO2	48	O	BO3	84	I	GI10	120	I	CVPVDI
13	O	RO1	49	O	BO2	85	I	GI11	121	I	CVPFI
14	O	RO0	50	O	BO1	86	I	GI12	122	—	NC
15	—	GND	51	O	BO0	87	I	GI13	123	O	CVPBLO
16	O	P7	52	—	GND	88	—	NC	124	O	CVPPBO
17	—	Vcc	53	O	P6	89	—	Vcc	125	—	Vcc
18	—	Vcc	54	—	Vcc	90	—	Vcc	126	—	Vcc
19	I	SDATA	55	I	$\overline{ODE1}$	91	I	PRST	127	O	CVPHDO
20	I	SCLOCK	56	I	$\overline{ODE0}$	92	O	P5	128	O	CVPVDO
21	I	SLOAD	57	I	BI0	93	—	GND	129	O	CVPFO
22	—	GND	58	I	BI1	94	I	RI0	130	O	ENO
23	O	GO11	59	I	BI2	95	I	RI1	131	O	LDO
24	O	GO10	60	I	BI3	96	I	RI2	132	O	CLRO
25	O	GO9	61	I	BI4	97	I	RI3	133	—	GND
26	O	GO8	62	I	BI5	98	I	RI4	134	I	AMC
27	O	GO7	63	I	BI6	99	I	RI5	135	I	SMC
28	O	GO6	64	I	BI7	100	I	RI6	136	O	P4
29	—	GND	65	I	BI8	101	I	RI7	137	I	SIN
30	O	GO5	66	I	BI9	102	I	RI8	138	O	P3
31	O	GO4	67	I	BI10	103	I	RI9	139	O	SOT
32	O	GO3	68	I	BI11	104	I	RI10	140	O	P2
33	O	GO2	69	I	BI12	105	I	RI11	141	O	P1
34	O	GO1	70	I	BI13	106	I	RI12	142	O	P0
35	O	GO0	71	—	GND	107	I	RI13	143	—	GND
36	—	Vcc	72	—	GND	108	—	Vcc	144	—	GND

CXD9130GB (SONY)

MICROCONTROLLER WITH 32-BIT RISC CPU

—BOTTOM VIEW—

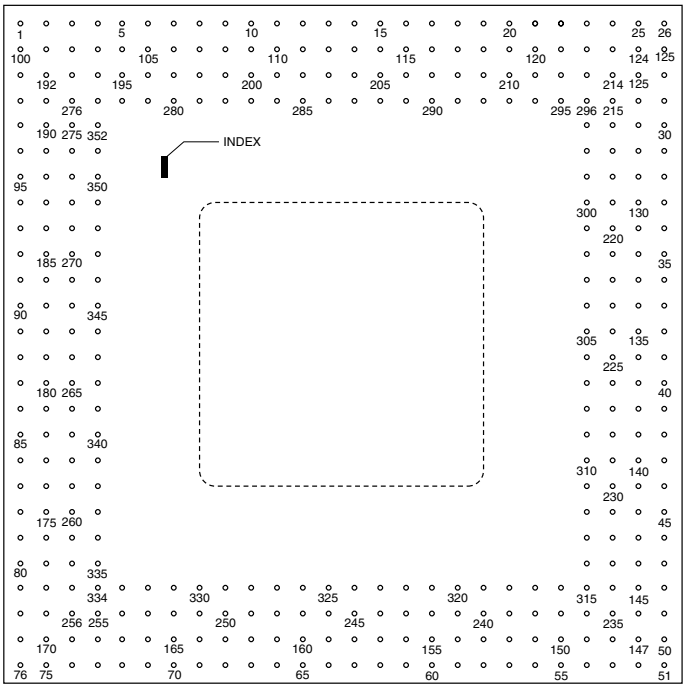

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	GND	45	I/O	PE24	89	I/O	PB0	133	I/O	PE6
2	I	IPO	46	I/O	PE21	90	I/O	PA29	134	I/O	PE3
3	I/O	PF15	47	I/O	PF6	91	I/O	PA25	135	I/O	PE31
4	—	Vcc	48	I/O	PF2	92	I/O	PA22	136	I/O	PC29
5	I/O	PC19	49	I/O	PD15	93	I/O	PA19	137	I/O	PC26
6	I/O	PC17	50	I/O	PD14	94	I/O	PA17	138	I/O	PC22
7	I	AN 19	51	—	GND	95	O	TA82	139	I/O	PB28
8	I	AN 16	52	I/O	PA14	96	I	TCK	140	I/O	PE29
9	I	AN 14	53	I/O	PA12	97	I	TRST	141	I/O	PE26
10	I	AN 10	54	—	Vcc	98	I	TA77	142	I/O	PE23
11	I	AN 6	55	I/O	PA6	99	I	TA76	143	I/O	PF7
12	I	AN 2	56	I/O	PA4	100	I	TA75	144	I/O	PF3
13	I	VRL1	57	I/O	PA0	101	I	TA72	145	I/O	PF1
14	I	A.Vcc	58	O	TA86	102	—	GND	146	I/O	PD13
15	I	A.GND	59	O	TA66	103	I	XTCK0	147	I/O	PA16
16	I/O	PC15	60	O	TA63	104	I/O	PF11	148	I/O	PA13
17	I/O	PC12	61	O	TA60	105	I/O	PC18	149	I/O	PA9
18	I/O	PC8	62	I/O	TA57	106	I/O	PF8	150	I/O	PA8
19	I/O	PC6	63	I/O	TA53	107	I	AN 15	151	I/O	PA5
20	I/O	PC2	64	I/O	TA50	108	I	AN 13	152	I/O	PA1
21	I/O	PD31	65	I/O	TA47	109	I	AN 9	153	O	TA67
22	I/O	PD29	66	I/O	TA43	110	I	AN 5	154	O	TA65
23	I/O	PD25	67	I/O	TA40	111	I	AN 1	155	O	TA62
24	I/O	PD22	68	I/O	TA36	112	O	VR1	156	O	TA59
25	I/O	PD21	69	I/O	TA34	113	I	VRH0	157	I/O	TA56
26	—	GND	70	I/O	TA30	114	I	AFGB0	158	I/O	TA52
27	I/O	PD16	71	I/O	TA27	115	I/O	PC14	159	I/O	TA49
28	I/O	PD11	72	I/O	TA25	116	I/O	PC11	160	I/O	TA46
29	I/O	PD7	73	I/O	TA21	117	I/O	PC7	161	I/O	TA42
30	I/O	PD3	74	I/O	TA18	118	I/O	PC4	162	I/O	TA39
31	I/O	PD1	75	I/O	TA17	119	I/O	PC1	163	I/O	TA35
32	I/O	PE18	76	—	GND	120	I/O	PD30	164	I/O	TA32
33	I/O	PE17	77	I/O	TA12	121	I/O	PD26	165	I/O	TA29
34	I/O	PE14	78	I/O	TA10	122	I/O	PD24	166	I/O	TA26
35	I/O	PE11	79	I/O	TA6	123	I/O	PD20	167	I/O	TA22
36	I/O	PE7	80	I/O	TA2	124	I/O	PD18	168	I/O	TA20
37	I/O	PE4	81	I/O	TA0	125	I/O	PD12	169	I/O	TA16
38	I/O	PE0	82	I/O	PB20	126	I/O	PD8	170	I/O	TA14
39	I/O	PC30	83	I/O	PB19	127	I/O	PD5	171	I/O	TA11
40	I/O	PC27	84	I/O	PB16	128	I/O	PD2	172	I/O	TA7
41	I/O	PC23	85	I/O	PB13	129	I/O	PE19	173	I/O	TA4
42	I/O	PC20	86	I/O	PB10	130	I/O	PE15	174	I/O	TA1
43	I/O	PB25	87	I/O	PB7	131	I/O	PE13	175	I/O	PB21
44	I/O	PE28	88	I/O	PB3	132	I/O	PE10	176	I/O	PB17

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
177	I/O	PB15	221	I/O	PE9	265	I/O	PB5	309	I/O	PB26
178	I/O	PB12	222	I/O	PE5	266	I/O	PB1	310	—	Vcc
179	I/O	PB9	223	I/O	PE2	267	I/O	PA30	311	—	Vcc
180	I/O	PB6	224	I/O	PE30	268	I/O	PA27	312	I/O	PF5
181	I/O	PB2	225	I/O	PC28	269	I/O	PA23	313	—	GND
182	I/O	PA31	226	I/O	PC25	270	I/O	PA20	314	I/O	PC31
183	I/O	PA28	227	I/O	PC21	271	I	TA81	315	—	Vcc
184	I/O	PA24	228	I/O	PB27	272	I	TA83	316	I/O	PA10
185	I/O	PA21	229	I/O	PE27	273	O	TA84	317	—	GND
186	I/O	PA18	230	I/O	PE25	274	O	TDO	318	I/O	PA3
187	O	TA80	231	I/O	PE22	275	I	TA71	319	—	Vcc
188	I	TA85	232	I/O	PF4	276	—	NC	320	—	Vcc
189	I	TMS	233	I/O	PF0	277	—	Vcc	321	O	TA61
190	I	TA79	234	—	NC	278	I/O	PF13	322	—	GND
191	I	TA76	235	I/O	PA15	279	—	GND	323	O	TA54
192	I	TA74	236	I/O	PA11	280	I/O	PF10	324	—	Vcc
193	I	TA69	237	—	GND	281	I	AN 17	325	—	Vcc
194	I/O	PF14	238	I/O	PA7	282	I	AN 12	326	I/O	TA44
195	I/O	PF12	239	I/O	PA2	283	I	AN 7	327	—	GND
196	I/O	PB24	240	O	TA68	284	I	AN 3	328	I/O	TA37
197	I/O	PF9	241	O	TA64	285	I	A.GND	329	—	Vcc
198	I	AN 16	242	I	TA87	286	I	A.Vcc	330	—	Vcc
199	I	AN 11	243	I	TA58	287	I	VRL0	331	I/O	TA24
200	I	AN 8	244	I/O	TA55	288	I/O	PC16	332	—	GND
201	I	AN 4	245	I/O	TA51	289	—	GND	333	I/O	TA15
202	I	AN 0	246	I/O	TA48	290	I/O	PC9	334	—	Vcc
203	I	VRH1	247	I/O	TA45	291	—	Vcc	335	I/O	TA8
204	O	VR0	248	I/O	TA41	292	—	Vcc	336	—	GND
205	I	AFGA0	249	I/O	TA38	293	I/O	PD28	337	I/O	PB23
206	I/O	PC13	250	I/O	TA33	294	—	GND	338	—	Vcc
207	I/O	PC10	251	I/O	TA31	295	I/O	PD19	339	—	Vcc
208	I/O	PC5	252	I/O	TA28	296	—	Vcc	340	O	SDCLK
209	I/O	PC3	253	I/O	TA23	297	I/O	PD9	341	—	GND
210	I/O	PC0	254	I/O	TA19	298	—	GND	342	I/O	PB4
211	I/O	PD27	255	—	NC	299	I/O	PD0	343	—	Vcc
212	I/O	PD23	256	I/O	TA13	300	—	Vcc	344	—	Vcc
213	—	NC	257	I/O	TA9	301	—	Vcc	345	I/O	PA26
214	I/O	PD17	258	I/O	TA5	302	I/O	PE8	346	—	GND
215	I/O	PD10	259	I/O	TA3	303	—	GND	347	O	TA70
216	I/O	PD6	260	I/O	PB22	304	I/O	PE1	348	—	Vcc
217	I/O	PD4	261	I/O	PB18	305	—	Vcc	349	—	Vcc
218	I/O	PE20	262	I/O	PB14	306	—	VCC	350	I	TDI
219	I/O	PE16	263	I/O	PB11	307	I/O	PC24	351	—	GND
220	I/O	PE12	264	I/O	PB8	308	—	GND	352	I	TA73

CXD9132R (SONY)

RF RATE CONVERTER
—TOP VIEW—

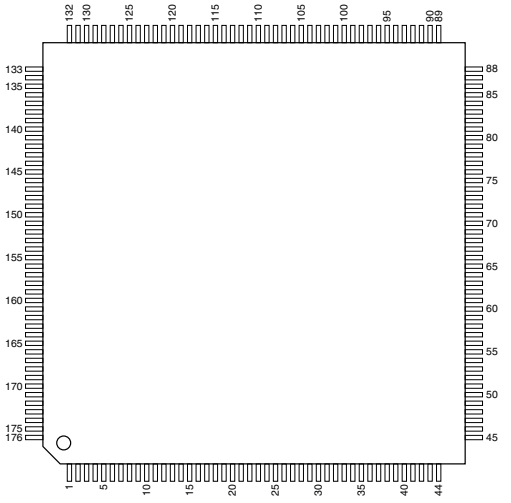

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	O	RF_START	45	—	VCCE5	89	I	TA_10	133	—	VCCE5
2	O	TRACK_START	46	O	MONITOR_0	90	I	TA_9	134	—	GND
3	—	VCCE5	47	O	MONITOR_1	91	I	TA_8	135	O	EE_SW_PORT1_A
4	O	ENC_CTRL_1	48	O	MONITOR_2	92	I	TA_7	136	O	EE_SW_PORT1_B
5	O	ENC_CTRL_0	49	O	MONITOR_3	93	I	TA_6	137	O	EE_SW_PORT1_C
6	—	GND	50	—	GND	94	—	GND	138	—	GND
7	I	CLS	51	—	VCCEI	95	O	EE_SW_PORT2_A	139	—	VCCEI
8	—	VCC	52	O	MONITOR_4	96	O	EE_SW_PORT2_B	140	O	EE_SW_PORT1_D
9	—	TCLK	53	O	MONITOR_5	97	O	EE_SW_PORT2_C	141	O	REC_DT_PORT1_A
10	—	TCKE	54	O	MONITOR_6	98	O	EE_SW_PORT2_D	142	O	REC_DT_PORT1_B
11	I	REC_EXTERNAL	55	O	MONITOR_7	99	—	VCCE5	143	O	REC_DT_PORT1_C
12	—	VCCEI	56	—	VCCE5	100	—	VCCEI	144	—	VCCE5
13	I	REC_ENABLE_AC	57	O	MONITOR_8	101	O	EE_SW_PORT2_E	145	O	REC_DT_PORT1_D
14	—	VCC	58	O	MONITOR_9	102	O	EE_SW_PORT2_F	146	O	CLK_HEADI1_R
15	I	REC_DATA_ACP	59	—	TDO	103	O	EE_SW_PORT2_G	147	O	REC_EN_PORT1_A
16	I	REC_DATA_ACN	60	—	TDI	104	O	EE_SW_PORT2_H	148	O	REC_EN_PORT1_B
17	—	GND	61	—	GND	105	—	GND	149	—	GND
18	I	REC_DATA_BDP	62	—	TMS	106	O	REC_DT_PORT2_A	150	O	REC_EN_PORT1_C
19	I	REC_DATA_BDN	63	—	TCK	107	O	REC_DT_PORT2_B	151	O	REC_EN_PORT1_D
20	O	BIAS_EX	64	—	TRST	108	O	REC_DT_PORT2_C	152	—	GND
21	I	CLK_RECI_P	65	—	GND	109	O	REC_DT_PORT2_D	153	—	VCCE5
22	I	CLK_RECI_N	66	—	VCCE5	110	O	REC_DT_PORT2_E	154	I	XCPUSTRB
23	—	VCCEI	67	—	GND	111	—	VCCE5	155	I	XCPUCS
24	I	PBI	68	—	VCCE5	112	O	REC_DT_PORT2_F	156	I	CPUSTAT_0
25	—	TTST	69	O	REC_EN_PORT1_E	113	O	REC_DT_PORT2_G	157	I	CPUSTAT_1
26	I	RESET	70	O	REC_EN_PORT1_F	114	O	REC_DT_PORT2_H	158	I	CLK_CPU
27	I	VPD	71	O	REC_EN_PORT1_G	115	O	CLK_HEADI_2	159	—	GND
28	—	GND	72	—	GND	116	—	GND	160	—	GND
29	I	CLK_HEADI	73	O	REC_EN_PORT1_H	117	O	REC_EN_PORT2_A	161	—	VCCE5
30	—	TBST	74	O	CLK_HEADI1_L	118	O	REC_EN_PORT2_B	162	—	VCCE5
31	—	VCC	75	O	REC_DT_PORT1_E	119	O	REC_EN_PORT2_C	163	I/O	B_CPUAD_0
32	I	FRAME	76	O	REC_DT_PORT1_F	120	O	REC_EN_PORT2_D	164	I/O	B_CPUAD_1
33	—	VCCEI	77	—	VCCE5	121	—	VCCEI	165	—	VCCE5
34	—	TXCS	78	—	VCCE5	122	O	REC_EN_PORT2_E	166	I/O	B_CPUAD_2
35	I	RF_TRACK_START	79	O	REC_DT_PORT1_G	123	O	REC_EN_PORT2_F	167	I/O	B_CPUAD_3
36	—	TMS_1	80	O	REC_DT_PORT1_H	124	O	REC_EN_PORT2_G	168	I/O	B_CPUAD_4
37	—	VCC	81	O	EE_SW_PORT1_E	125	O	REC_EN_PORT2_H	169	—	GND
38	—	TMS_0	82	—	VCCEI	126	I	TA_5	170	—	VCCEI
39	—	GND	83	—	GND	127	—	GND	171	—	GND
40	I	CLK_MIF	84	O	EE_SW_PORT1_F	128	I	TA_4	172	I/O	B_CPUAD_5
41	I	P_UP_SEQ_MD	85	O	EE_SW_PORT1_G	129	I	TA_3	173	—	VCCE5
42	—	TDQM_1	86	O	EE_SW_PORT1_H	130	I	TA_2	174	I/O	B_CPUAD_6
43	—	TDQM_0	87	—	VCCE5	131	I	TA_1	175	I/O	B_CPUAD_7
44	—	GND	88	—	GND	132	I	TA_0	176	O	EVE_SEL

INPUTS

CLK_CPU	: CPU CLOCK (UNDER 27 MHz)
CLK_HEADI	: DRUM HEAD FREQUENCY CLOCK
CLK_MIF	: DRAM CLOCK
CLK_RECI_N	: ECC ENC CLOCK
CLK_RECI_P	: ECC ENC CLOCK
CLS	: DRAM TEST
CPUSTAT_0, CPUSTAT_1	: CPU CONTROL
FRAME	: ECC ENC SYNCHRONIZE FRAME/FIELD PULSE
PBI	: DRAM TEST CONTROL
P_UP_SEQ_MD	: DRAM INITIALIZE (WHEN LOW:INITIALIZE)
REC_DATA_ACN	: REC DATA ACN (ECC ENC DATA)
REC_DATA_ACP	: REC DATA ACP (ECC ENC DATA)
REC_DATA_BDN	: REC DATA BDN (ECC ENC DATA)
REC_DATA_BDP	: REC DATA BDP (ECC ENC DATA)
REC_ENABLE_AC	: REC ENABLE AC
REC_EXTERNAL	: REC EXTERNAL
RESET	: RESET
RF_TRACK_START	: DRUM HEAD SYNCHRONIZE TRACK START
TA_0 - TA_10	: DRAM TEST
VPD	: VPD
XCPUCS, XCPUSTRB	: CPU CONTROL

OUTPUTS

BIAS_EX	: LVDS BIAS
CLK_HEADI1_L	: PELIPHERAL CLOCK HEAD1 LEFT
CLK_HEADI1_R	: PELIPHERAL CLOCK HEAD1 RIGHT
CLK_HEADI_2	: PELIPHERAL CLOCK HEAD2
EE_SW_PORT1_A - EE_SW_PORT1_H	: EE SWITCH PORT1
EE_SW_PORT2_A - EE_SW_PORT2_H	: EE SWITCH PORT2
ENC_CTRL_0	: ENC CONTROL (BD_SEL/ TRACK_START)
ENC_CTRL_1	: ENC CONTROL (AC_SEL/ RF_START)
EVE_SEL	: AC SEL FOR EVE
MONITOR_0 - MONITOR_9	: MONITOR
REC_DT_PORT1_A - REC_DT_PORT1_H	: REC DT PORT1
REC_DT_PORT2_A - REC_DT_PORT2_H	: REC DT PORT2
REC_EN_PORT1_A - REC_EN_PORT1_H	: REC EN PORT1
REC_EN_PORT2_A - REC_EN_PORT2_H	: REC EN PORT2
RF_START	: RF START FOR TEST
TRACK_START	: TRACK START FOR TEST

INPUTS/OUTPUTS

B_CPUAD_0 - B_CPUAD_7	: CPU DATA

OTHERS

TCK, TDI, TDO, TMS, TRST	: JTAG
TCKE, TCLK	: DRAM TEST
TDQM_0, TDQM_1	: DRAM TEST
TMS_0, TMS_1	: DRAM TEST
TBST, TTST	: DRAM TEST CONTROL
TXCS	: DRAM TEST
VCCE5	: ADDITIONAL POWER SUPPLY (3.3 V)
VCCEI	: POWER SUPPLY (INTERNAL : 2.5 V)

CXD9135R (SONY)

TIMING GENERATOR
—TOP VIEW—

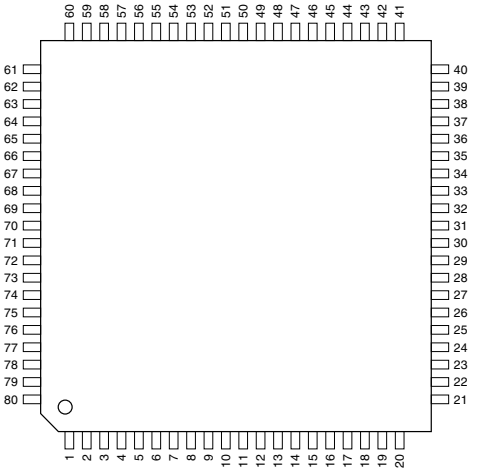

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	GND	21	—	Vcc	41	—	GND	61	—	Vcc
2	O	N370	22	O	C59EN	42	O	VH2	62	O	ST3
3	O	P370	23	O	BSHON	43	O	VH1	63	O	ST2
4	I	RST2	24	O	AUX6	44	O	SMG	64	O	ST1
5	I	PGG11	25	O	AUX5	45	O	HHG	65	O	SUB
6	I	PGG21	26	O	AUX4	46	I	SSNORM	66	I	MODE1
7	I	PVS	27	O	AUX3	47	O	SSCAN	67	I	MODE2
8	I	SDATA	28	O	AUX2	48	O	IM4	68	I	MODE3
9	O	BLK10	29	I	SCLK	49	O	IM3	69	I	TESTSEL
10	I	SLOAD	30	I	MPX12GI	50	O	IM2	70	I	AMC
11	O	BLK20	31	I	MPX11GI	51	O	IM1	71	I	RST3
12	I	IMSTOP	32	O	MPXP37	52	I	HTIME	72	O	CLP
13	I	CLK60	33	I	SHPUO	53	O	SG2	73	I	SHPU1
14	I	CLK59	34	O	AUX1	54	O	SG1	74	I	HCLK
15	I	SMC	35	O	AUX0	55	O	ST8	75	I	HRST
16	I	IOSEL	36	O	MPXN37	56	O	ST7	76	I	SHG21
17	O	WSHON	37	I	MPX22GI	57	O	ST6	77	I	SHG11
18	O	CXDEN	38	I	MPX21GI	58	O	ST5	78	O	FIELD
19	I	RST1	39	O	PBLK	59	O	ST4	79	I	FRST
20	—	GND	40	—	Vcc	60	—	GND	80	—	Vcc

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I	RES	51	I/O	P42/TMRI0/SCK2
2	I	XTAL	52	I/O	P43/TMCI1
3	I	EXTAL	53	I/O	P44/TMO1
4	—	Vcc1	54	I/O	P45/TMRI1
5	I	MD1	55	I/O	P46/PWX0
6	I	MD0	56	I/O	P47/PWX1
7	I	NMI	57	I/O	PB7/D7
8	I	STBY	58	I/O	PB6/D6
9	—	Vcc2(VCL)	59	—	Vcc1
10	I/O	KIN15/CIN15/A23/PA7	60	I/O	P27/A15
11	I/O	KIN14/CIN14/A22/PA6	61	I/O	P26/A14
12	I/O	SCK0/P52	62	I/O	P25/A13
13	I/O	RXD0/P51	63	I/O	P24/A12
14	I/O	TXD0/P50	64	I/O	P23/A11
15	—	GND	65	I/O	P22/A10
16	I/O	WAIT/P97	66	I/O	P21/A9
17	I/O	EXCL/ø/P96	67	I/O	P20/A8
18	I/O	IOS/AS/P95	68	I/O	PB5/D5
19	I/O	HWR/P94	69	I/O	PB4/D4
20	I/O	KIN13/CIN13/A21/PA5	70	—	GND
21	I/O	KIN12/CIN12/A20/PA4	71	—	GND
22	I/O	RD/P93	72	I/O	P17/A7
23	I/O	IRQ0/P92	73	I/O	P16/A6
24	I/O	IRQ1/P91	74	I/O	P15/A5
25	I/O	ADTRG/LWR/IRQ2/P90	75	I/O	P14/A4
26	I/O	P60/FTCI/CIN0/KIN0	76	I/O	P13/A3
27	I/O	P61/FTOA/CIN1/KIN1	77	I/O	P12/A2
28	I/O	P62/FTIA/CIN2/KIN2/TMIY	78	I/O	P11/A1
29	I/O	P63/FTIB/CIN3/KIN3	79	I/O	P10/A0
30	I/O	PA3/A19/CIN11/KIN11	80	I/O	PB3/D3
31	I/O	PA2/A18/CIN10/KIN10	81	I/O	PB2/D2
32	I/O	P64/FTIC/CIN4/KIN4	82	I/O	P30/D8
33	I/O	P65/FTID/CIN5/KIN5	83	I/O	P31/D9
34	I/O	P66/FTOB/CIN6/KIN6/IRQ6	84	I/O	P32/D10
35	I/O	P67/CIN7/KIN7/IRQ7	85	I/O	P33/D11
36	I	AVREF	86	I/O	P34/D12
37	—	AVcc	87	I/O	P35/D13
38	I	AN0/P70	88	I/O	P36/D14
39	I	AN1/P71	89	I/O	P37/D15
40	I	AN2/P72	90	I/O	PB1/D1
41	I	AN3/P73	91	I/O	PB0/D0
42	I	AN4/P74	92	—	GND
43	I	AN5/P75	93	I/O	P80
44	I/O	DA0/AN6/P76	94	I/O	P81
45	I/O	DA1/AN7/P77	95	I/O	P82
46	—	A GND	96	I/O	P83
47	I/O	PA1/A17/CIN9/KIN9	97	I/O	P84/IRQ3/TXD1
48	I/O	PA0/A16/CIN8/KIN8	98	I/O	P85/IRQ4/RXD1
49	I/O	PA40/TMCI0/TXD2/IRTXD	99	I/O	P86/IRQ5/SCK1
50	I/O	PA41/TMO0/RXD2/IRRXD	100	O	RESO

HD64F2144TE20 (HITACHI)

MICRO COMPUTER UNIT
—TOP VIEW—

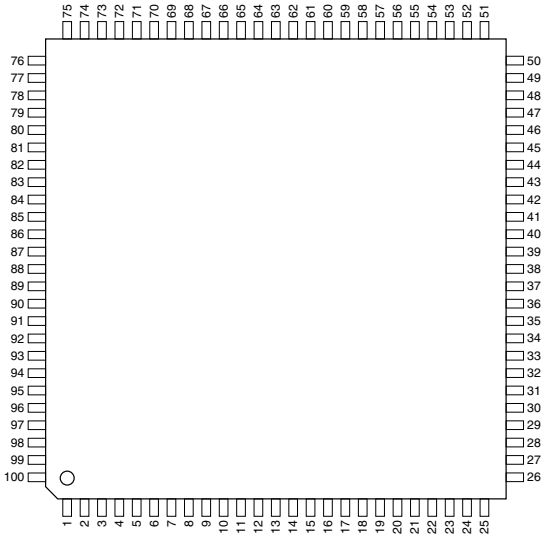

INPUTS

ADTRG	: EXTERNAL TRIGGER FOR A/D CONVERSION
AN0 - AN7	: ANALOG SIGNAL
CIN0 - CIN15	: EXPANSIVE A/D
EXCL	: EXTERNAL SUBSTITUDE CLOCK
EXTAL	: CRYSTAL OSCILLATOR
FTCI	: FRT COUNTER CLOCK
FTIA - FTID	: FRT INPUT CAPTURE
IRQ0 - IRQ7	: INTERRUPT REQUEST
IRRXD	: ENCODED DATA FOR IRDA
KIN0 - KIN15	: KEYBOARD
MD0, MD1	: MODE SELECT
NMI	: NON-MASKABLE INTERRUPT
P70 - P77	: PORT 7
RES	: RESET
RXD0 - RXD2	: RECEIVE DATA
STBY	: STANDBY
TMCI0, TMCI1	: EXTERNAL COUNTER CLOCK
TMIY	: EXTERNAL COUNTER CLOCK AND RESET
TMRI0, TMRI1	: EXTERNAL COUNTER RESET
WAIT	: WAIT
XTAL	: CRYSTAL OSCILLATOR

OUTPUTS

ø	: SYSTEM CLOCK
A0 - A15	: ADDRESS BUS
A16- A23	: ADDRESS BUS (ADVANCED)
AS, IOS	: ADDRESS STROBE
DA0, DA1	: ANALOG SIGNAL
FTOA, FTOB	: FRT OUTPUT COMPARE
HWR	: HIGH WRITE
IRTXD	: IRDA TRANSMIT/RECEIVE DATA
LWR	: LOW WRITE
PWX0, PWX1	: PWMX TIMER
RD	: READ
RESO	: RESET
TMO0, TMO1	: COMPARE MATCH
TXD0 - TXD2	: TRANSMIT DATA

INPUTS/OUTPUTS

D0 - D7	: DATA BUS (LOWER)
D8 - D15	: DATA BUS (UPPER)
P10 - P17	: PORT 1
P20 - P27	: PORT 2
P30 - P37	: PORT 3
P40 - P47	: PORT 4
P50 - P52	: PORT 5
P60 - P67	: PORT 6
P80 - P86	: PORT 8
P90 - P97	: PORT 9
PA0 - PA7	: PORT A
PB0 - PB7	: PORT B
SCK0 - SCK2	: SERIAL CLOCK

OTHERS

A GND	: ANALOG GROUND
A Vcc	: ANALOG SUPPLY
A VREF	: ANALOG REFERENCE VOLTAGE
Vcc1, Vcc2 (VCL)	: POWER SUPPLY

HN58V66AFP-10Z (HITACHI)

64K (8192 × 8)-BIT EEPROM

—TOP VIEW—

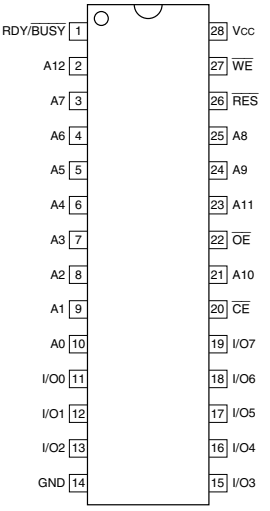

INPUTS

A0 - A12	:	ADDRESS
$\overline{CE}$	:	CHIP ENABLE
$\overline{OE}$	:	OUTPUT ENABLE
RDY/$\overline{BUSY}$	:	READY BUSY
$\overline{RES}$	:	RESET
$\overline{WE}$	:	WRITE ENABLE

INPUTS/OUTPUTS

I/O0 - I/O7	:	DATA

ML60851BTB (OKI)
ML60851CTB

USB DEVICE CONTROLLER

—TOP VIEW—



PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I/O	D+	12	O	$\overline{INTR}$	23	I	ALE	34	O	$\overline{DREQ}$
2	I/O	D–	13	I/O	D15	24	I	ADSEL	35	I/O	AD7
3	—	VCC	14	I/O	D14	25	I	A7	36	I/O	AD6
4	I	TEST1	15	I/O	D13	26	I	A6	37	I/O	AD5
5	I	TEST2	16	I/O	D12	27	I	A5	38	I/O	AD4
6	I	XIN	17	—	GND	28	I	A4	39	—	GND
7	O	XOUT	18	—	VCC	29	I	A3	40	—	VCC
8	I	$\overline{CS}$	19	I/O	D11	30	I	A2	41	I/O	AD3
9	I	$\overline{RD}$	20	I/O	D10	31	I	A1	42	I/O	AD2
10	I	$\overline{WR}$	21	I/O	D9	32	I	A0	43	I/O	AD1
11	I	$\overline{RESET}$	22	I/O	D8	33	I	DACK	44	I/O	AD0

LTC1660CGN-E2 (LINEAR TECH)

D/A CONVERTER

—TOP VIEW—



INPUTS

$\overline{CLR}$	:	ASYNCHRONOUS CLEAR
$\overline{CS}$/LD	:	SERIAL INTERFACE CHIP SELECT/LOAD
D IN	:	SERIAL INTERFACE DATA
REF	:	REFERENCE VOLTAGE
SCK	:	SERIAL INTERFACE CLOCK

OUTPUTS

D OUT	:	SERIAL INTERFACE DATA
VOUT A - VOUT H	:	DAC ANALOG VOLTAGE

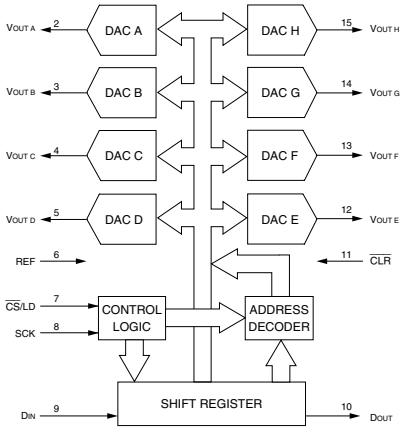

INPUTS

A0 - A7	:	ADDRESS
ADSEL	:	ADDRESS INPUT FORMAT SELECT
ALE	:	ADDRESS LATCH ENABLE
$\overline{CS}$	:	CHIP SELECT
$\overline{DACK}$	:	DMA ACKNOWLEDGEMENT
$\overline{RD}$	:	READ
$\overline{RESET}$	:	RESET
TEST1, TEST2	:	TEST
$\overline{WR}$	:	WRITE
XIN	:	CRYSTAL OR EXTERNAL CLOCK

OUTPUTS

$\overline{DREQ}$	:	DMA REQUEST
$\overline{INTR}$	:	INTERRUPT REQUEST
XOUT	:	CRYSTAL FEEDBACK

INPUTS/OUTPUTS

AD0 - AD7	:	DATA BUS (LSB)/ADDRESS (INPUT)
D+, D–	:	DIFFERENTIAL USB DATA
D8 - D15	:	DATA BUS (MSB)

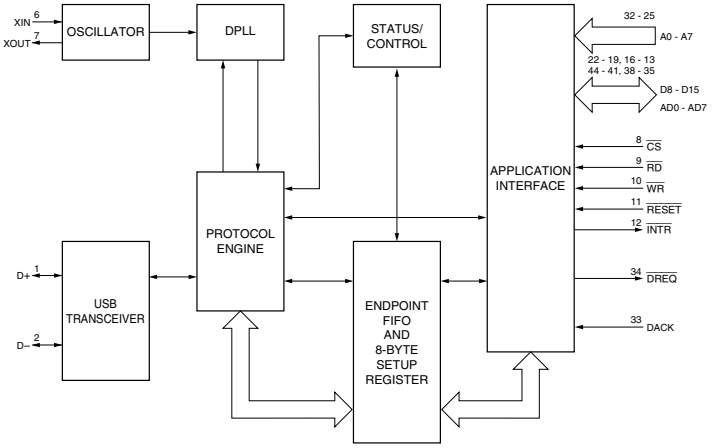

MAX821RUS-T (MAXIM)

VOLTAGE MONITOR

—TOP VIEW—



INPUT

SRT	:	SET RESET TIMEOUT

OUTPUT

$\overline{RESET}$	:	ACTIVE-LOW RESET

NM24C16ULEM8X (FSC)

16K-BIT SERIAL EEPROM
—TOP VIEW—



INPUT
SCL : SERIAL CLOCK

INPUT/OUTPUT
SDA : SERIAL DATA

OTHER
NC : NO CONNECTION

PCF8574TS-T (PHILIPS)

REMOTE 8-BIT I/O EXPANDER
—TOP VIEW—

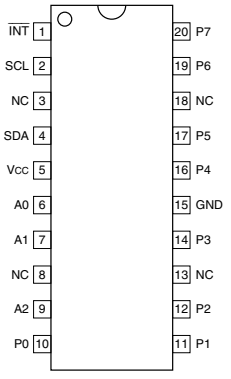

INPUTS
A0 - A2 : ADDRESS
SCL : SERIAL CLOCK LINE

OUTPUT
$\overline{INT}$: INTERRUPT OUTPUT

INPUTS/OUTPUTS
P0 - P7 : I/O PORT
SDA : SERIAL DATA LINE

OTHER
NC : NO CONNECTION

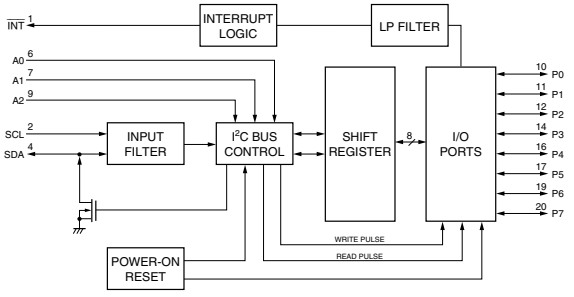

SI9145BQ-T1 (SILICONIX)

SWITCHMODE CONTROLLER
—TOP VIEW—



INPUTS

COSC	: SET THE OSCILLATOR FREQUENCY WITH EXTERNAL CAPACITOR
DMAX/SS	: CONTROL THE MAXIMUM DUTY CYCLE
ENABLE	: ALLOW NORMAL OPERATION (WHEN HIGH), OR STANDBY MODE (WHEN LOW)
FB	: INVERTING INPUT OF THE ERROR AMPLIFIER
MODE SELECT	: ENABLE MAXIMUM DUTY CYCLE LIMIT AND SET OUTPUT POLARITY CONTROLLER
NI	: NON-INVERTING INPUT OF THE ERROR AMPLIFIER
ROSC	: EQUIVALENT OF A 1.0-V VOLTAGE SOURCE
UVLOSET	: MAKE CHIP IN THE STANDBY MODE (WHEN UVLOSET VOLTAGE BELOW 1.2 V), OR NORMAL OPERATION (WHEN UVLOSET VOLTAGE EXCEED 1.2 V)

OUTPUTS

COMP	: ERROR AMPLIFIER
$\overline{OTS}$	: INDICATE AN OVER-TEMPARATURE CONDITION
OUTPUT	: DRIVE THE EXTERNAL MOSFET
VREF	: REFERENCE VOLTAGE 1.5 V

OTHERS

PGND	: NEGATIVE RETURN FOR THE VS SUPPLY
VS	: POSITIVE TERMINAL OF THE POWER SUPPLY

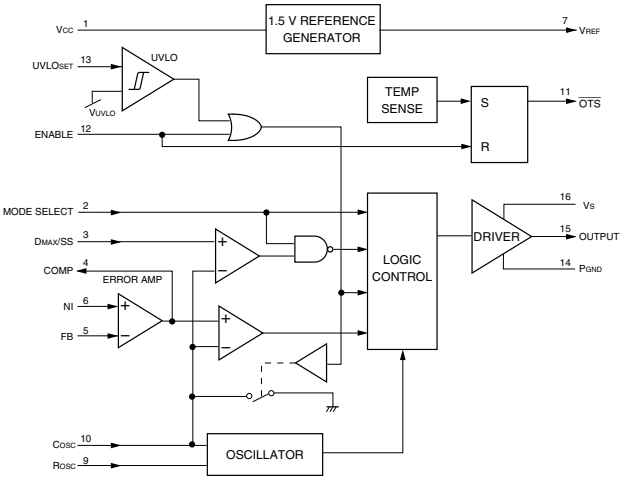

SN65LVDS1DBVR (TI)

DIFFERENTIAL LINE DRIVER
—TOP VIEW—



INPUT	OUTPUTS	
D	Y	Z
1	1	0
0	0	1
OPEN	0	1

0 = LOW LEVEL
1 = HIGH LEVEL



SN65LVDT2DBVR (TI)

DIFFERENTIAL LINE RECEIVER
—TOP VIEW—



INPUTS VID=VA-VB	OUTPUT R
VID≧100mV	1
−100mV<VID<100mV	?
VID≦−100mV	0
OPEN	1

0 = LOW LEVEL
1 = HIGH LEVEL
? = INDETERMINATE



SN74CBT16211ADGGR (TI)
SN74CBTLV16211GR (TI)

24-BIT BUS EXCHANGE SWITCH
—TOP VIEW—

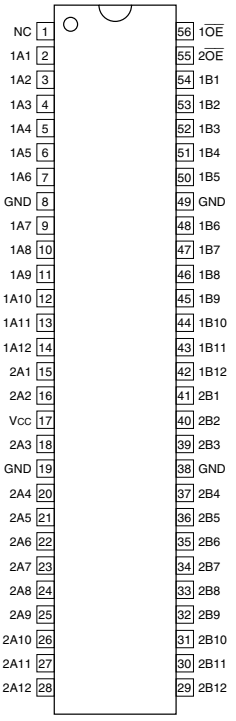



INPUTS		INPUTS/OUTPUTS	
1OE	2OE	1A, 1B	2A, 2B
0	0	1A=1B	2A=2B
0	1	1A=1B	HI-Z
1	0	HI-Z	2A=2B
1	1	HI-Z	HI-Z

0 : LOW LEVEL
1 : HIGH LEVEL
HI-Z: HIGH IMPEDANCE

SN74CBT16214DGGR (TI)

FET MULTIPLEXER/DEMULTIPLEXER
—TOP VIEW—

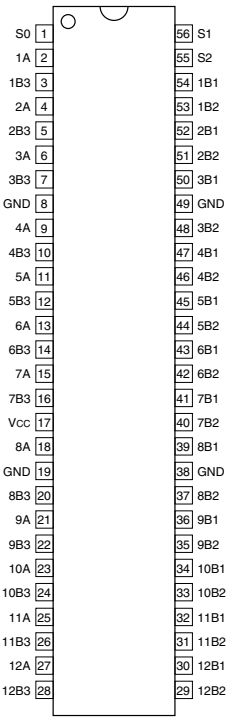



S2	S1	S0	A	FUNCTION
0	0	0	HI-Z	DISCONNECT (OPEN)
0	0	1	B1	A=B1
0	1	0	B2	A=B2
0	1	1	HI-Z	DISCONNECT (OPEN)
1	0	0	HI-Z	DISCONNECT (OPEN)
1	0	1	B3	A=B3
1	1	0	B1	A=B1
1	1	1	B2	A=B2

0 : LOW LEVEL
1 : HIGH LEVEL
HI-Z : HIGH IMPEDANCE

SN74CBT1G125DCKR (TI)

SINGLE FET BUS SWITCH
—TOP VIEW—



OE	FUNCTION
0	A=B
1	DISCONNECT

0 = LOW LEVEL
1 = HIGH LEVEL



SN74CBT3126PWR (TI)

QUADRUPLE FET BUS SWITCH
—TOP VIEW—



$\overline{OE}$	FUNCTION
0	DISCONNECT
1	A=B

0 : LOW LEVEL
1 : HIGH LEVEL



TC4053BFN) (TOSHIBA)
TC4053BFT(EL,N)

C-MOS TRIPLE 2-CHANNEL ANALOG MULTIPLEXER/DEMULTIPLEXER
—TOP VIEW—

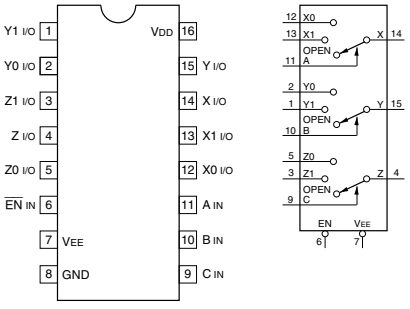

CONTROL INPUTS				ON CHANNEL		
EN	SELECT					
	C	B	A			
0	0	0	0	Z0	Y0	X0
0	0	0	1	Z0	Y0	X1
0	0	1	0	Z0	Y1	X0
0	0	1	1	Z0	Y1	X1
0	1	0	0	Z1	Y0	X0
0	1	0	1	Z1	Y0	X1
0	1	1	0	Z1	Y1	X0
0	1	1	1	Z1	Y1	X1
1	×	×	×	OPEN		

0 : LOW LEVEL
1 : HIGH LEVEL
× : DON'T CARE

TC55V2161FTI-85L (TOSHIBA)

2M (131072 × 16) -BIT SRAM
—TOP VIEW—

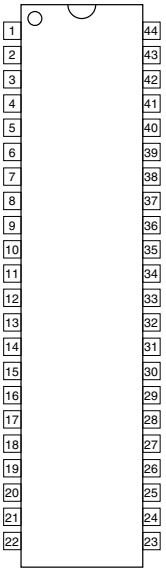

INPUTS
A0 - A16 : ADDRESS
$\overline{CE}$: CHIP ENABLE
CS : CHIP SELECT
$\overline{LB}$: LOWER DATA BYTE CONTROL
$\overline{OE}$: OUTPUT ENABLE
R/W : READ/WRITE CONTROL
$\overline{UB}$: UPPER DATA BYTE CONTROL

INPUTS/OUTPUTS
I/O1 - I/O16 : DATA

OTHER
NC : NO CONNECTION

MODE	$\overline{CE}$	CS	$\overline{OE}$	R/W	$\overline{LB}$	$\overline{UB}$	I/O1 - I/O8	I/O9 - I/O16
READ	0	1	0	1	0	0	OUT	OUT
					1	0	HI-Z	OUT
					0	1	OUT	HI-Z
WRITE	0	1	×	0	0	0	IN	IN
					1	0	HI-Z	IN
					0	1	IN	HI-Z
OUTPUT DISABLE	0	1	1	1	×	×	HI-Z	HI-Z
			×	×	1	1		
CS STANDBY	×	0	×	×	×	×	HI-Z	HI-Z
STANDBY	1	×	×	×	×	×	HI-Z	HI-Z

0 : LOW LEVEL
1 : HIGH LEVEL
× : DON'T CARE
HI-Z : HIGH IMPEDANCE

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I	A4	12	—	GND	23	—	NC	34	—	GND
2	I	A3	13	I/O	I/O5	24	I	A11	35	I/O	I/O13
3	I	A2	14	I/O	I/O6	25	I	A10	36	I/O	I/O14
4	I	A1	15	I/O	I/O7	26	I	A9	37	I/O	I/O15
5	I	A0	16	I/O	I/O8	27	I	A8	38	I/O	I/O16
6	I	$\overline{CE}$	17	I	R/W	28	I	CS	39	I	$\overline{LB}$
7	I/O	I/O1	18	I	A15	29	I/O	I/O9	40	I	$\overline{UB}$
8	I/O	I/O2	19	I	A14	30	I/O	I/O10	41	I	$\overline{OE}$
9	I/O	I/O3	20	I	A13	31	I/O	I/O11	42	I	A7
10	I/O	I/O4	21	I	A12	32	I/O	I/O12	43	I	A6
11	—	Vcc	22	I	A16	33	—	Vcc	44	I	A5

TC7WH123FU(TE12R) (TOSHIBA)

MONOSTABLE MULTIVIBRATOR
—TOP VIEW—



INPUTS			OUTPUTS	NOTE
$\overline{A}$	B	CLR	Q	
↓	1	1	⊓	OUTPUT ENABLE
×	0	1	0	INHIBIT
1	×	1	0	INHIBIT
0	⊓	1	⊓	OUTPUT ENABLE
0	1	⊓	⊓	OUTPUT ENABLE
×	×	0	0	RESET

0 : LOW LEVEL
1 : HIGH LEVEL
× : DON'T CARE

TC7WH157FU(TE12R) (TOSHIBA)

2-CHANNEL MULTIPLEXER
—TOP VIEW—



INPUTS				OUTPUTS	
$\overline{EN}$	G1	A	B	Y	$\overline{Y}$
1	×	×	×	0	1
0	0	0	×	0	1
0	0	1	×	1	0
0	1	×	0	0	1
0	1	×	1	1	0

0 : LOW LEVEL
1 : HIGH LEVEL
× : DON'T CARE

UPD4702G-E2 (NEC)

8-BIT UP DOWN COUNTER (ROTARY ENCODER)

—TOP VIEW—

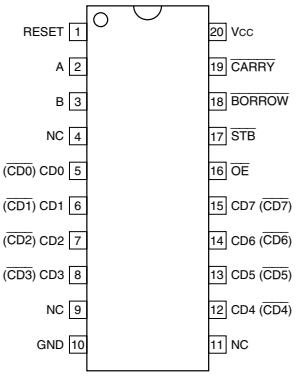

INPUTS

A, B	:	TWO-PHASE INCREMENTAL SIGNAL
$\overline{OE}$	:	OUTPUT ENABLE
RESET	:	COUNTER RESET
$\overline{STB}$	:	LATCH STROBE SIGNAL

OUTPUTS

$\overline{BORROW}$	:	BORROW PULSE
$\overline{CARRY}$	:	CARRY PULSE
CD0 - CD7, $\overline{CD0}$ - $\overline{CD7}$	:	COUNT DATA

OTHER

NC	:	NO CONNECTION

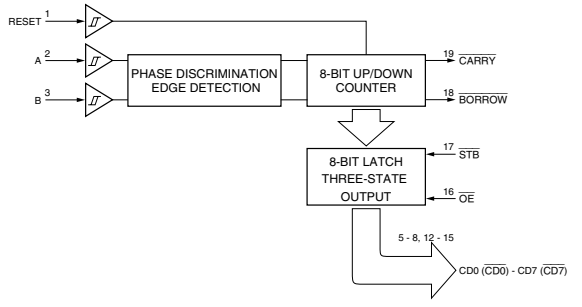

XC9572XL-10VQ64C (XILINX)

ECC DECODE PRE-PROCESSOR

—TOP VIEW—

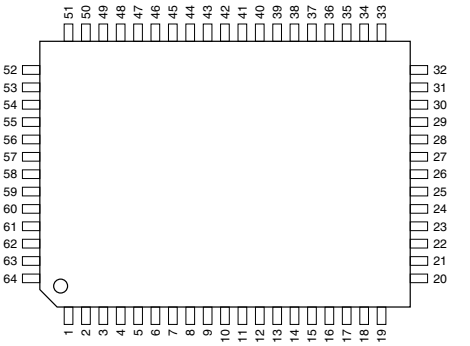

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I/O	I/O	17	I/O	I/O/GCK3	33	I/O	I/O	49	I/O	I/O
2	I/O	I/O/GTS2	18	I/O	I/O	34	I/O	I/O	50	I/O	I/O
3	—	VCCINT 3.3V	19	I/O	I/O	35	I/O	I/O	51	I/O	I/O
4	I/O	I/O	20	I/O	I/O	36	I/O	I/O	52	I/O	I/O
5	I/O	I/O/GTS1	21	I/O	GND	37	—	VCCINT 3.3V	53	—	TDO
6	I/O	I/O	22	I/O	I/O	38	I/O	I/O	54	I/O	I/O
7	I/O	I/O	23	I/O	I/O	39	I/O	I/O	55	—	VCCIO2.5V/ 3.3V
8	I/O	I/O	24	I/O	I/O	40	I/O	I/O	56	—	GND
9	I/O	I/O	25	I/O	I/O	41	—	GND	57	I/O	I/O
10	I/O	I/O	26	—	VCCIO2.5V/ 3.3V	42	I/O	I/O	58	I/O	I/O
11	I/O	I/O	27	I/O	I/O	43	I/O	I/O	59	I/O	I/O
12	I/O	I/O	28	—	TDI	44	I/O	I/O	60	I/O	I/O
13	I/O	I/O	29	—	TMS	45	I/O	I/O	61	I/O	I/O
14	—	GND	30	—	TCK	46	I/O	I/O	62	I/O	I/O
15	I/O	I/O/GCK1	31	I/O	I/O	47	I/O	I/O	63	I/O	I/O
16	I/O	I/O/GCK2	32	I/O	I/O	48	I/O	I/O	64	I/O	I/O/GSR

XC18V02VQ44C (XILINX)

PROGRAMMABLE CONFIGURATION PROM

—TOP VIEW—



INPUTS

$\overline{CE}$	:	CHIP ENABLE
CLK	:	CLOCK
OE/$\overline{RESET}$	:	OUTPUT ENABLE/ ADDRESS COUNTER RESET
TCK	:	TEST CLOCK
TDI	:	TEST DATA
TMS	:	TEST MODE SELECT

OUTPUTS

$\overline{CEO}$	:	CHIP ENABLE OUTPUT
$\overline{CF}$	:	CONFIGURATION DATA
D0 - D7	:	DATA
TDO	:	TEST DATA

OTHER

NC	:	NO CONNECTION

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	NC	12	—	NC	23	—	NC	34	—	NC
2	—	NC	13	I	OE/$\overline{RESET}$	24	—	NC	35	—	VCC
3	I	TDI	14	O	D6	25	O	D5	36	—	VCC
4	—	NC	15	I	$\overline{CE}$	26	—	VCC	37	—	NC
5	I	TMS	16	—	VCC	27	O	D3	38	—	VCC
6	—	GND	17	—	VCC	28	—	GND	39	—	NC
7	I	TCK	18	—	GND	29	O	D1	40	O	D0
8	—	VCC	19	O	D7	30	—	NC	41	—	GND
9	O	D4	20	—	NC	31	O	TDO	42	O	D2
10	O	$\overline{CF}$	21	O	$\overline{CEO}$	32	—	NC	43	I	CLK
11	—	NC	22	—	NC	33	—	NC	44	—	NC

INPUTS/OUTPUTS

I/O	:	INPUT/OUTPUT
I/O/GCK1 - I/O/GCK3	:	GLOBAL CONTROL
I/O/GSR	:	GLOBAL CONTROL
I/O/GTS1 - I/O/GTS2	:	GLOBAL CONTROL

OTHERS

TCK	:	TEST CLOCK
TDI	:	TEST DATA INPUT
TDO	:	TEST DATA OUTPUT
TMS	:	TEST MODE SELECT

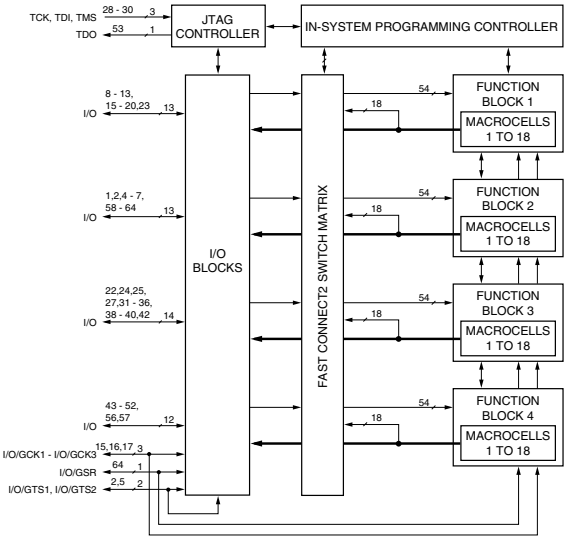

http://getMANUAL.com

XCS05XL-4VQ100C (XILINX)

TIMECODE DELAY CONTROLLER

—TOP VIEW—

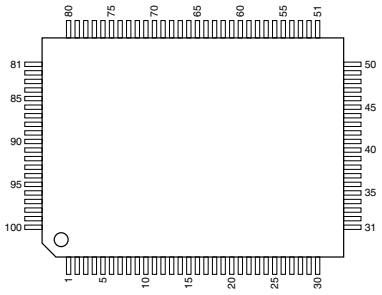

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	GND	26	I/O	PWRDWN	51	—	Vcc	76	O	O,TDO
2	I/O	I/O,GCK1	27	I/O	I/O,GCK3	52	I	PROGRAM	77	—	GND
3	I/O	I/O	28	I/O	I/O(HDC)	53	I/O	I/O(D7)	78	I/O	I/O
4	I/O	I/O,TDI	29	I/O	I/O	54	I/O	I/O,GCK5	79	I/O	I/O,GCK7
5	I/O	I/O,TCK	30	I/O	I/O(LDC)	55	I/O	I/O(D6)	80	I/O	I/O(CS1)
6	I/O	I/O,TMS	31	I/O	I/O	56	I/O	I/O	81	I/O	I/O
7	I/O	I/O	32	I/O	I/O	57	I/O	I/O(D5)	82	I/O	I/O
8	I/O	I/O	33	I/O	I/O	58	I/O	I/O	83	I/O	I/O
9	I/O	I/O	34	I/O	I/O	59	I/O	I/O	84	I/O	I/O
10	I/O	I/O	35	I/O	I/O	60	I/O	I/O	85	I/O	I/O
11	—	GND	36	I/O	I/O(INIT)	61	I/O	I/O(D4)	86	I/O	I/O
12	—	Vcc	37	—	Vcc	62	I/O	I/O	87	I/O	I/O
13	I/O	I/O	38	—	GND	63	—	Vcc	88	—	GND
14	I/O	I/O	39	I/O	I/O	64	I/O	GND	89	—	Vcc
15	I/O	I/O	40	I/O	I/O	65	I/O	I/O(D3)	90	I/O	I/O
16	I/O	I/O	41	I/O	I/O	66	I/O	I/O	91	I/O	I/O
17	I/O	I/O	42	I/O	I/O	67	I/O	I/O	92	I/O	I/O
18	I/O	I/O	43	I/O	I/O	68	I/O	I/O(D2)	93	I/O	I/O
19	I/O	I/O	44	I/O	I/O	69	I/O	I/O	94	I/O	I/O
20	I/O	I/O	45	I/O	I/O	70	I/O	I/O(D1)	95	I/O	I/O
21	I/O	I/O,GCK2	46	I/O	I/O	71	I/O	I/O	96	I/O	I/O
22	I	M1	47	I/O	I/O	72	I/O	I/O(D0,DIN)	97	I/O	I/O
23	—	GND	48	I/O	I/O,GCK4	73	I/O	I/O,GCK6,DOUT	98	I/O	I/O
24	I	M0	49	—	GND	74	I	CCLK	99	I/O	I/O,GCK8
25	—	Vcc	50	I/O	DONE	75	—	Vcc	100	—	Vcc

INPUTS

CCLK : CONFIGURATION CLOCK
CS1 : SERIAL-ENABLE SIGNAL FOR DAISY-CHAINING (DURING EXPRESS CONFIGURATION)
D0 - D7 : RECEIVE CONFIGURATION DATA (DURING EXPRESS CONFIGURATION)
DIN : SERIAL CONFIGURATION DATA RECEIVING DATA ON THE RISING EDGE OF CCLK (DURING SLAVE SERIAL OR MASTER SERIAL CONFIGURATION)
GCK1 - GCK8 : GLOBAL
M0, M1 : MODE
PROGRAM : FORCE THE FPGA TO CLEAR ITS CONFIGURATION MEMORY
PWRDWN : FORCE THE FPGA INTO THE POWER DOWN STATE AND REDUCE POWER CONSUMPTION
TDI : TEST DATA (WHEN BOUNDARY SCAN IS USED)
TCK : TEST CLOCK (WHEN BOUNDARY SCAN IS USED)
TMS : TEST MODE SELECT (WHEN BOUNDARY SCAN IS USED)

OUTPUTS

DOUT : SERIAL CONFIGURATION DATA DRIVING THE DIN OF DAISY-CHAINED SLAVE FPGAS (DURING SLAVE SERIAL OR MASTER SERIAL CONFIGURATION)
HDC : HIGH DURING CONFIGURATION
LDC : LOW DURING COFIGURATION
TDO : TEST DATA (WHEN BOUNDARY SCAN IS USED)

INPUTS/OUTPUTS

DONE : BIDIRECTIONAL SIGNAL WITH AN OPTIONAL INTERNAL PULL-UP RESISTOR
INIT : BIDIRECTIONAL SIGNAL (BEFORE AND DURING CONFIGURATION)
I/O : INPUT AND/OR OUTPUT AFTER CONFIGURATION IS COMPLETED

Section 3
Block Diagrams

Index

Board Name	Function	Page
CAMERA BLOCK Overall	–	3-2
VTR BLOCK Overall	–	3-15
AL-43	AUDIO AMP	3-32
APR-59	AUDIO PROCESSOR	3-31
AT-143	SYSTEM CONTROL	3-14
AXM-24	CONNECTOR	3-32
BP-33	BATTERY	3-32
CCM-45	TELE FILE	3-23
CI-27	50PIN ADAPTOR INTERFACE	3-23
CN-2037	CONNECTOR for DR-433	3-5
CNB-15	CIRCUIT BREAKER	3-34
DC-110 (HKDW-702)	DOWN CONVERTER	3-12
DC-111	BATTERY DC FILTER	3-34
DCP-28	CAMERA PROCESSOR	3-6
DR-433	CCD DRIVER	3-5
DVP-18	VTR PROCESSOR	3-18
ENC-61	ROTARY ENCODER	3-33
EQ-88	EQUALIZER	3-27
FP-121	ANALOG AUDIO PROCESSOR	3-30
HN-277	HARNESS	3-23
HP-103	HEADPHONE	3-31
HP-104	HEADPHONE	3-32
IF-794	INTERFACE	3-23
IFA-11	LENS CONTROL	3-30
IO-202	IN/OUT	3-8, 3-25
KY-475	FUNCTION KEY	3-33
LP-114	REAR TALLY	3-32
MA-103	MIC AMP	3-30
MDC-13	MECHA DECK CONTROL	3-26
MDR-14	DRUM MOTOR DRIVE	3-26
MY-99 (HKDW-703)	PICTURE CACHE	3-23
PA-253	PRE AMP	3-4
PS-595	POWER SUPPLY (LIGHT)	3-34
RE-186	REGULATOR	3-34
RE-187	REGULATOR	3-34
RM-188	CONNECTOR (RM)	3-7
RX-54	WIRELESS RECEIVER INTERFACE	3-30
SE-613	SENSOR	3-26
SS-92	SERVO/SYSCON	3-24
SW-1030	LIGHT SWITCH	3-34
SW-1031	SWITCH	3-30
SW-1038	SWITCH	3-33
TG-219	TIMING GENERATOR	3-5

3-1

CAMERA BLOCK Overall (1/2)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

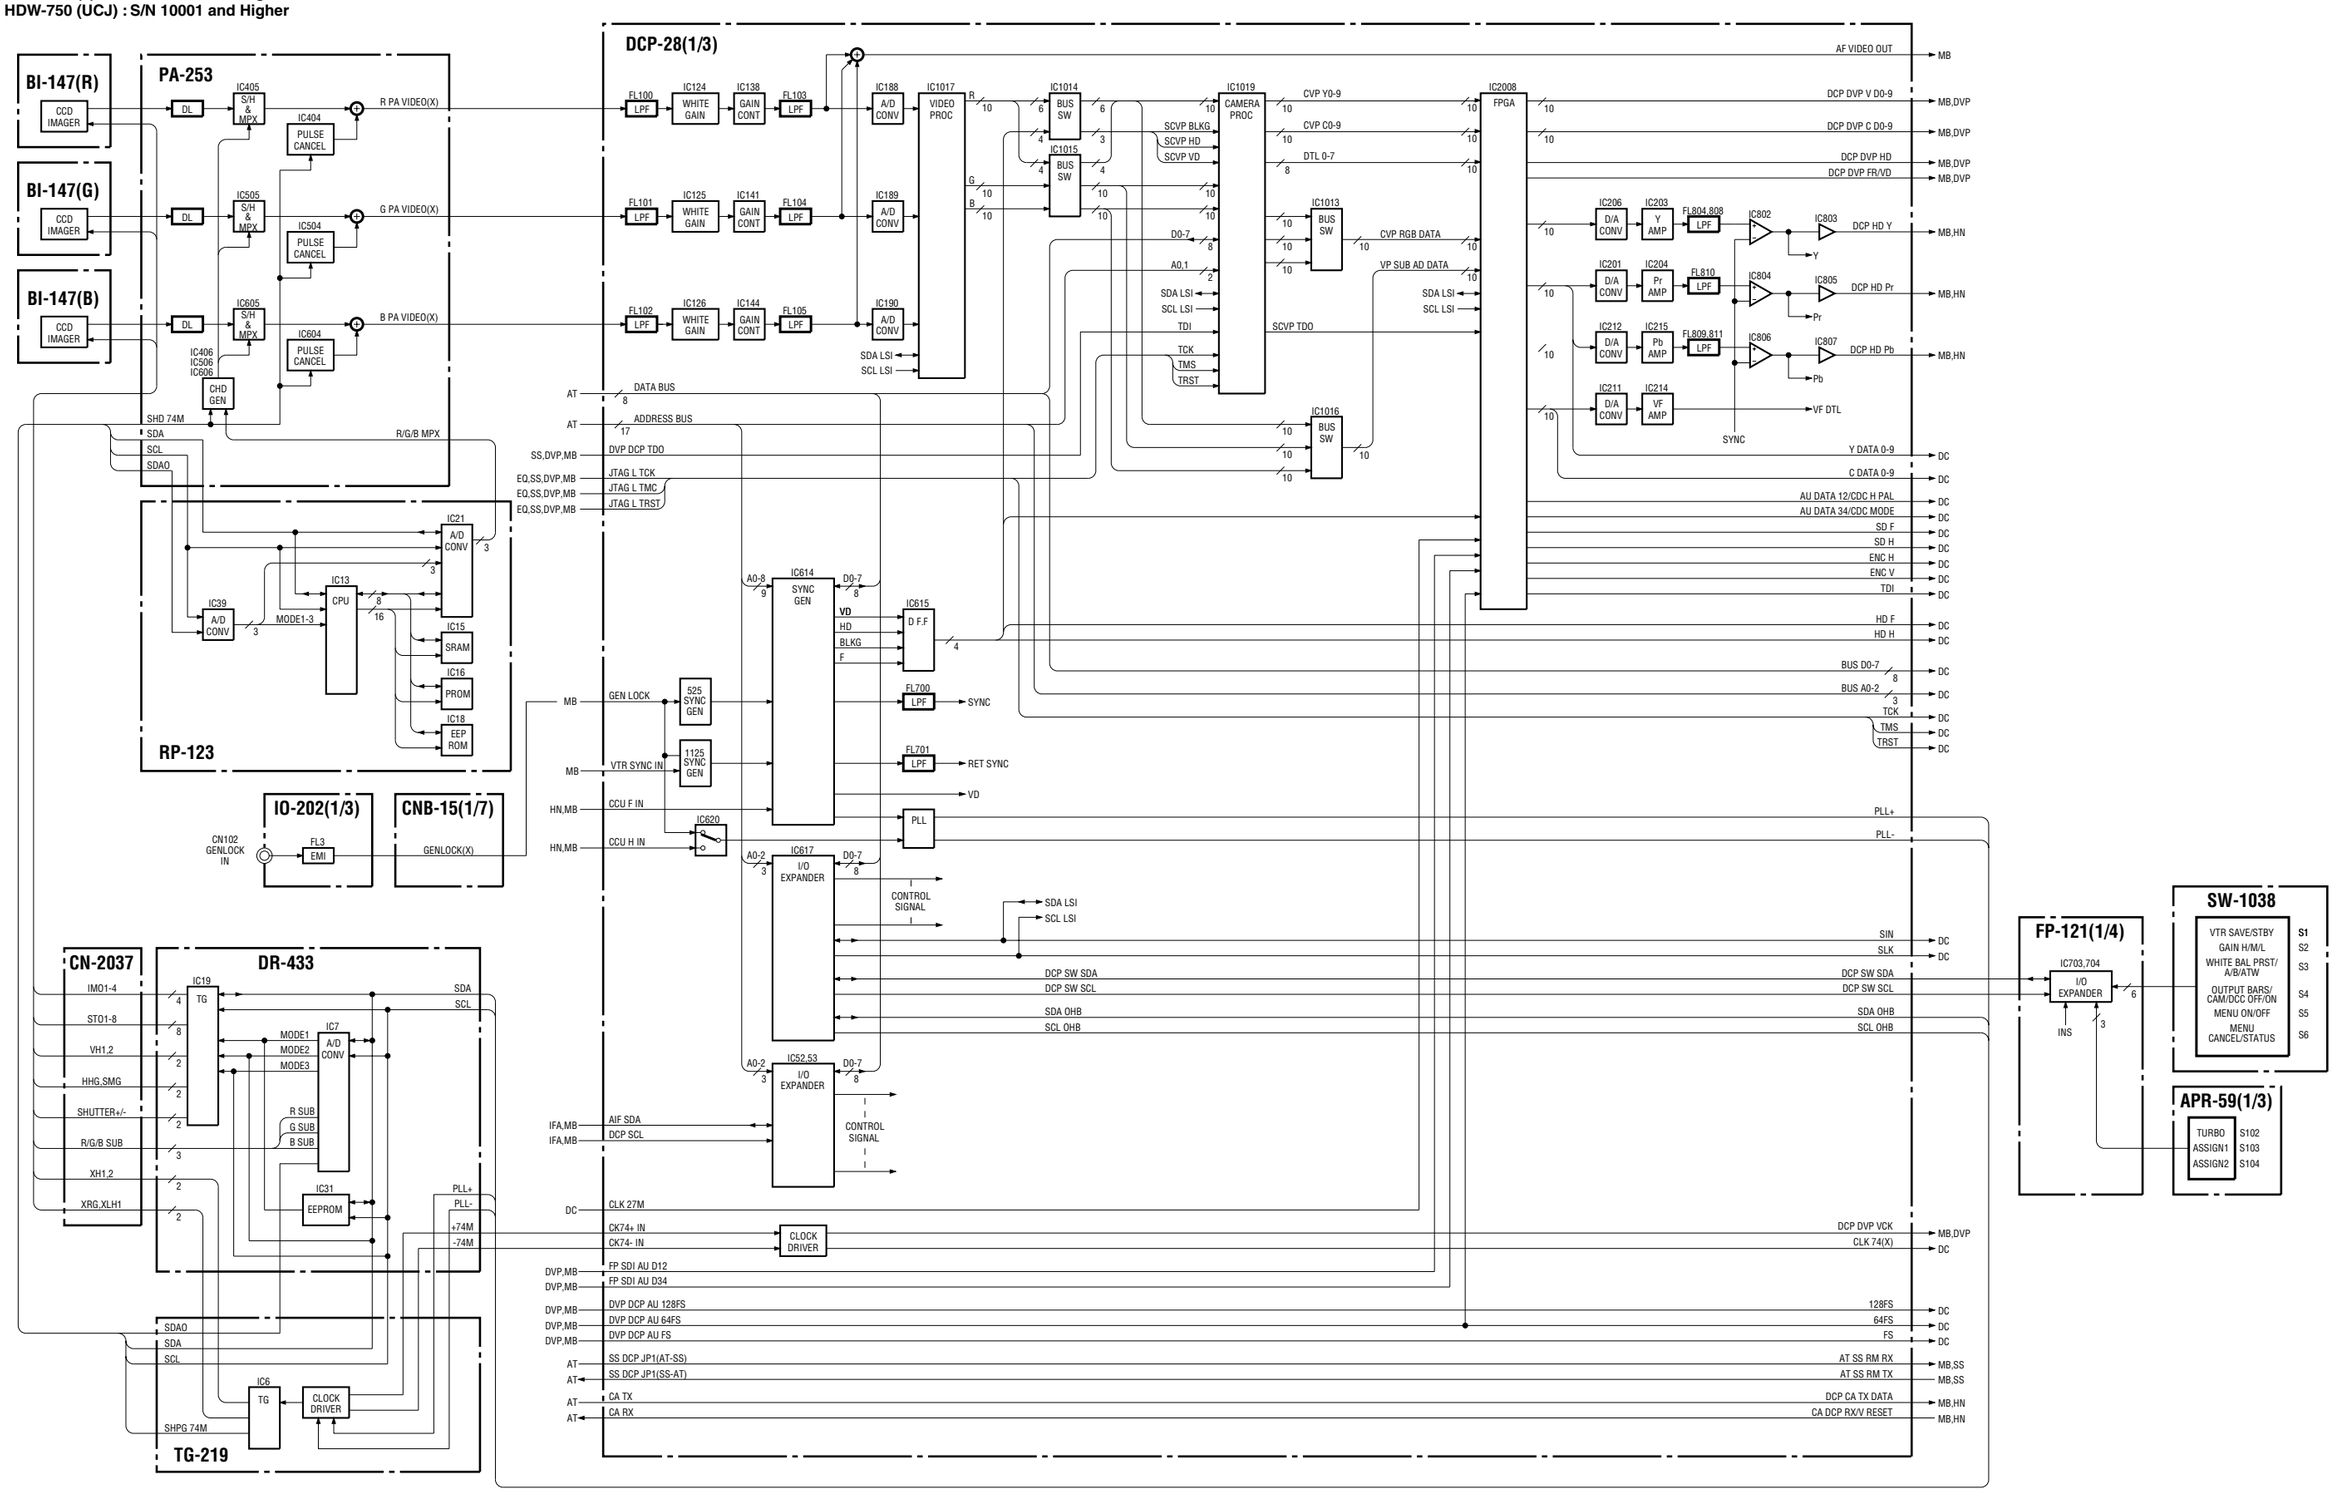

CAMERA BLOCK Overall (1/2)

CAMERA BLOCK Overall (2/2)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

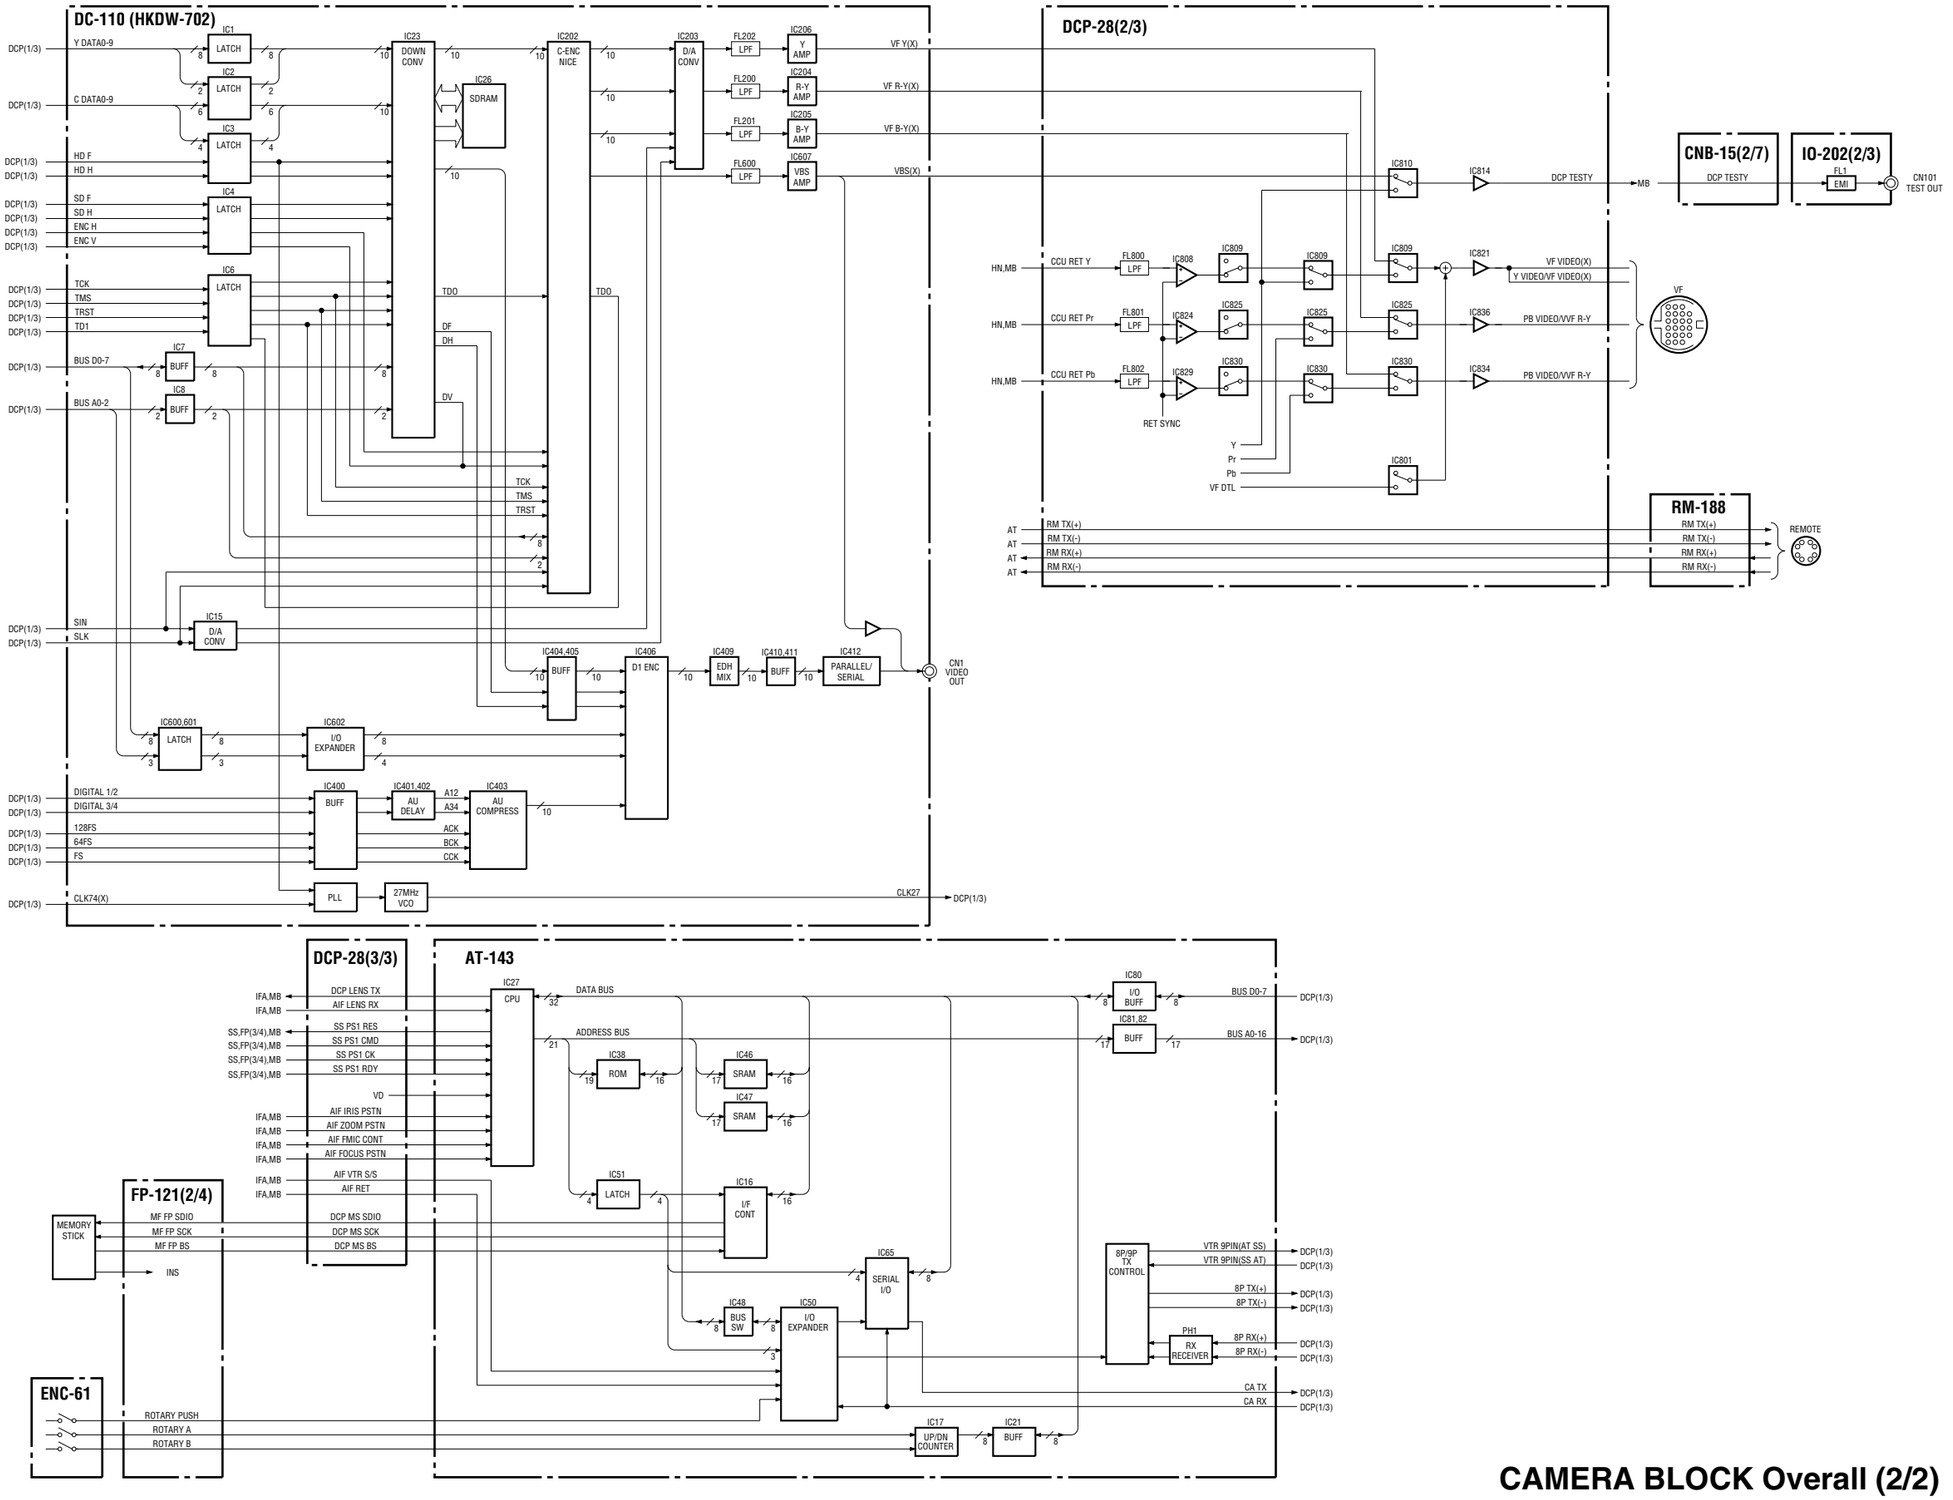

CAMERA BLOCK Overall (2/2)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

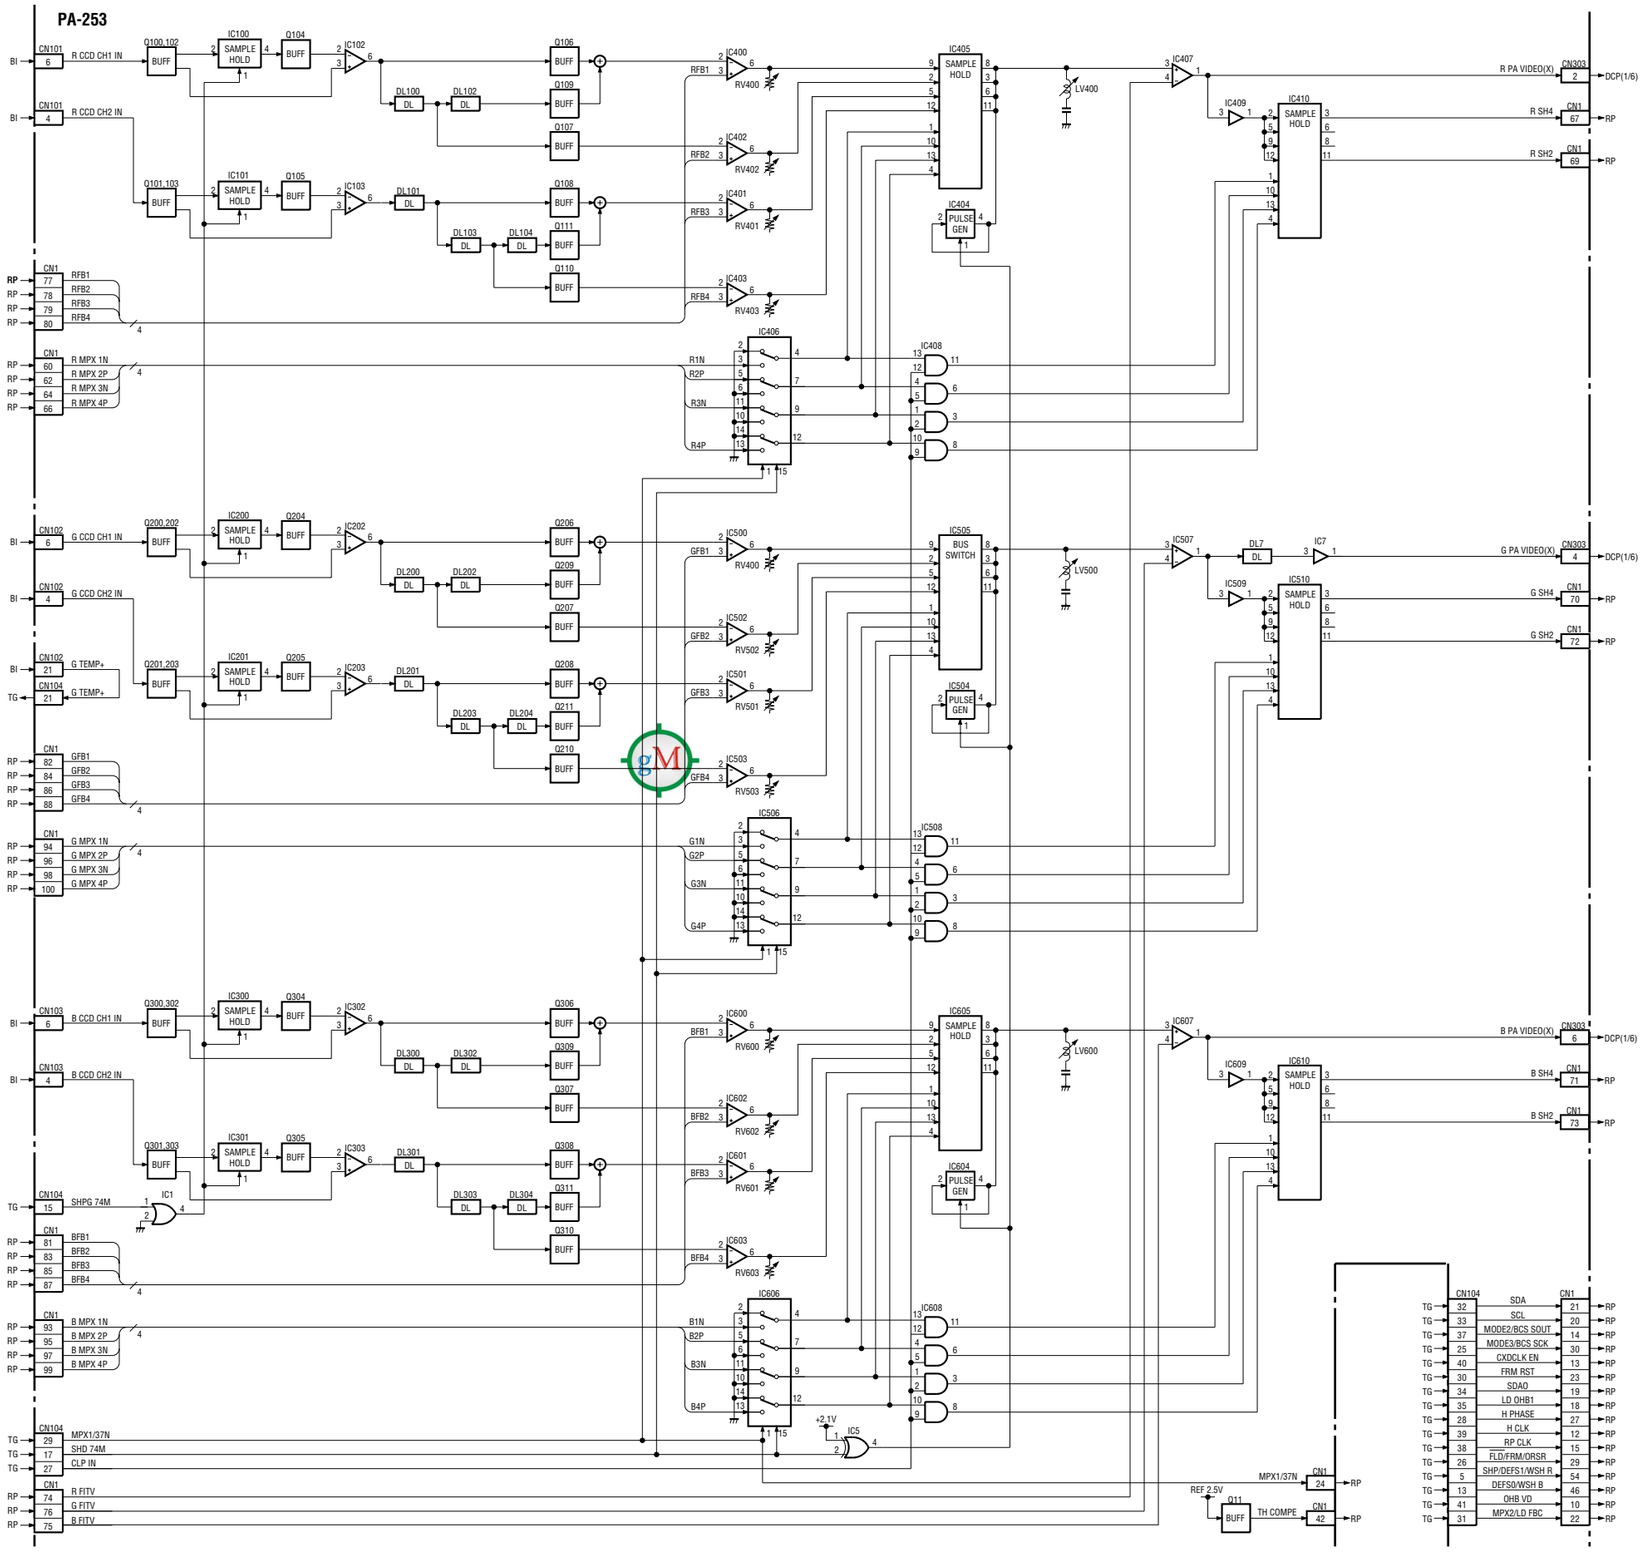

PRE AMP
PA-253

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

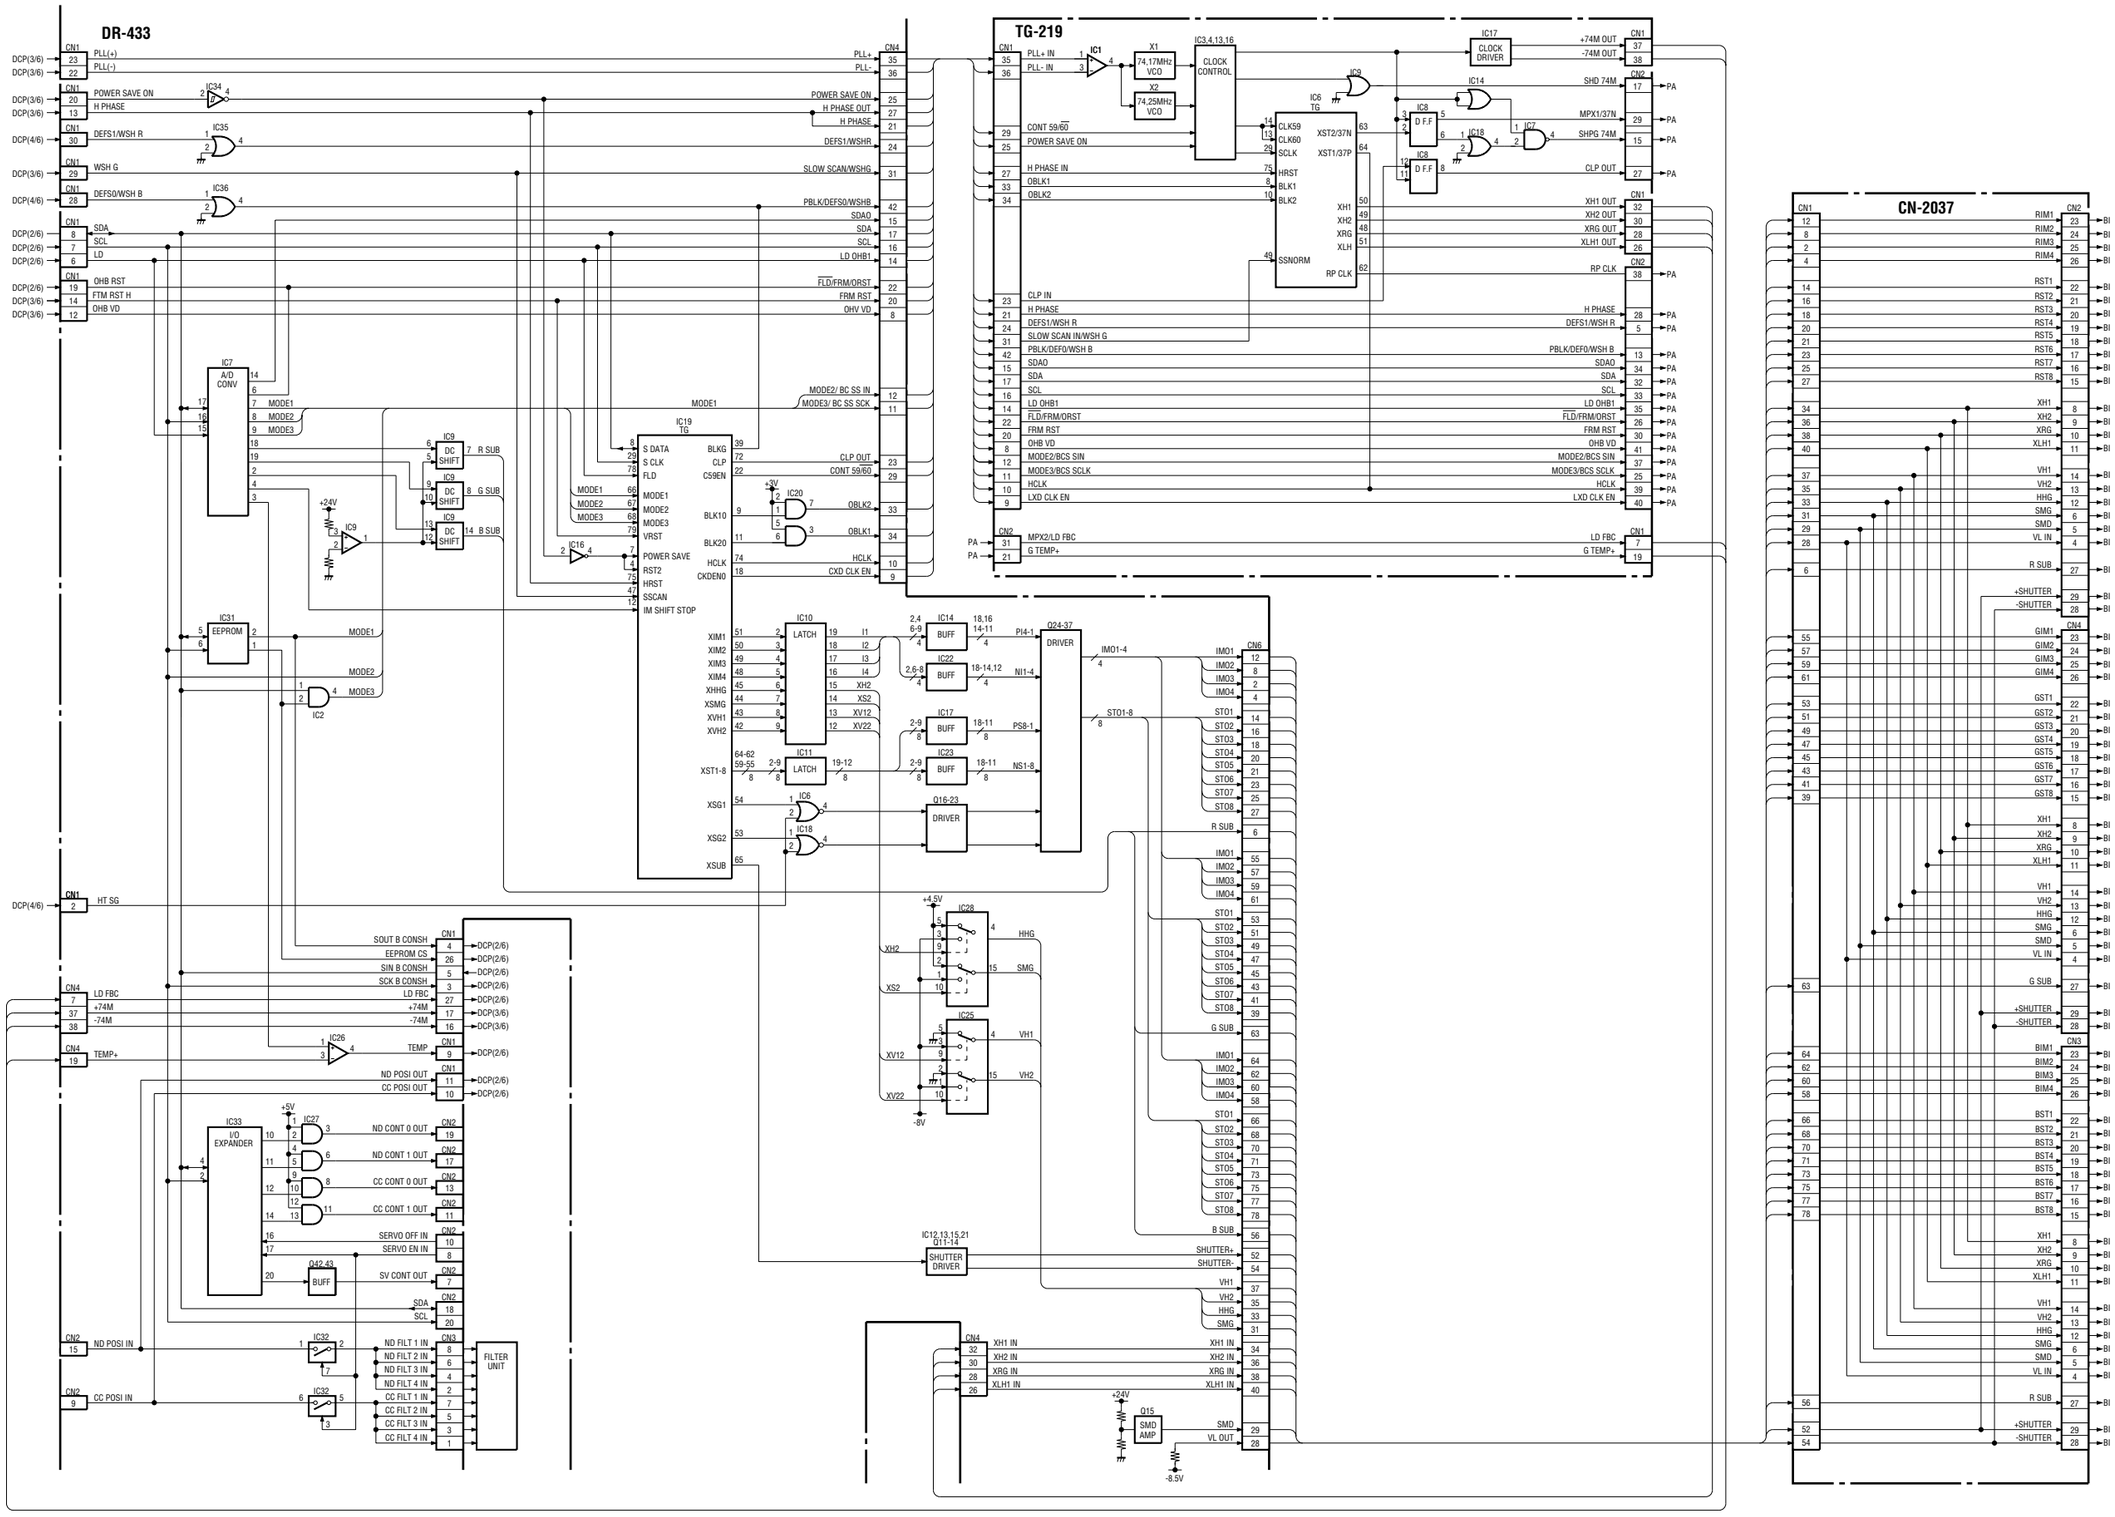

CCD DRIVER
DR-433
CONNECTOR for DR-433
CN-2037
TIMING GENERATOR
TG-219

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

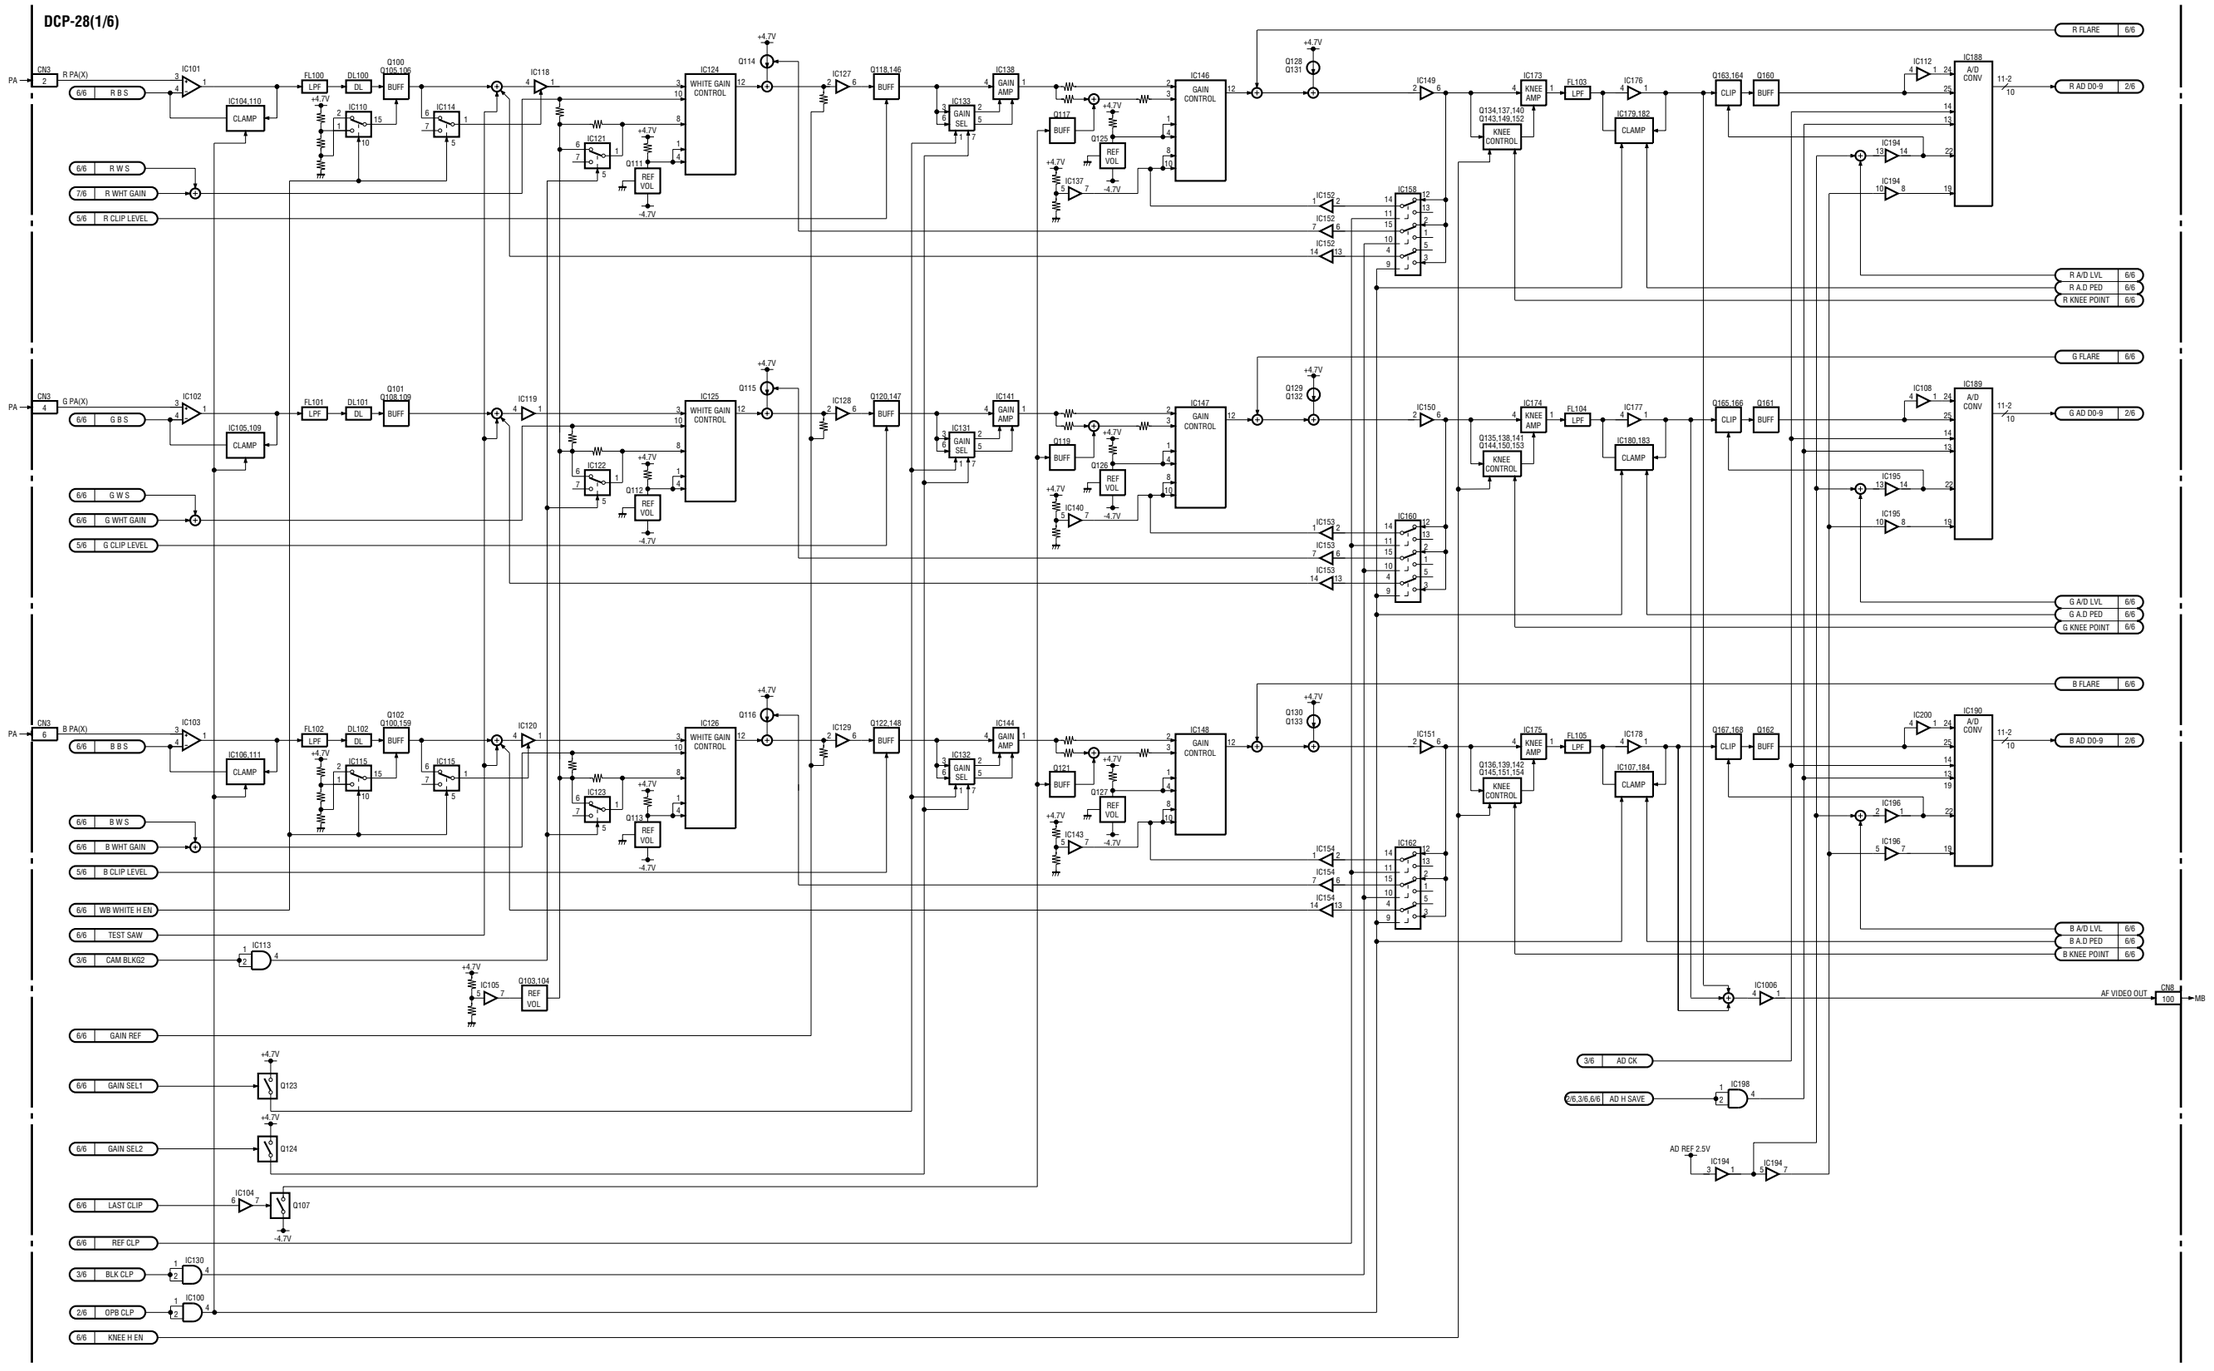

CAMERA PROCESSOR
DCP-28 (1/6)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

DCP-28(2/6)

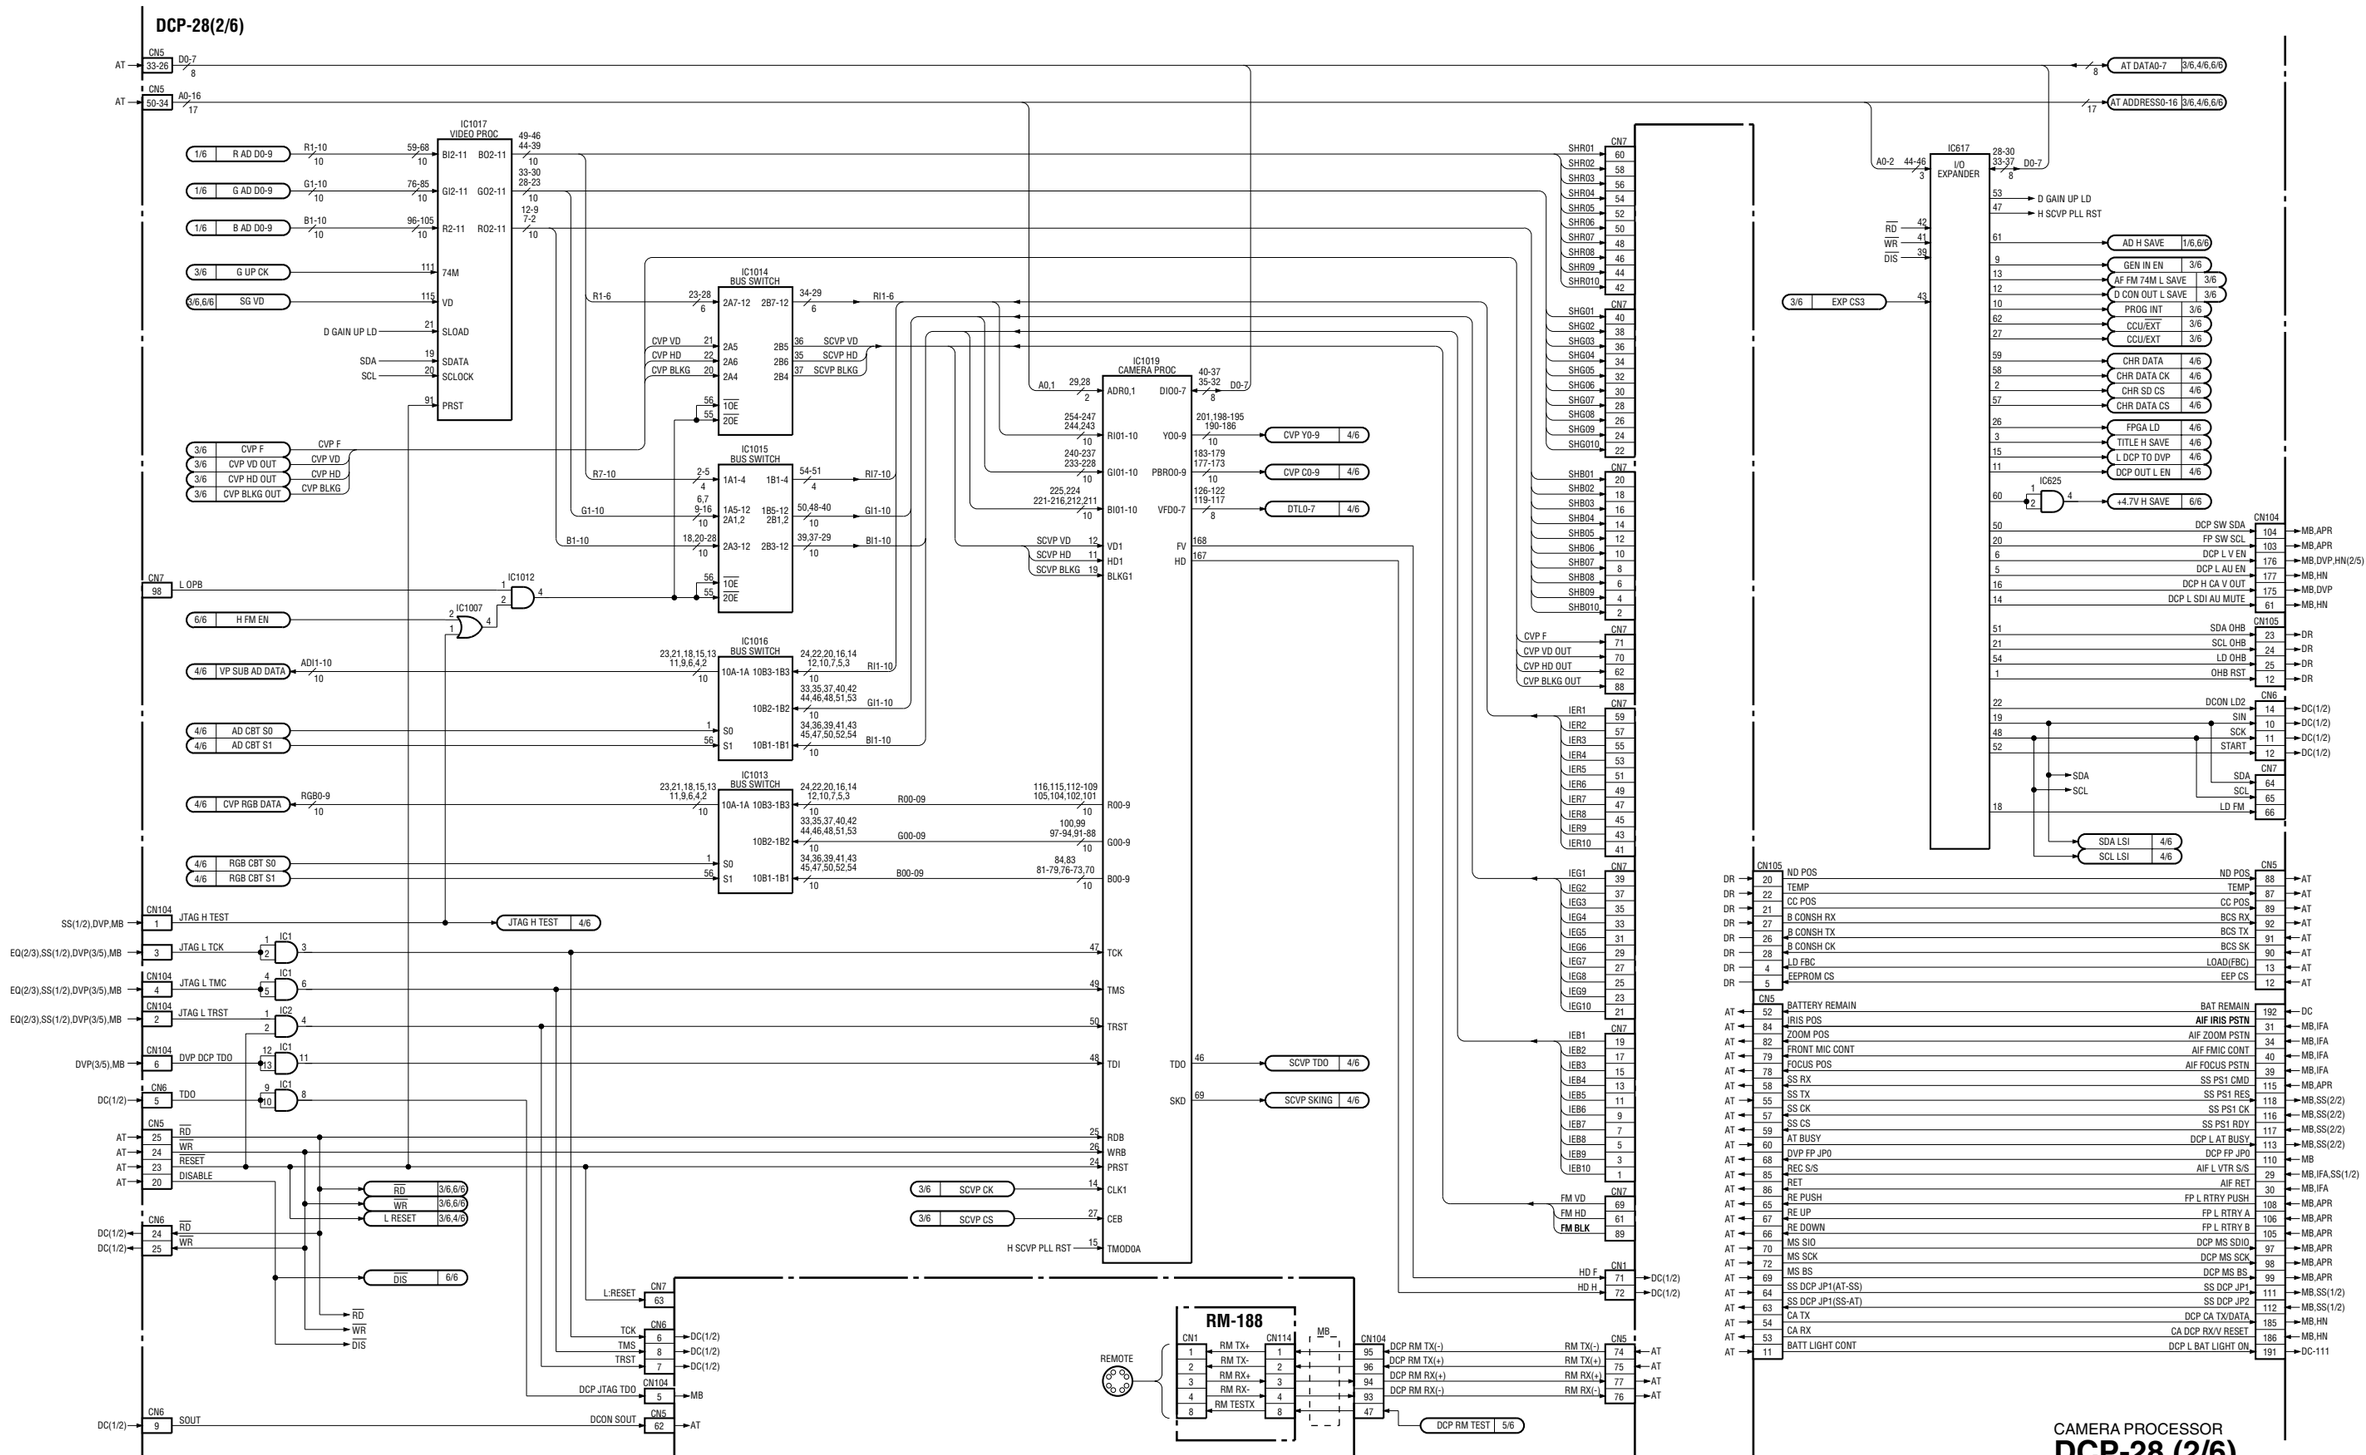

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

DCP-28(3/6)

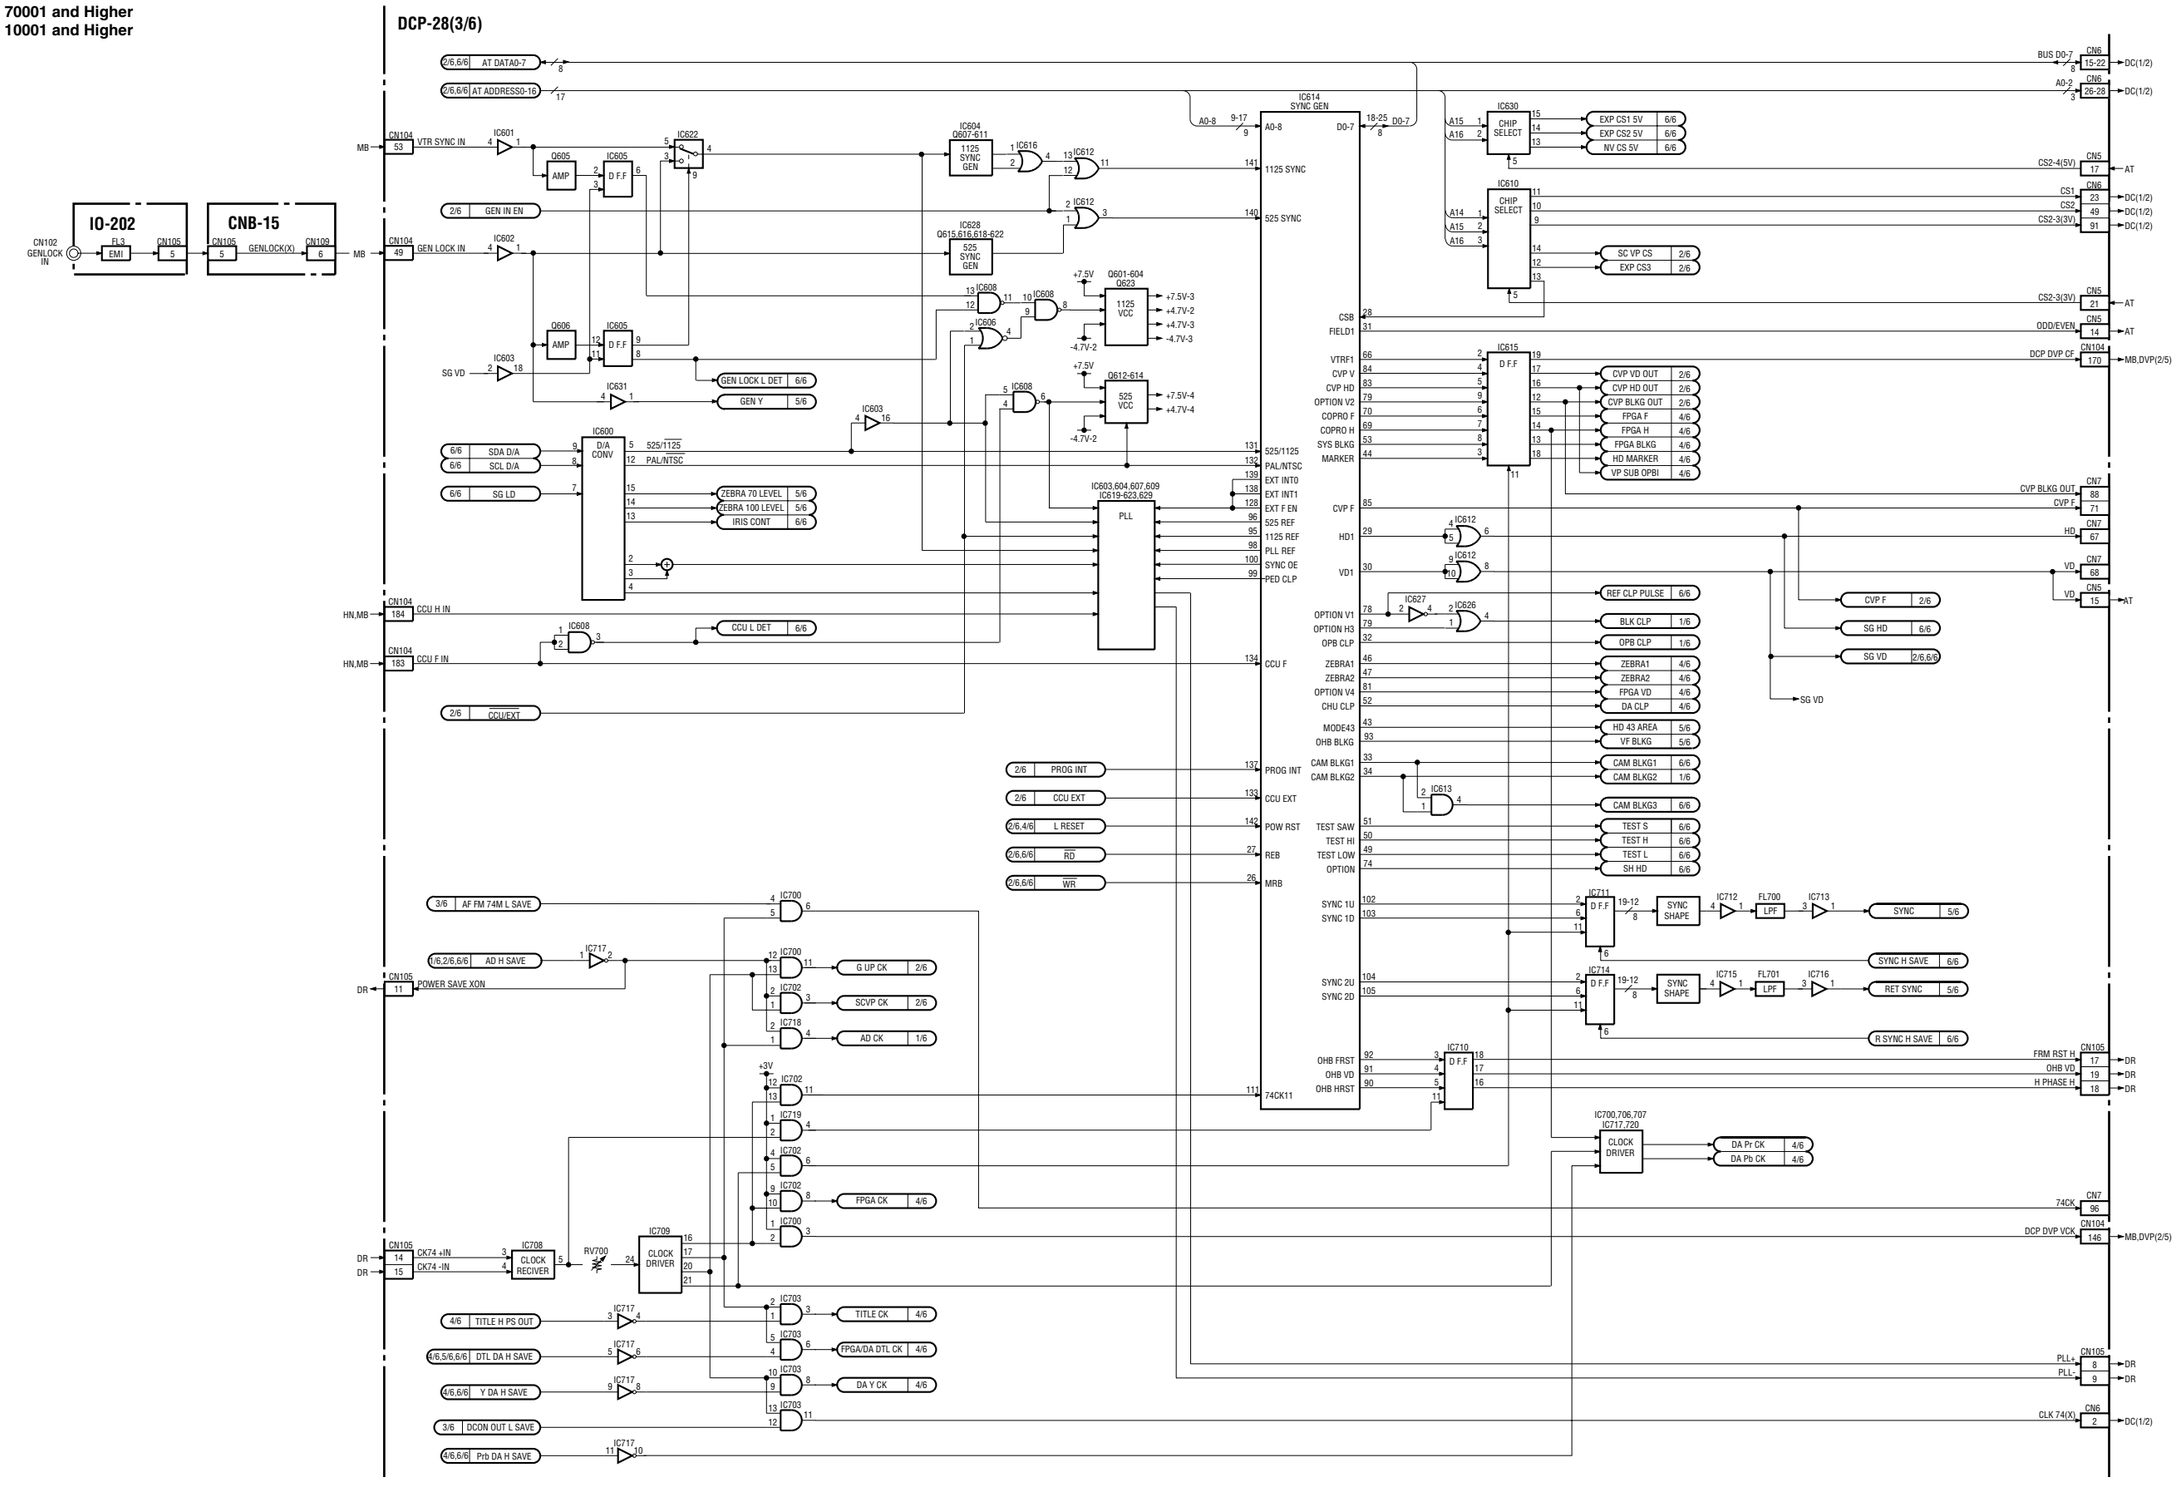

CAMERA PROCESSOR
DCP-28 (3/6)

http://getMANUAL.com

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

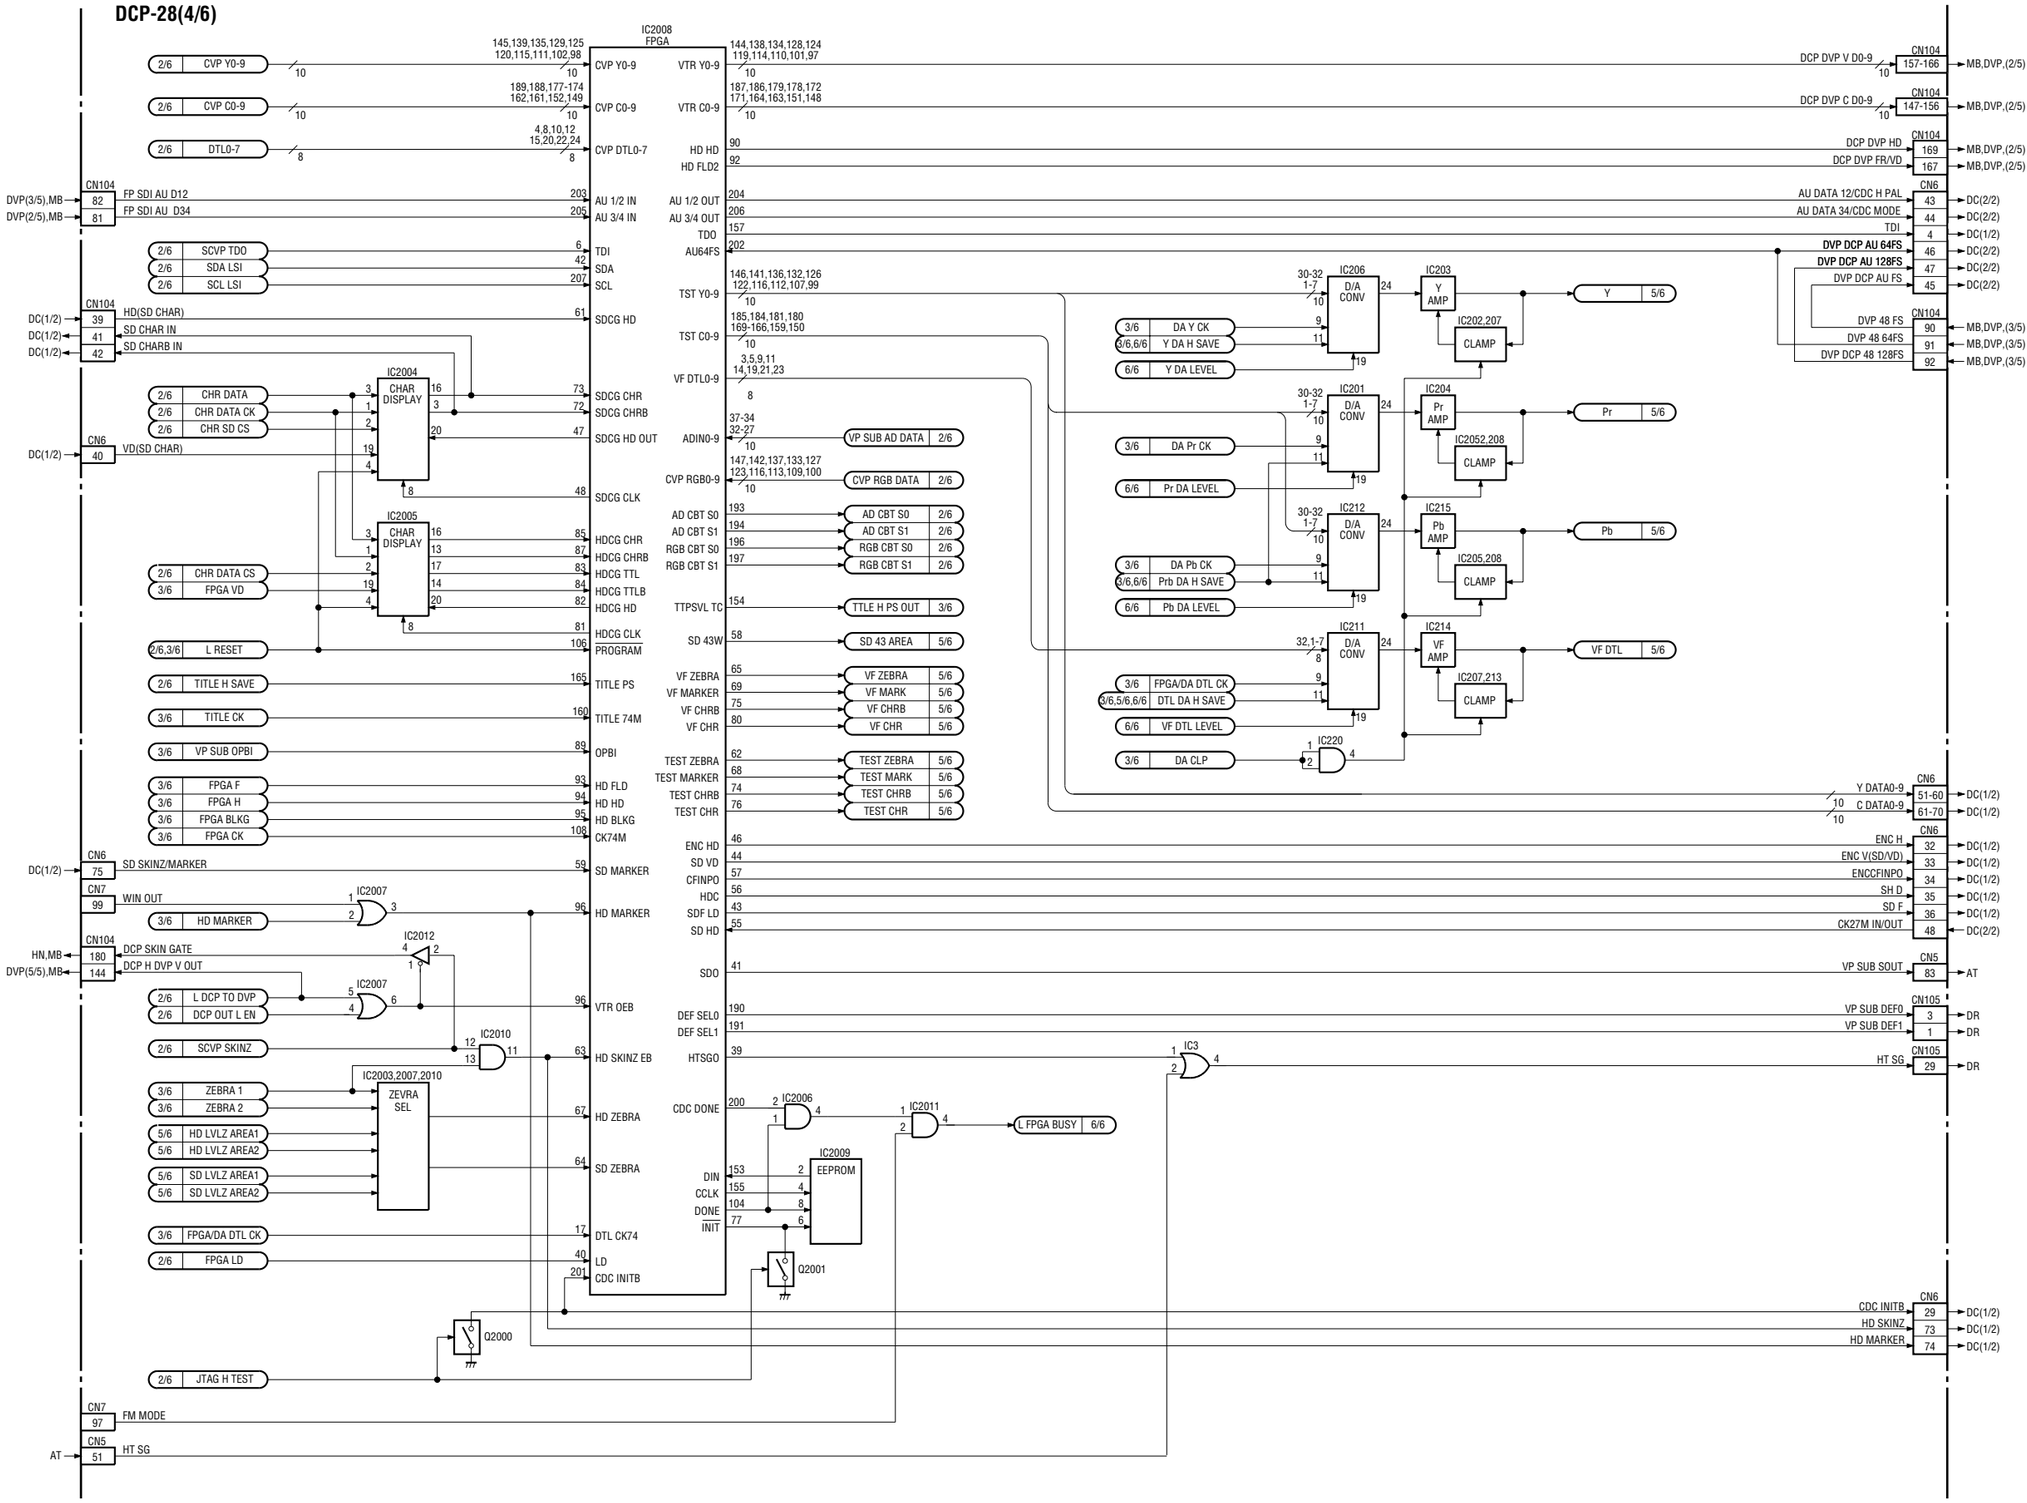

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

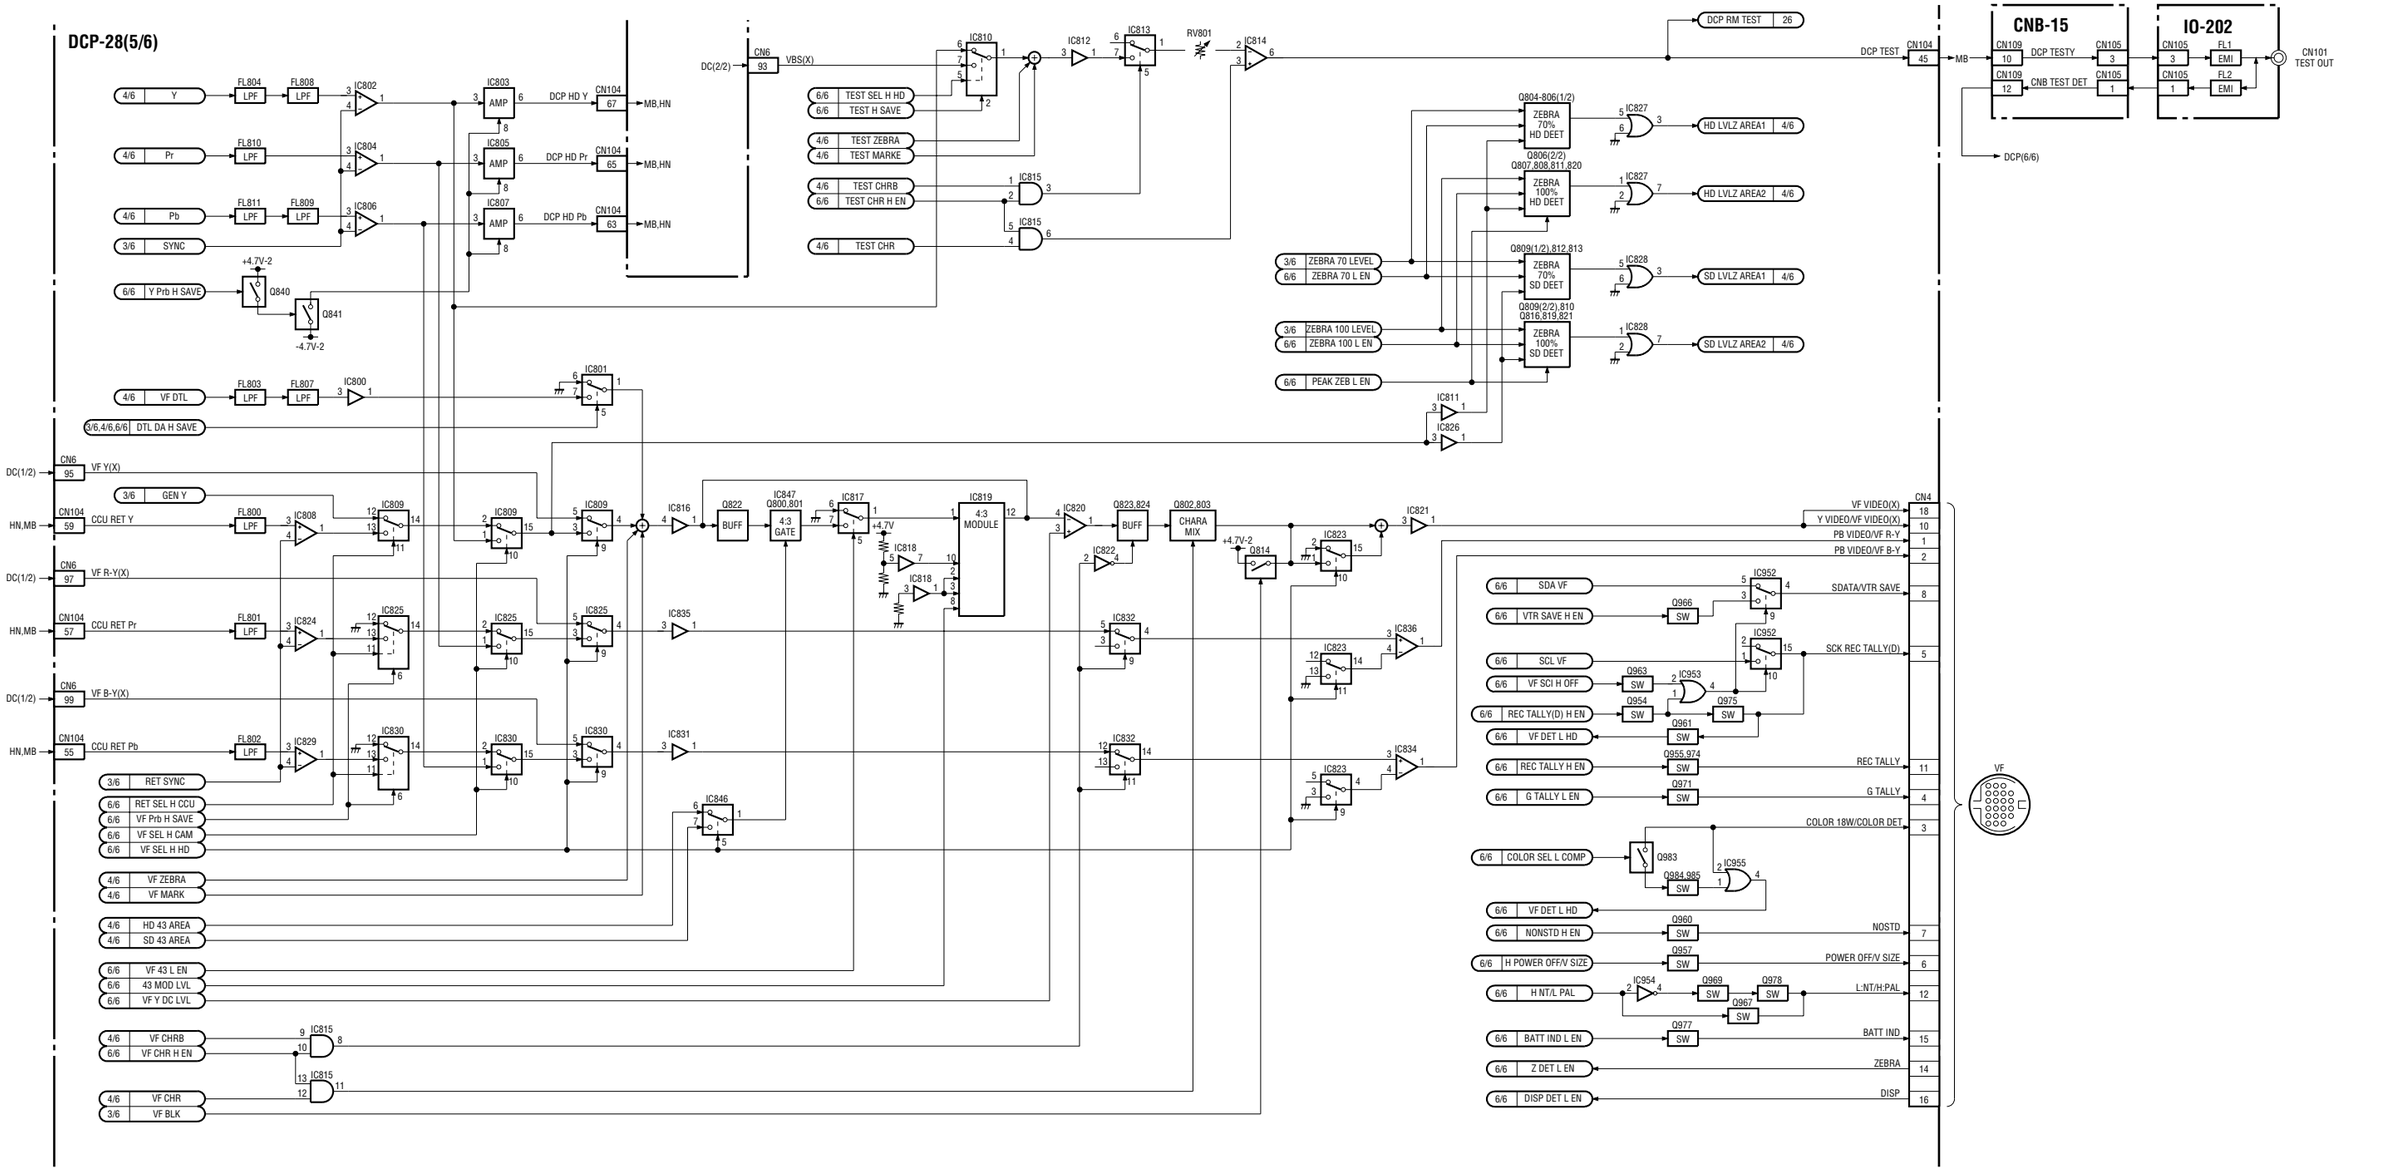

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

DCP-28(6/6)

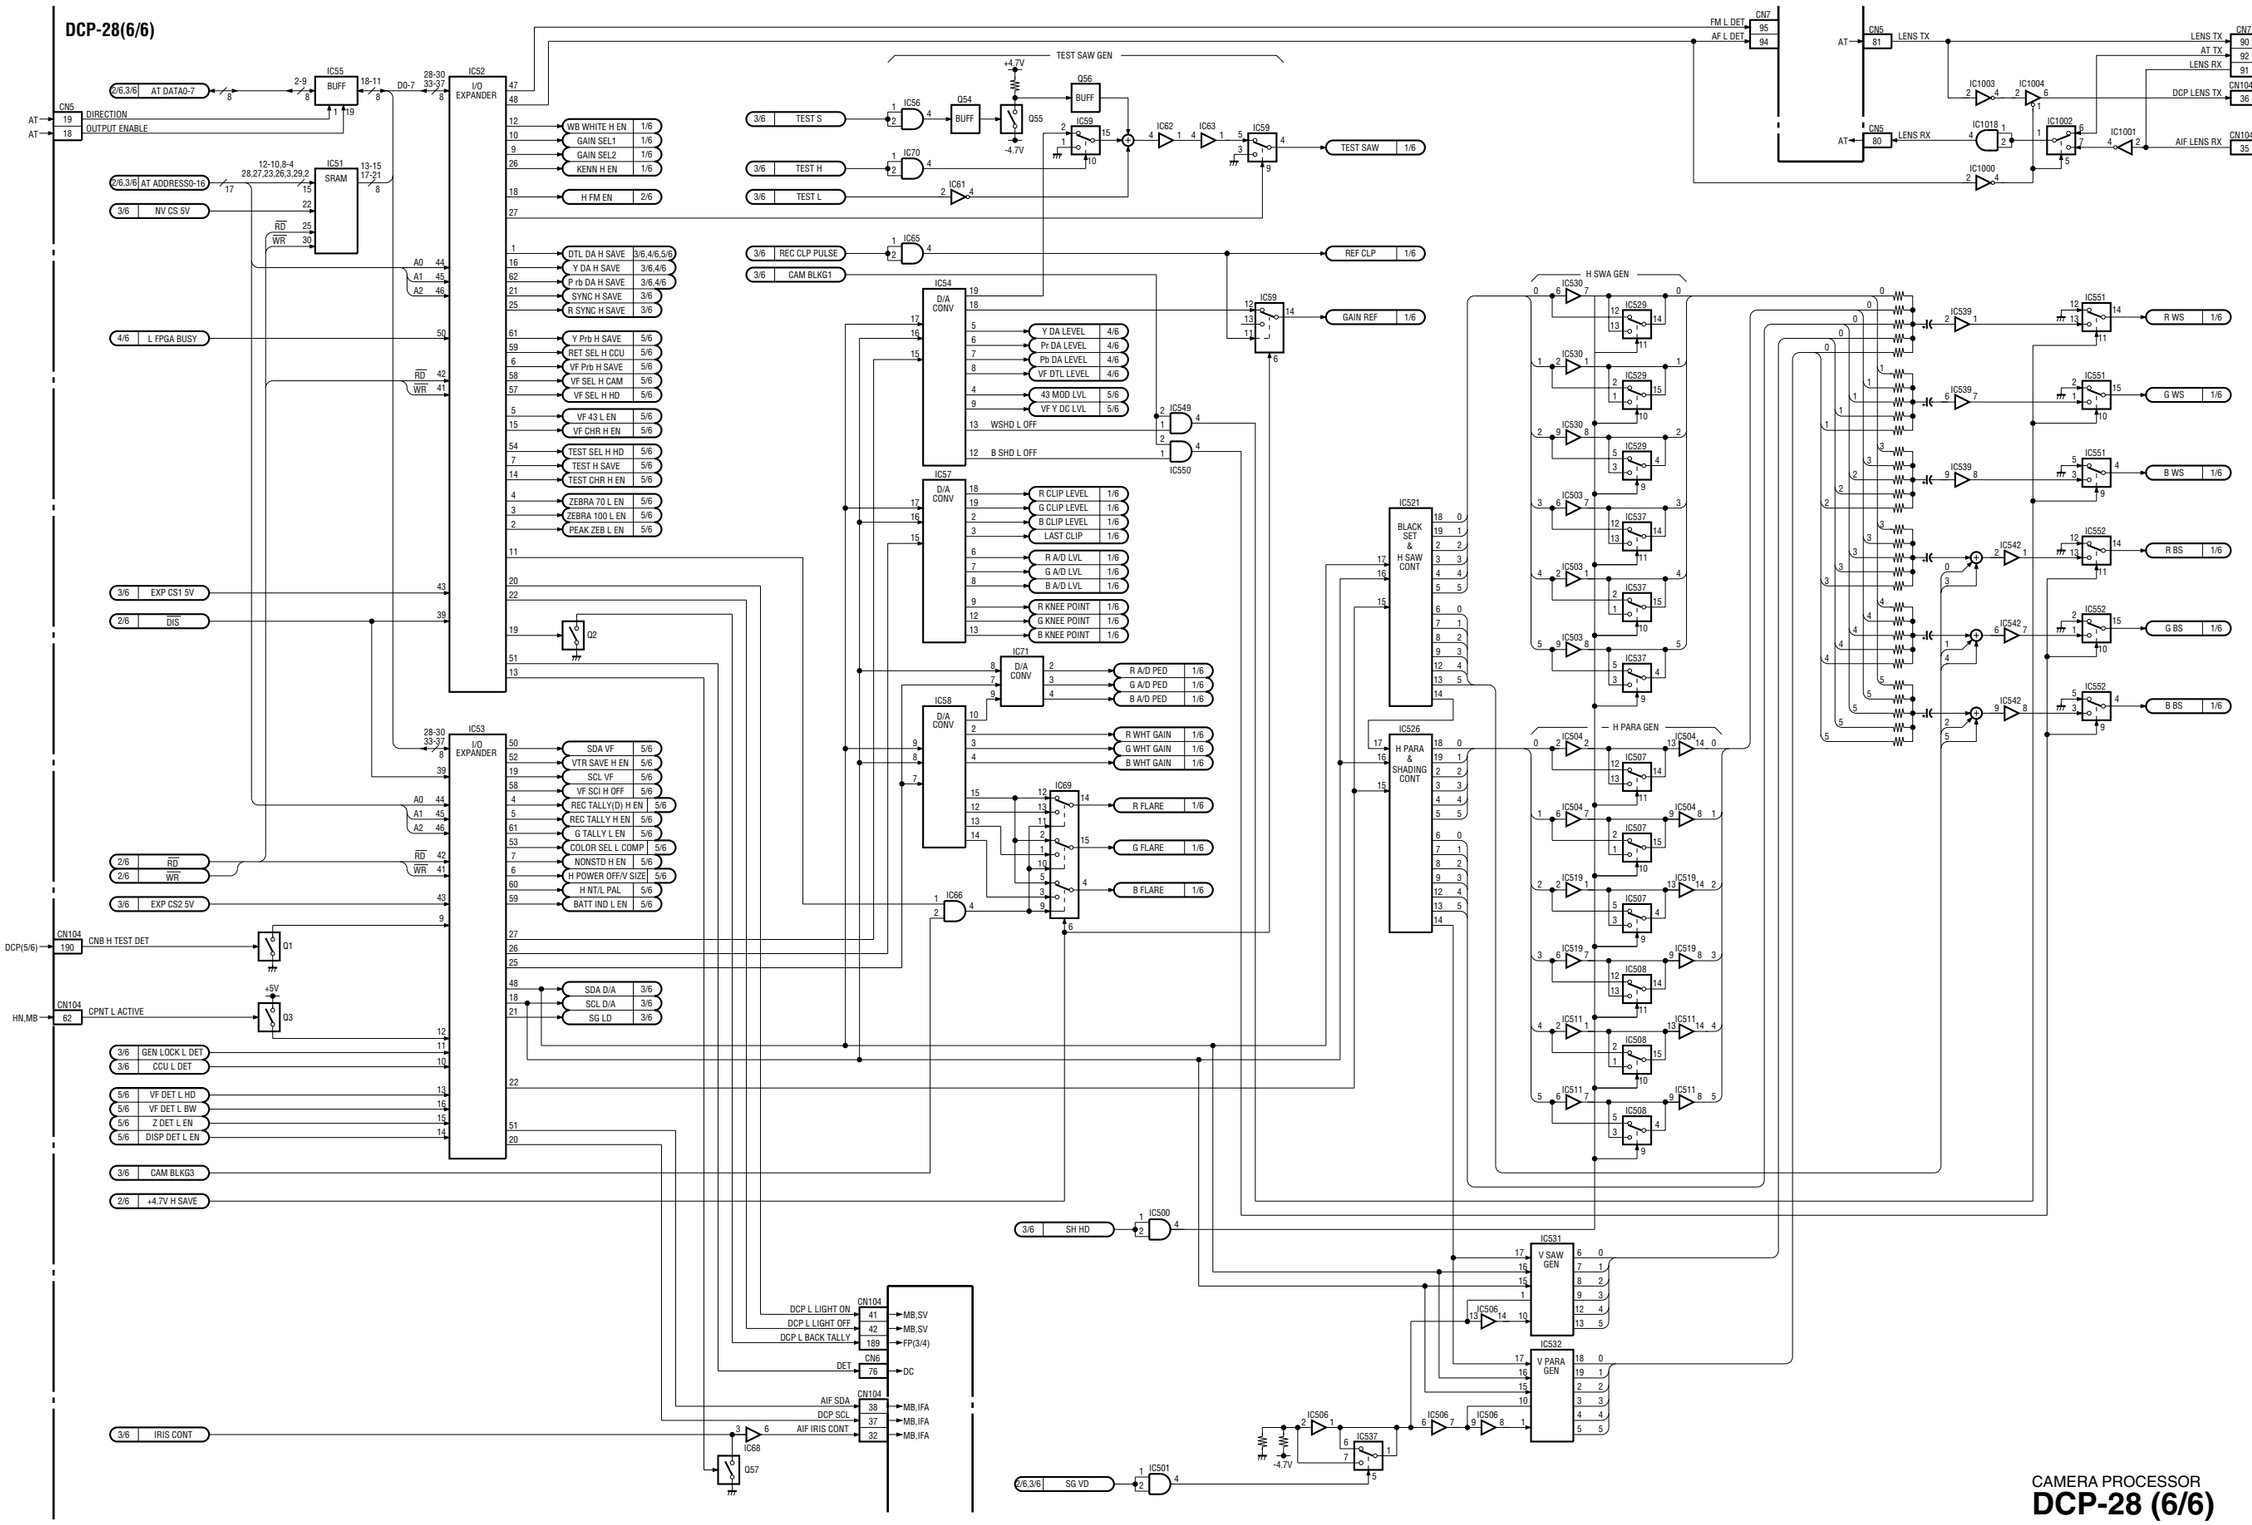

CAMERA PROCESSOR
DCP-28 (6/6)

HDW-750 (J) : S/N 70001 and Higher
HKDW-702 (UCJ) : S/N 10001 and Higher

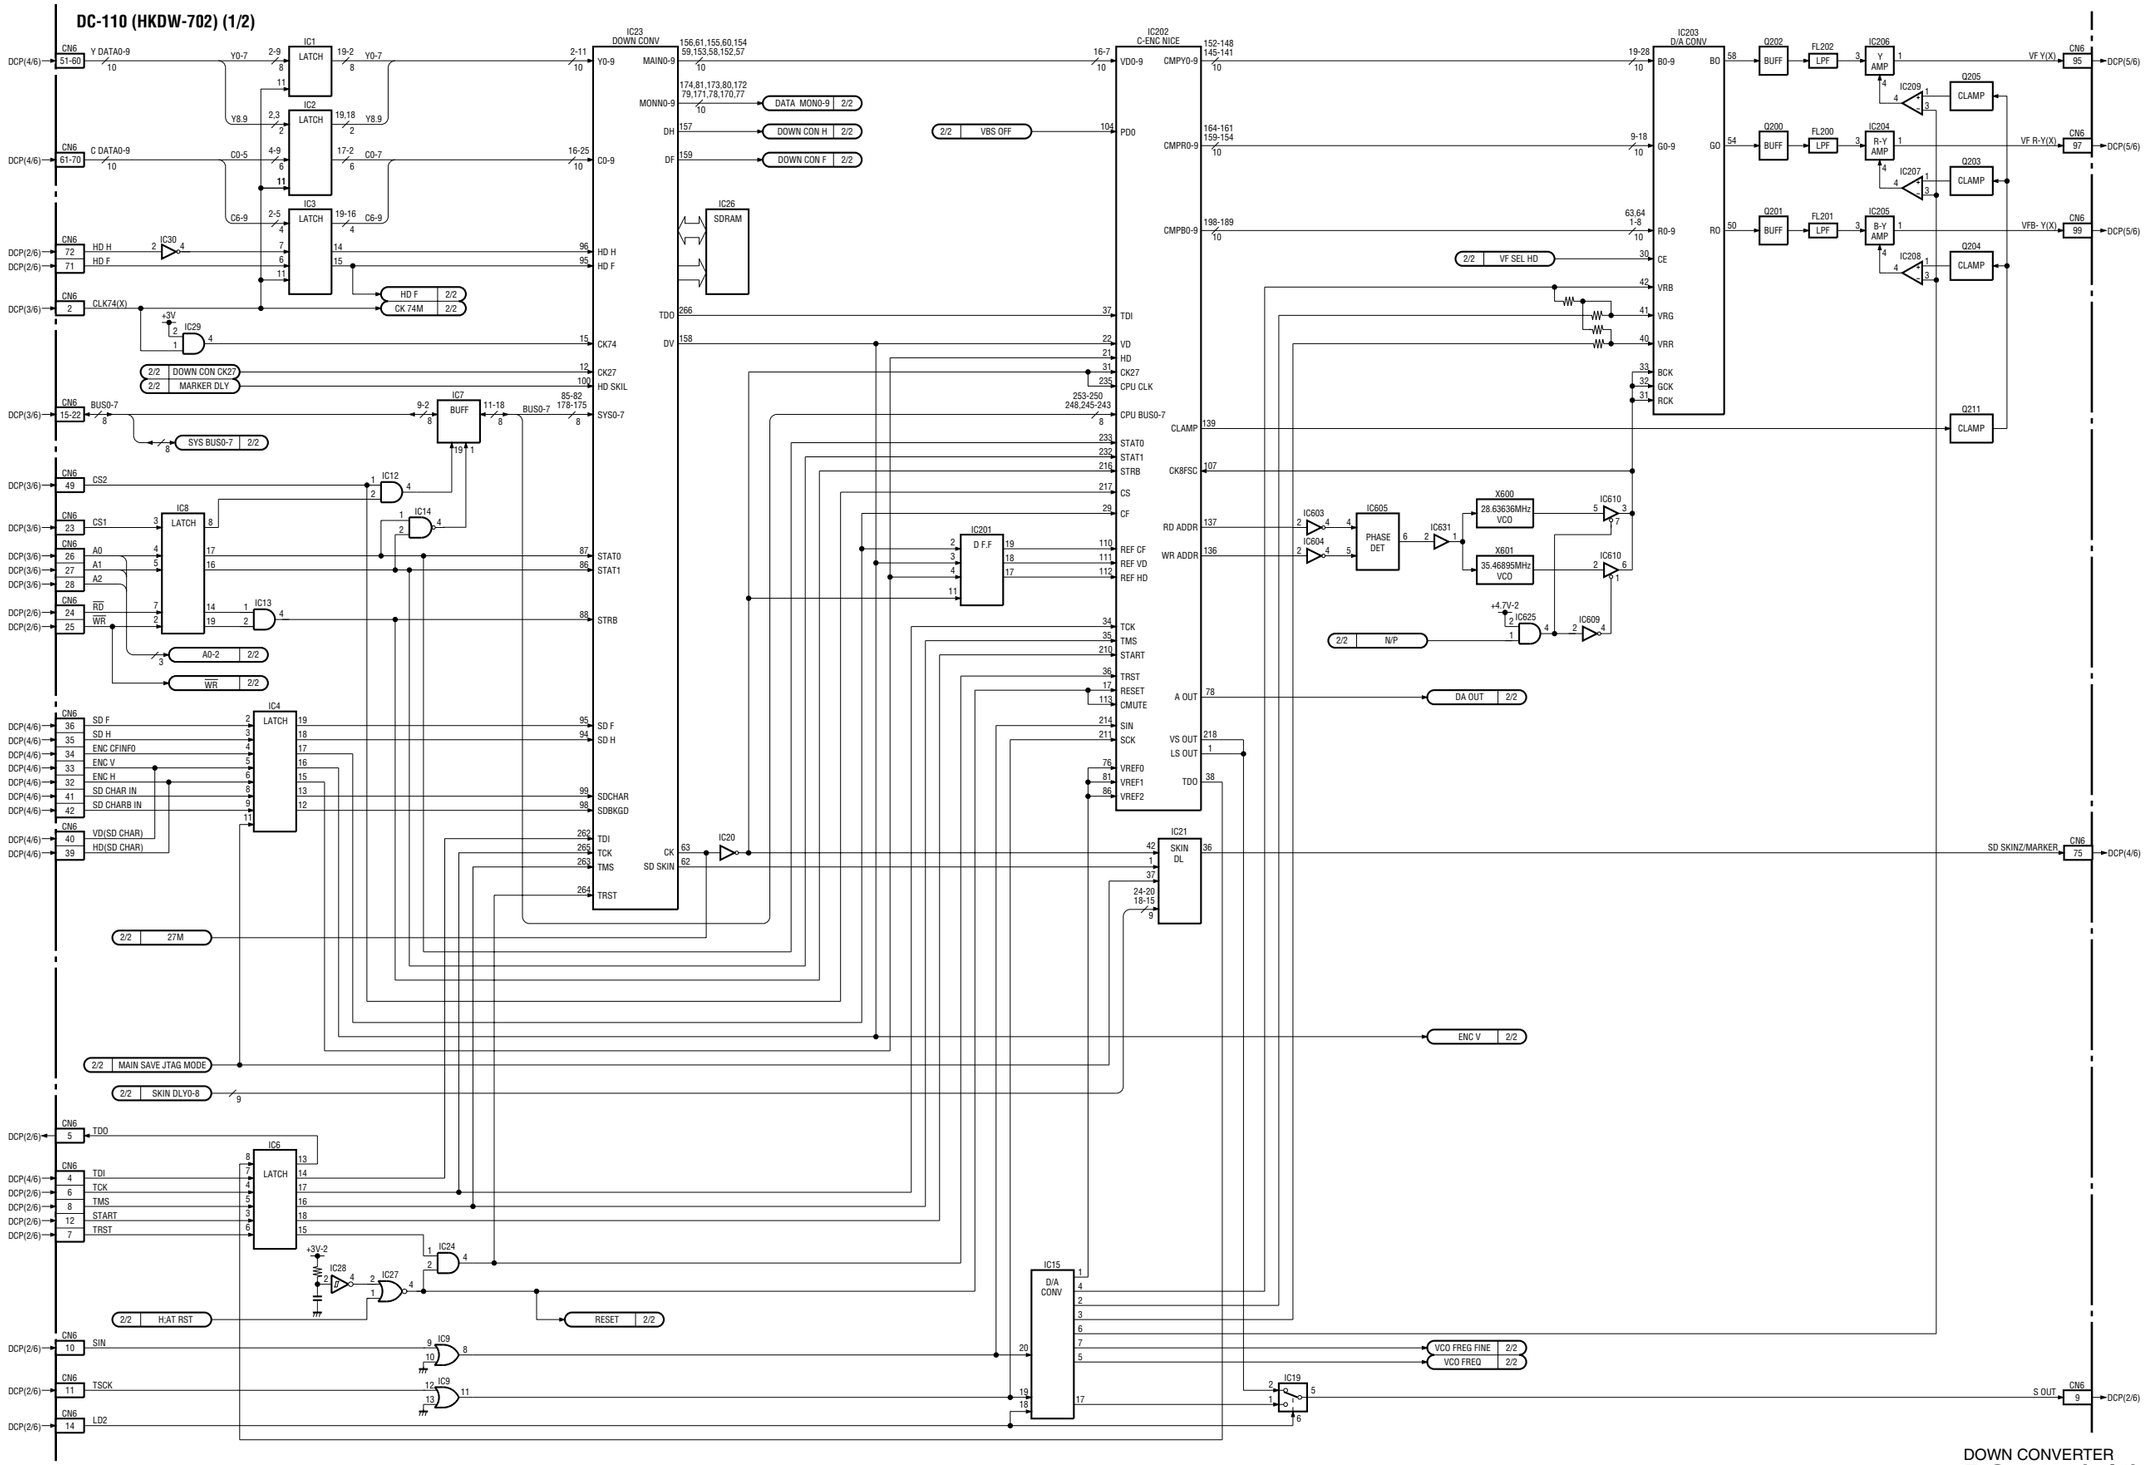

DOWN CONVERTER
DC-110 (1/2)

HDW-750 (J) : S/N 70001 and Higher
HKDW-702 (UCJ) : S/N 10001 and Higher

DC-110 (HKDW-702) (2/2)

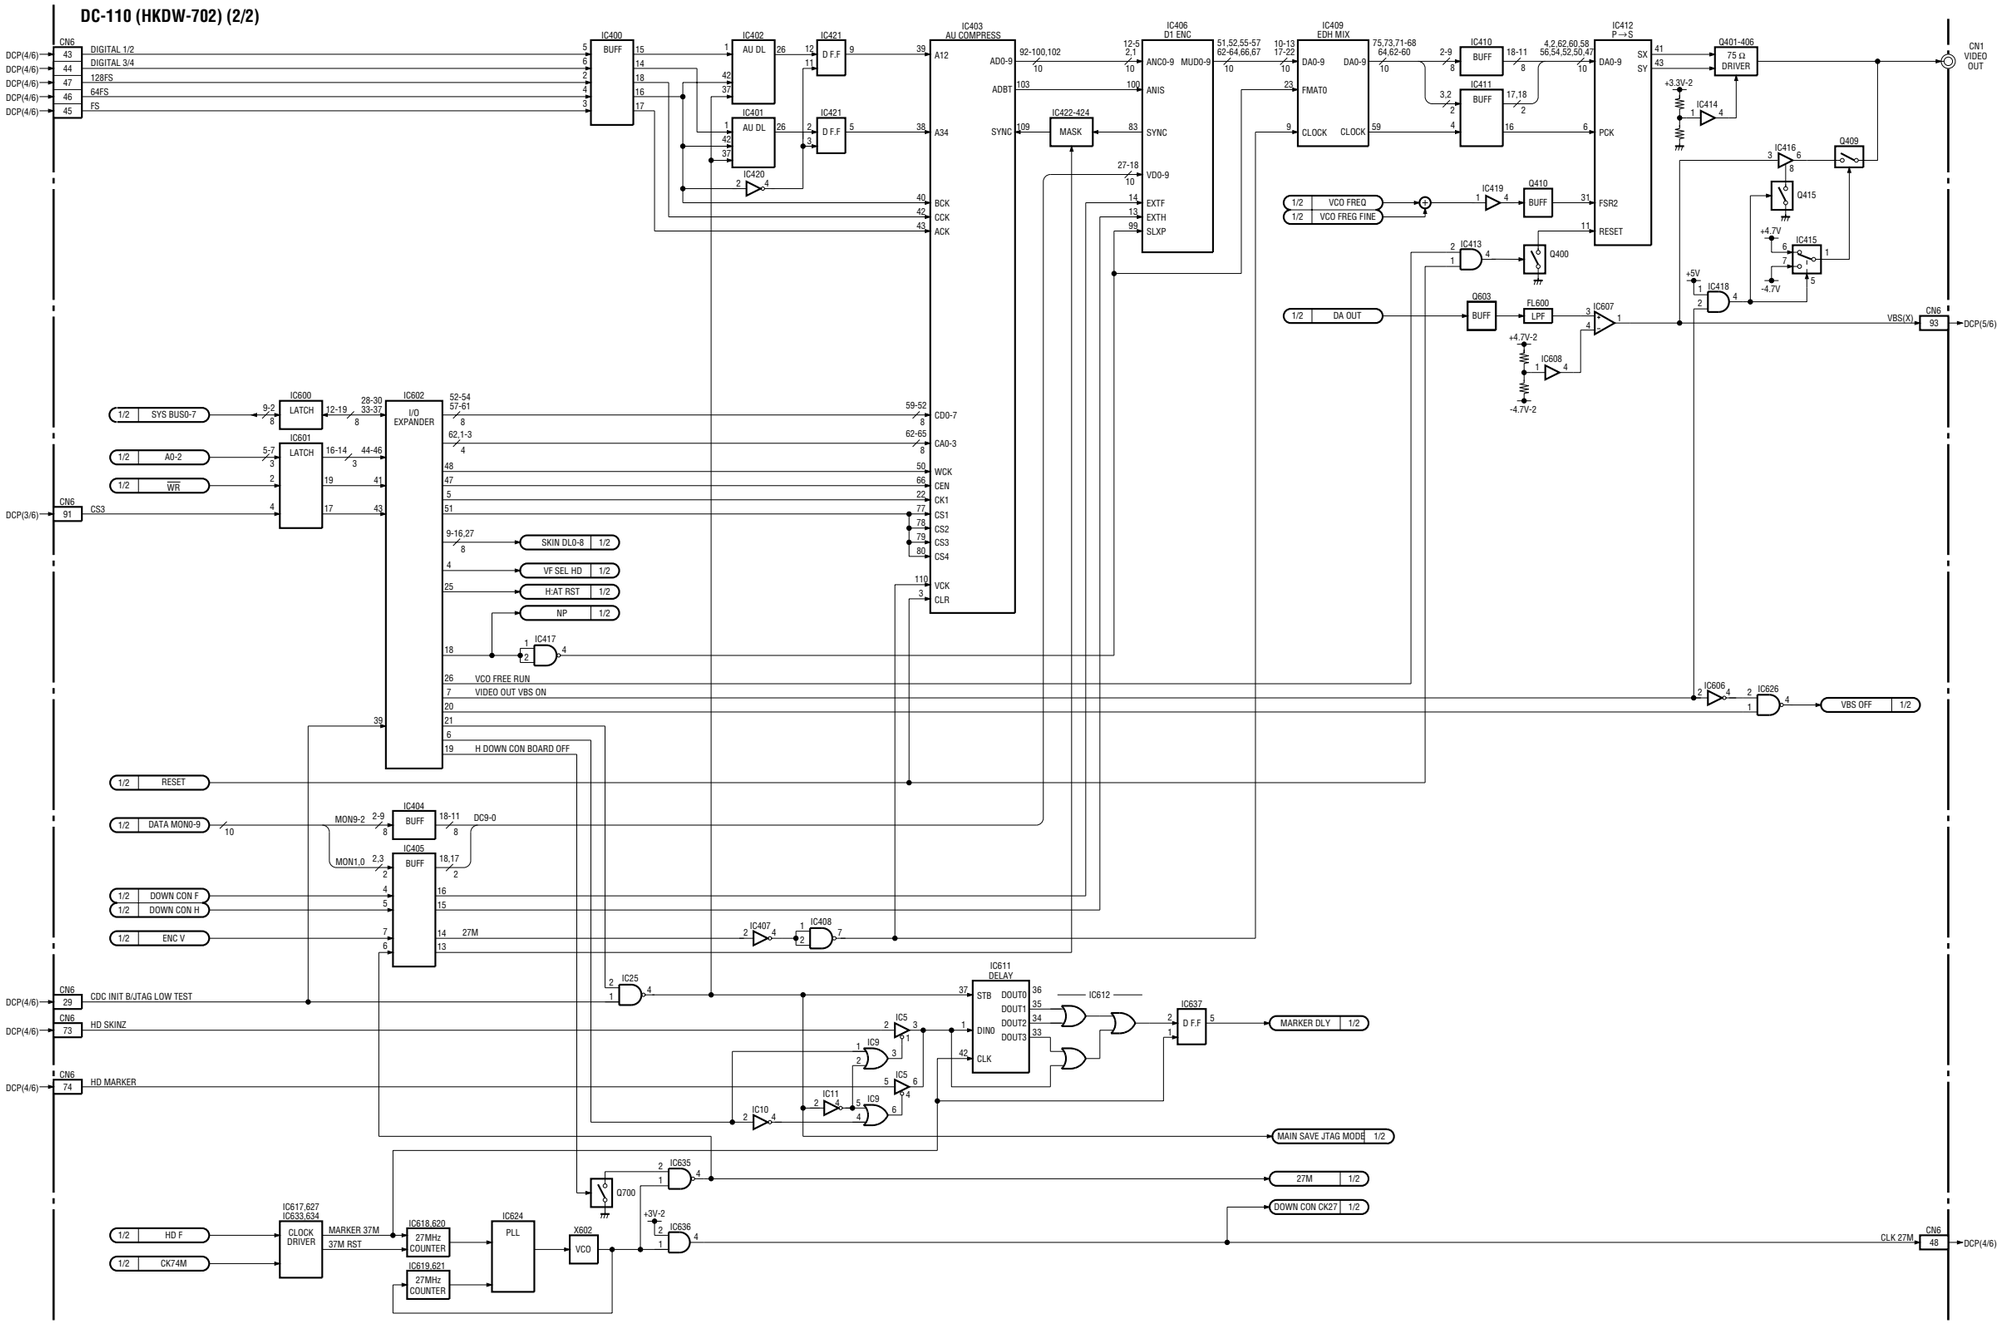

DOWN CONVERTER
DC-110 (2/2)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

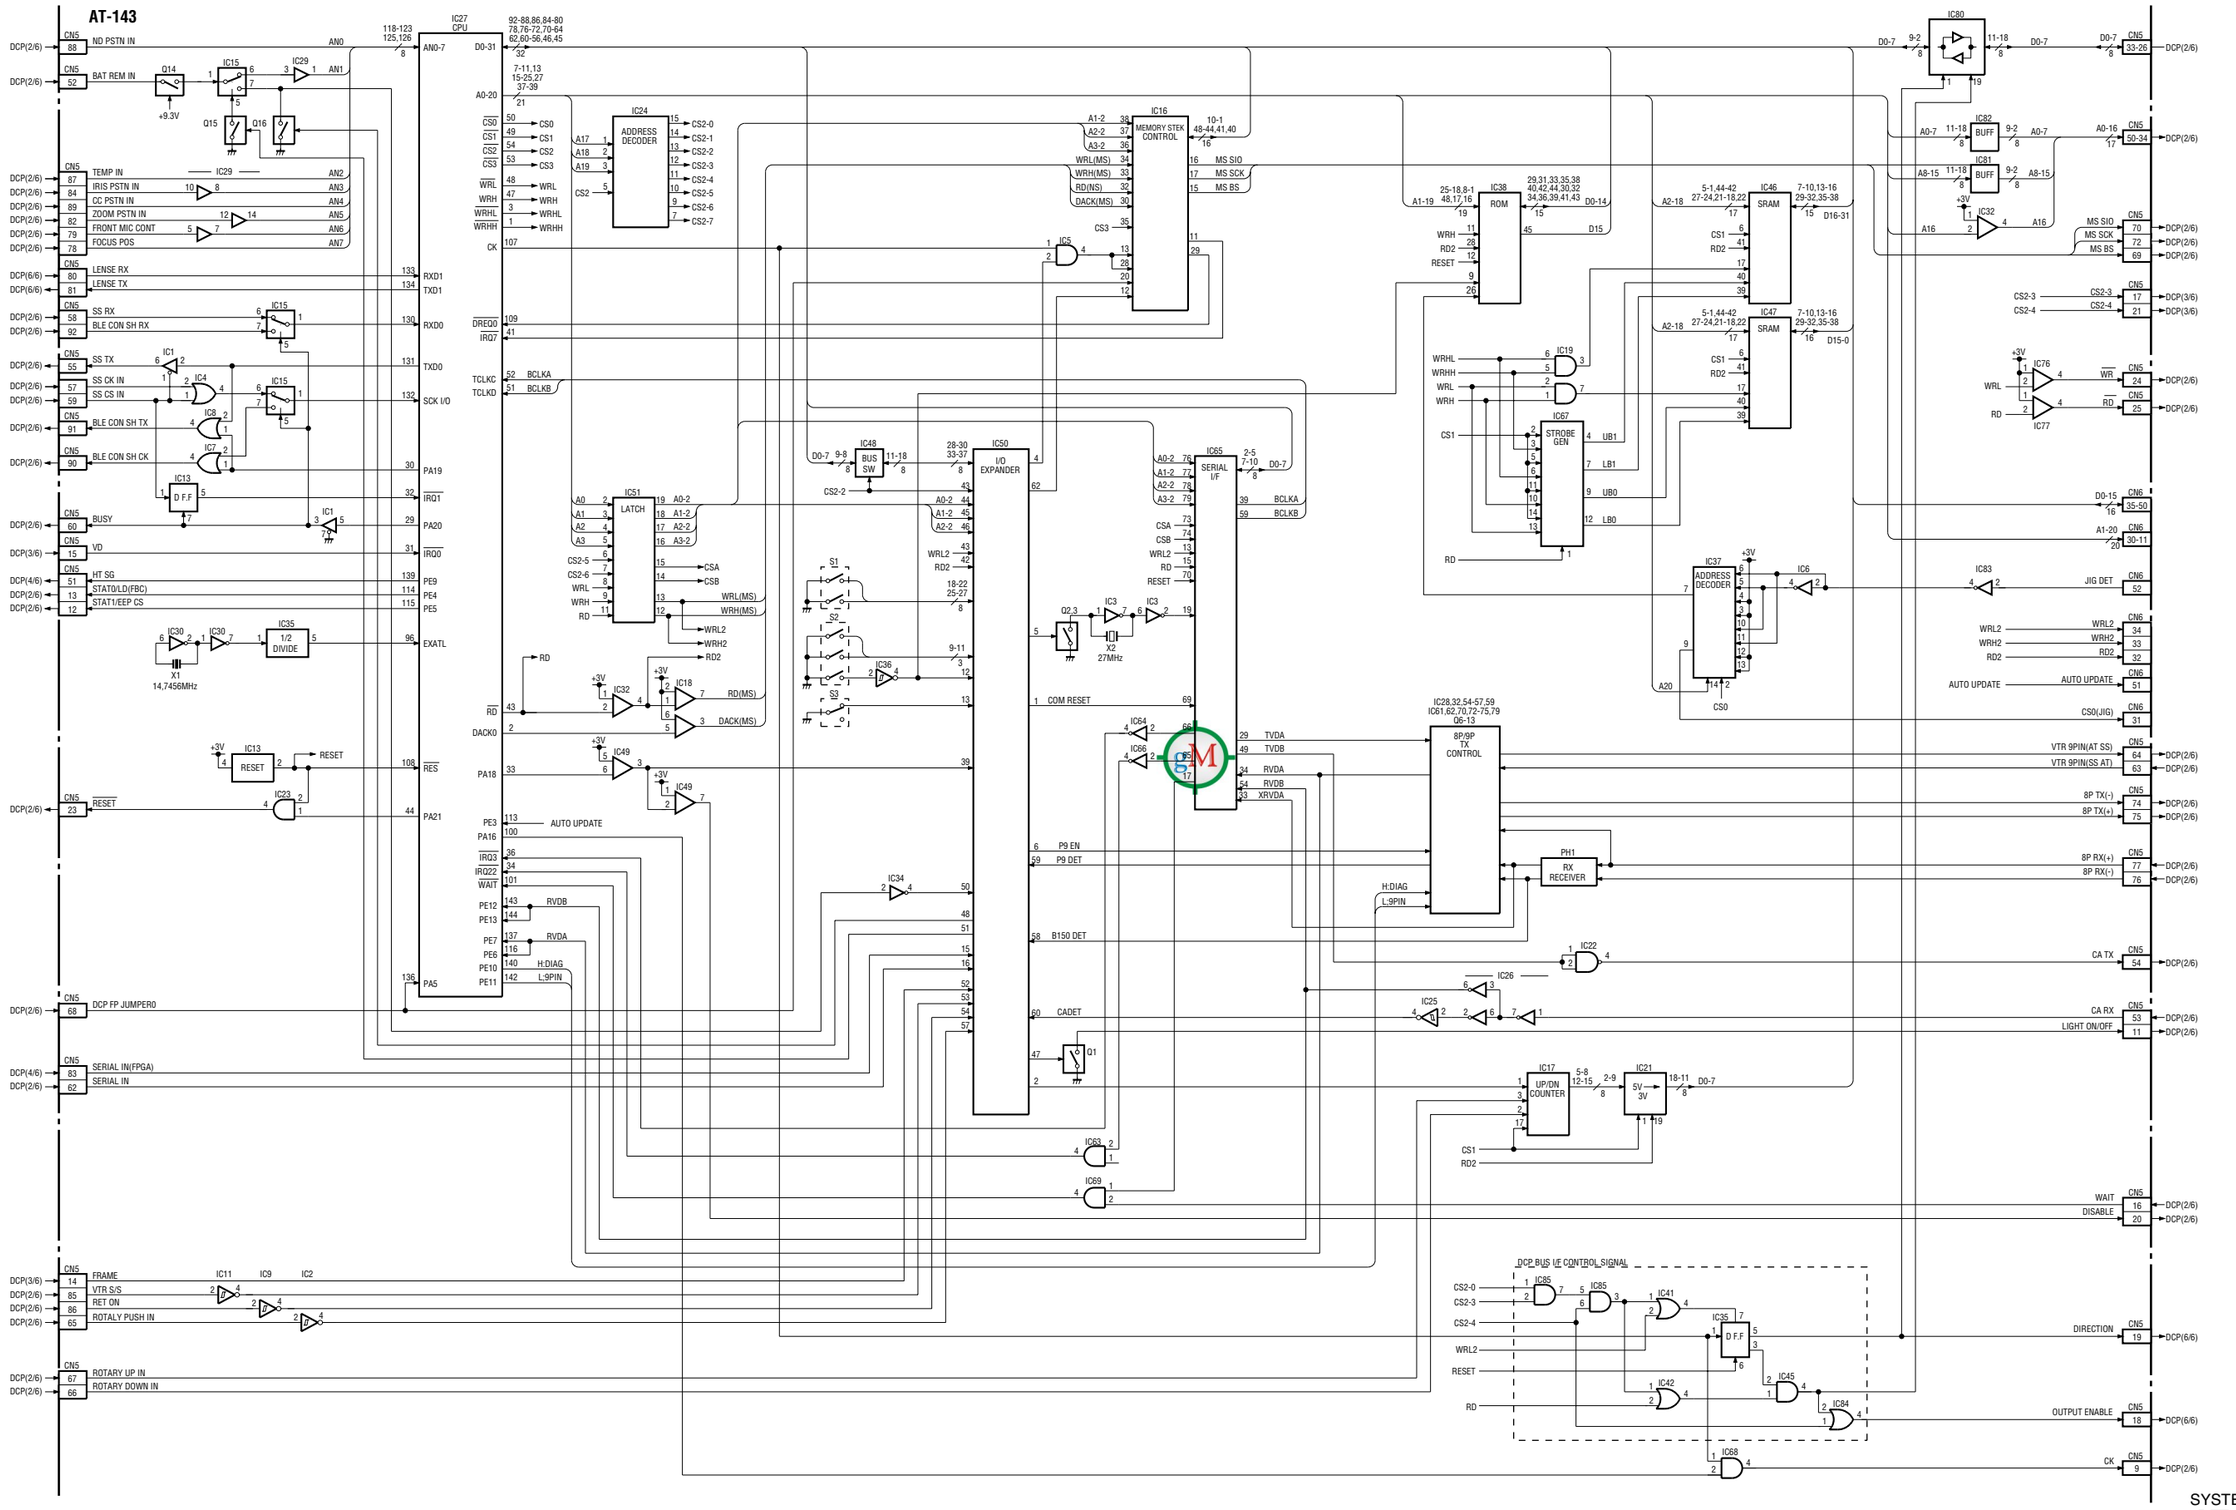

SYSTEM CONTROL
AT-143

VTR BLOCK Overall (1/3)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

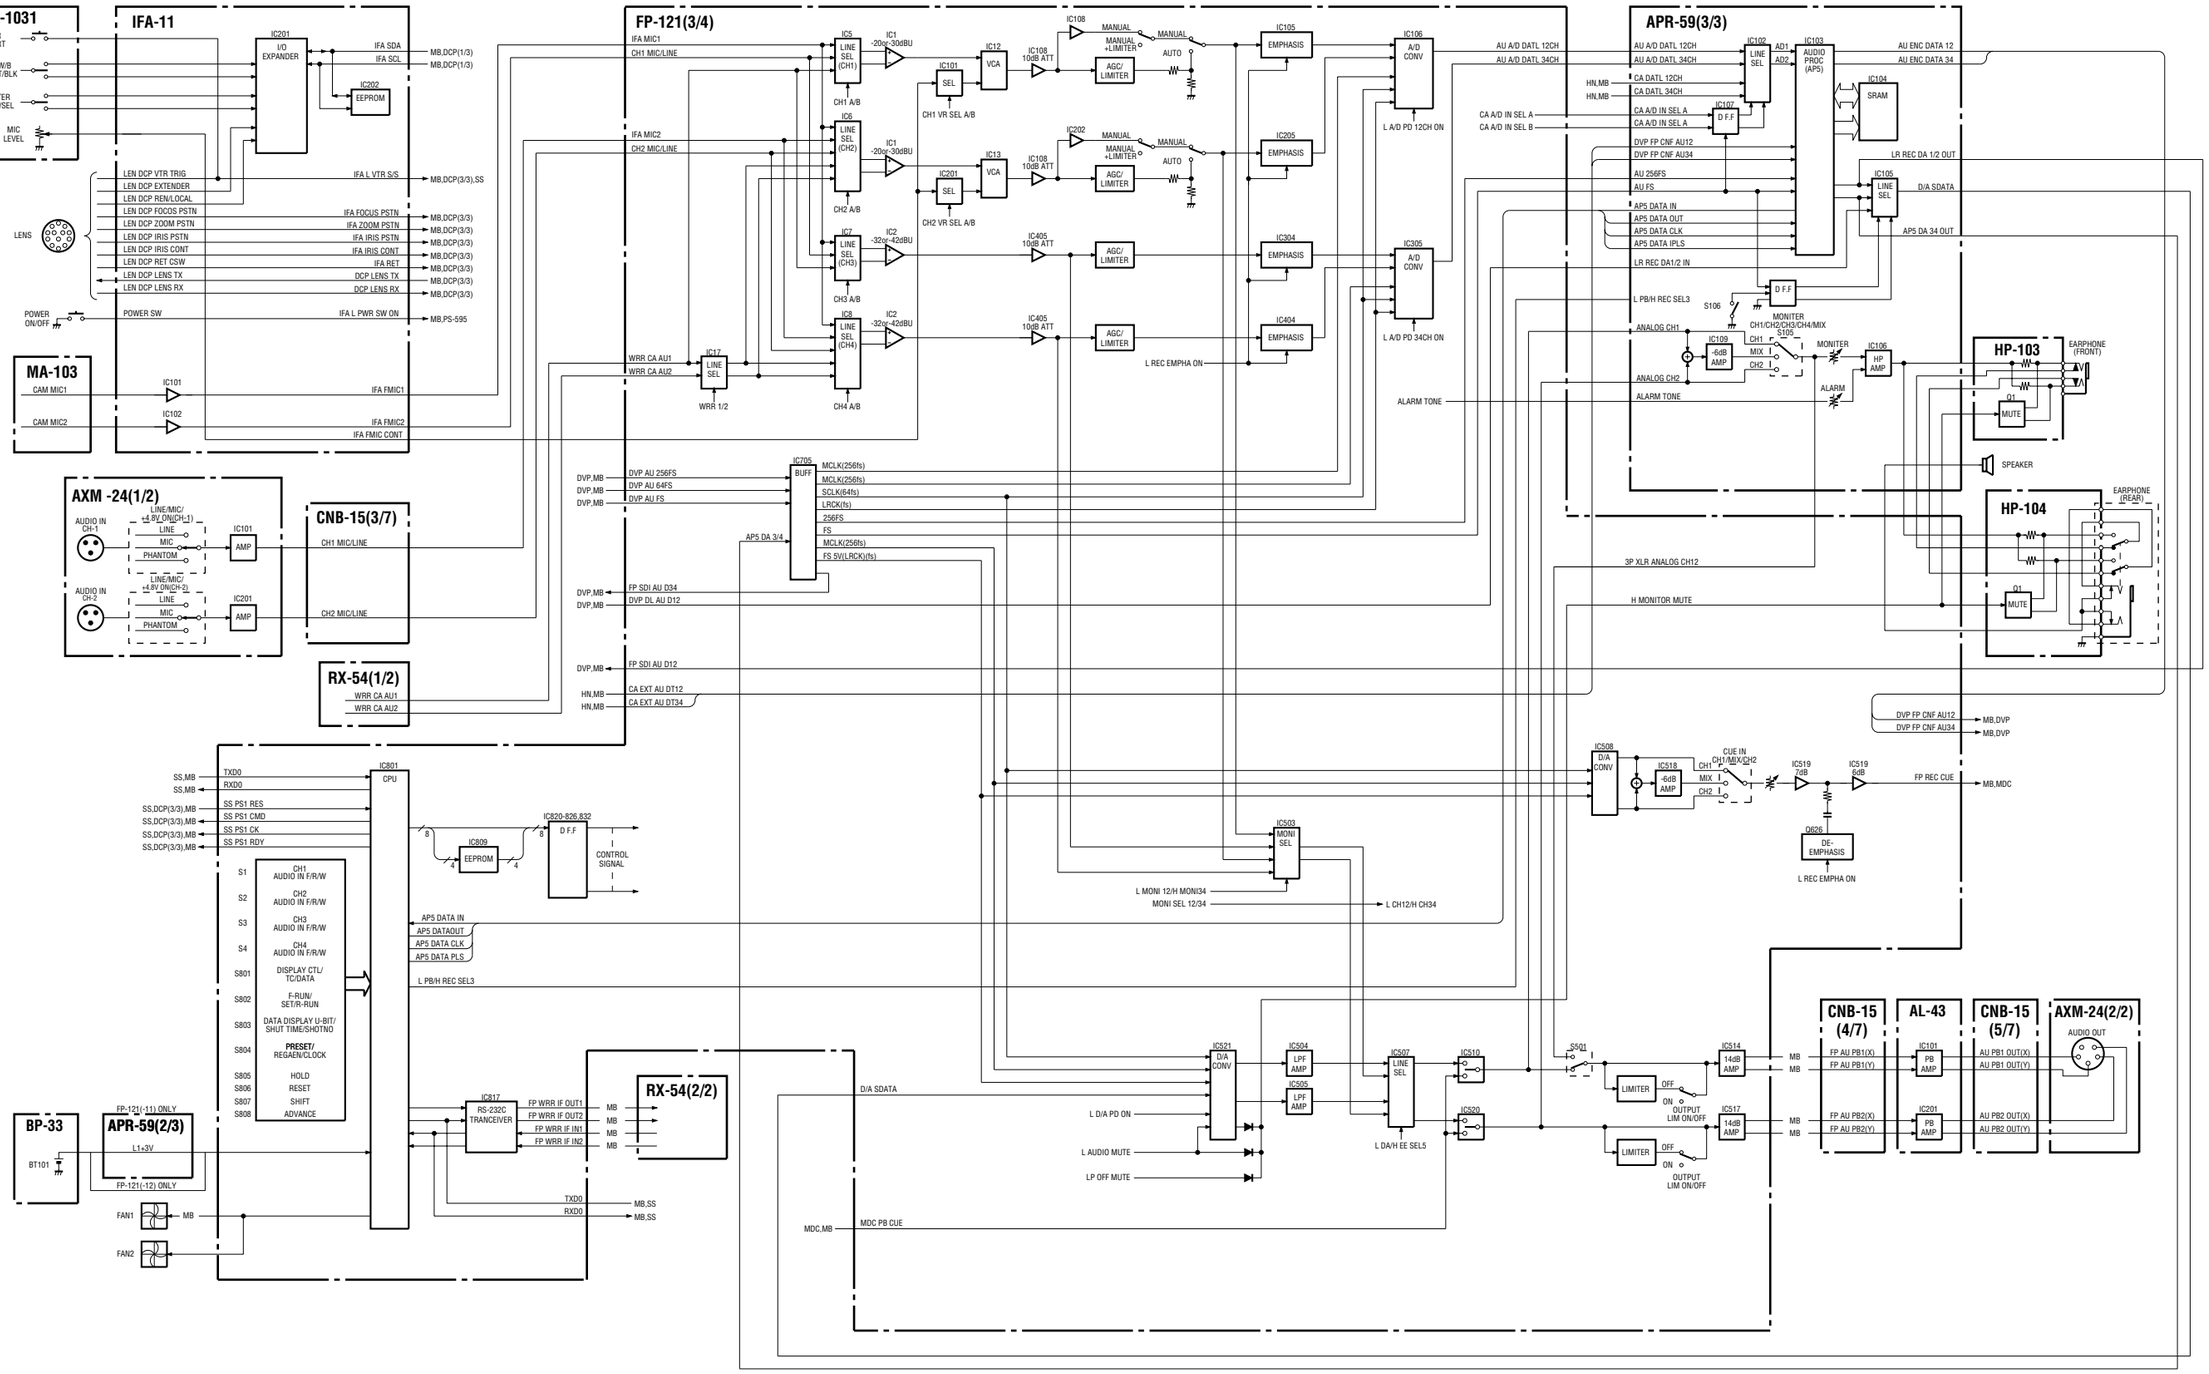

VTR BLOCK Overall (1/3)

VTR BLOCK Overall (2/3)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

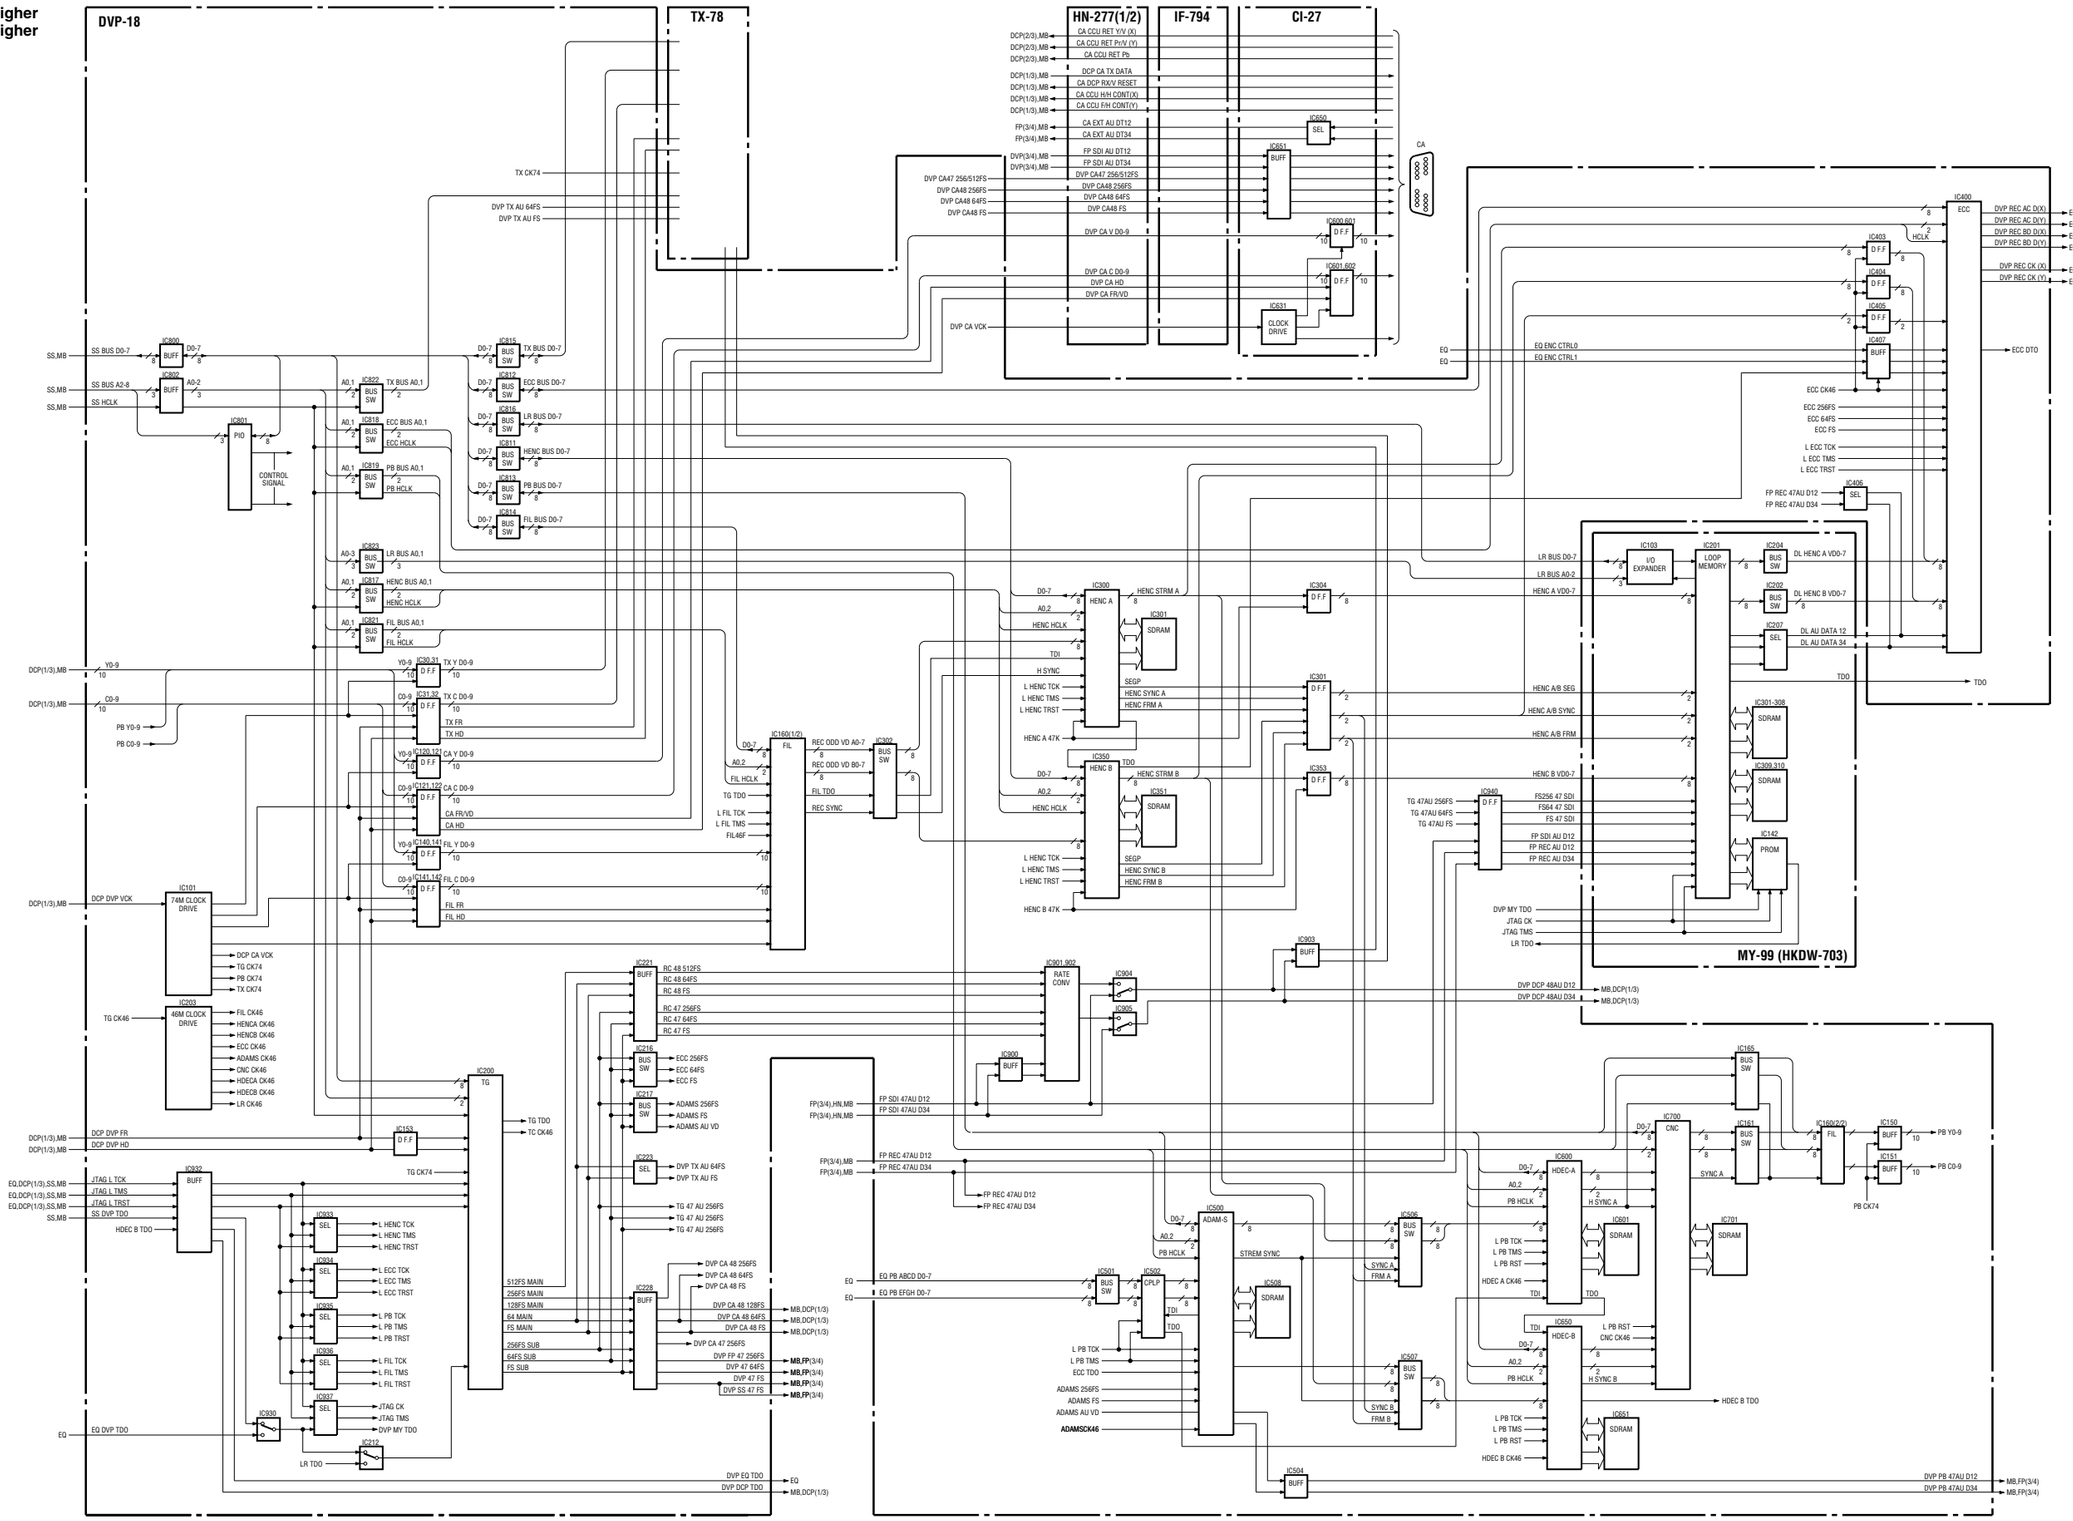

3-16

VTR BLOCK Overall (3/3)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

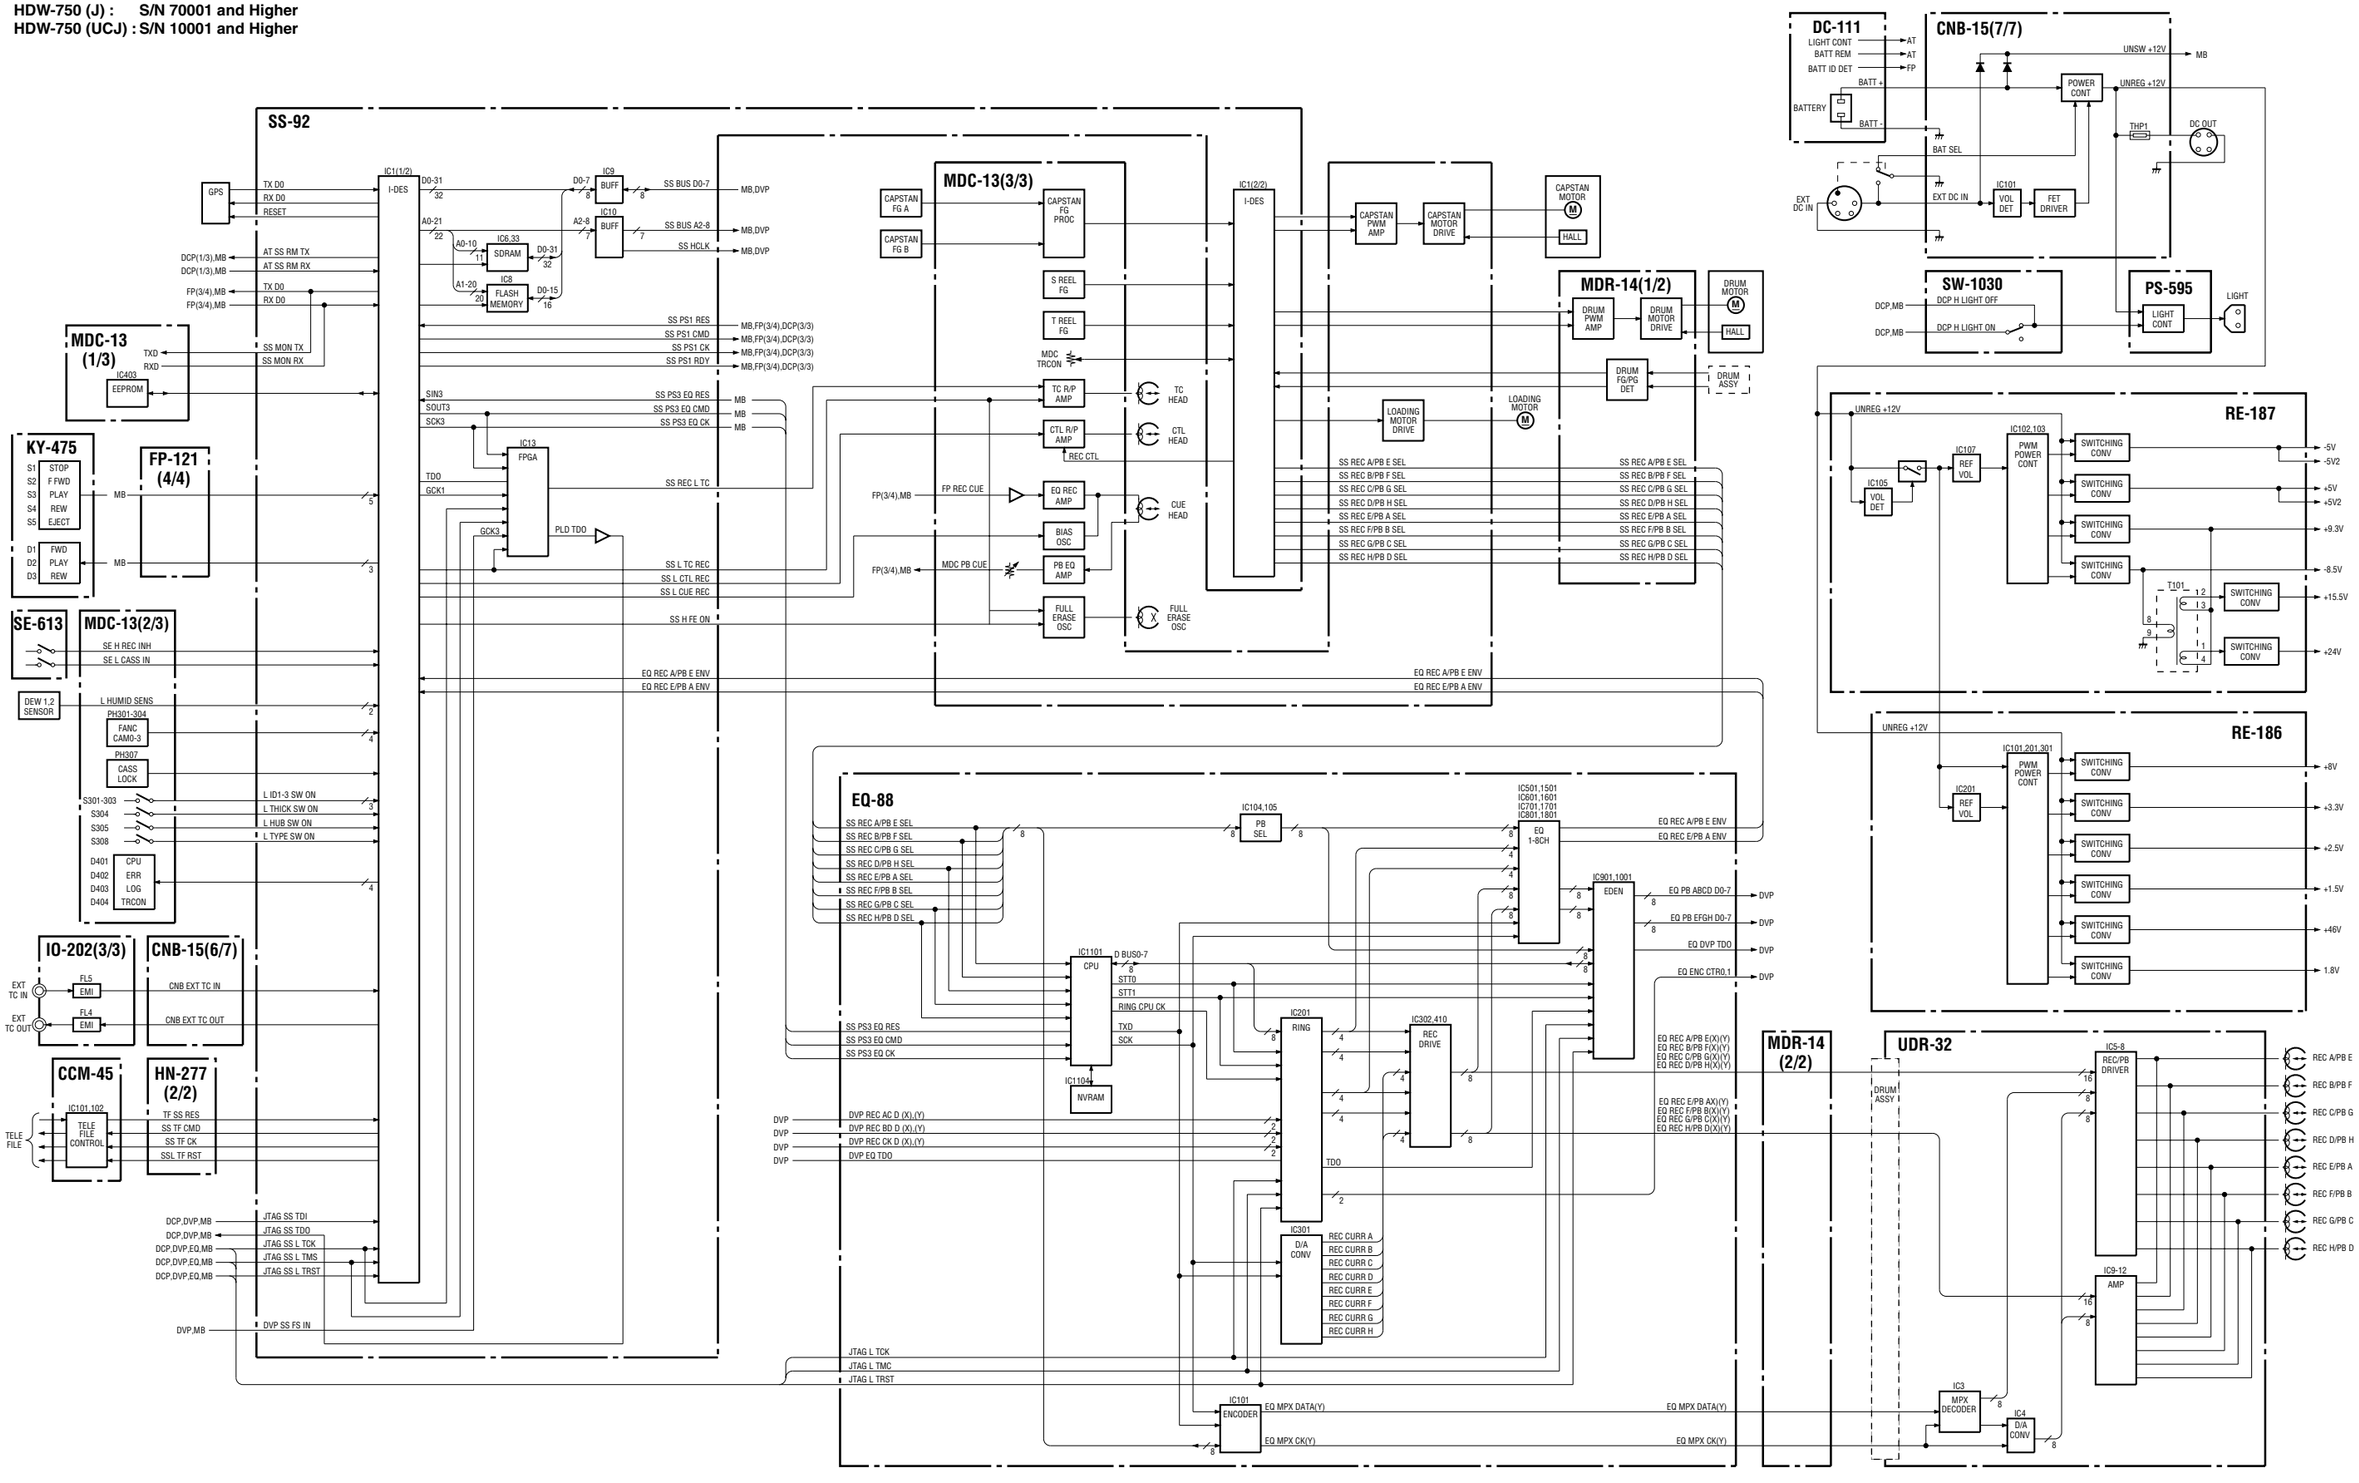

VTR BLOCK Overall (3/3)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

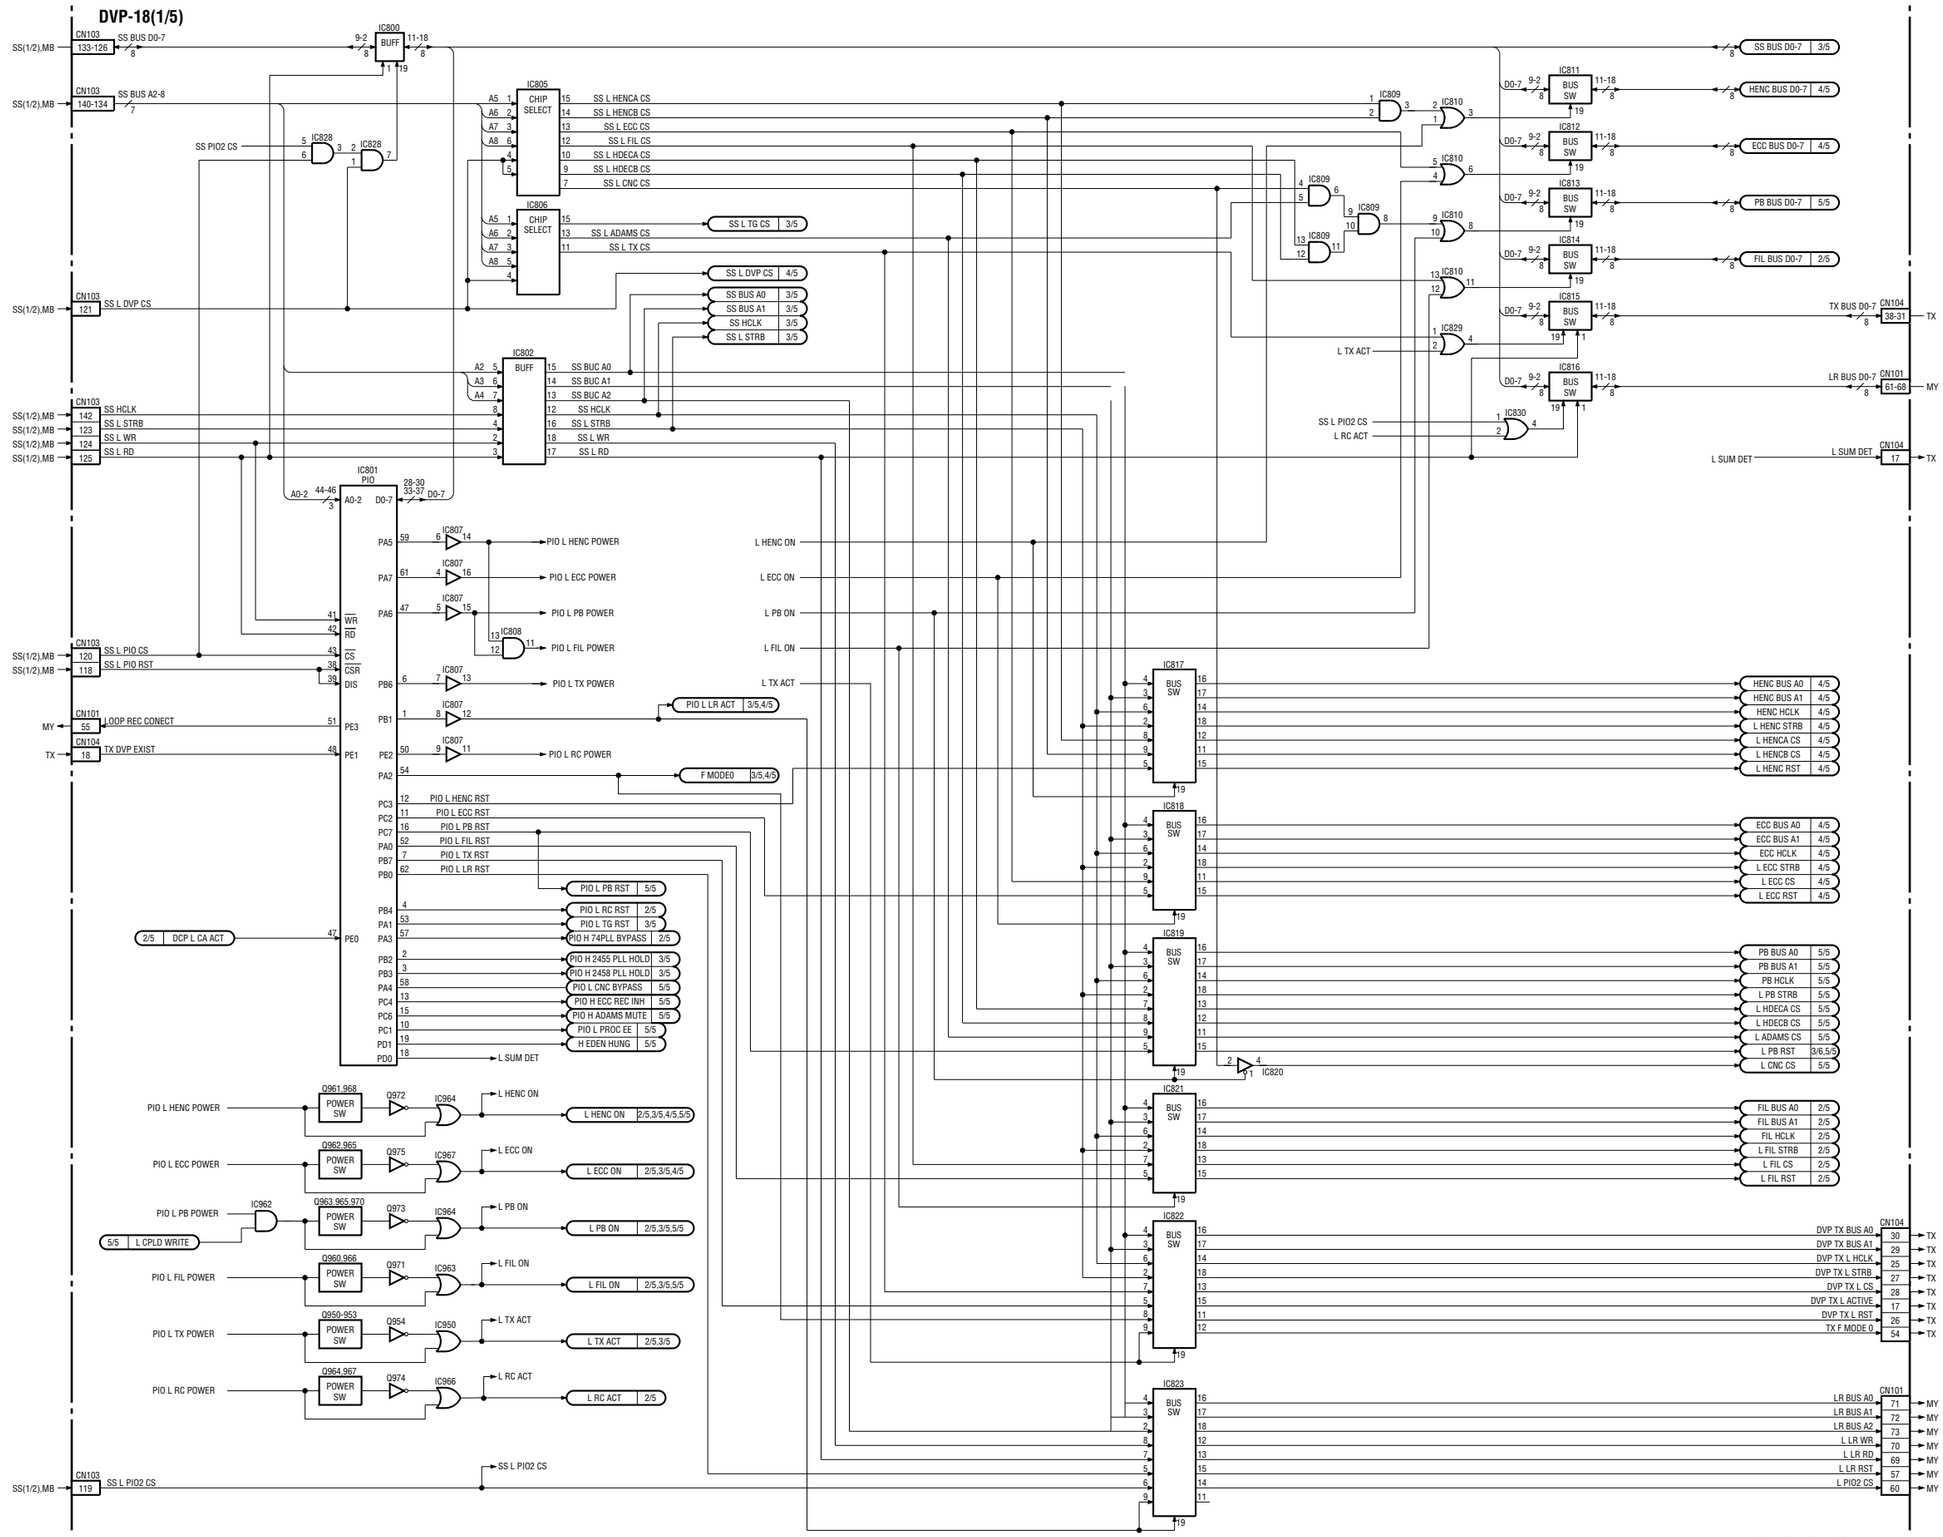

VTR PROCESSOR
DVP-18 (1/5)

http://getMANUAL.com

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

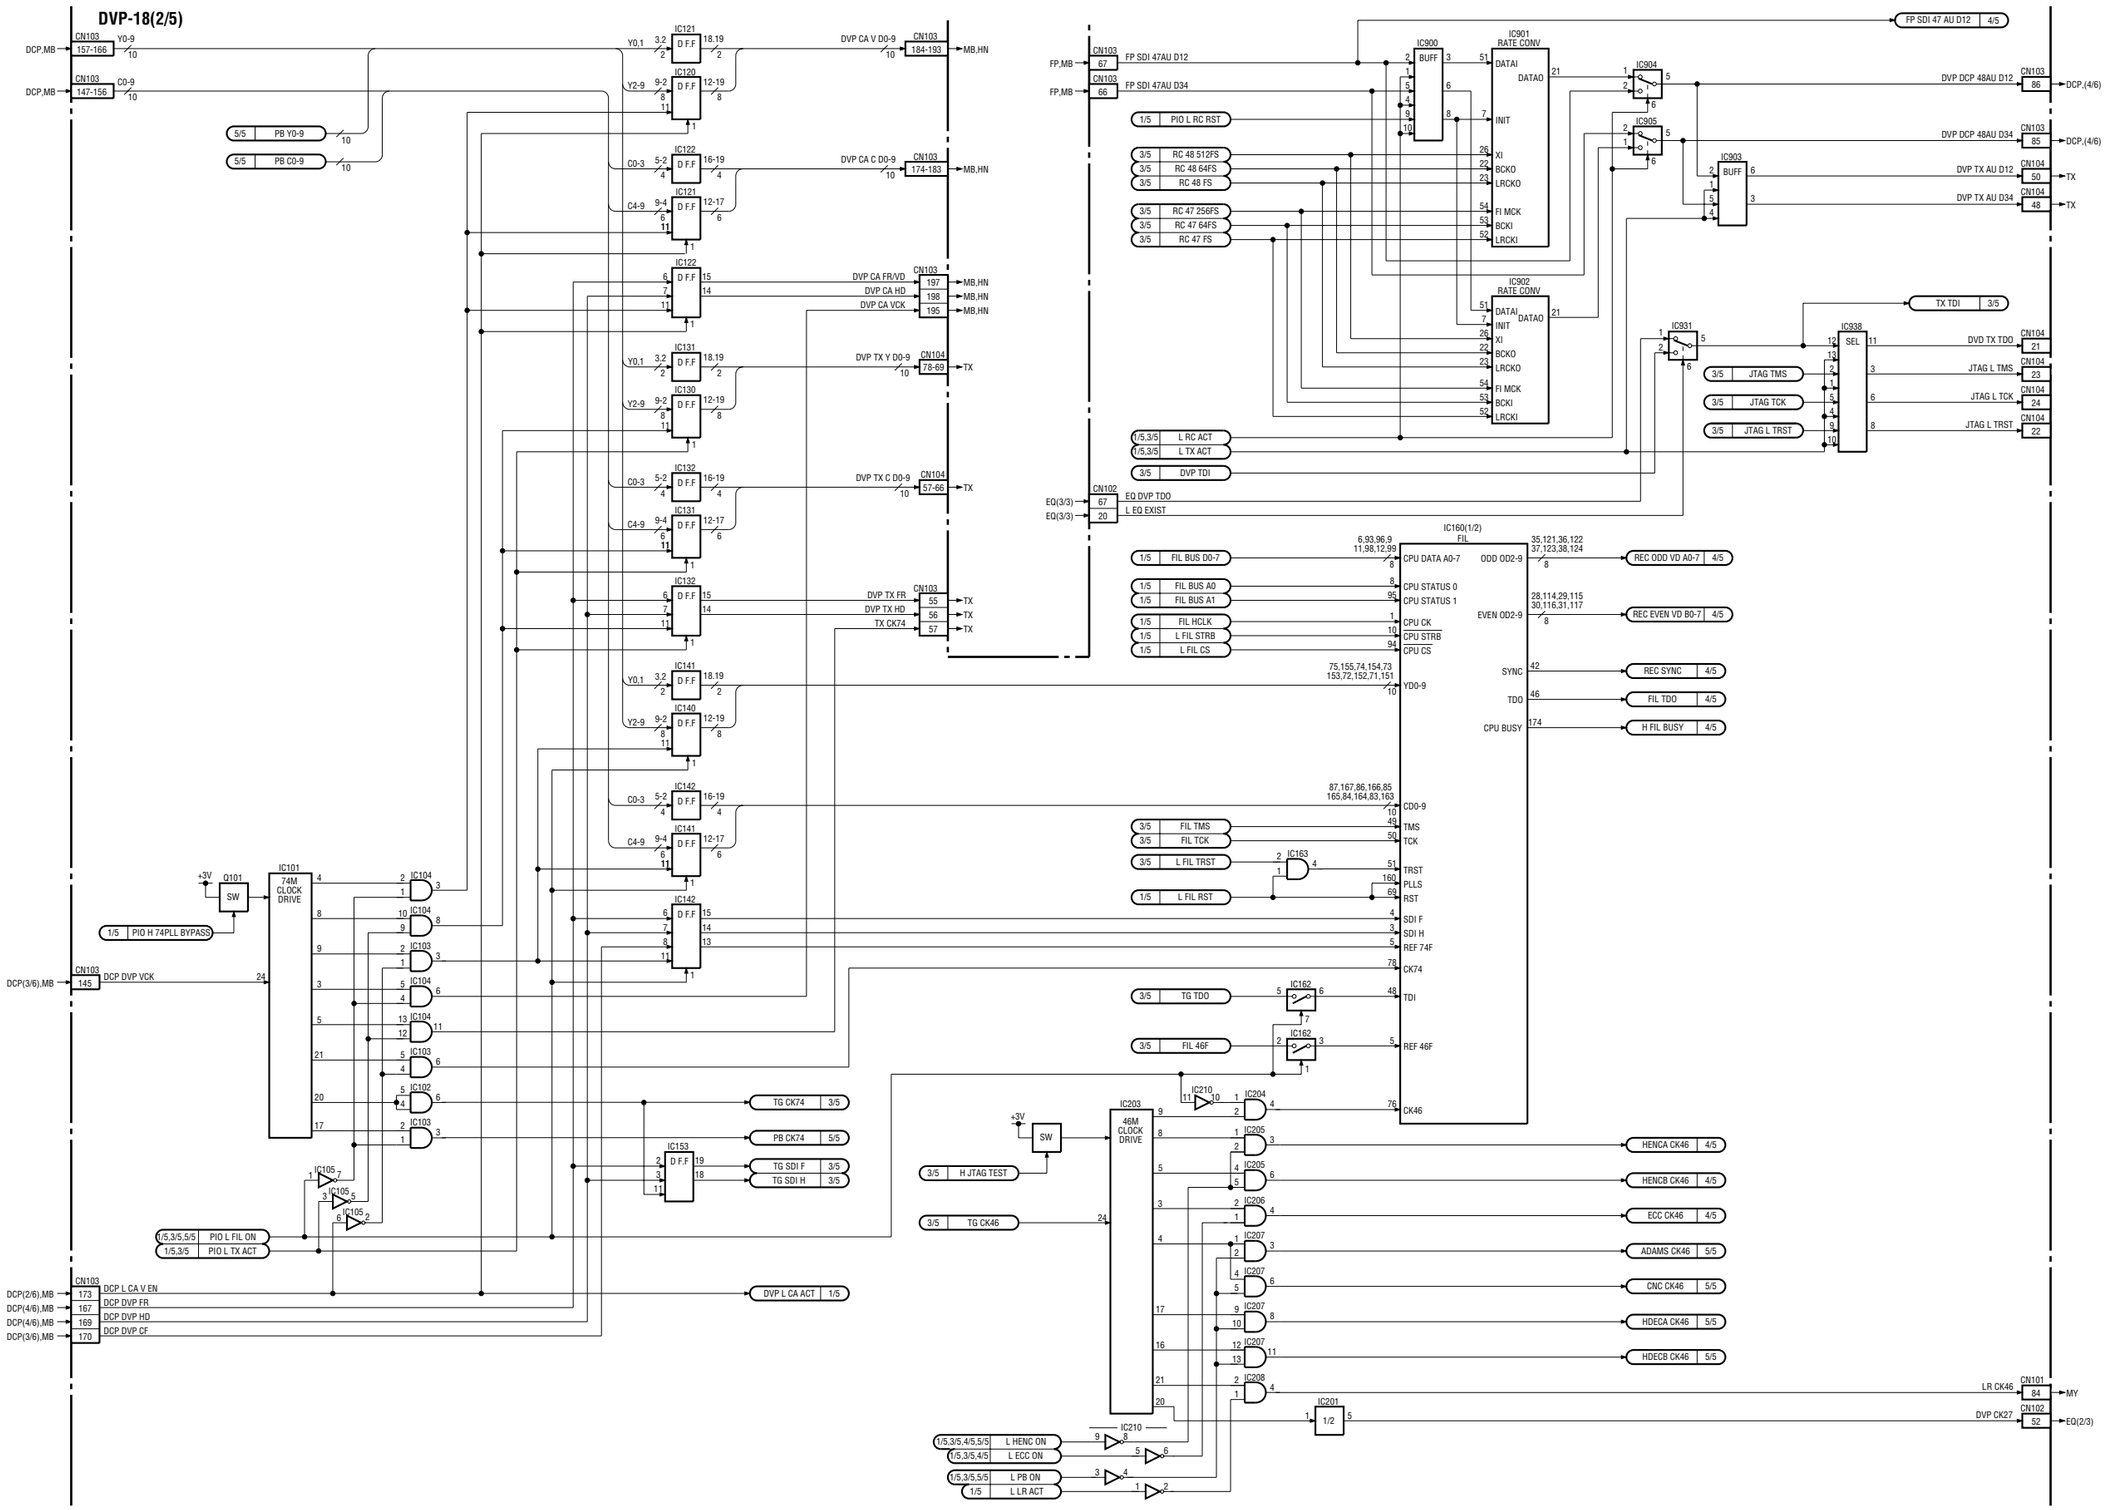

VTR PROCESSOR
DVP-18 (2/5)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

DVP-18(3/5)

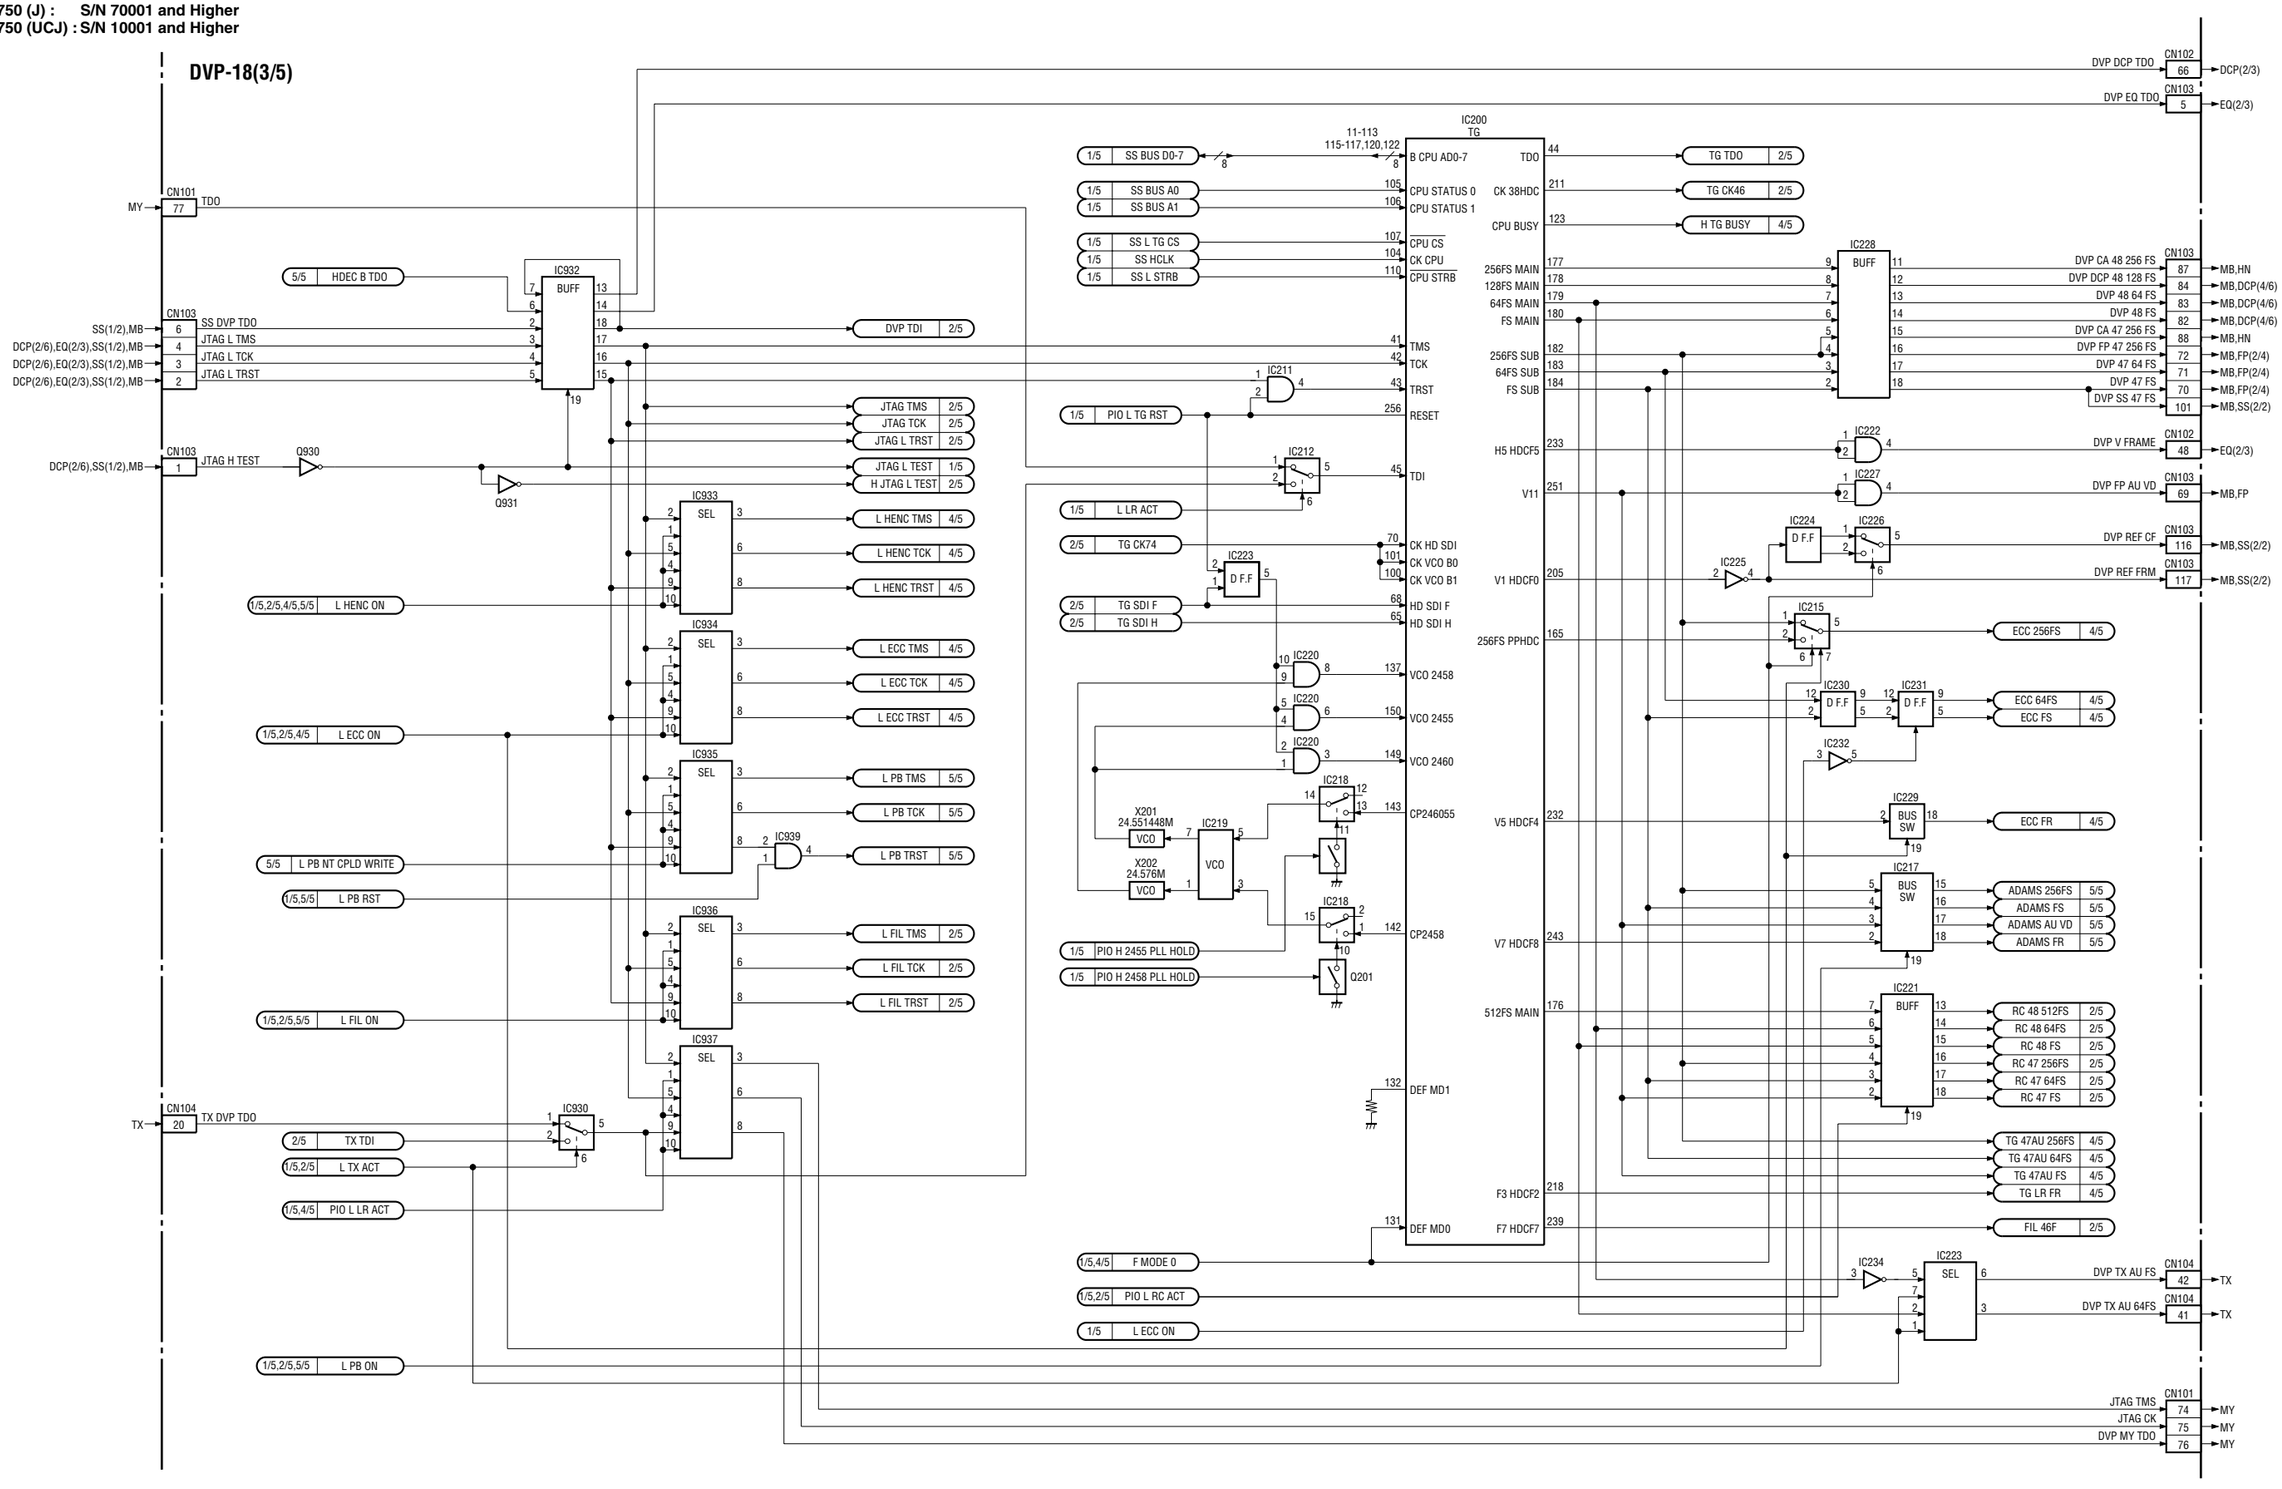

VTR PROCESSOR
DVP-18 (3/5)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

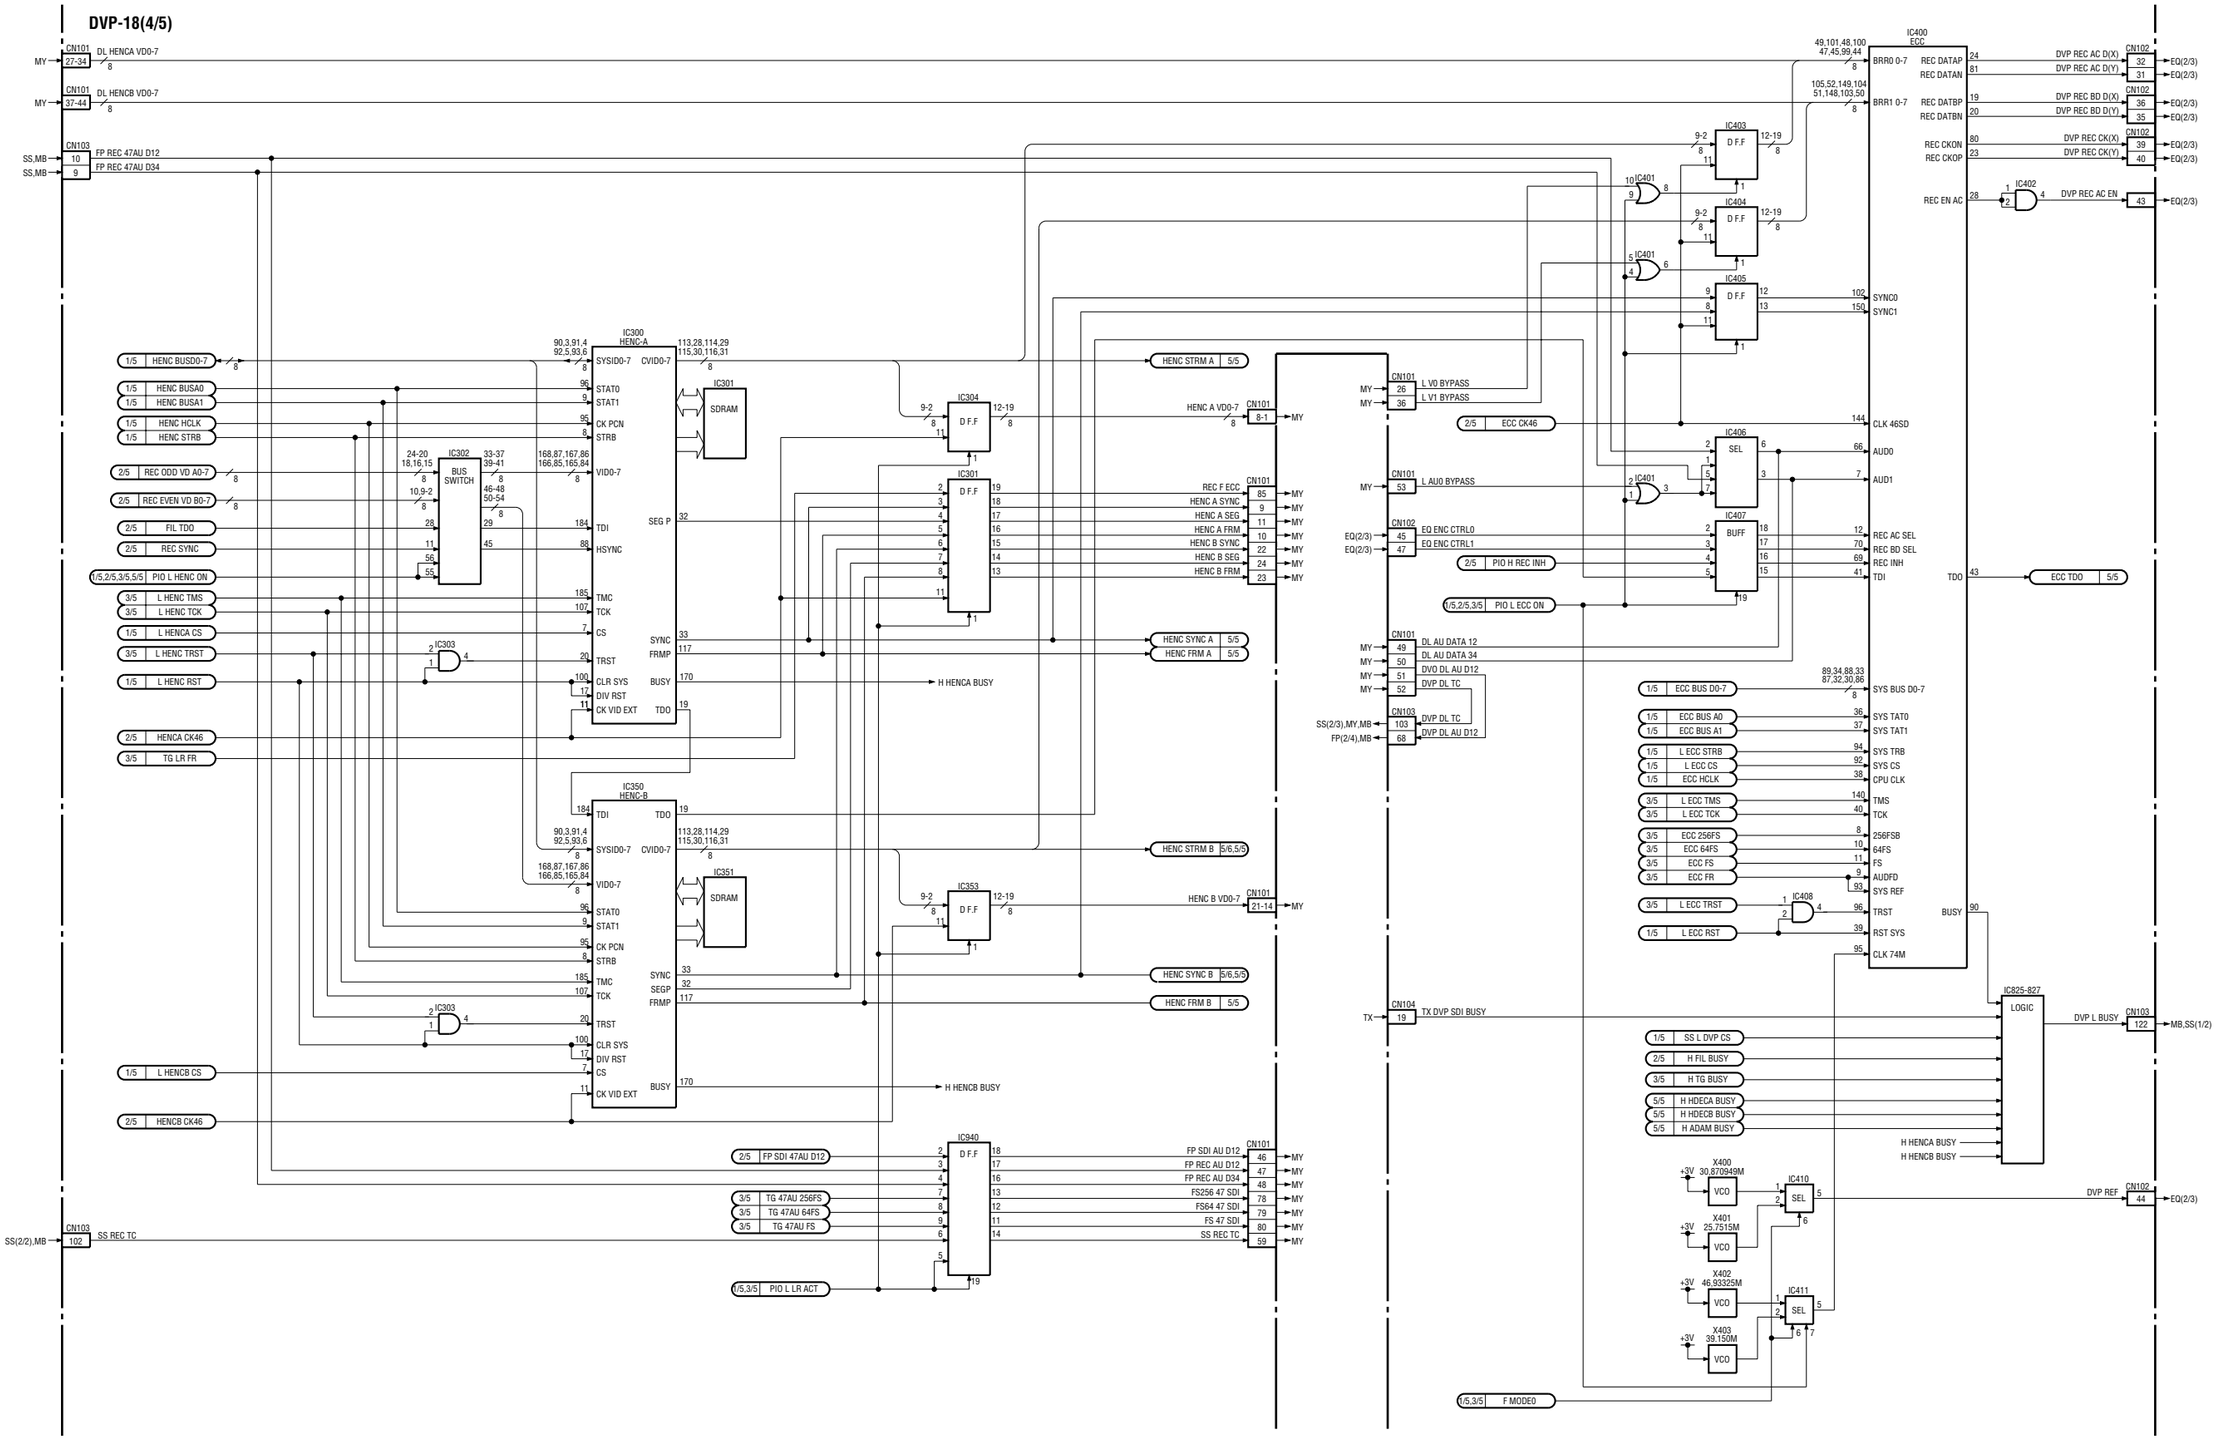

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

DVP-18(5/5)

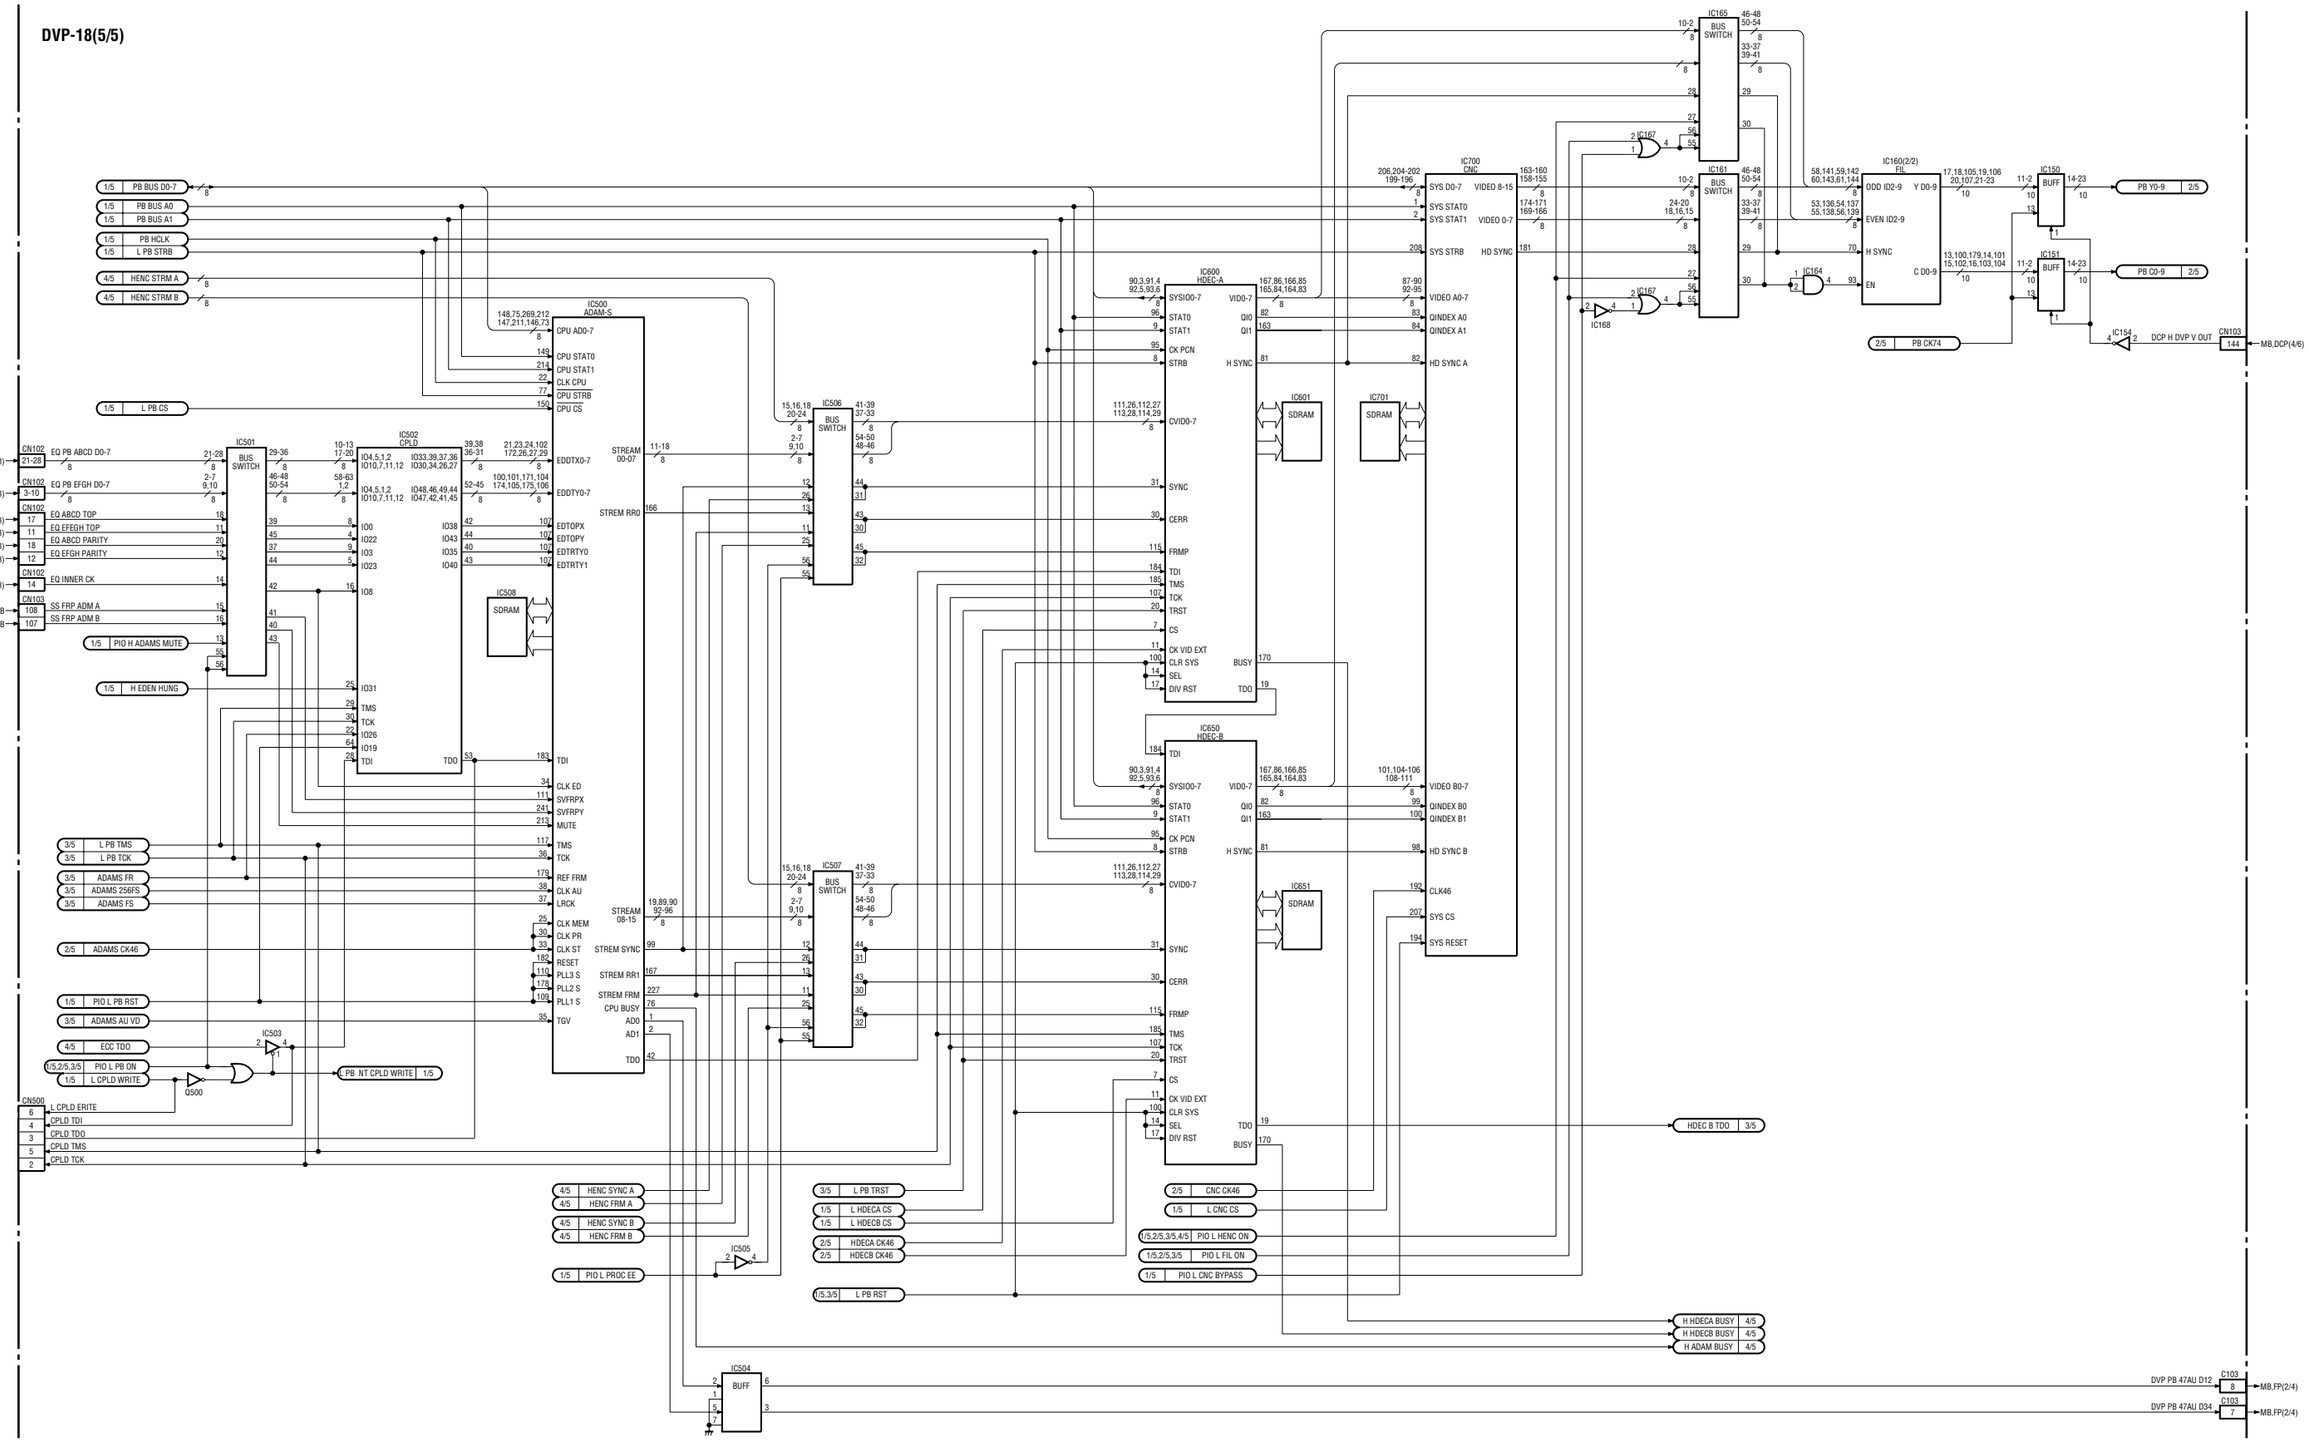

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher
HKDW-703 (UCJ) : S/N 10001 and Higher

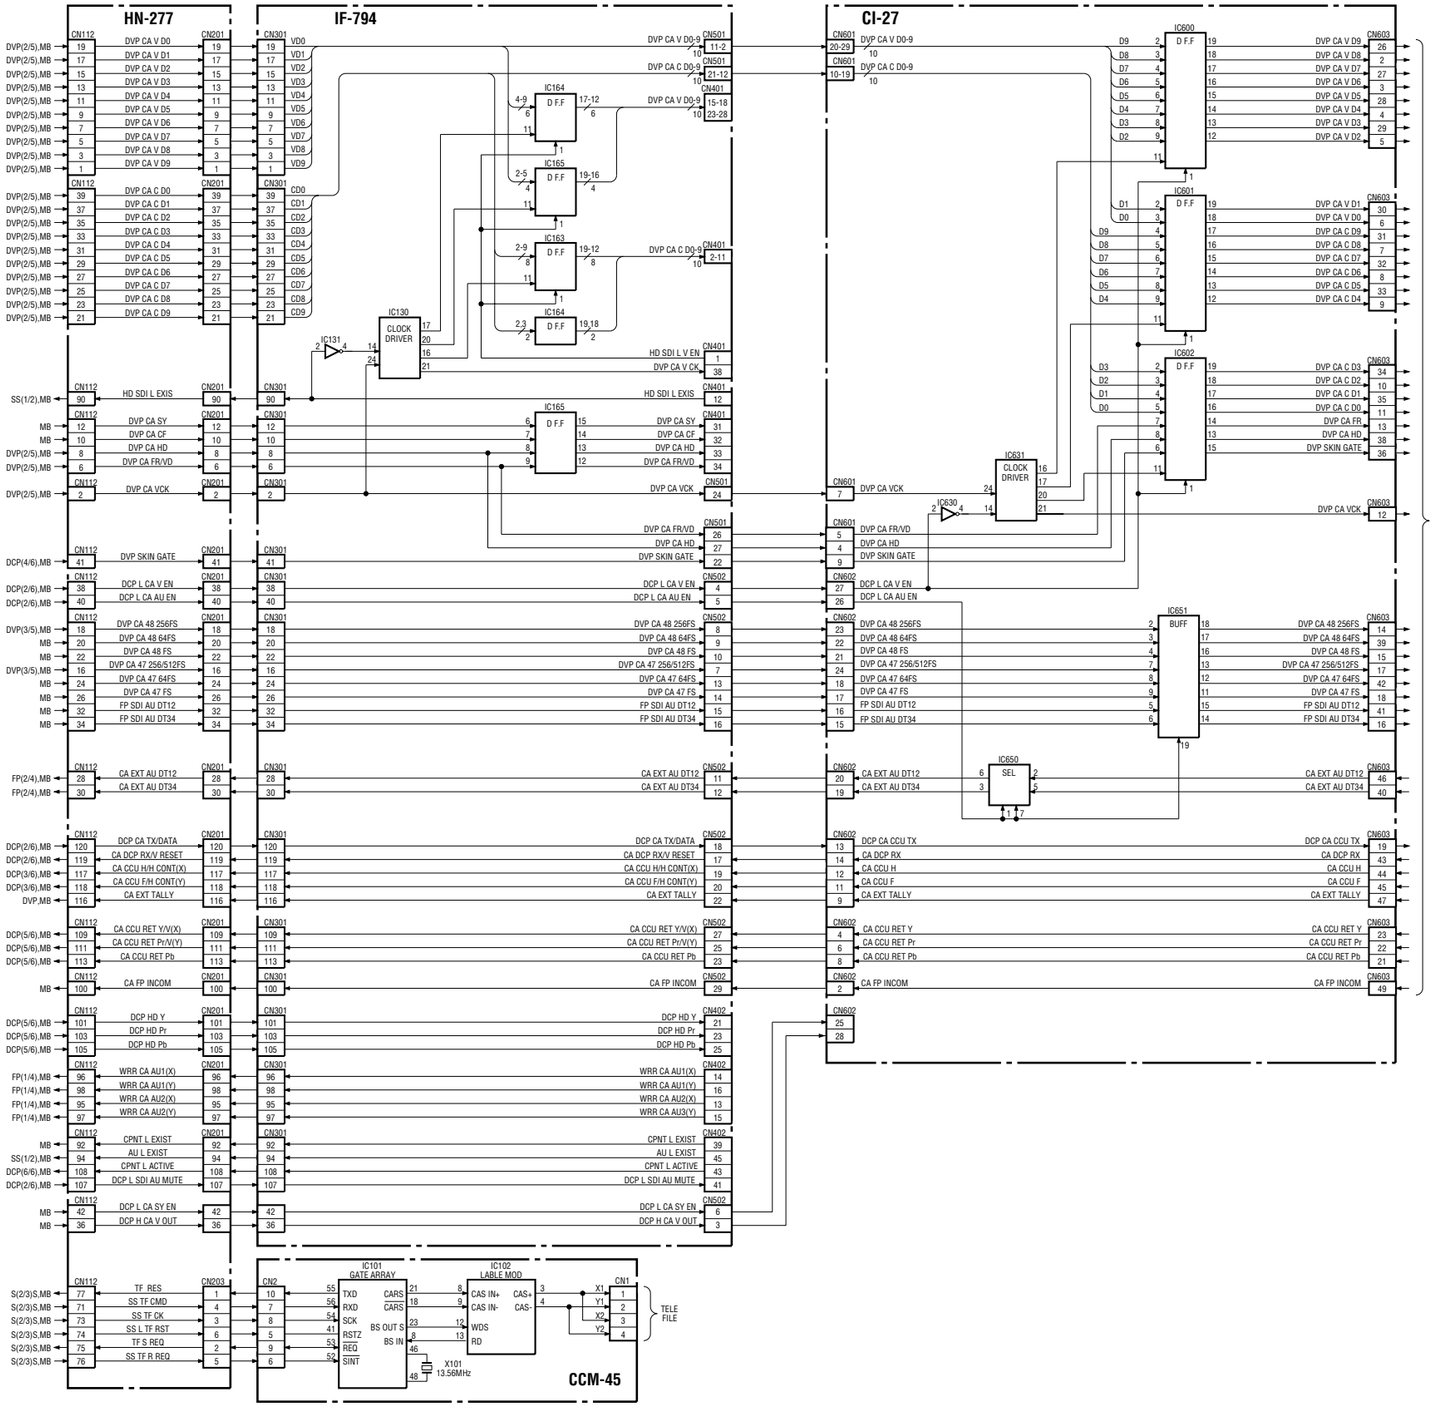

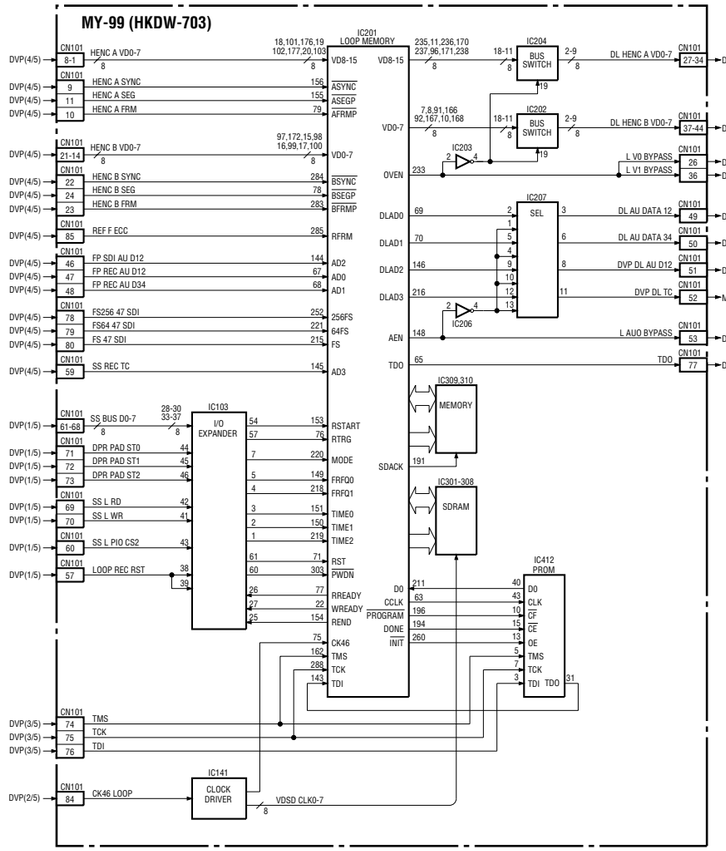

TELE FILE
CCM-45
50PIN ADAPTOR INTERFACE
CI-27
HARNESS
HN-277
INTERFACE
IF-794
PICTURE CACHE
MY-99

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

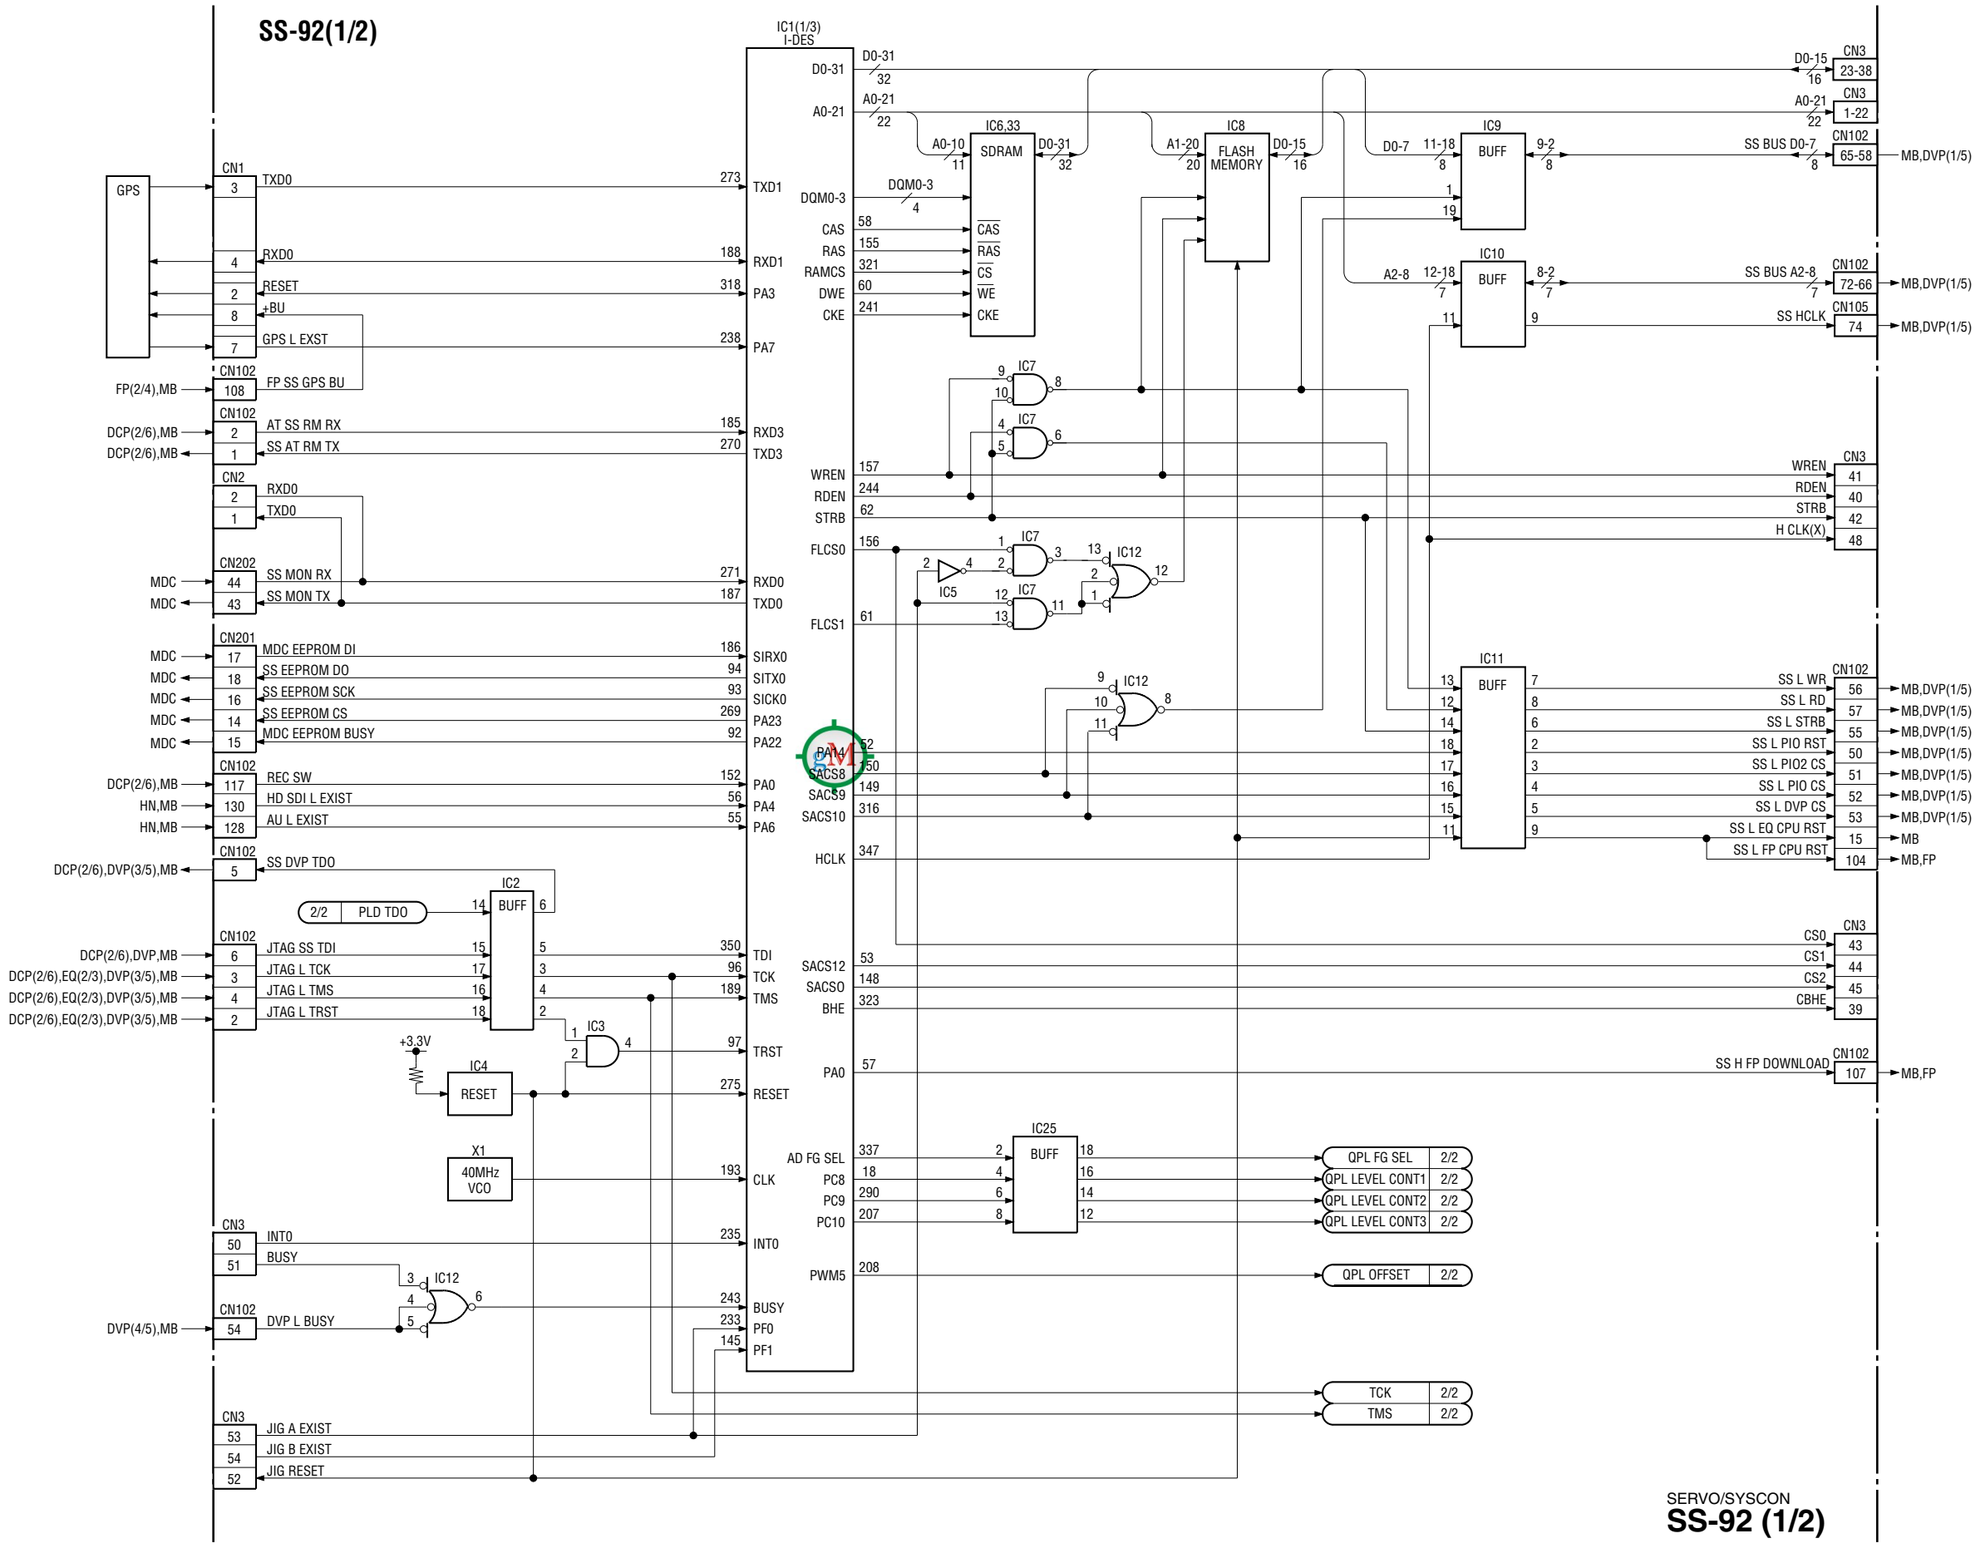

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

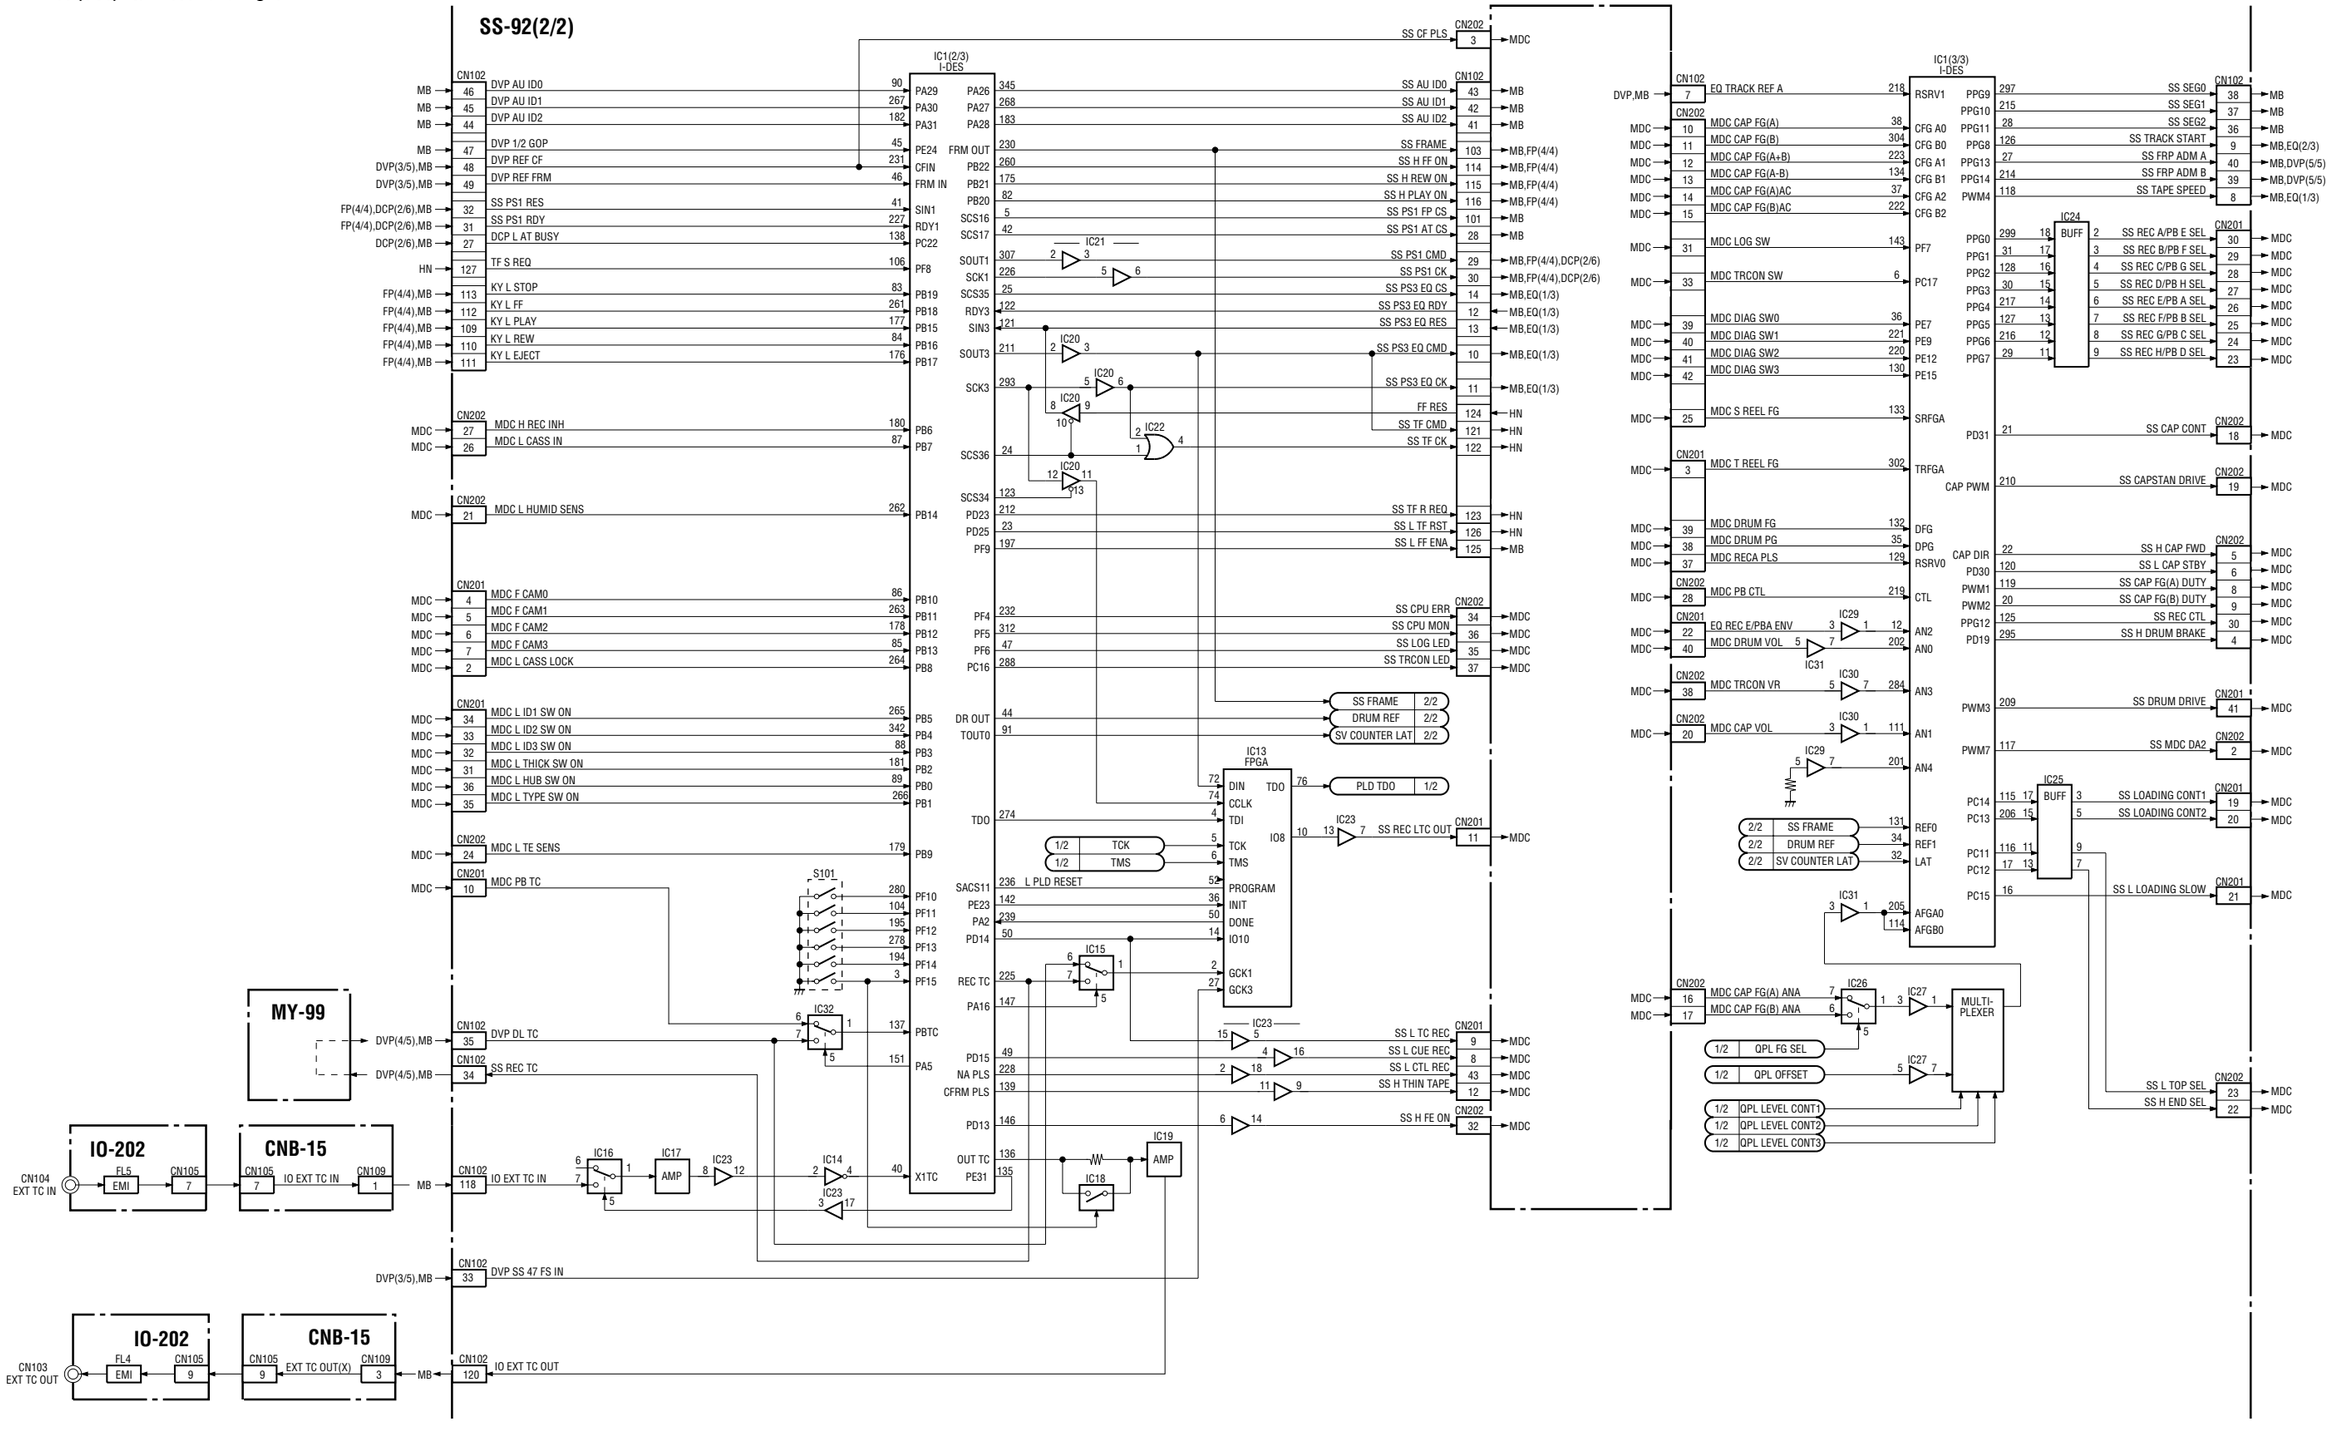

SERVO/SYSCON
SS-92 (2/2)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

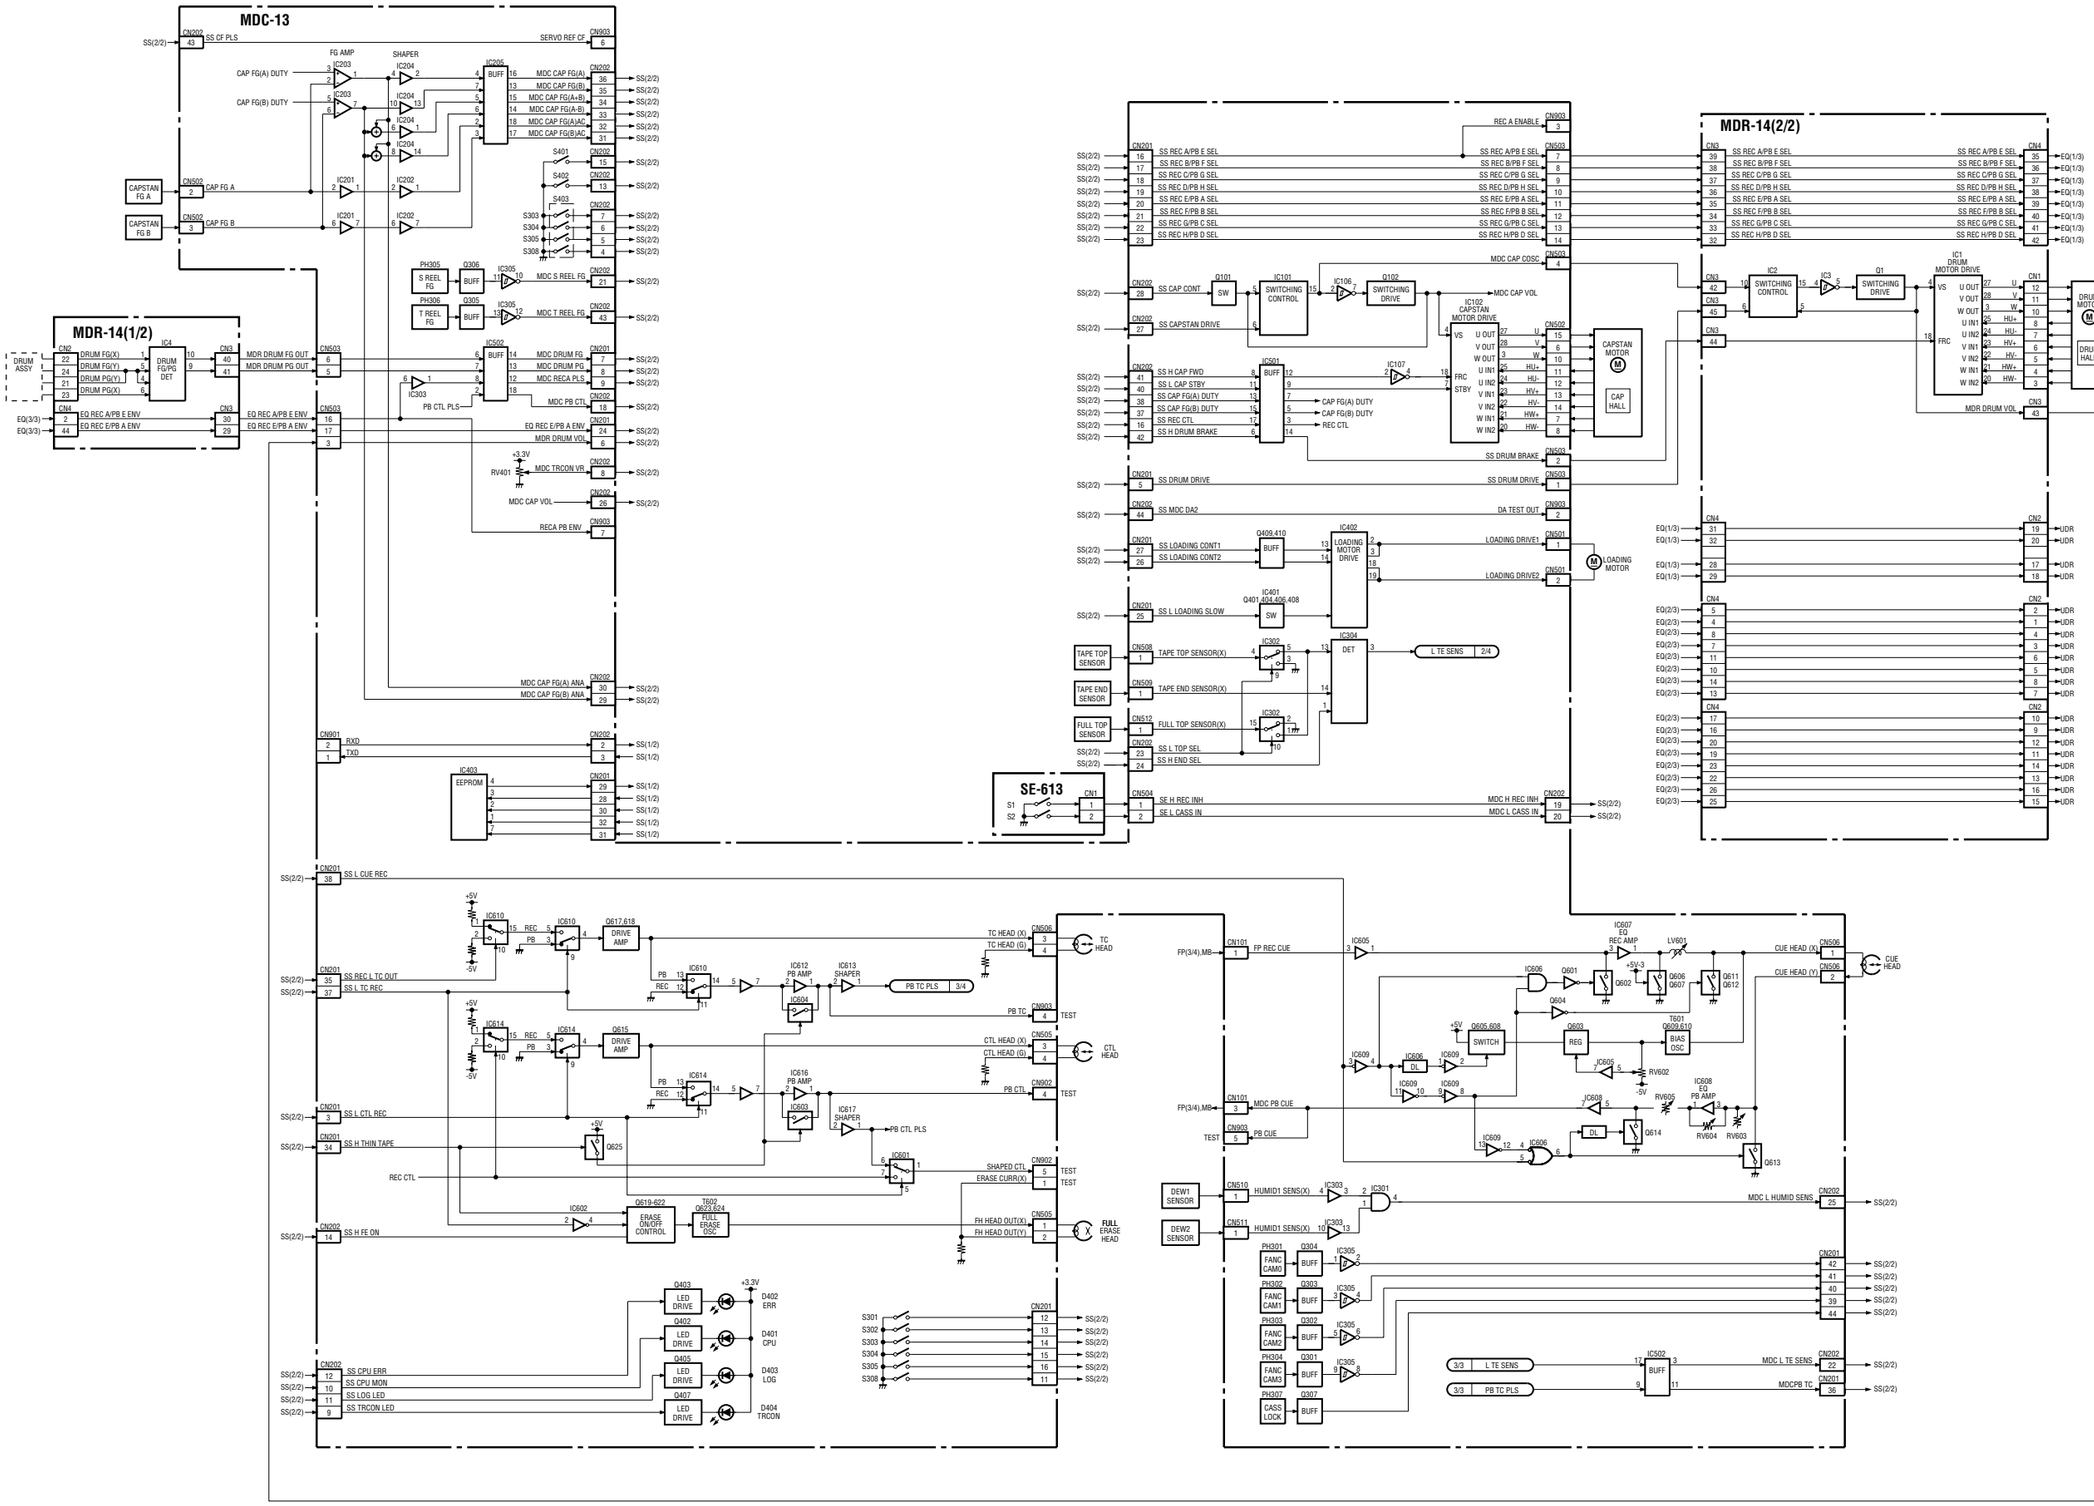

MECHA DECK CONTROL
MDC-13
DRUM MOTOR DRIVE
MDR-14
SENSOR
SE-613

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

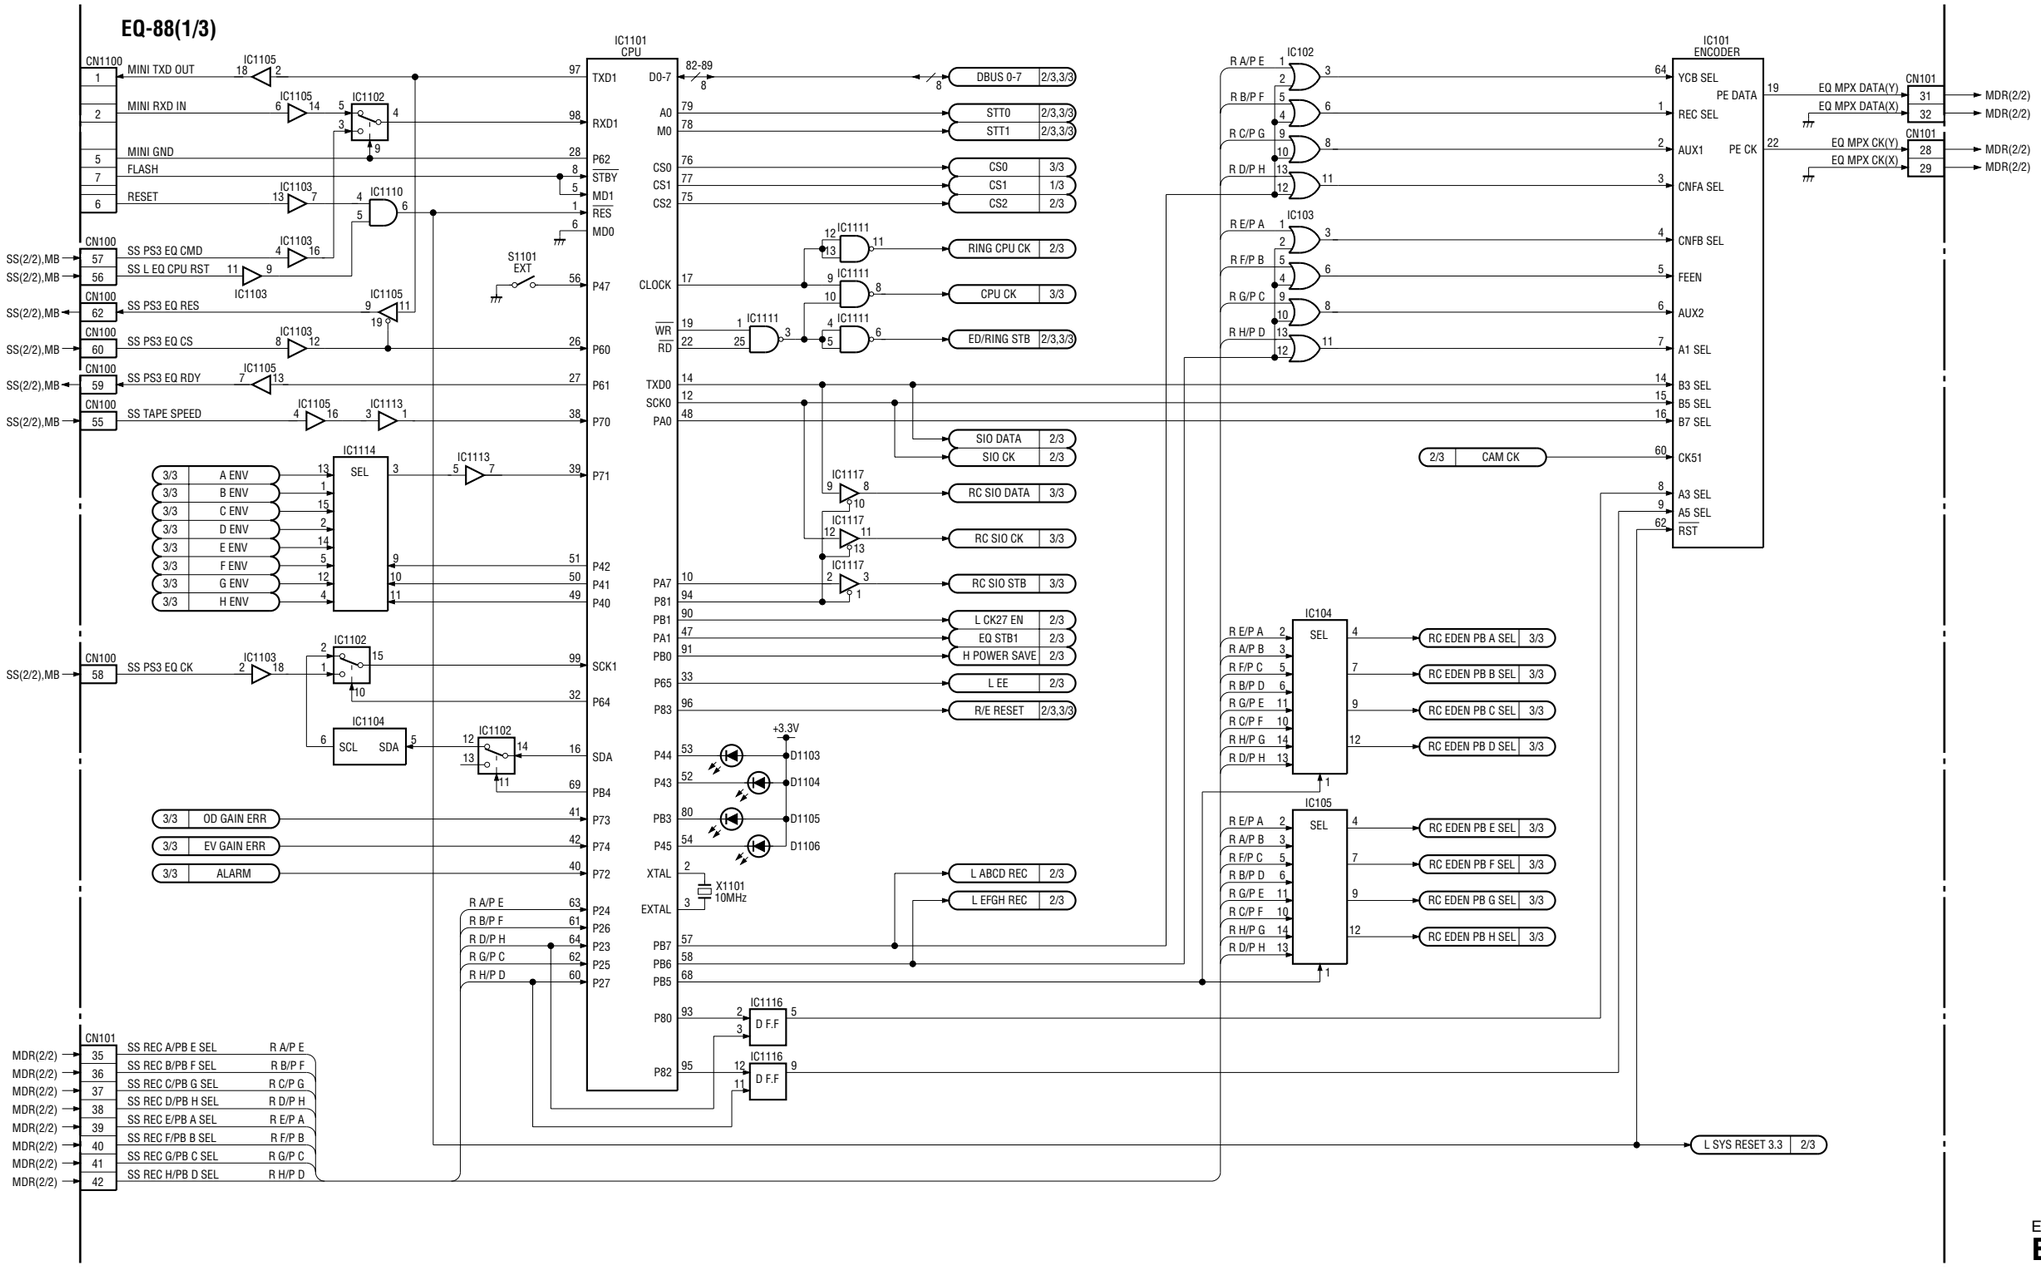

EQUALIZER
EQ-88 (1/3)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

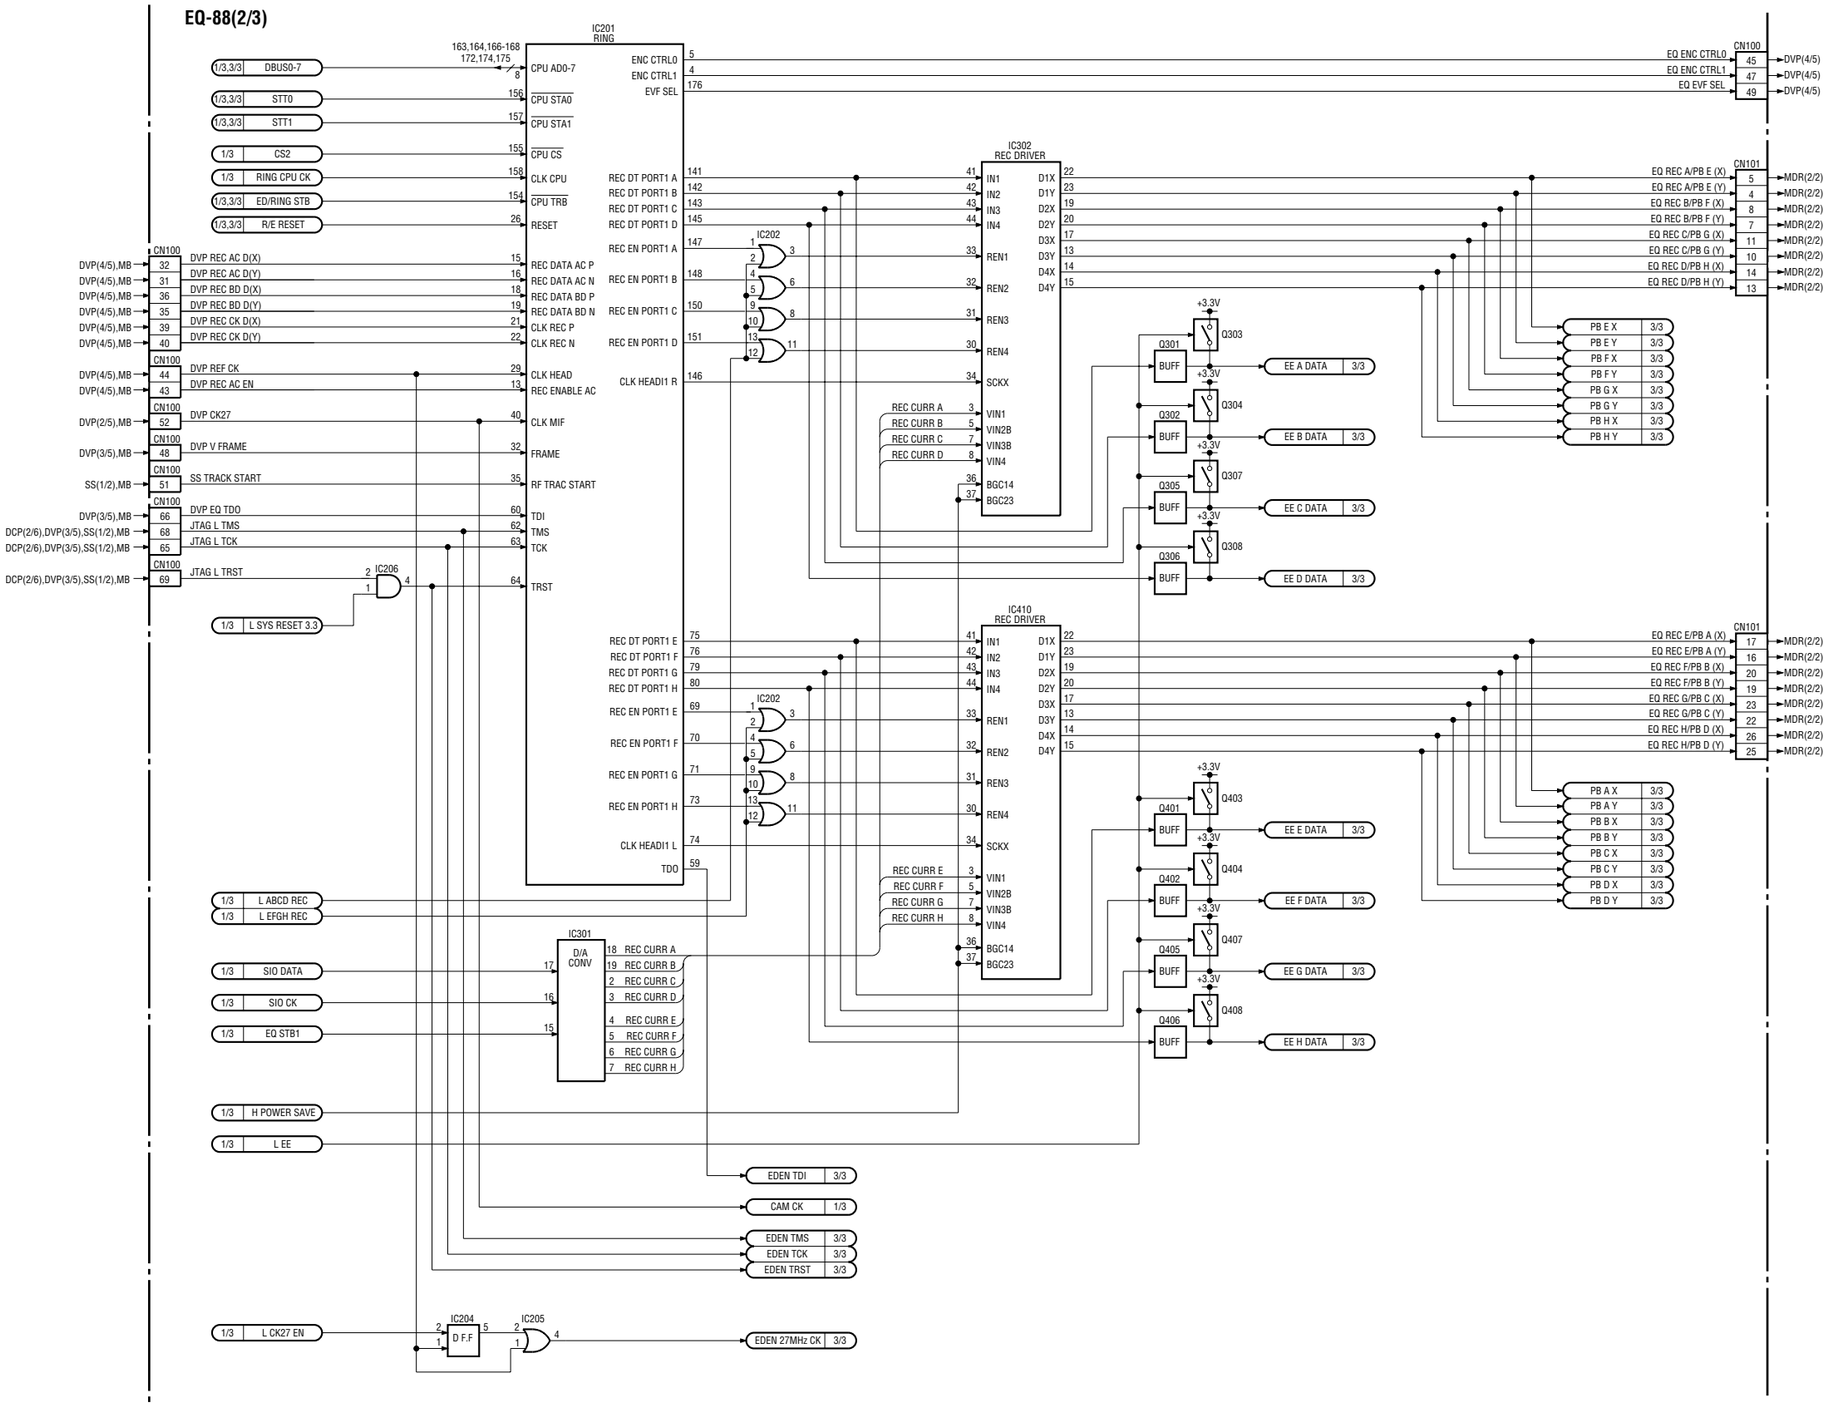

EQUALIZER
EQ-88 (2/3)

http://getMANUAL.com

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

EQ-88(3/3)

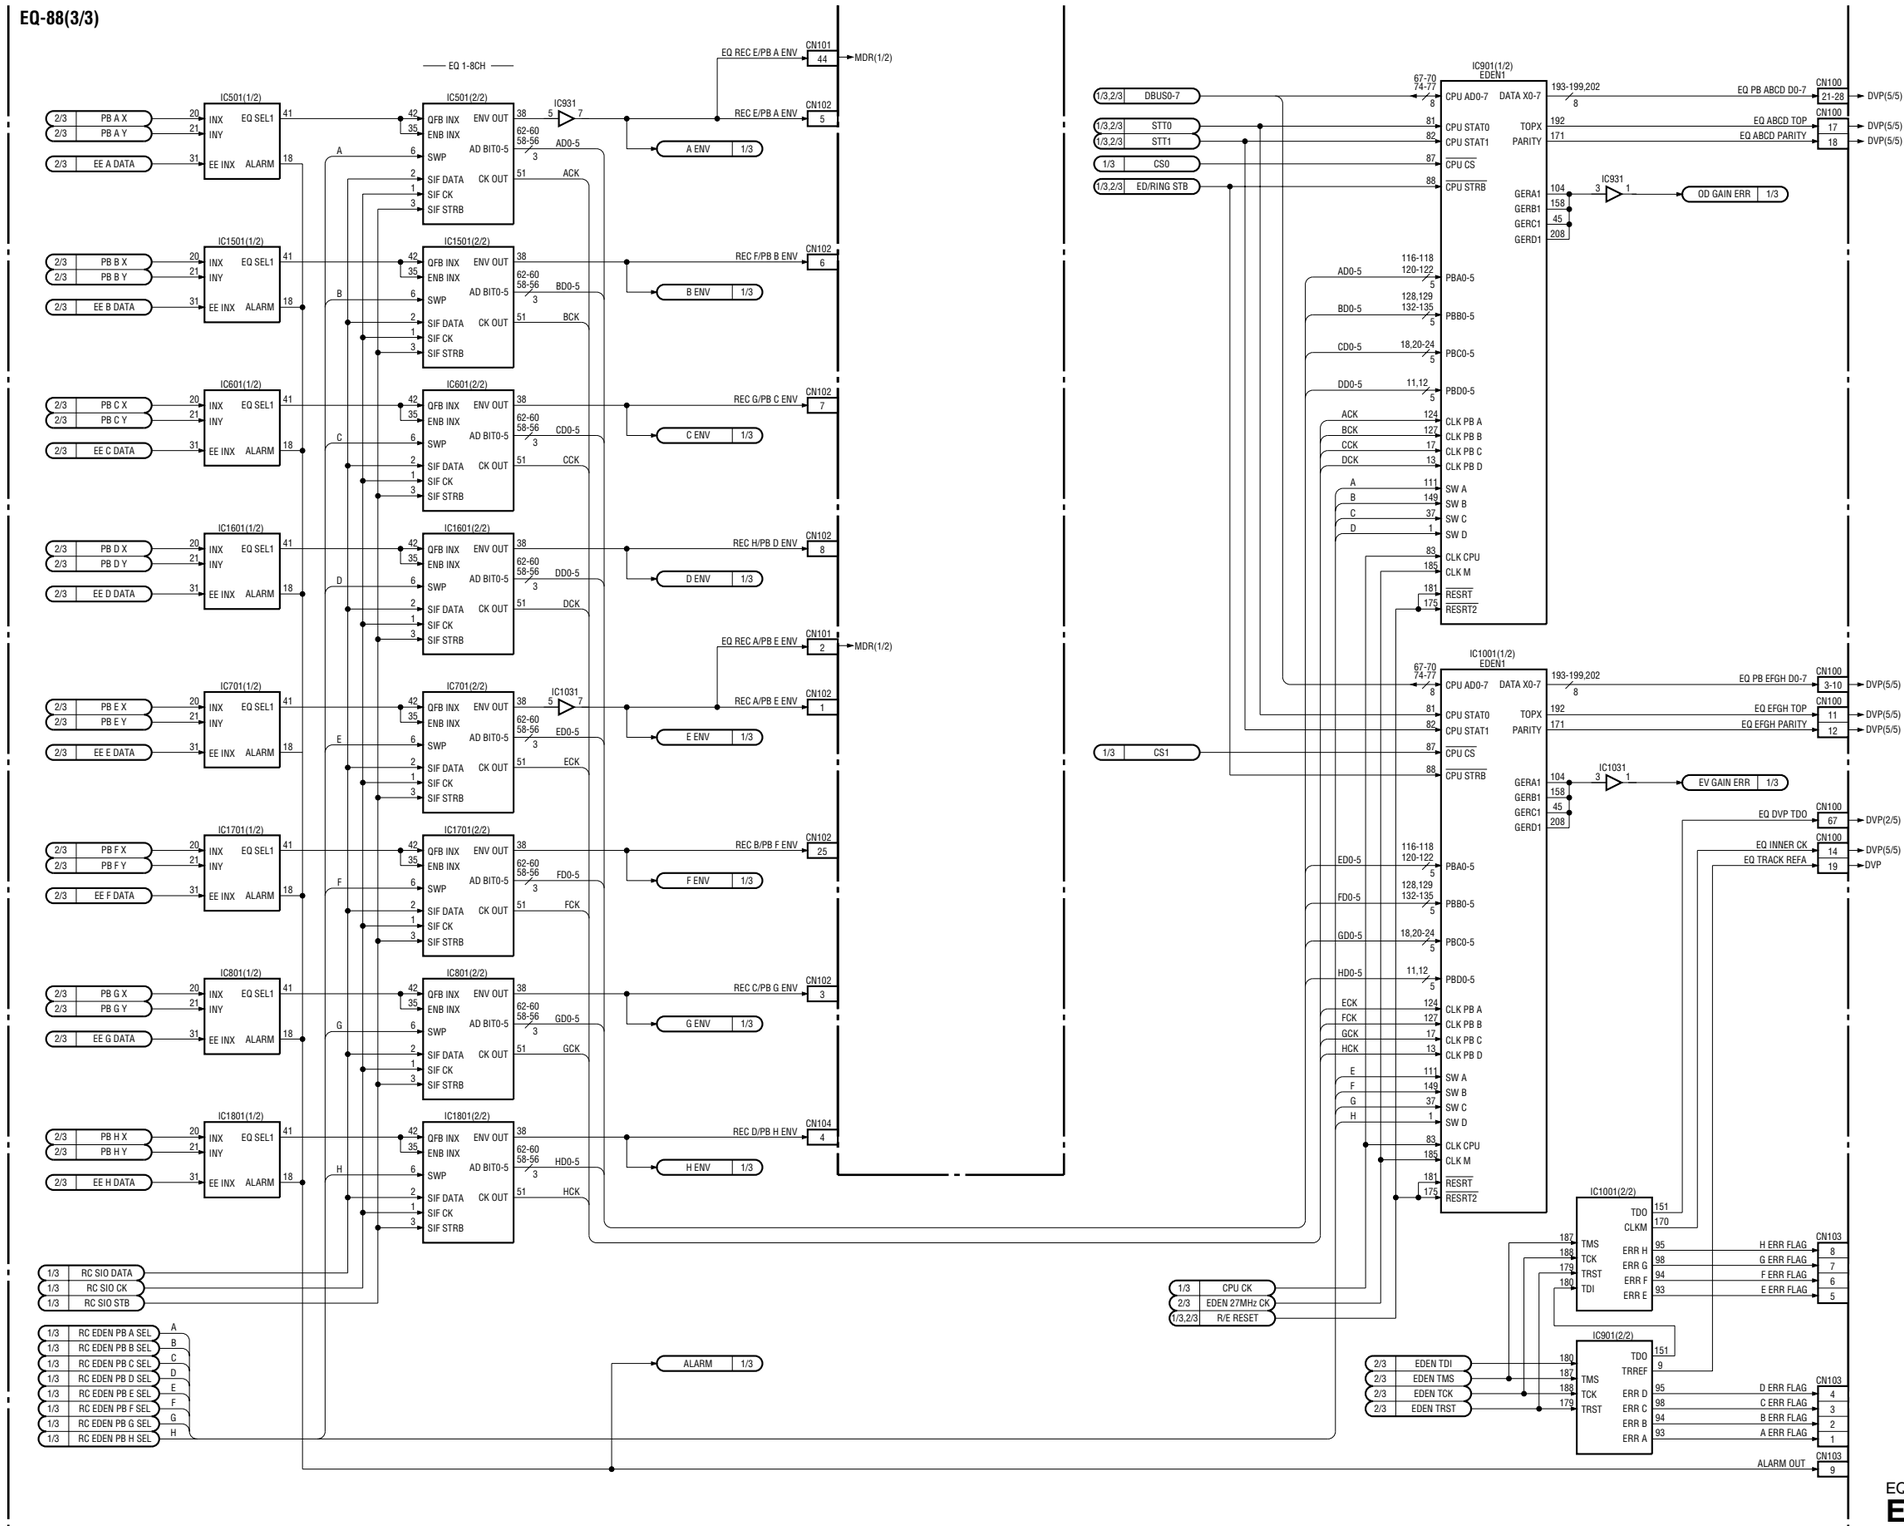

EQUALIZER
EQ-88 (3/3)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

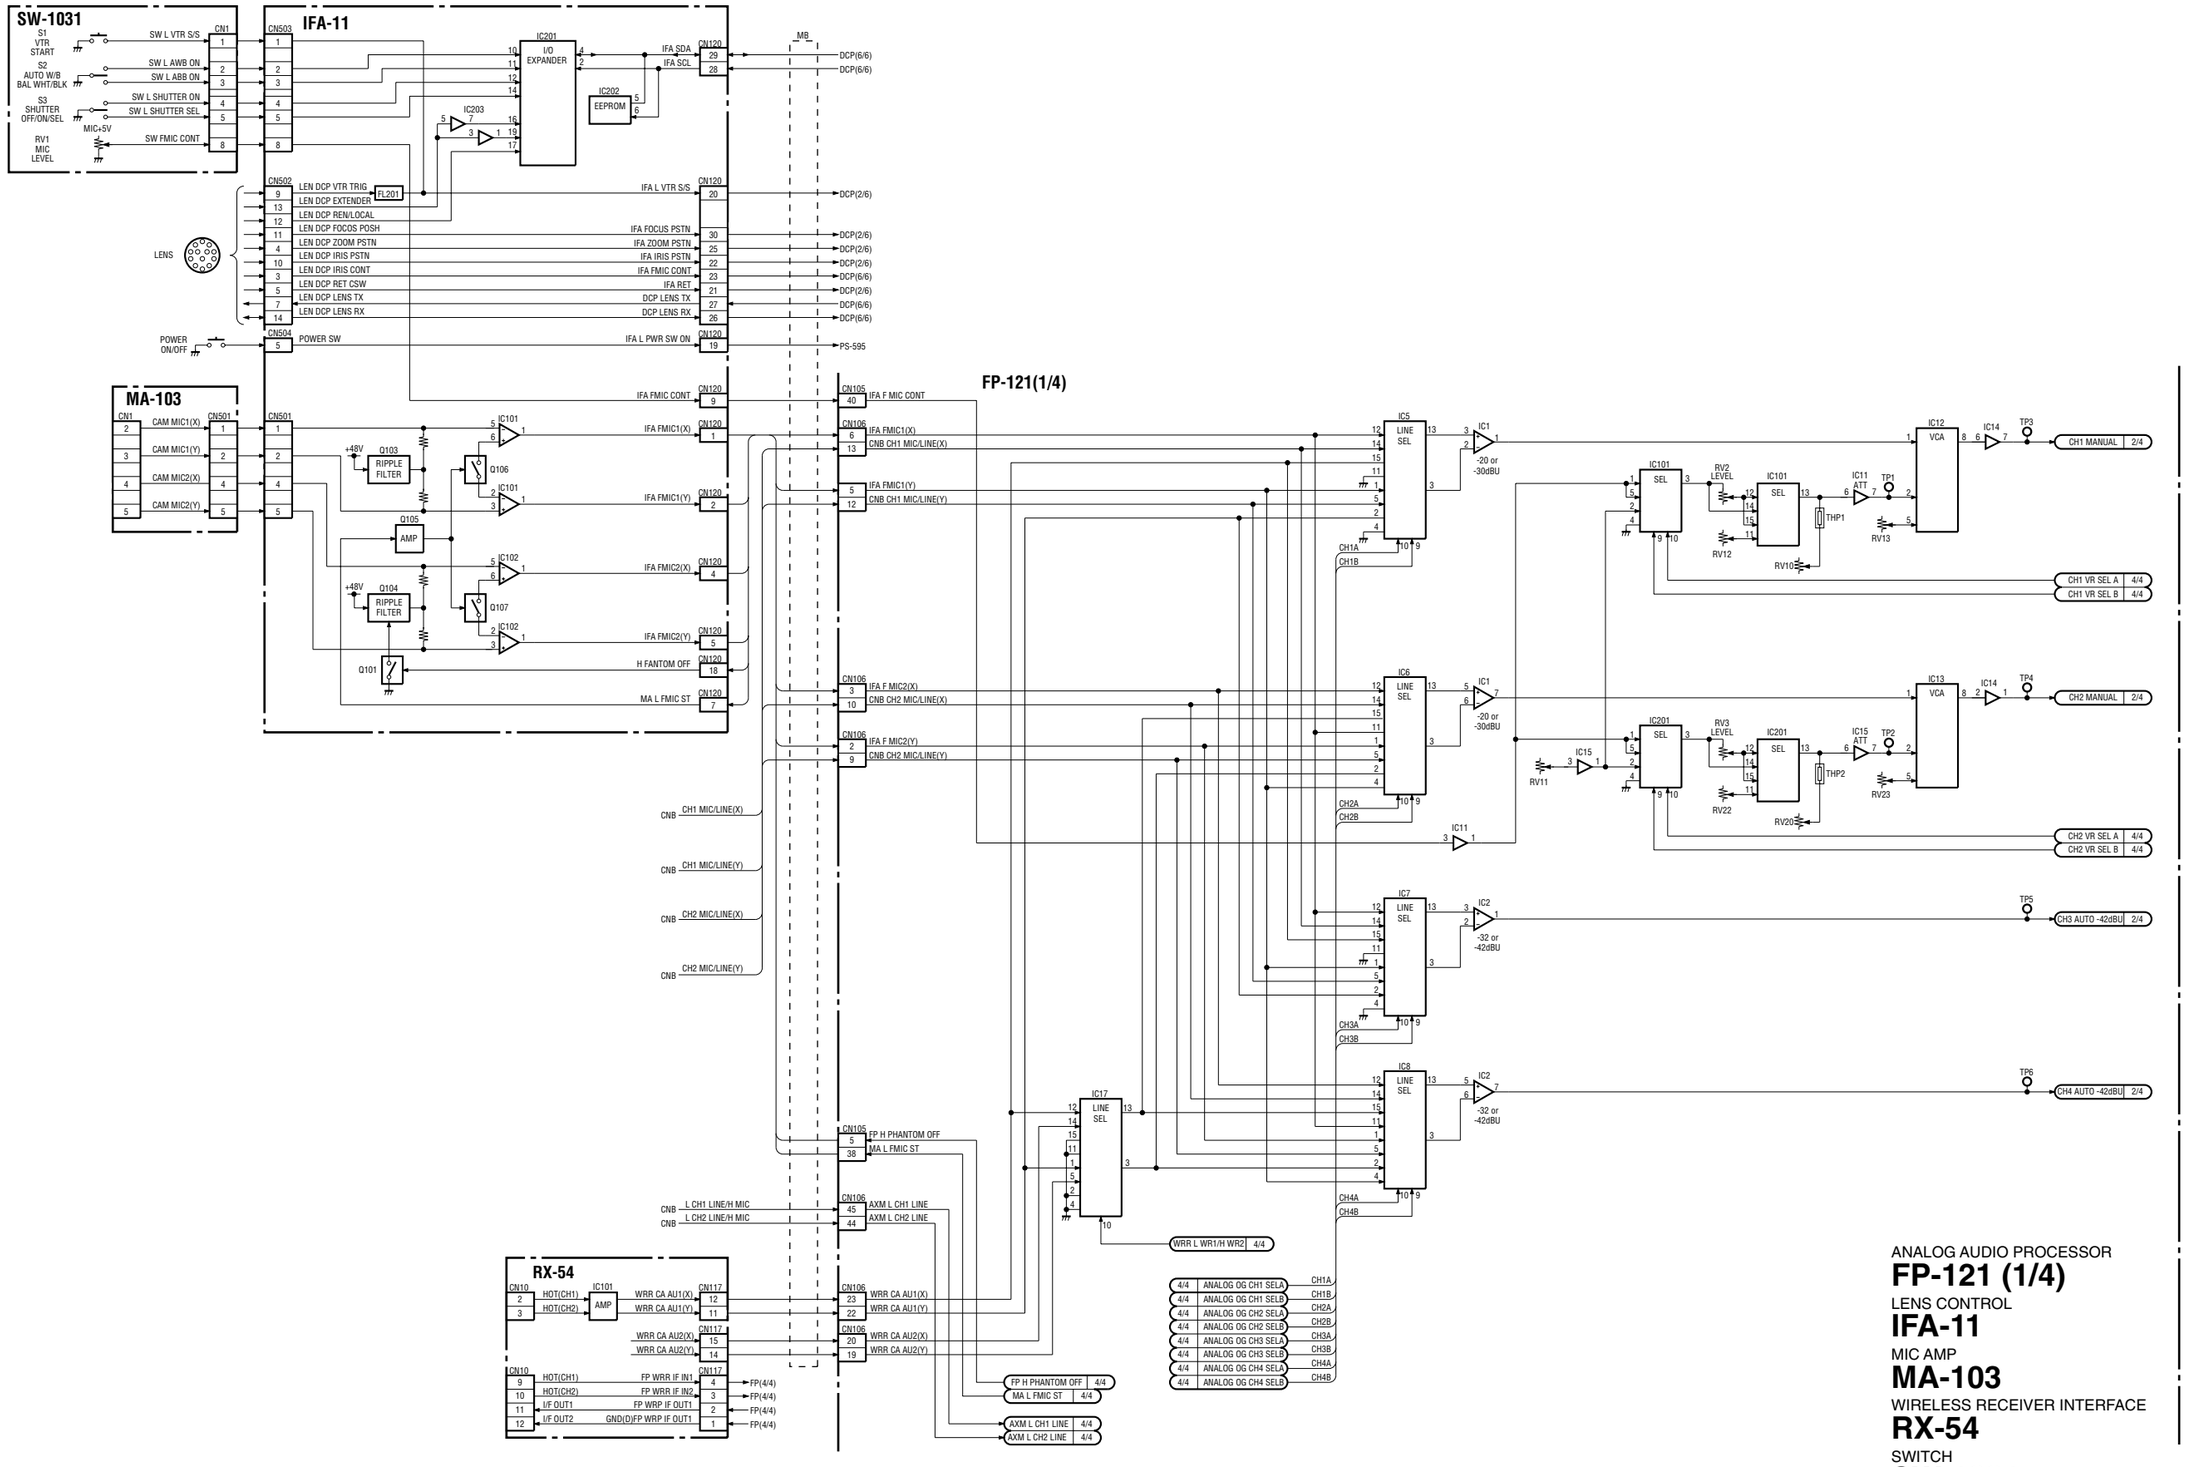

FP-121 (2/4), APR-59, HP-103

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

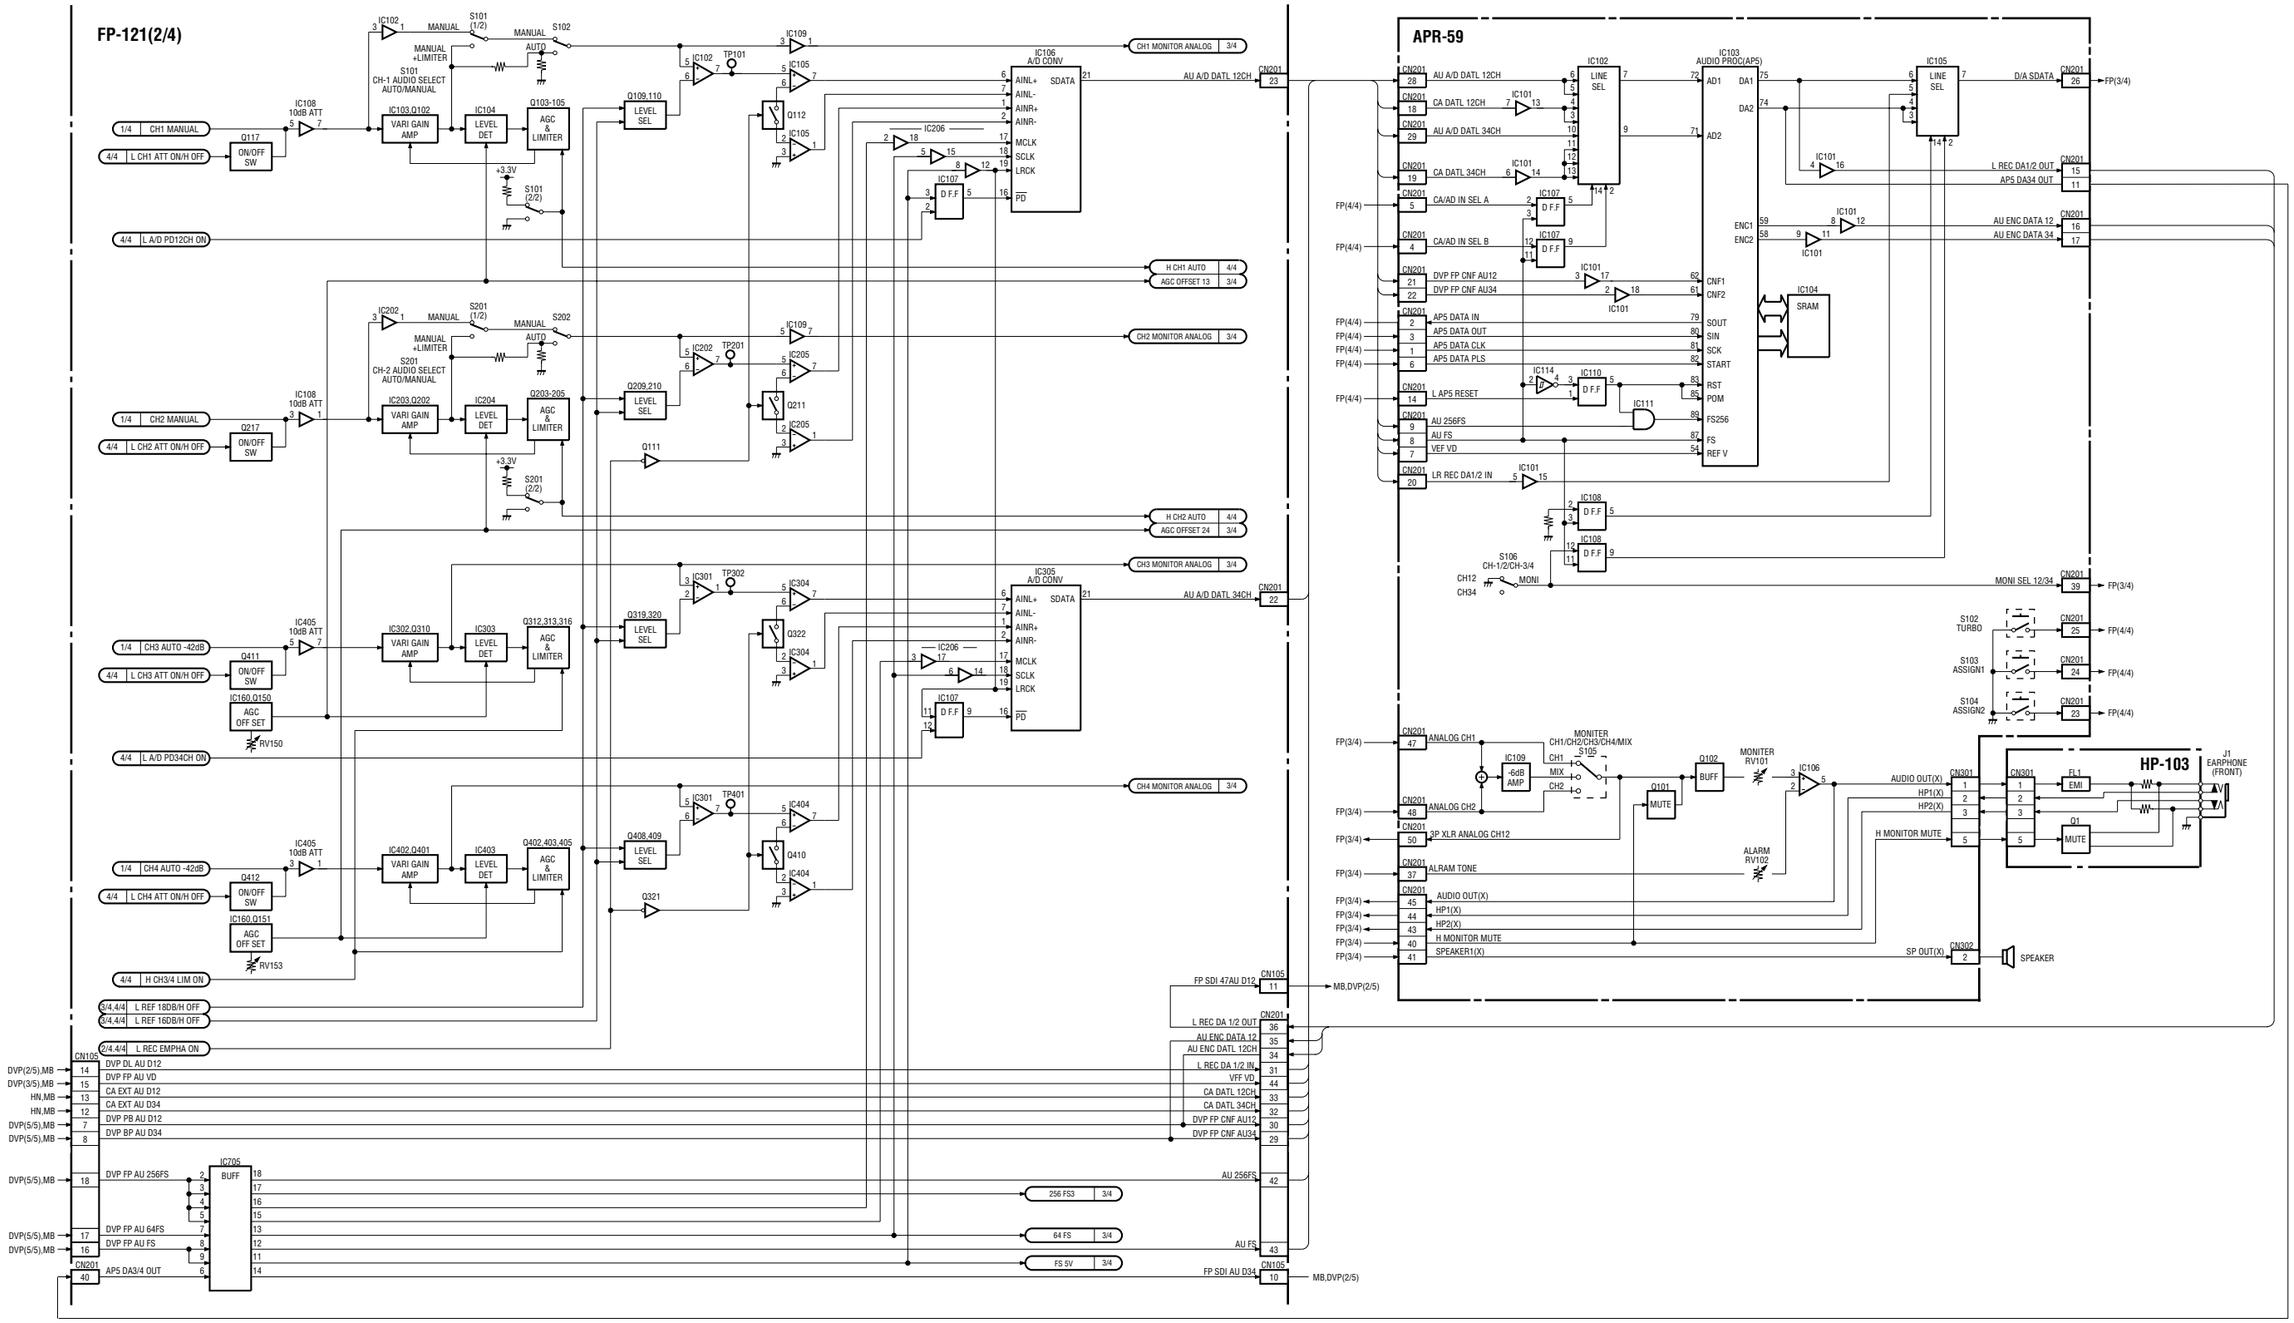

ANALOG AUDIO PROCESSOR
FP-121 (2/4)
AUDIO PROCESSOR
APR-59
HEAD PHONE
HP-103

3-31

FP-121 (3/4), AL-43, AXM-24, BP-33, HP-104, LP-114

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

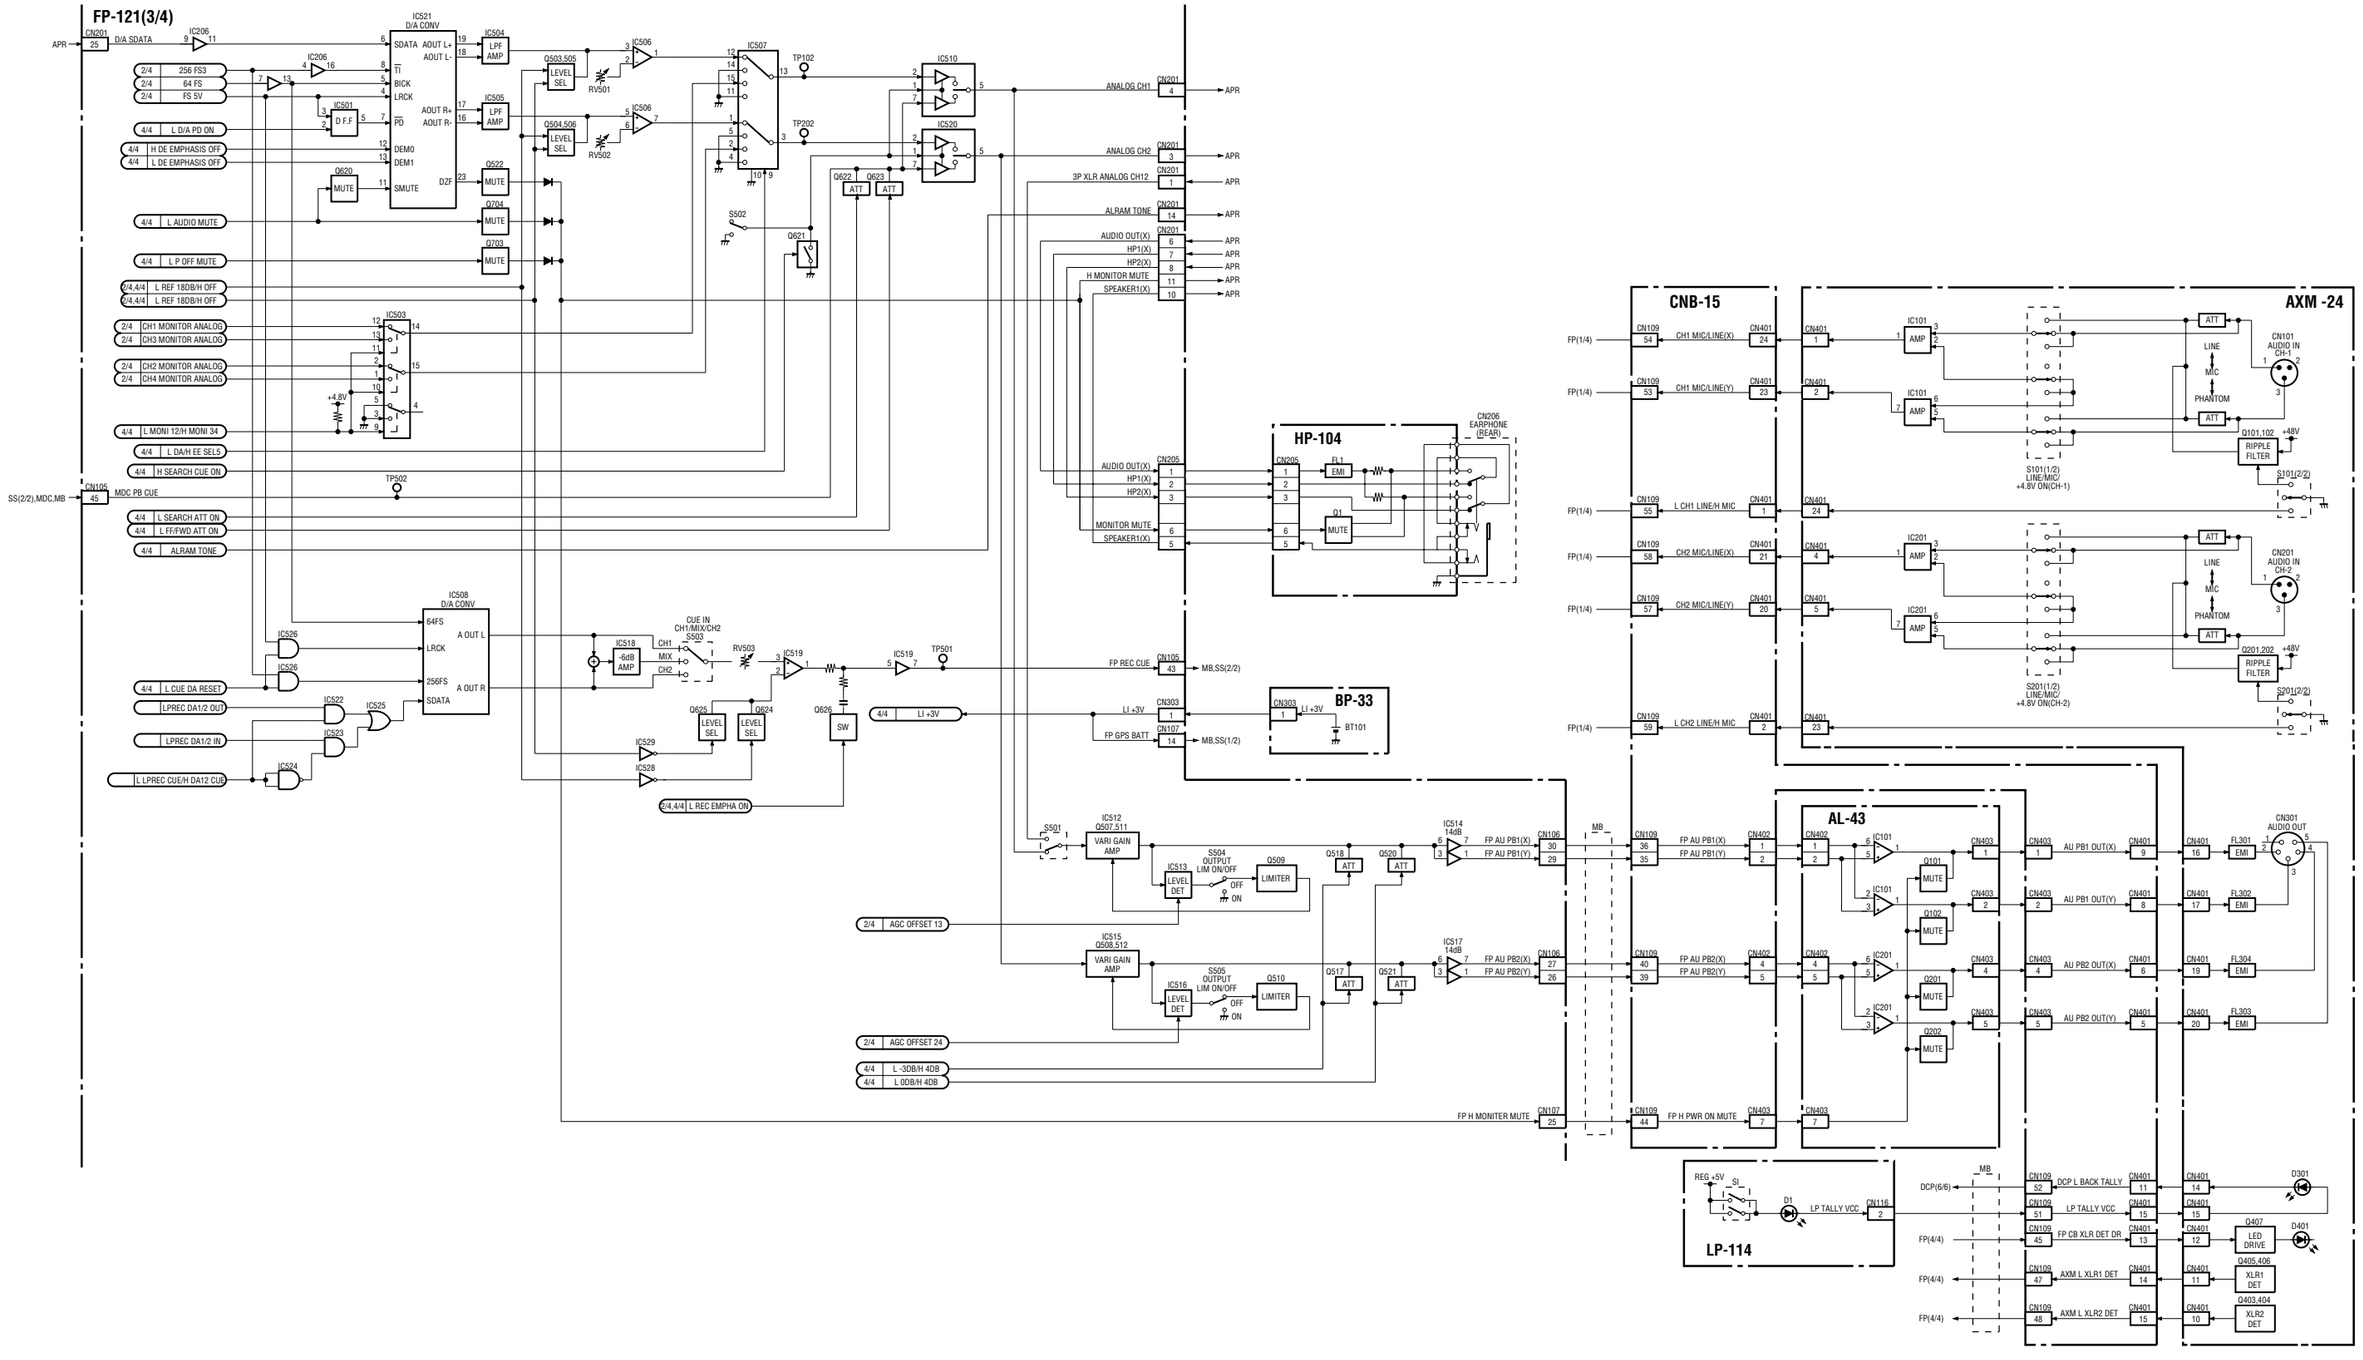

ANALOG AUDIO PROCESSOR
FP-121 (3/4)
AUDIO AMP
AL-43

CONNECTOR
AXM-24
BATTERY
BP-33

HEAD PHONE
HP-104
REAR TALLY
LP-114

3-32

FP-121 (4/4), ENC-61, KY-475, SW-1038

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

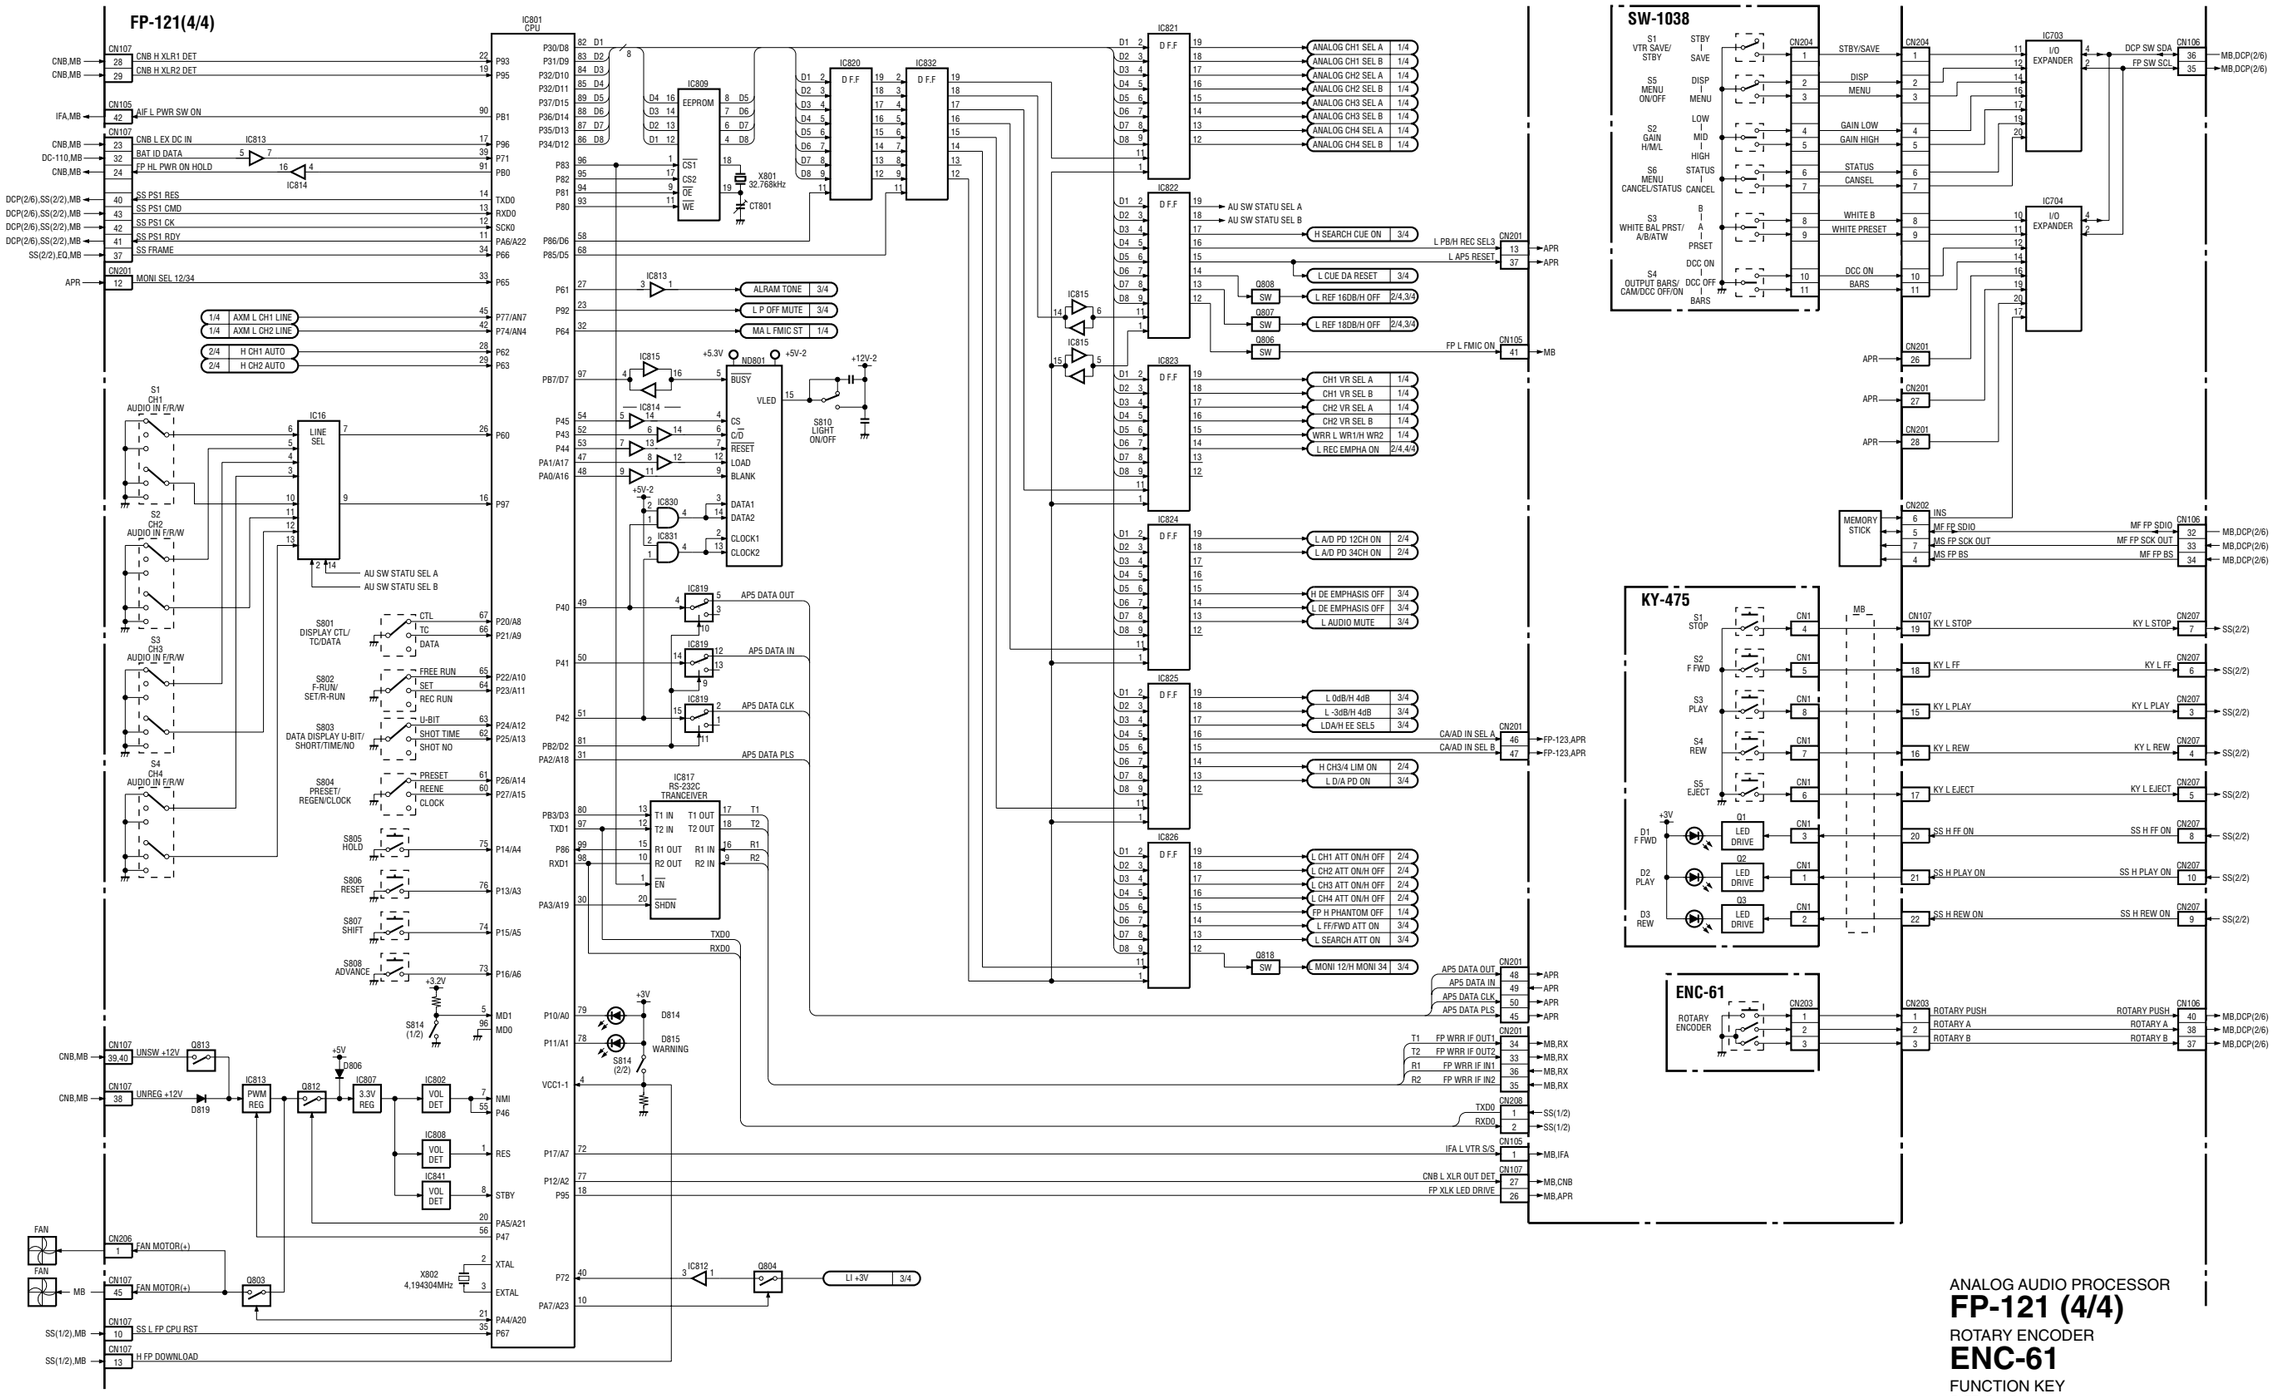

ANALOG AUDIO PROCESSOR
FP-121 (4/4)
ROTARY ENCODER
ENC-61
FUNCTION KEY
KY-475
SWITCH
SW-1038

3-33

CNB-15, DC-111, PS-595, RE-186, RE-187, SW-1030

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

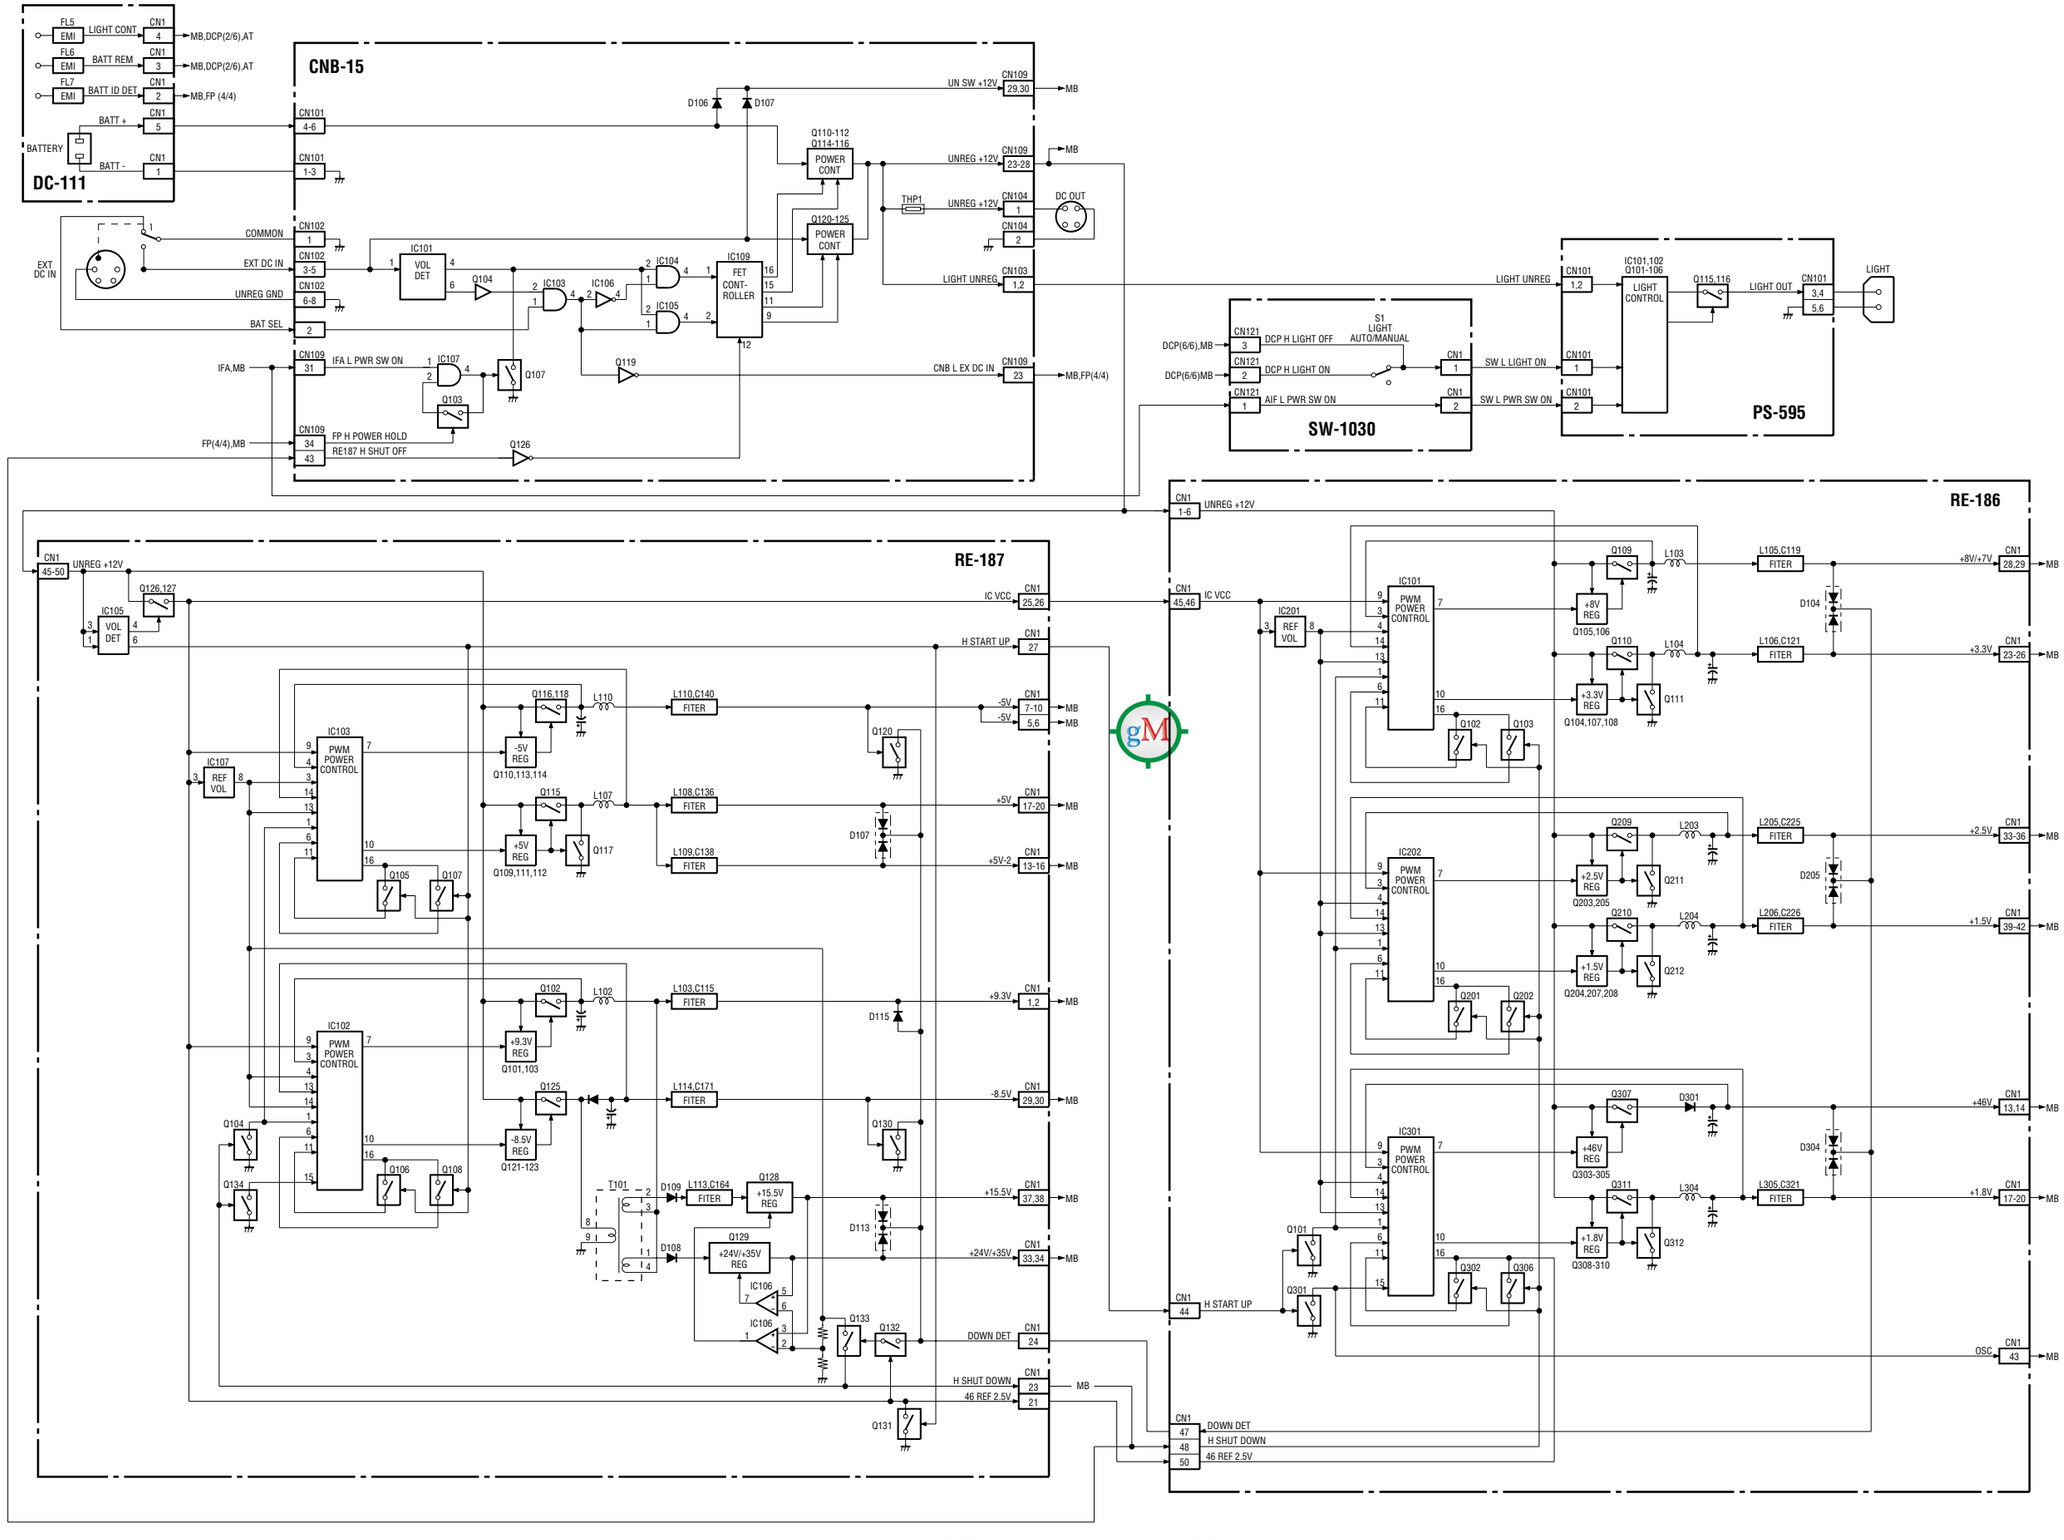

3-34

Section 4
Schematic Diagrams

Index

Board Name	Function	Page
AL-43	AUDIO AMP	4-137
APR-59	AUDIO PROCESSOR	4-134
AT-143	SYSTEM CONTROL	4-44
AXM-24	CONNECTOR	4-138
BP-33	BATTERY	4-139
CCM-45	TELE FILE	4-79
CI-27	50PIN ADAPTOR INTERFACE	4-77
CN-2037	CONNECTOR for DR-433	4-7
CNB-15	CIRCUIT BREAKER	4-146
DC-110 (HKDW-702)	DOWN CONVERTER	4-34
DC-111	BATTERY DC FILTER	4-149
DCP-28	CAMERA PROCESSOR	4-11
DR-433	CCD DRIVER	4-4
DVP-18	VTR PROCESSOR	4-48
ENC-61	ROTARY ENCODER	4-140
EQ-88	EQUALIZER	4-96
FP-121	ANALOG AUDIO PROCESSOR	4-118
HN-277	HARNESS	4-76
HP-103	HEADPHONE	4-136
HP-104	HEADPHONE	4-139
IF-794	INTERFACE	4-75
IFA-11	LENS CONTROL	4-130
IO-202	IN/OUT	4-33
KY-475	FUNCTION KEY	4-141
LP-114	REAR TALLY	4-140
MA-103	MIC AMP	4-132
MB-898	MOTHERBOARD	4-152
MDC-13	MECHA DECK CONTROL	4-86
MDR-14	DRUM MOTOR DRIVE	4-94
MY-99 (HKDW-703)	PICTURE CACHE	4-71
PA-253	PRE AMP	4-2
PS-595	POWER SUPPLY (LIGHT)	4-150
RE-186	REGULATOR	4-142
RE-187	REGULATOR	4-144
RM-188	CONNECTOR (RM)	4-33
RX-54	WIRELESS RECEIVER INTERFACE	4-132
SE-613	SENSOR	4-95
SS-92	SERVO/SYSCON	4-80
SW-1030	LIGHT SWITCH	4-151
SW-1031	SWITCH	4-133
SW-1038	SWITCH	4-141
TG-219	TIMING GENERATOR	4-8
FRAME	–	4-154

4-1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

TO BI-147
CN101

1	R-TEMP-
2	R-TEMP+
3	GND
4	R-CCD_CH2_IN
5	GND
6	R-CCD_CH1_IN

TO BI-147
CN102

1	G-TEMP-
2	G-TEMP+
3	GND
4	G-CCD_CH2_IN
5	GND
6	G-CCD_CH1_IN

TO BI-147
CN103

1	B-TEMEP-
2	B-TEMP+
3	GND
4	B-CCD_CH2_IN
5	GND
6	B-CCD_CH1_IN

TO TG-219
CN104

1	GND
2	GND
3	PA_GND
4	GND
5	SHP/DEFS1/WSH_R
6	GND
7	SLOW_SCAN/WSH_G
8	PA_+4.5V
9	PA_+4.5FB
10	PA_+4.5V
11	PA_+2.1V
12	PA_+2.1V
13	DEFSO/WSH_B
14	+3.3V
15	SHPG74M
16	+3.3V
17	SHD74M
18	PA_-4.5V
19	PA_-4.5FB
20	PA_-4.5V
21	G_TEMP+
22	BCS_+1.8V
23	G_TEMP-
24	BCS_+1.8V
25	MODE3/BCSSCK
26	FLD/FRM/O_RST
27	CLP_IN
28	H_PHASE
29	MPX1/37N
30	FRM_RST
31	MPX2/LD_FBC
32	SDA
33	SCL
34	SDAO
35	LD_OHB1
36	MODE1/BCSSOUT
37	MODE2/BCSSIN
38	RP_CLK
39	H_CLK
40	CXOCLK_EN
41	OHB_VD
42	BCS_+2.5V
43	+5V
44	-5V
45	+5V
46	-5V
47	GND
48	GND

GTEMP-
GTEMP+
R1 0
WSHR
WSHG
WSHB
+4.5V
C2 47uF 6.3V
+2.1V
C1672
C3 100uF 6.3V
+3.3V
+3.3V
C1 47uF 6.3V
C1672
-4.5V
+1.8V
+1.8V
MODE3
FLD/FRM
CLP
H_PHASE
MPX1
FRM_RST
MPX2
SDA
SCL
SDAO
LD_OHB1
MODE1
MODE2
RP_CLK
H_CLK
CXOCLK_EN
OHBVD
+2.5V
+5V
-5V
+5V
-5V

IC1 (1/2)
TC7SZ32FU (TE85R)
R2 22

IC1 (2/2)
TC7SZ32FU (TE85R)
+2.1V
C4 0.01uF
VCC
GND

SHD74M | 002-J7
PS | 002-U1
DR_RP | 002-K10
NR_PA | 002-K1

Q100 2SA1610-T1Y33
Q102 2SA1610-T1Y33
IC100 SN74CBTLGT25DCKR
Q104 2SC3661-TB
IC102 CLC505AJE-T
Q106 2SA1610-T1Y33
Q107 2SA1610-T1Y33
Q109 2SA1610-T1Y33
D100 MA6ST21-(TX) NM
C100 10uF 20V
R152 150
R102 10k
C103 10pF
R100 39k NM
R106 1.8k
R104 47
R108 47
R110 1.2k
R112 22
C102 0.01uF
C104 0.01uF
R116 22
C106 39pF
R118 3.9k
R120 270
R124 1k
R121 270
R126 1k
C108 0.01uF
R128 82k
C112 100pF
R130 100
C110 0.01uF
R132 220
R133 3.9k
R134 220
R135 2.2k
R138 220
R136 100
R141 3.9k
C114 0.01uF
DL100
DL102
R146 68
R147 47
R148 68
R10
R11
R12

Q101 2SA1610-T1Y33
Q103 2SA1610-T1Y33
IC101 SN74CBTLGT25DCKR
Q105 2SC3661-TB
IC103 CLC505AJE-T
Q108 2SA1610-T1Y33
Q110 2SA1610-T1Y33
Q111 2SA1610-T1Y33
C101 10uF 20V
R153 150
R103 10k
C116 10pF
R101 39k NM
R107 1.8k
R105 47
R109 47
R111 1.2k
R113 22
C105 0.01uF
C107 39pF
R117 22
R119 3.9k
R122 270
R125 1k
R123 270
R127 1k
C109 0.01uF
R129 82k
C113 100pF
R131 100
C111 0.01uF
R137 220
R139 3.9k
R140 220
R142 2.2k
R144 220
R145 3.9k
C115 0.01uF
DL101
DL103
DL104
R143 100
R149 68
R150 47
R151 68
R20
R21
R22

Q200 2SA1610-T1Y33
Q202 2SA1610-T1Y33
IC200 SN74CBTLGT25DCKR
Q204 2SC3661-TB
IC202 CLC505AJE-T
Q206 2SA1610-T1Y33
Q207 2SA1610-T1Y33
Q209 2SA1610-T1Y33
D200 MA6ST21-(TX) NM
C200 10uF 20V
R252 150
R202 10k
C203 10pF
R200 39k NM
R206 1.8k
R204 47
R208 47
R210 1.2k
R212 22
C202 0.01uF
C204 0.01uF
R216 22
C206 39pF
R218 3.9k
R220 270
R224 1k
R221 270
R226 1k
C208 0.01uF
R228 82k
C212 100pF
R230 100
C210 0.01uF
R232 220
R233 3.9k
R234 220
R235 2.2k
R238 220
R236 100
R241 3.9k
C214 0.01uF
DL200
DL202
R246 68
R247 47
R248 68
G10
G11
G12

Q201 2SA1610-T1Y33
Q203 2SA1610-T1Y33
IC201 SN74CBTLGT25DCKR
Q205 2SC3661-TB
IC203 CLC505AJE-T
Q208 2SA1610-T1Y33
Q210 2SA1610-T1Y33
Q211 2SA1610-T1Y33
C201 10uF 20V
R253 150
R202 10k
C216 10pF
R201 39k NM
R207 1.8k
R205 47
R209 47
R211 1.2k
R213 22
C205 0.01uF
C207 39pF
R217 22
R219 3.9k
R222 270
R225 1k
R223 270
R227 1k
C209 0.01uF
R229 82k
C213 100pF
R231 100
C211 0.01uF
R237 220
R239 3.9k
R240 220
R242 2.2k
R244 220
R245 3.9k
C215 0.01uF
DL201
DL203
DL204
R243 100
R249 68
R250 47
R251 68
G20
G21
G22

Q300 2SA1610-T1Y33
Q302 2SA1610-T1Y33
IC300 SN74CBTLGT25DCKR
Q304 2SC3661-TB
IC302 CLC505AJE-T
Q306 2SA1610-T1Y33
Q307 2SA1610-T1Y33
Q309 2SA1610-T1Y33
D300 MA6ST21-(TX) NM
C300 10uF 20V
R352 150
R302 10k
C303 10pF
R300 39k NM
R306 1.8k
R304 47
R308 47
R310 1.2k
R312 22
C302 0.01uF
C304 0.01uF
R316 22
C306 39pF
R318 3.9k
R320 270
R324 1k
R321 270
R326 1k
C308 0.01uF
R328 82k
C312 100pF
R330 100
C310 0.01uF
R332 220
R333 3.9k
R334 220
R335 2.2k
R338 220
R336 100
R341 3.9k
C314 0.01uF
DL300
DL302
R346 68
R347 47
R348 68
B10
B11
B12

Q301 2SA1610-T1Y33
Q303 2SA1610-T1Y33
IC301 SN74CBTLGT25DCKR
Q305 2SC3661-TB
IC303 CLC505AJE-T
Q308 2SA1610-T1Y33
Q310 2SA1610-T1Y33
Q311 2SA1610-T1Y33
C301 10uF 20V
R353 150
R303 10k
C316 10pF
R301 39k NM
R307 1.8k
R305 47
R309 47
R311 1.2k
R313 22
C305 0.01uF
C307 39pF
R317 22
R319 3.9k
R322 270
R325 1k
R323 270
R327 1k
C309 0.01uF
R329 82k
C313 100pF
R331 100
C311 0.01uF
R339 3.9k
R340 220
R342 2.2k
R344 220
R345 3.9k
C315 0.01uF
DL301
DL303
DL304
R343 100
R349 68
R350 47
R351 68
B20
B21
B22

PA-253 (1/2)
BOARD NO. 1-678-616-12, 13
LOT NO. 083-
HDW-750_PA-253_100_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

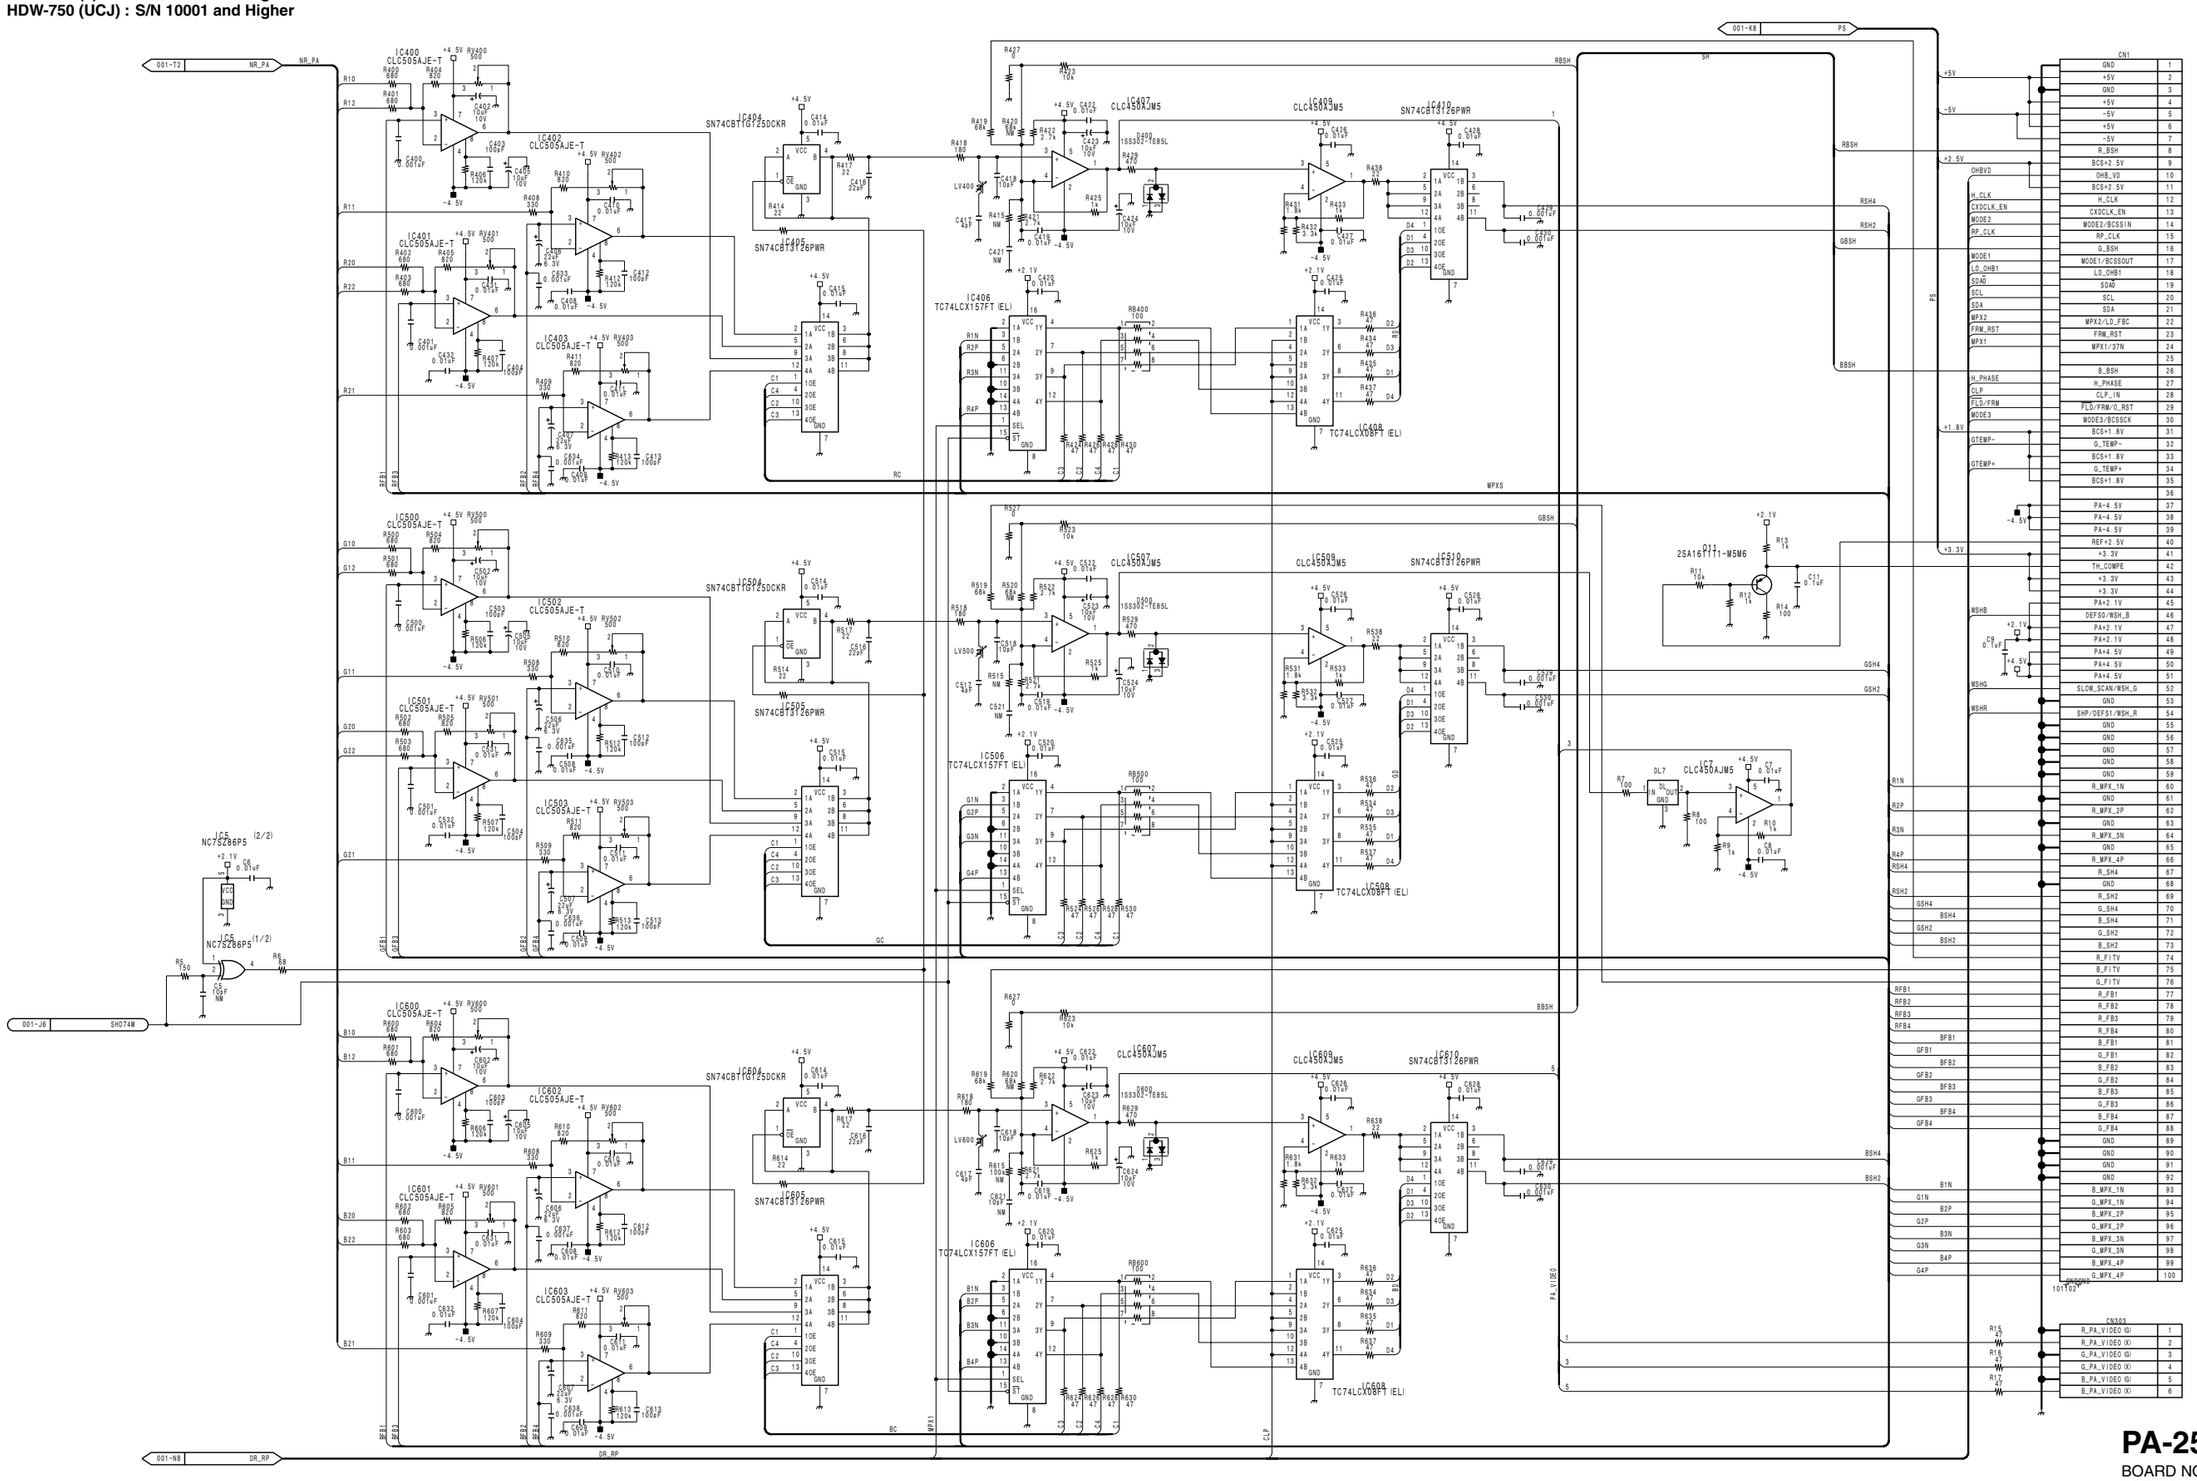

PA-253 (2/2)

BOARD NO. 1-678-616-12, 13
LOT NO. 083-

HDW-750_PA-253_100_2

HDW-750 (J) : S/N 70041 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

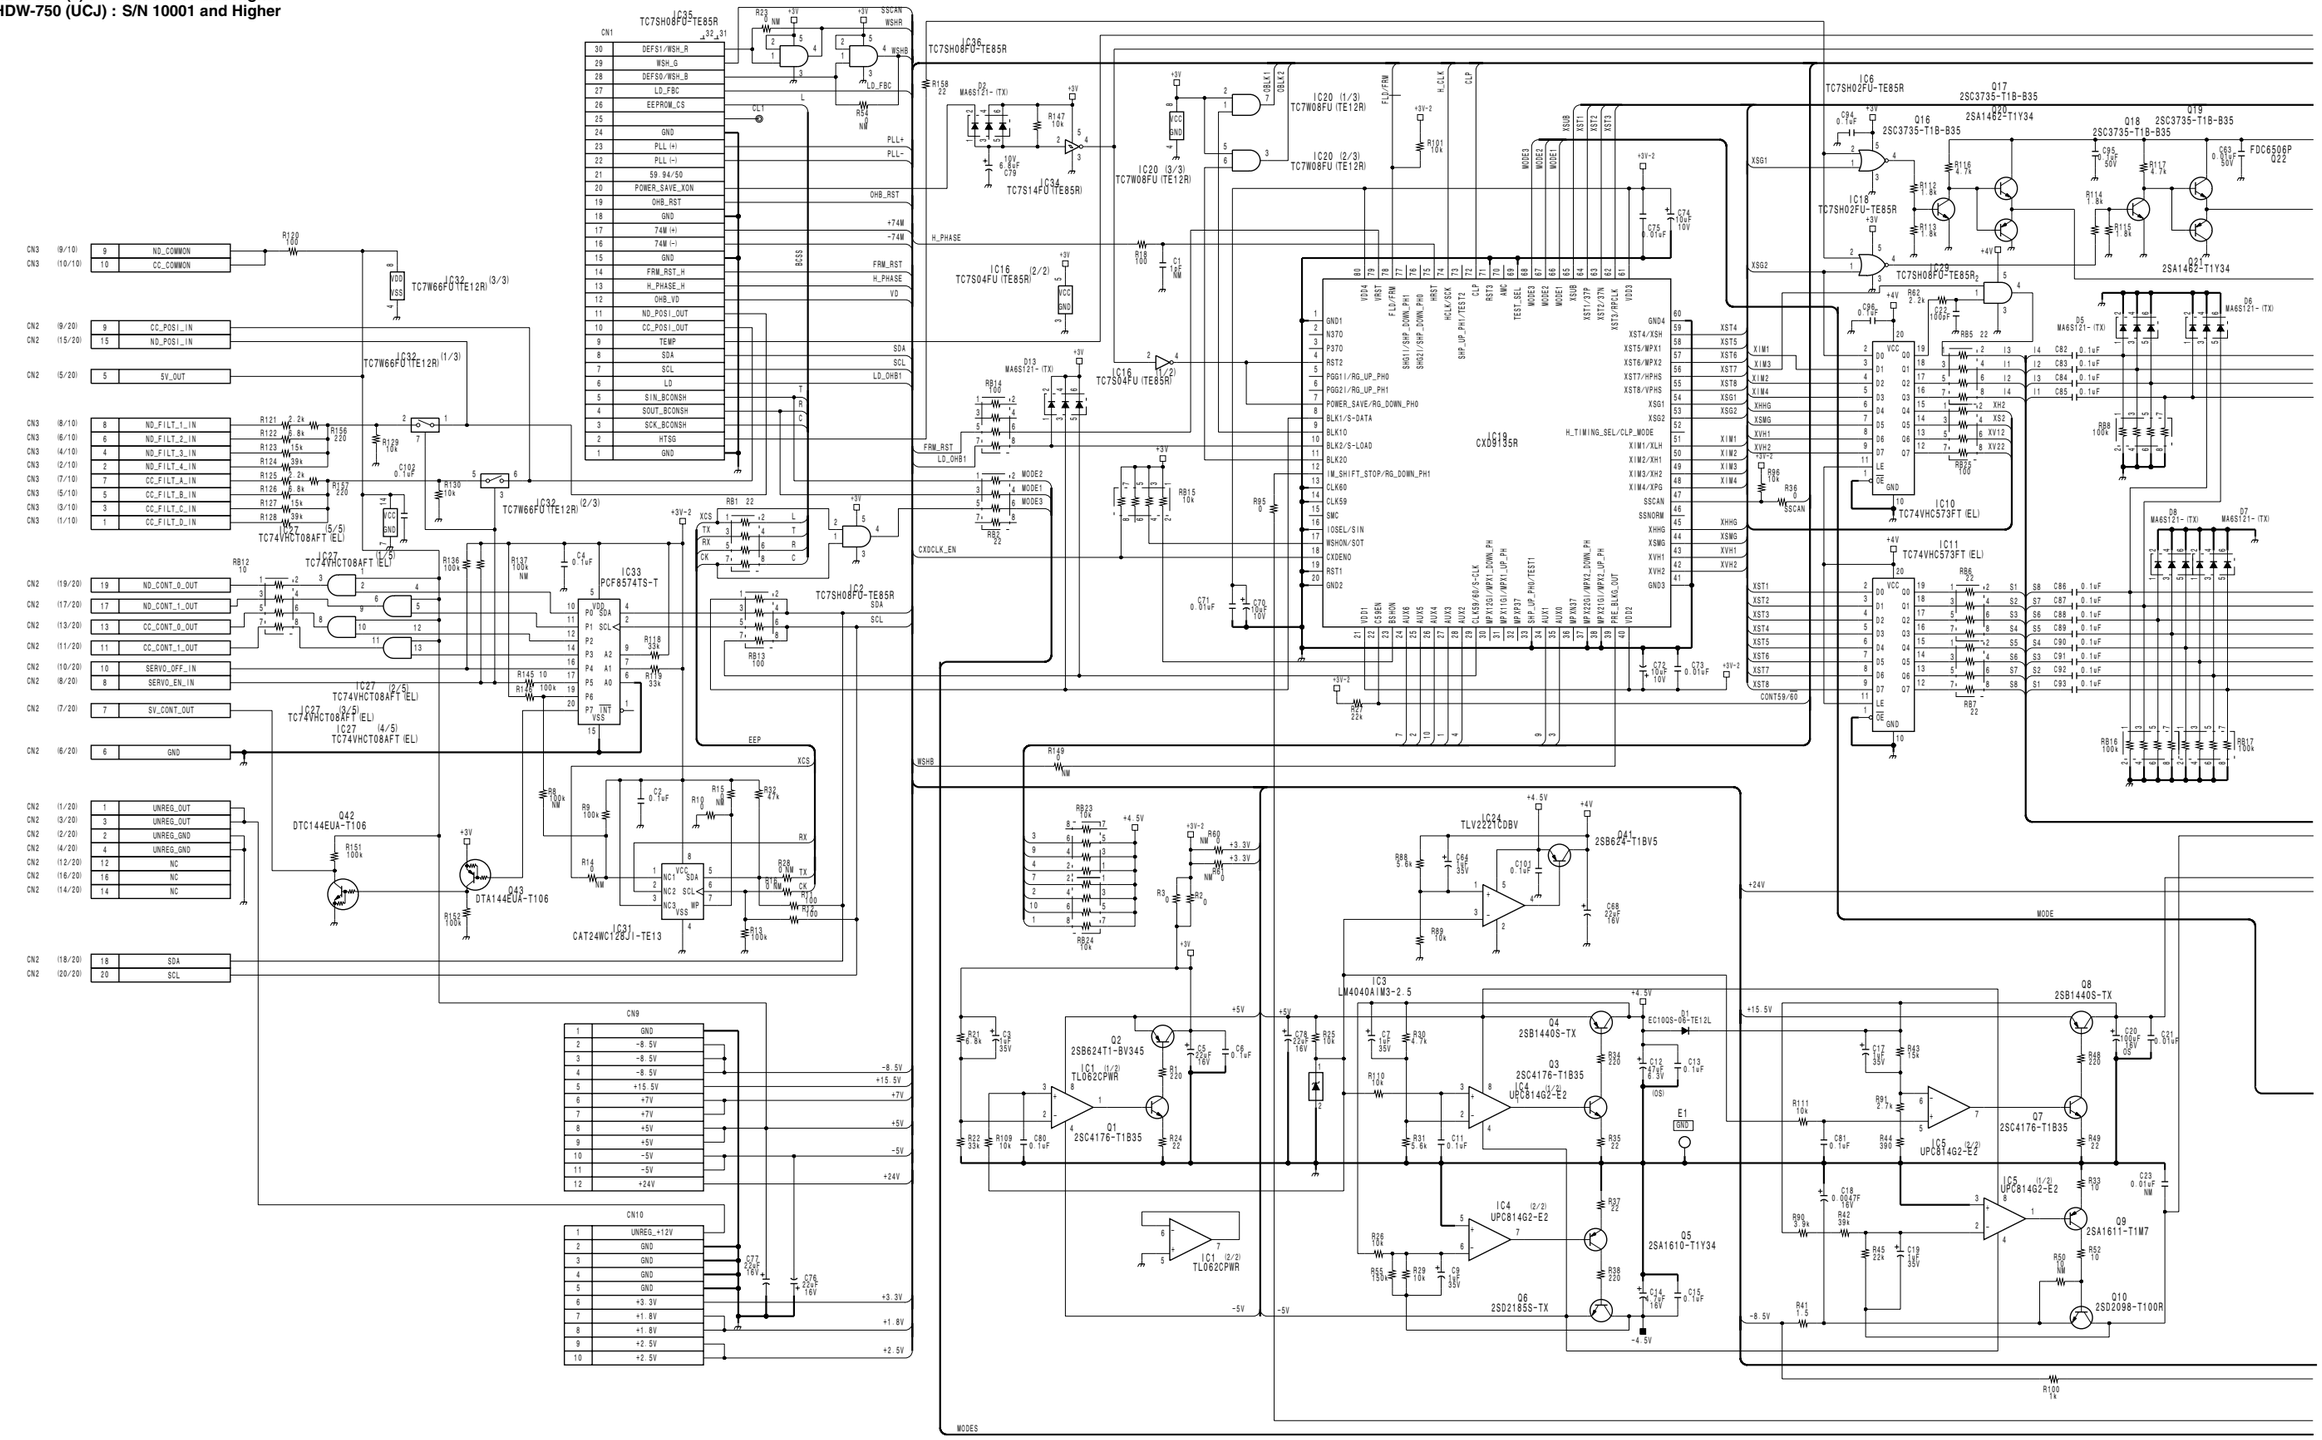

4-4 (b) 4-4 (b)

HDW-750 V2

http://getMANUAL.com

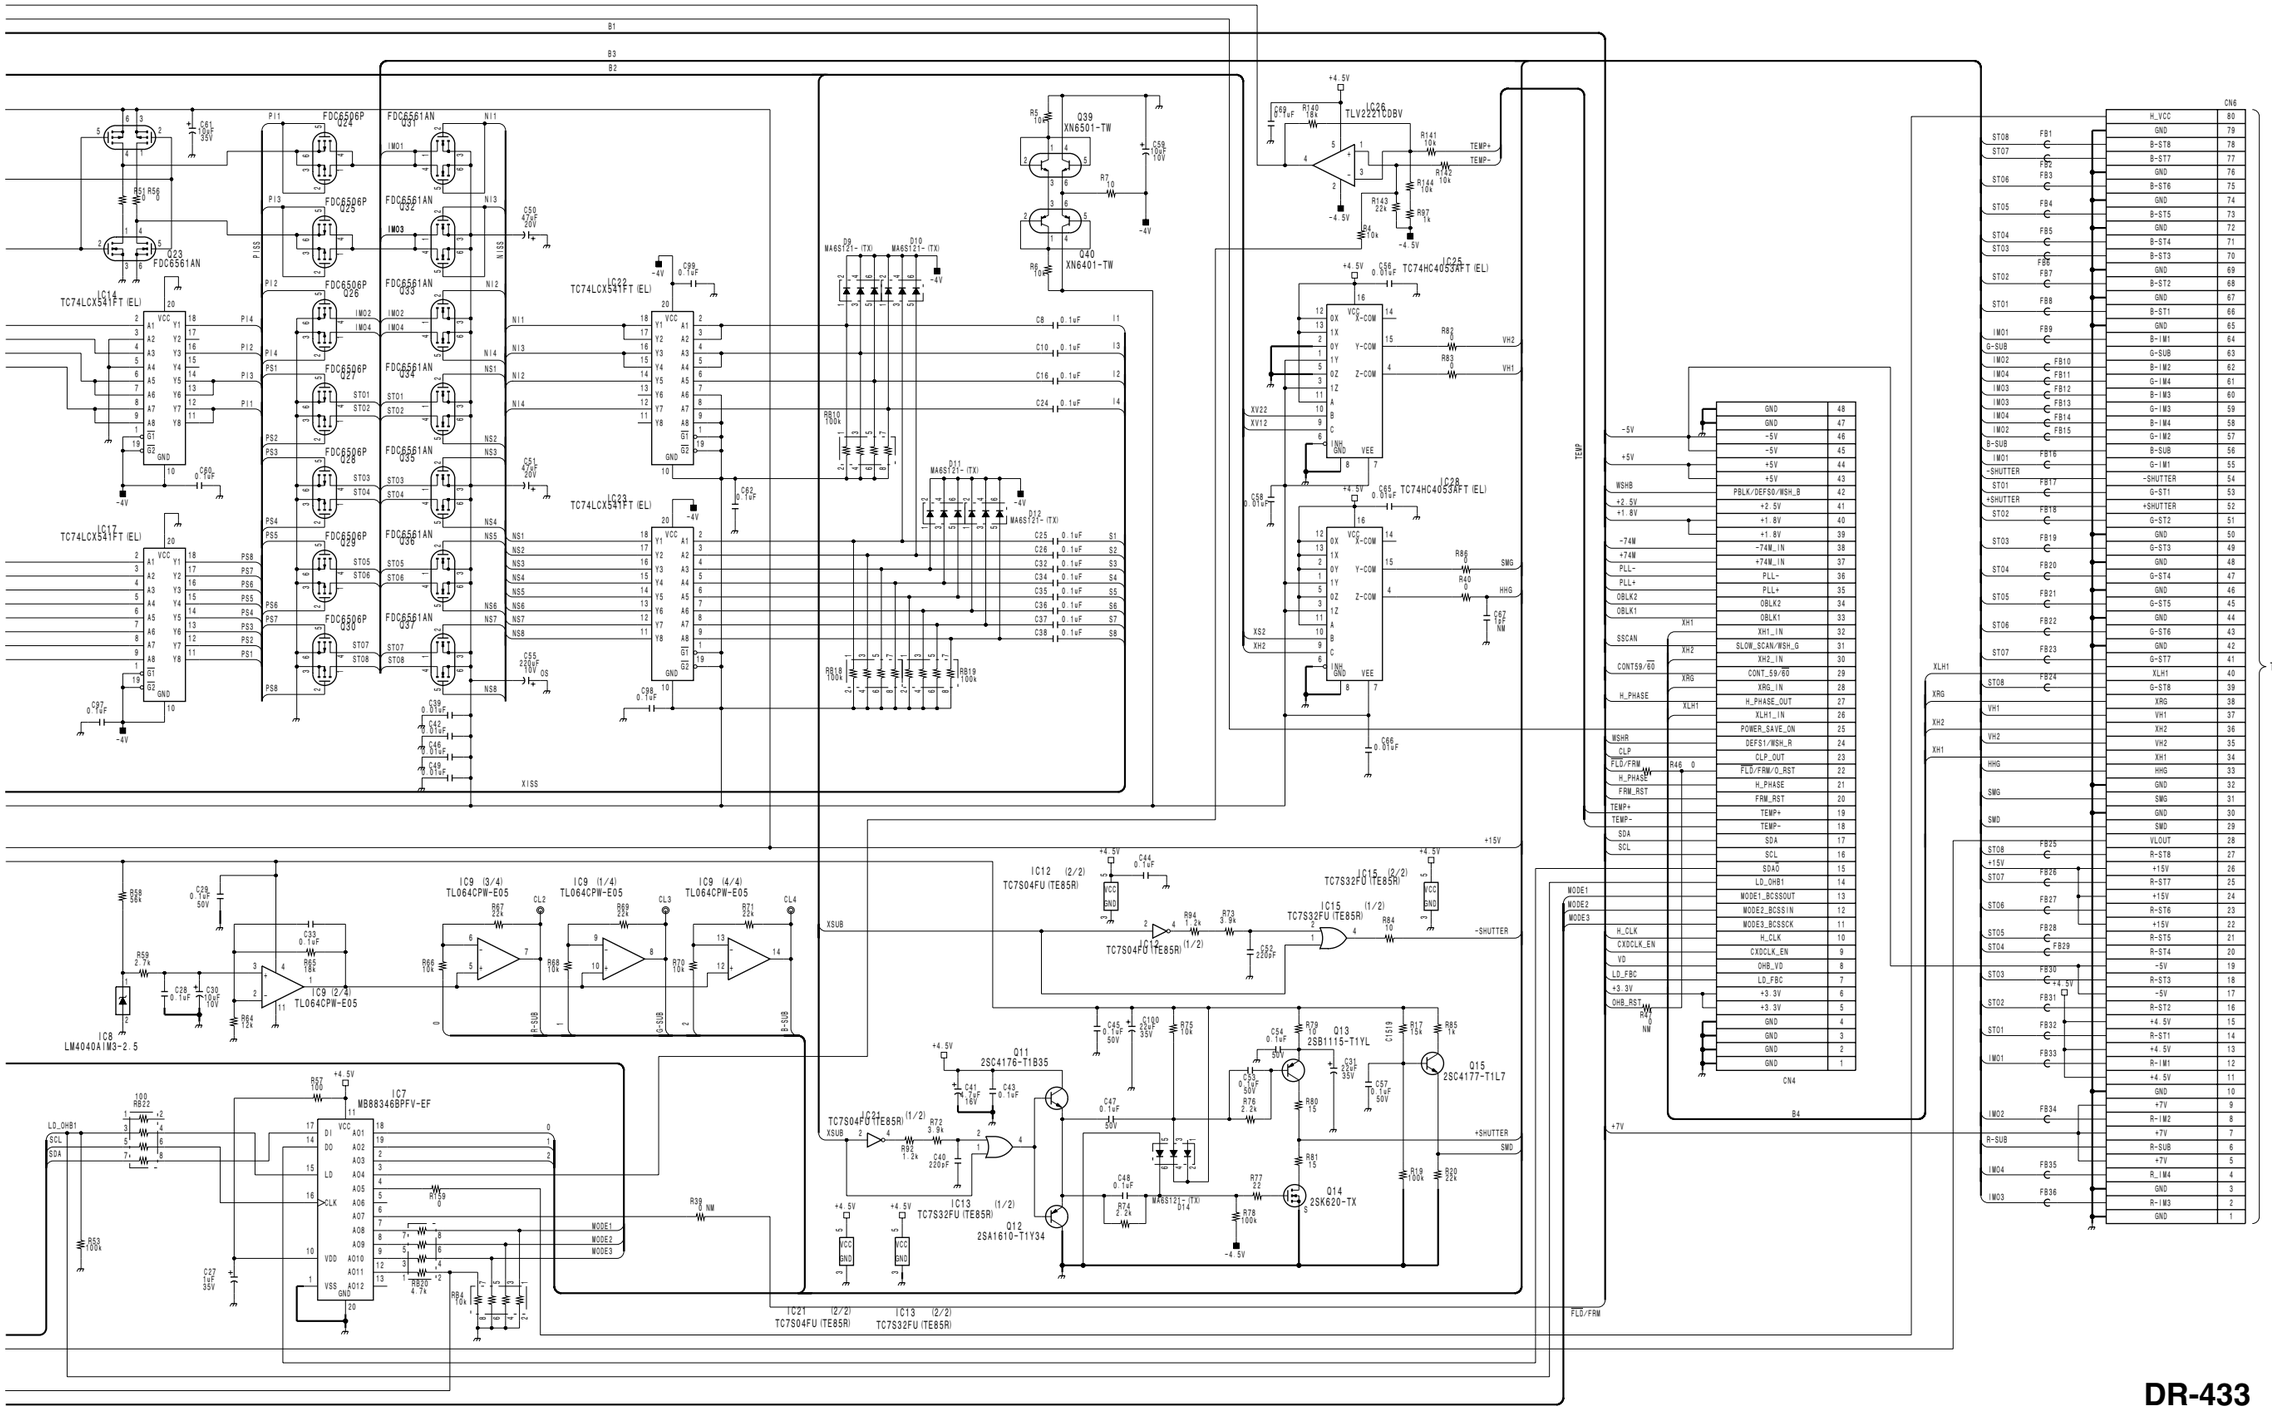

DR-433

BOARD NO. 1-678-606-13
LOT NO. 0A3-

HDW-750_DR-433_003_1

HDW-750 (J) : S/N 70001 through 70040

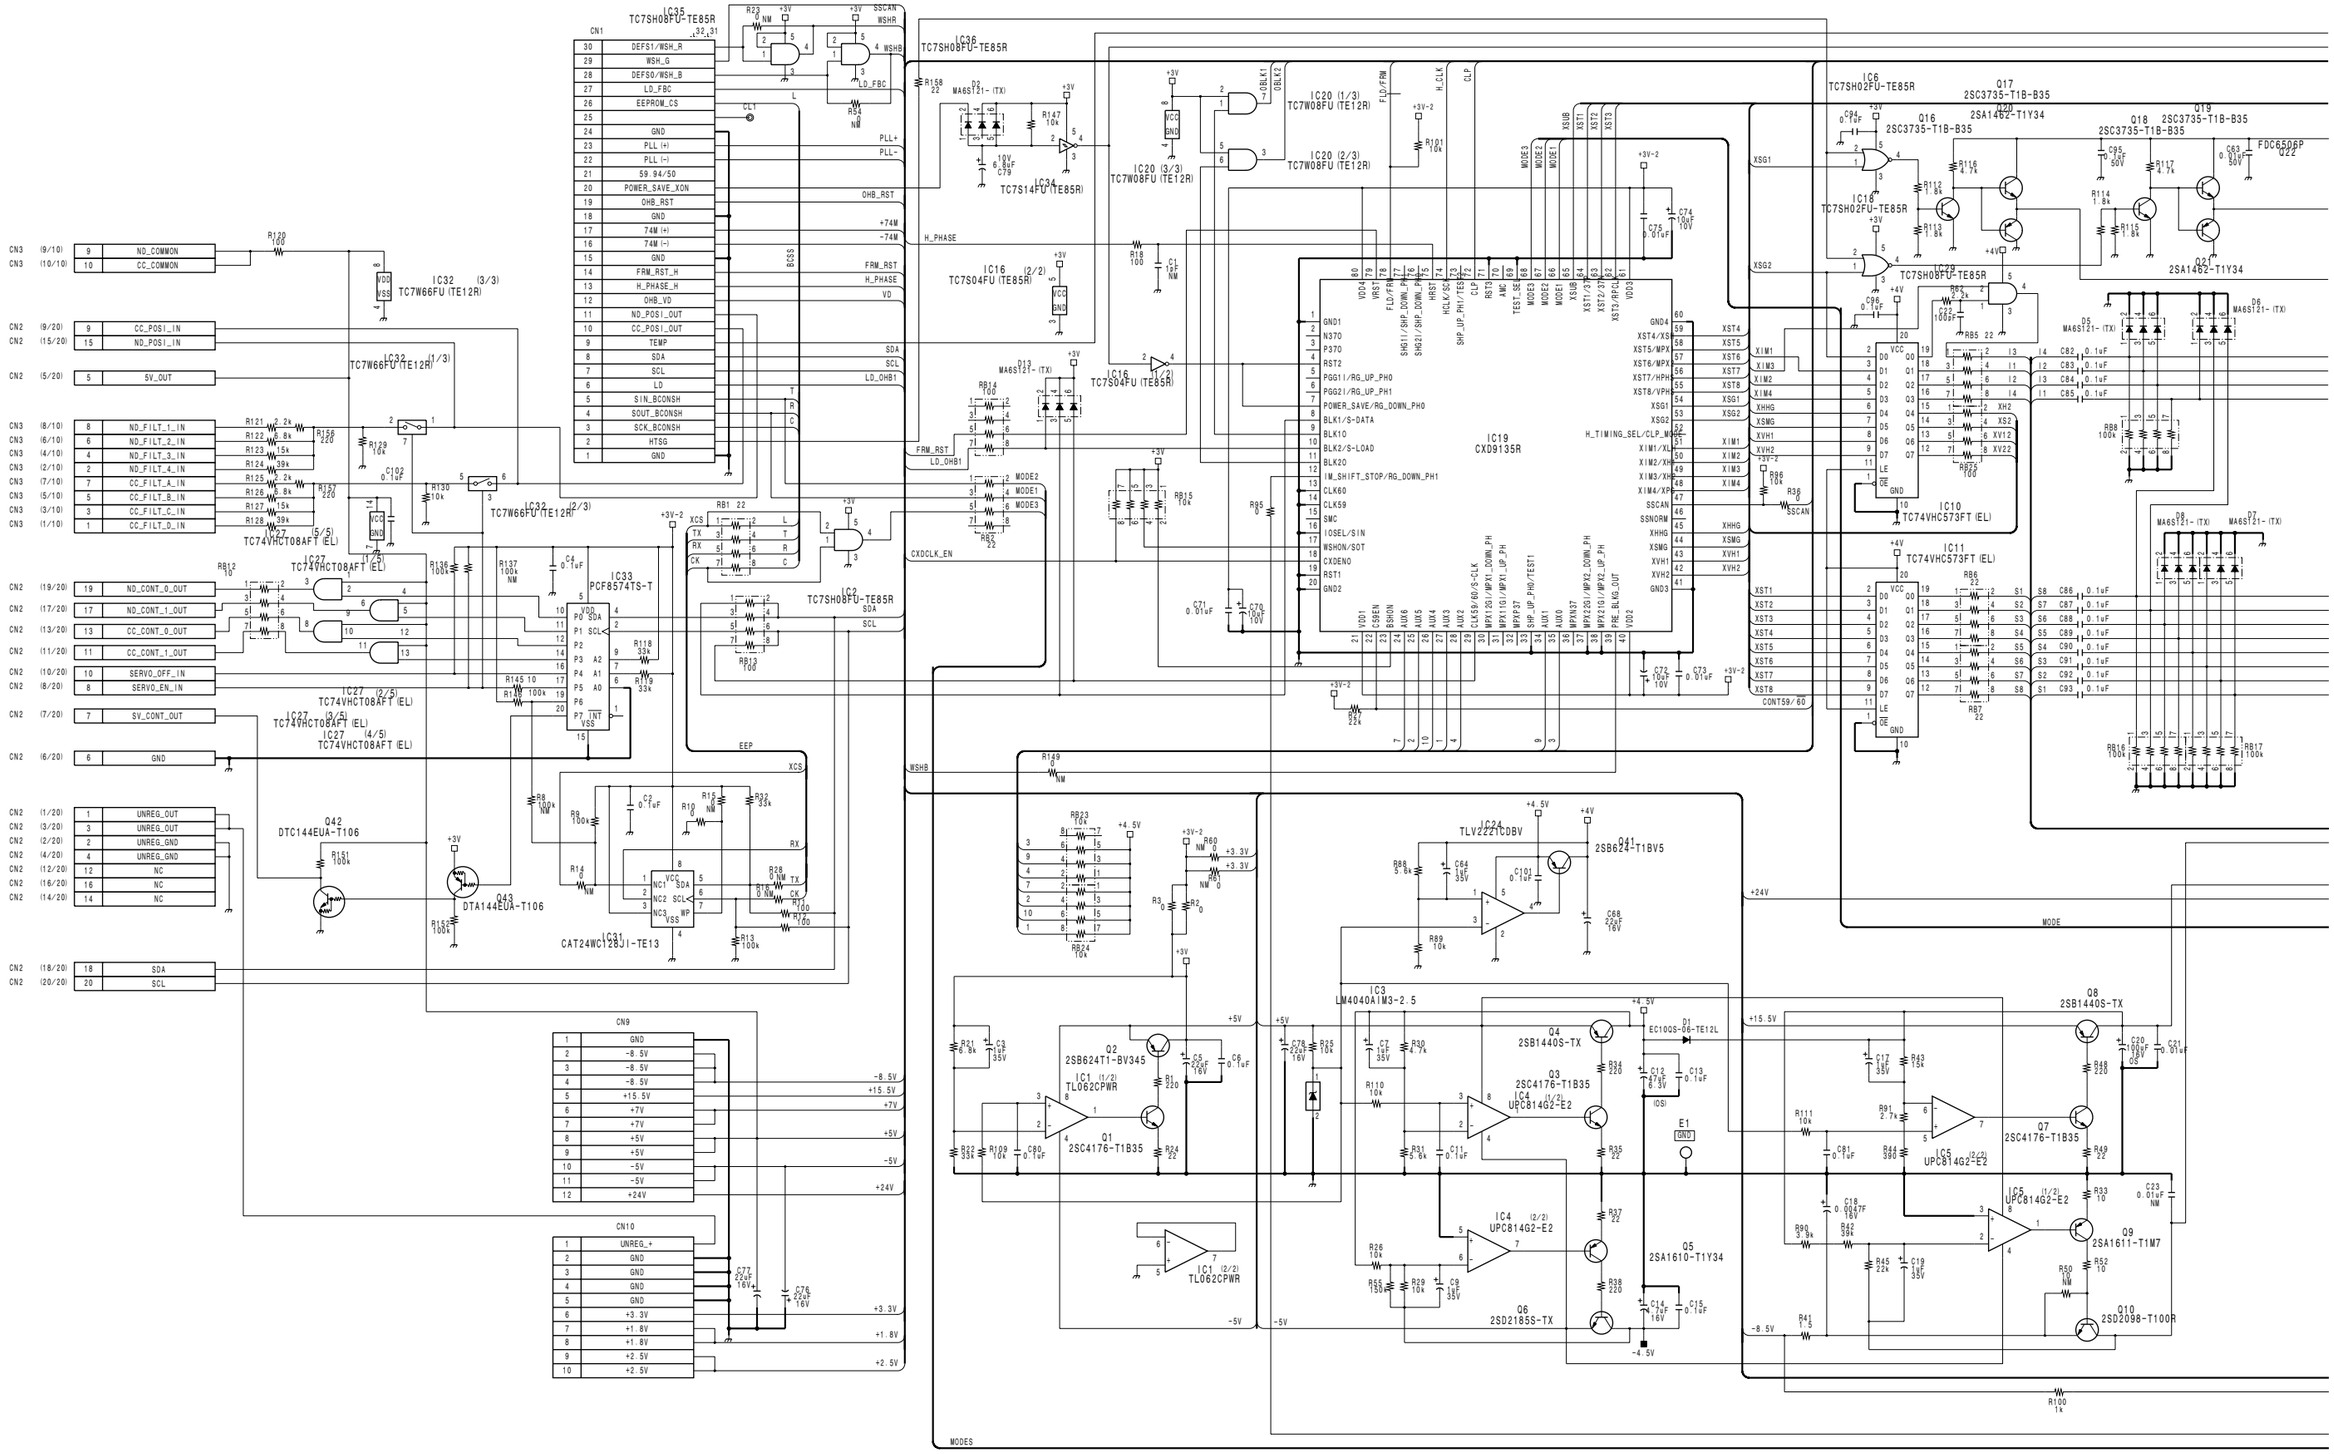

4-4 (a) 4-4 (a)

HDW-750 V2

A B C D E F G H

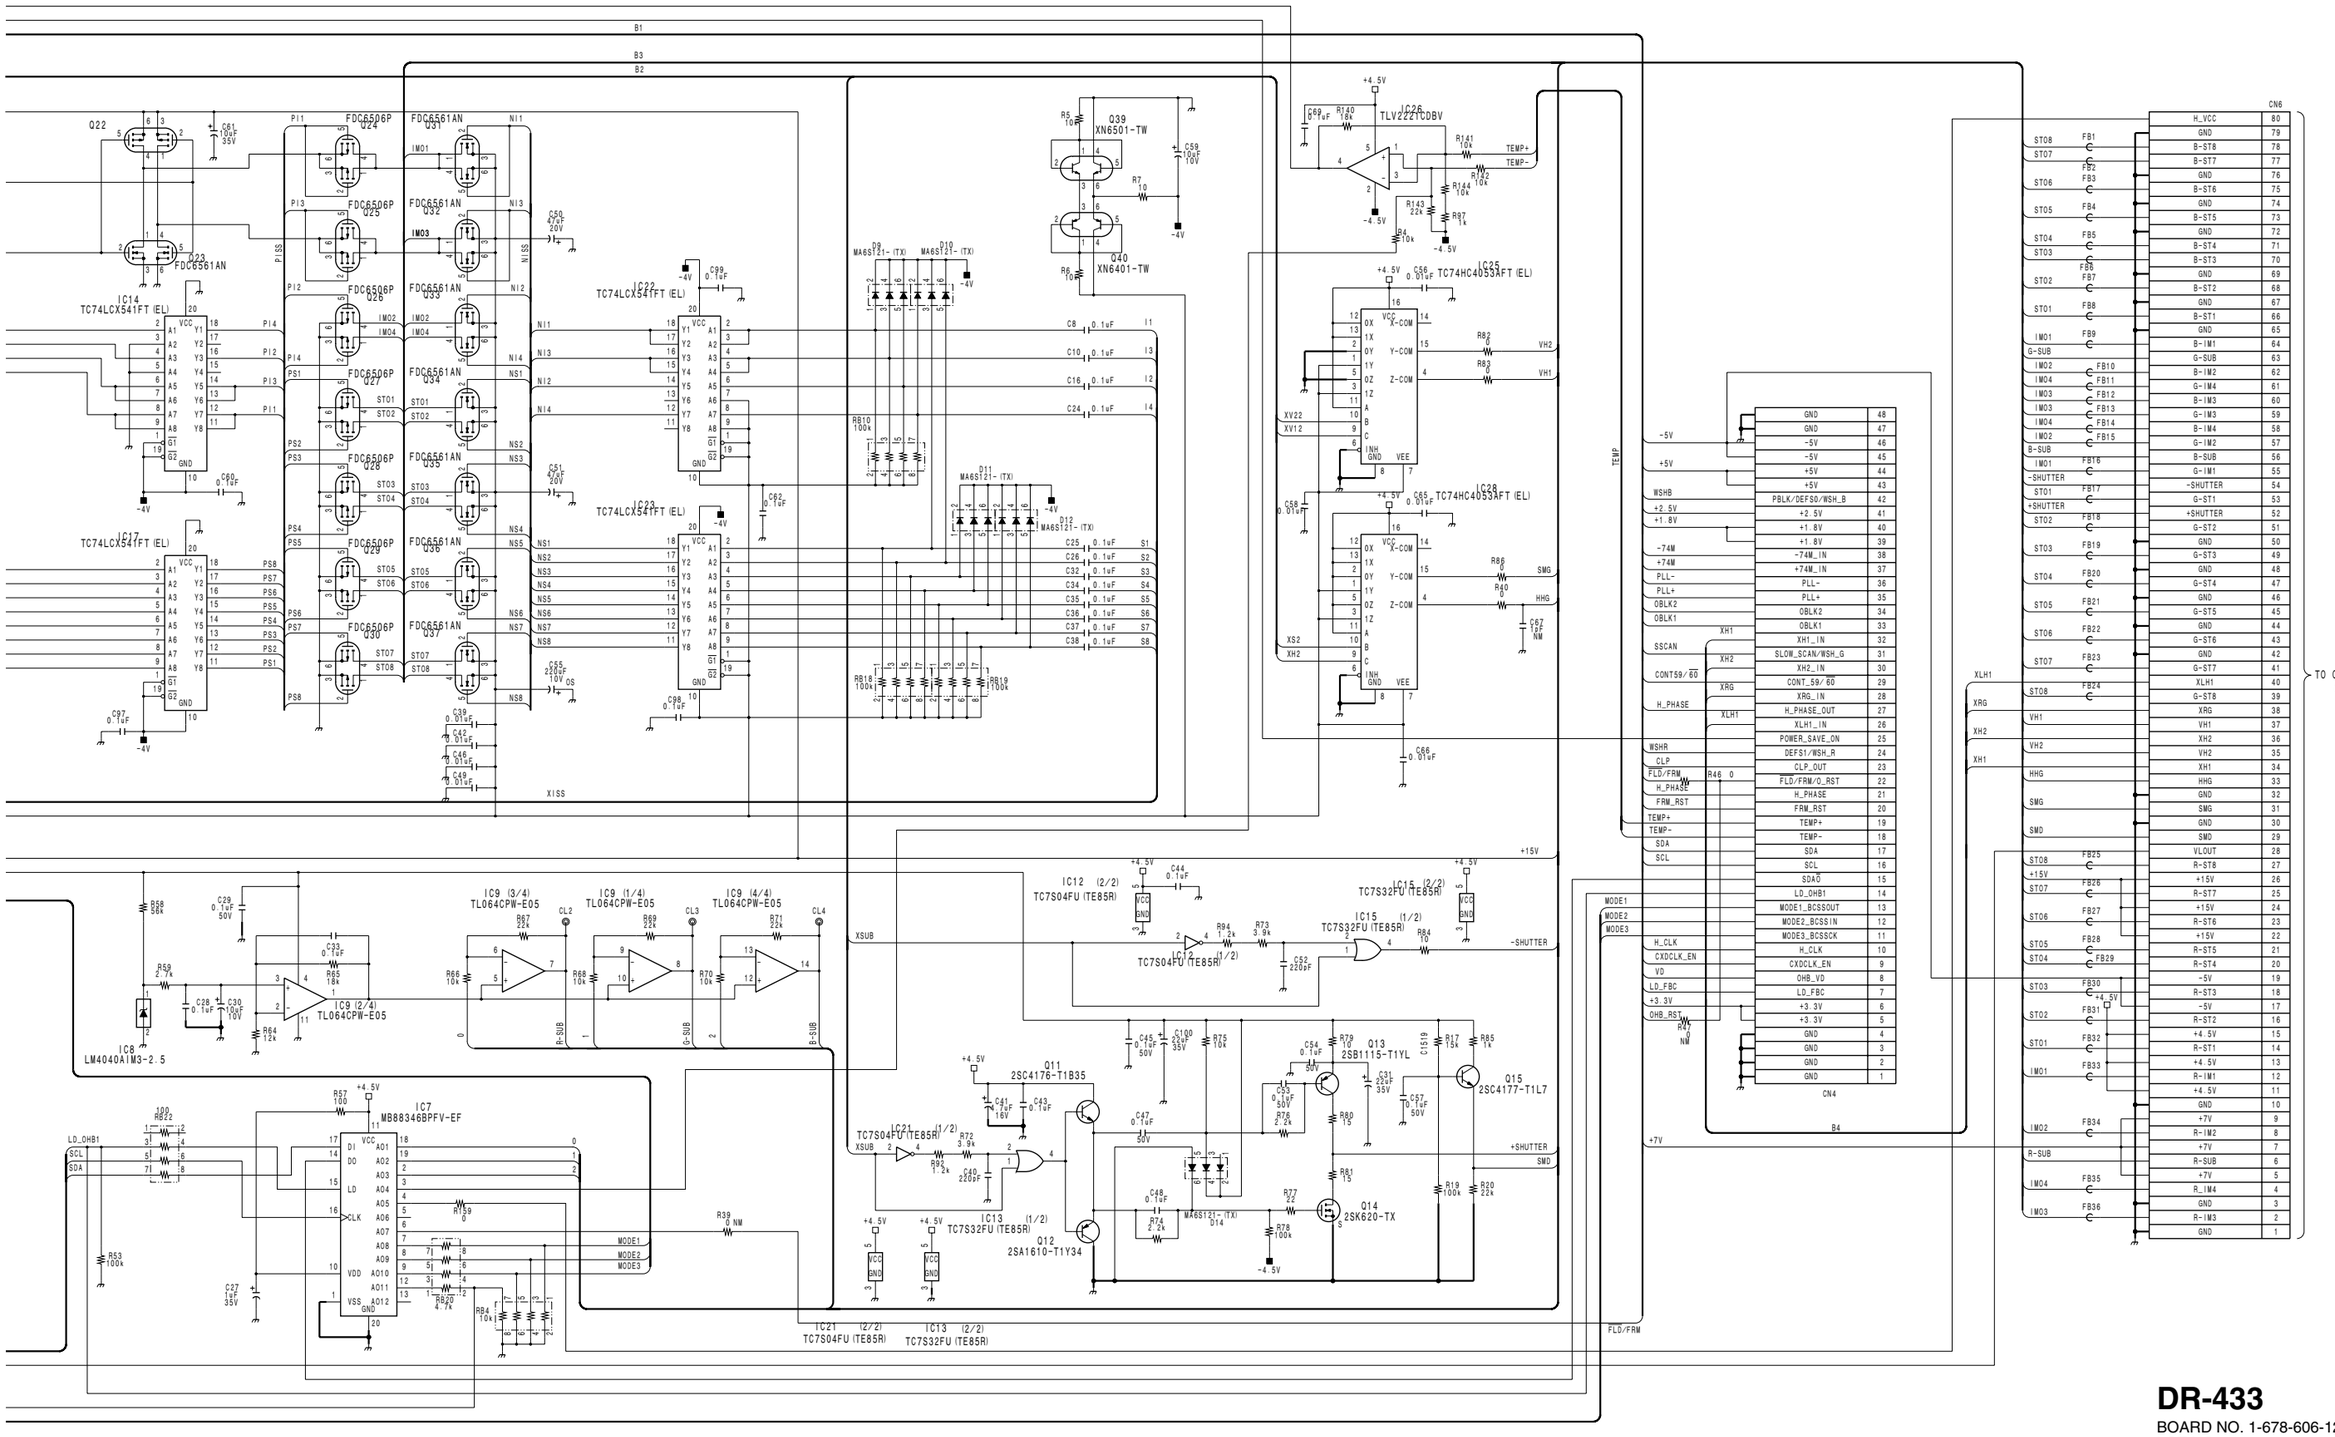

DR-433

BOARD NO. 1-678-606-12
LOT NO. 083-

HDW-750_DR-433_100_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

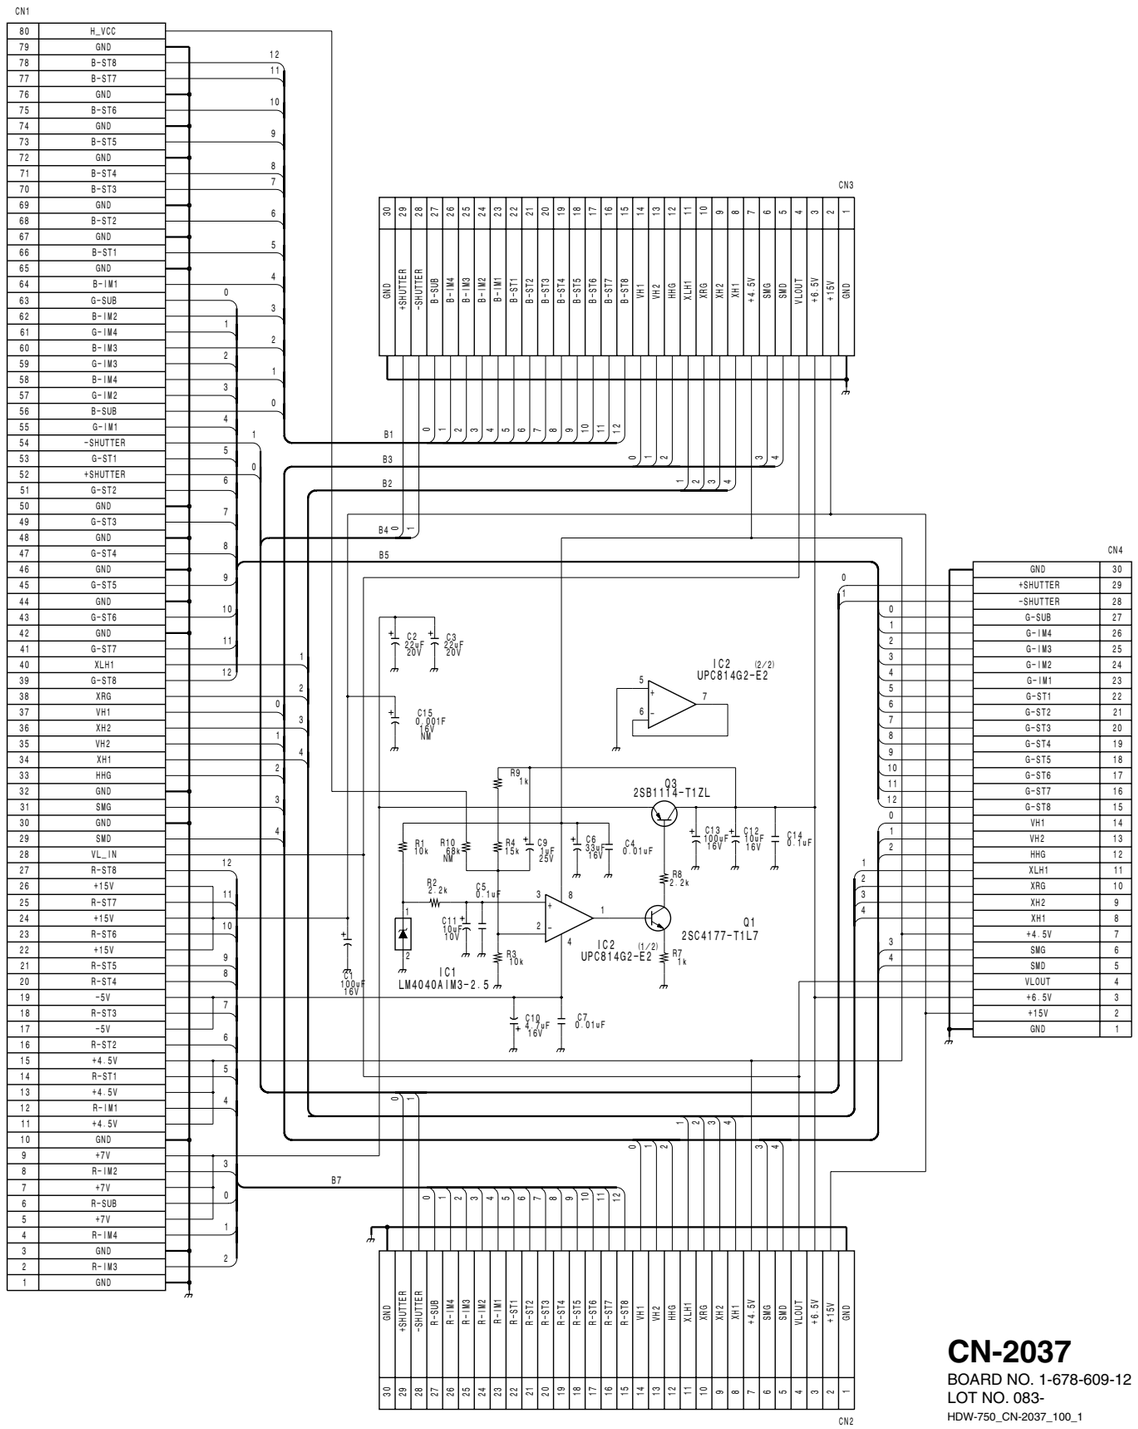

CN1	
80	H_VCC
79	GND
78	B-ST8
77	B-ST7
76	GND
75	B-ST6
74	GND
73	B-ST5
72	GND
71	B-ST4
70	B-ST3
69	GND
68	B-ST2
67	GND
66	B-ST1
65	GND
64	B-IM1
63	G-SUB
62	B-IM2
61	G-IM4
60	B-IM3
59	G-IM3
58	B-IM4
57	G-IM2
56	B-SUB
55	G-IM1
54	-SHUTTER
53	G-ST1
52	+SHUTTER
51	G-ST2
50	GND
49	G-ST3
48	GND
47	G-ST4
46	GND
45	G-ST5
44	GND
43	G-ST6
42	GND
41	G-ST7
40	XLH1
39	G-ST8
38	XRG
37	VH1
36	XH2
35	VH2
34	XH1
33	HHG
32	GND
31	SMG
30	GND
29	SMD
28	VL_IN
27	R-ST8
26	+15V
25	R-ST7
24	+15V
23	R-ST6
22	+15V
21	R-ST5
20	R-ST4
19	-5V
18	R-ST3
17	-5V
16	R-ST2
15	+4.5V
14	R-ST1
13	+4.5V
12	R-IM1
11	+4.5V
10	GND
9	+7V
8	R-IM2
7	+7V
6	R-SUB
5	+7V
4	R-IM4
3	GND
2	R-IM3
1	GND

CN4	
GND	30
+SHUTTER	29
-SHUTTER	28
G-SUB	27
G-IM4	26
G-IM3	25
G-IM2	24
G-IM1	23
G-ST1	22
G-ST2	21
G-ST3	20
G-ST4	19
G-ST5	18
G-ST6	17
G-ST7	16
G-ST8	15
VH1	14
VH2	13
HHG	12
XLH1	11
XRG	10
XH2	9
XH1	8
+4.5V	7
SMG	6
SMD	5
VLOUT	4
+6.5V	3
+15V	2
GND	1

CN3 / CN2	
30	GND
29	+SHUTTER
28	-SHUTTER
27	B-SUB / R-SUB
26	B-IM4 / R-IM4
25	B-IM3 / R-IM3
24	B-IM2 / R-IM2
23	B-IM1 / R-IM1
22	B-ST1 / R-ST1
21	B-ST2 / R-ST2
20	B-ST3 / R-ST3
19	B-ST4 / R-ST4
18	B-ST5 / R-ST5
17	B-ST6 / R-ST6
16	B-ST7 / R-ST7
15	B-ST8 / R-ST8
14	VH1
13	VH2
12	HHG
11	XLH1
10	XRG
9	XH2
8	XH1
7	+4.5V
6	SMG
5	SMD
4	VLOUT
3	+6.5V
2	+15V
1	GND

CN-2037

BOARD NO. 1-678-609-12
LOT NO. 083-
HDW-750_CN-2037_100_1

HDW-750 (J) : S/N 70041 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

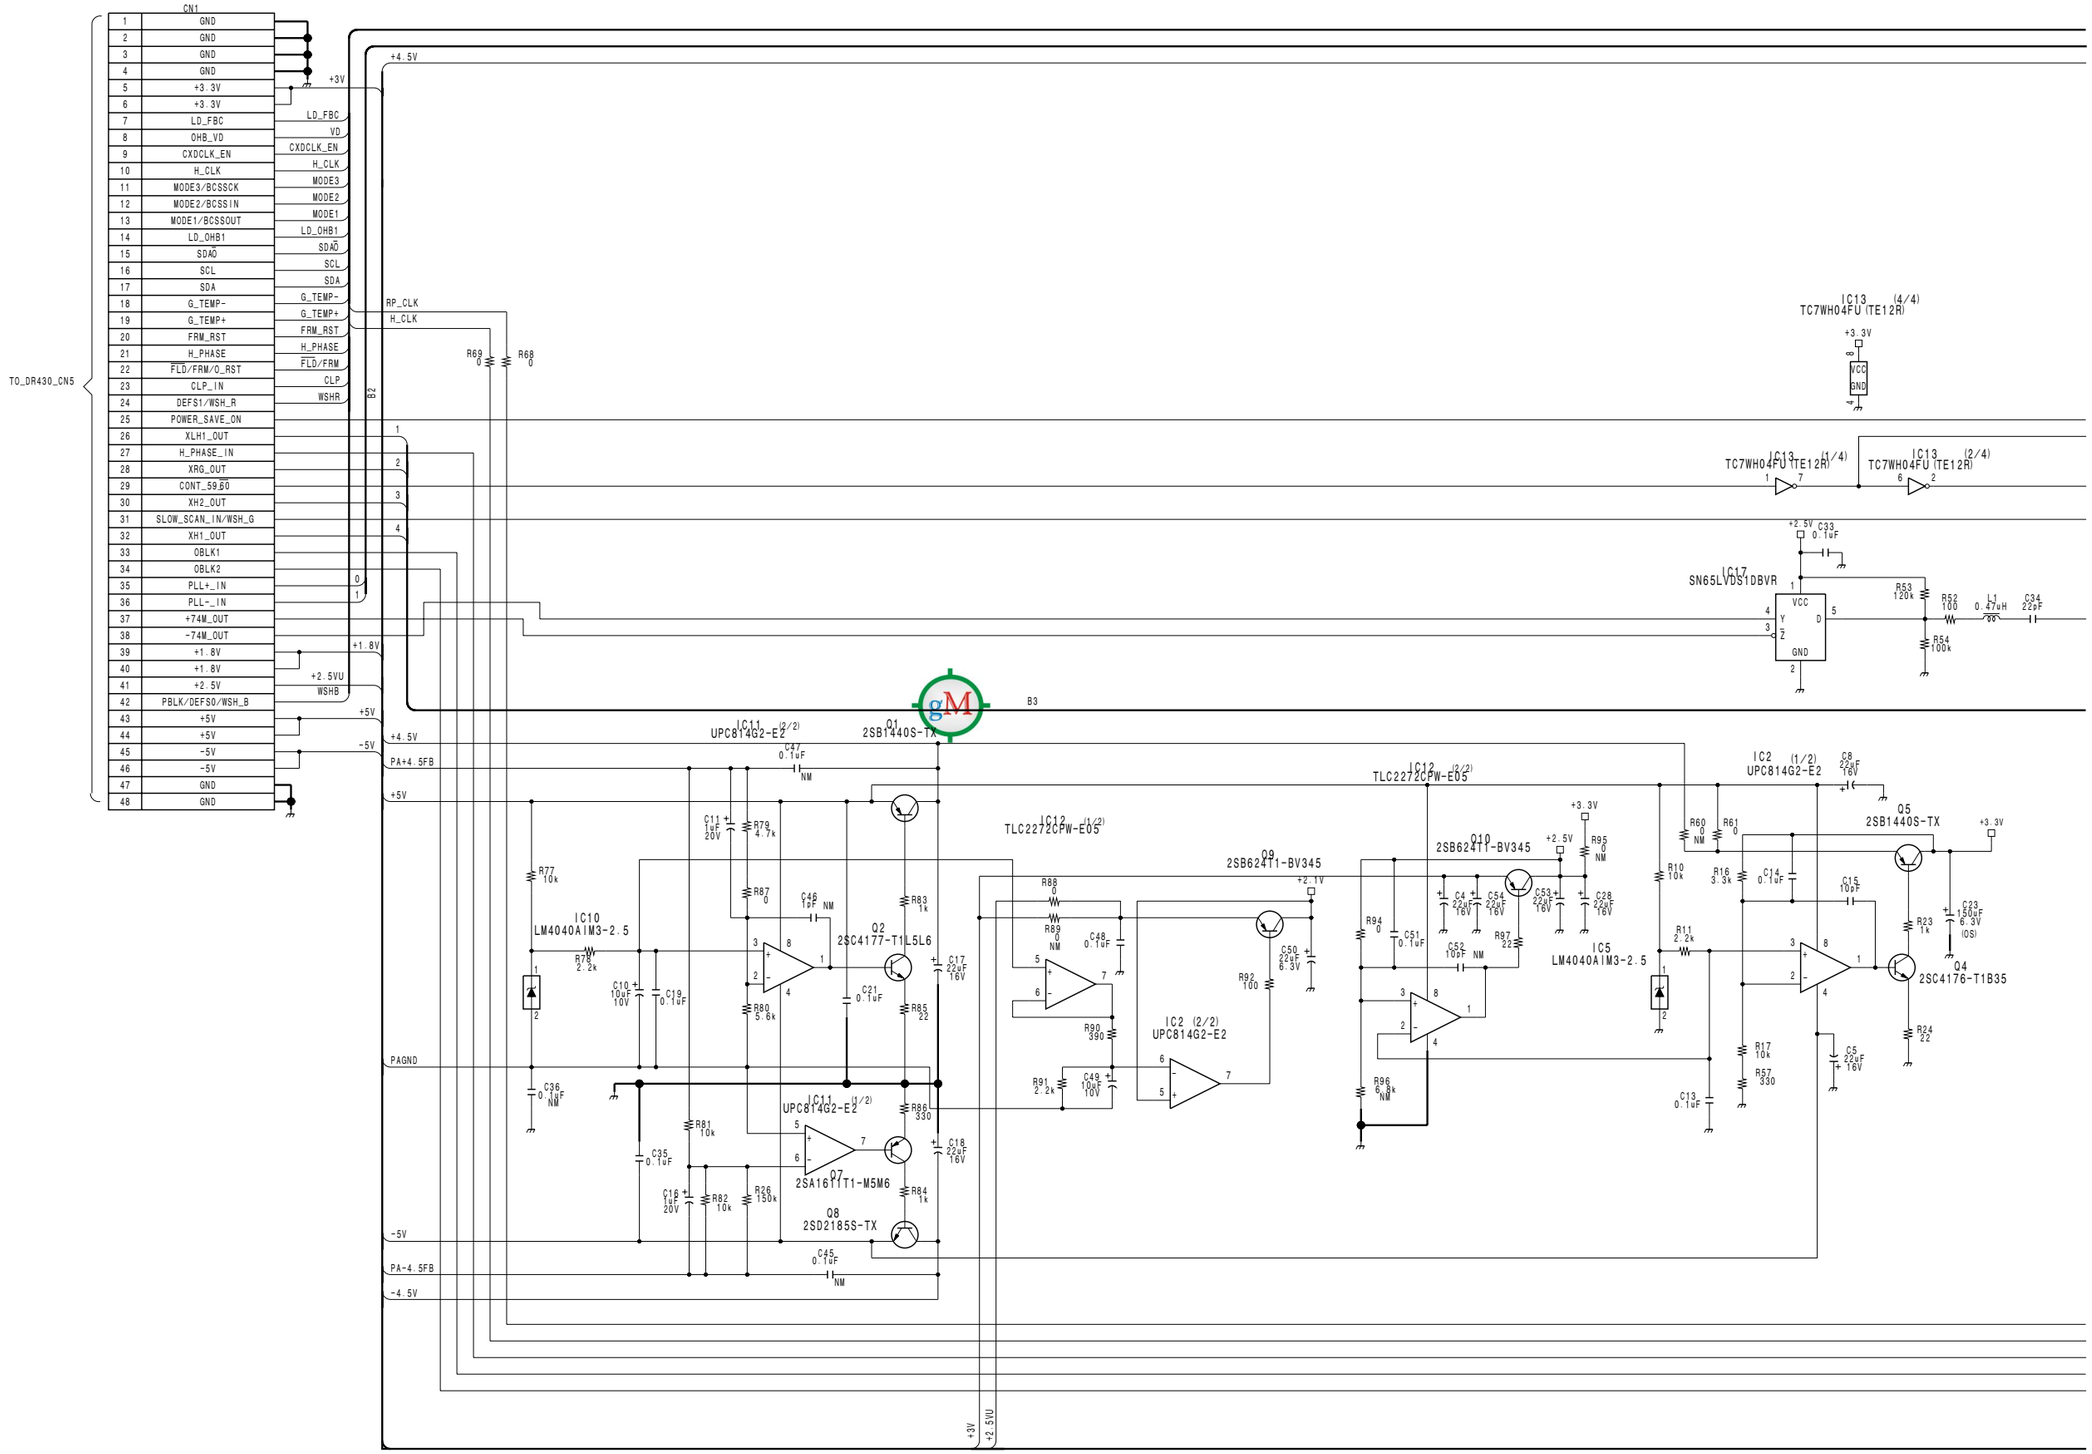

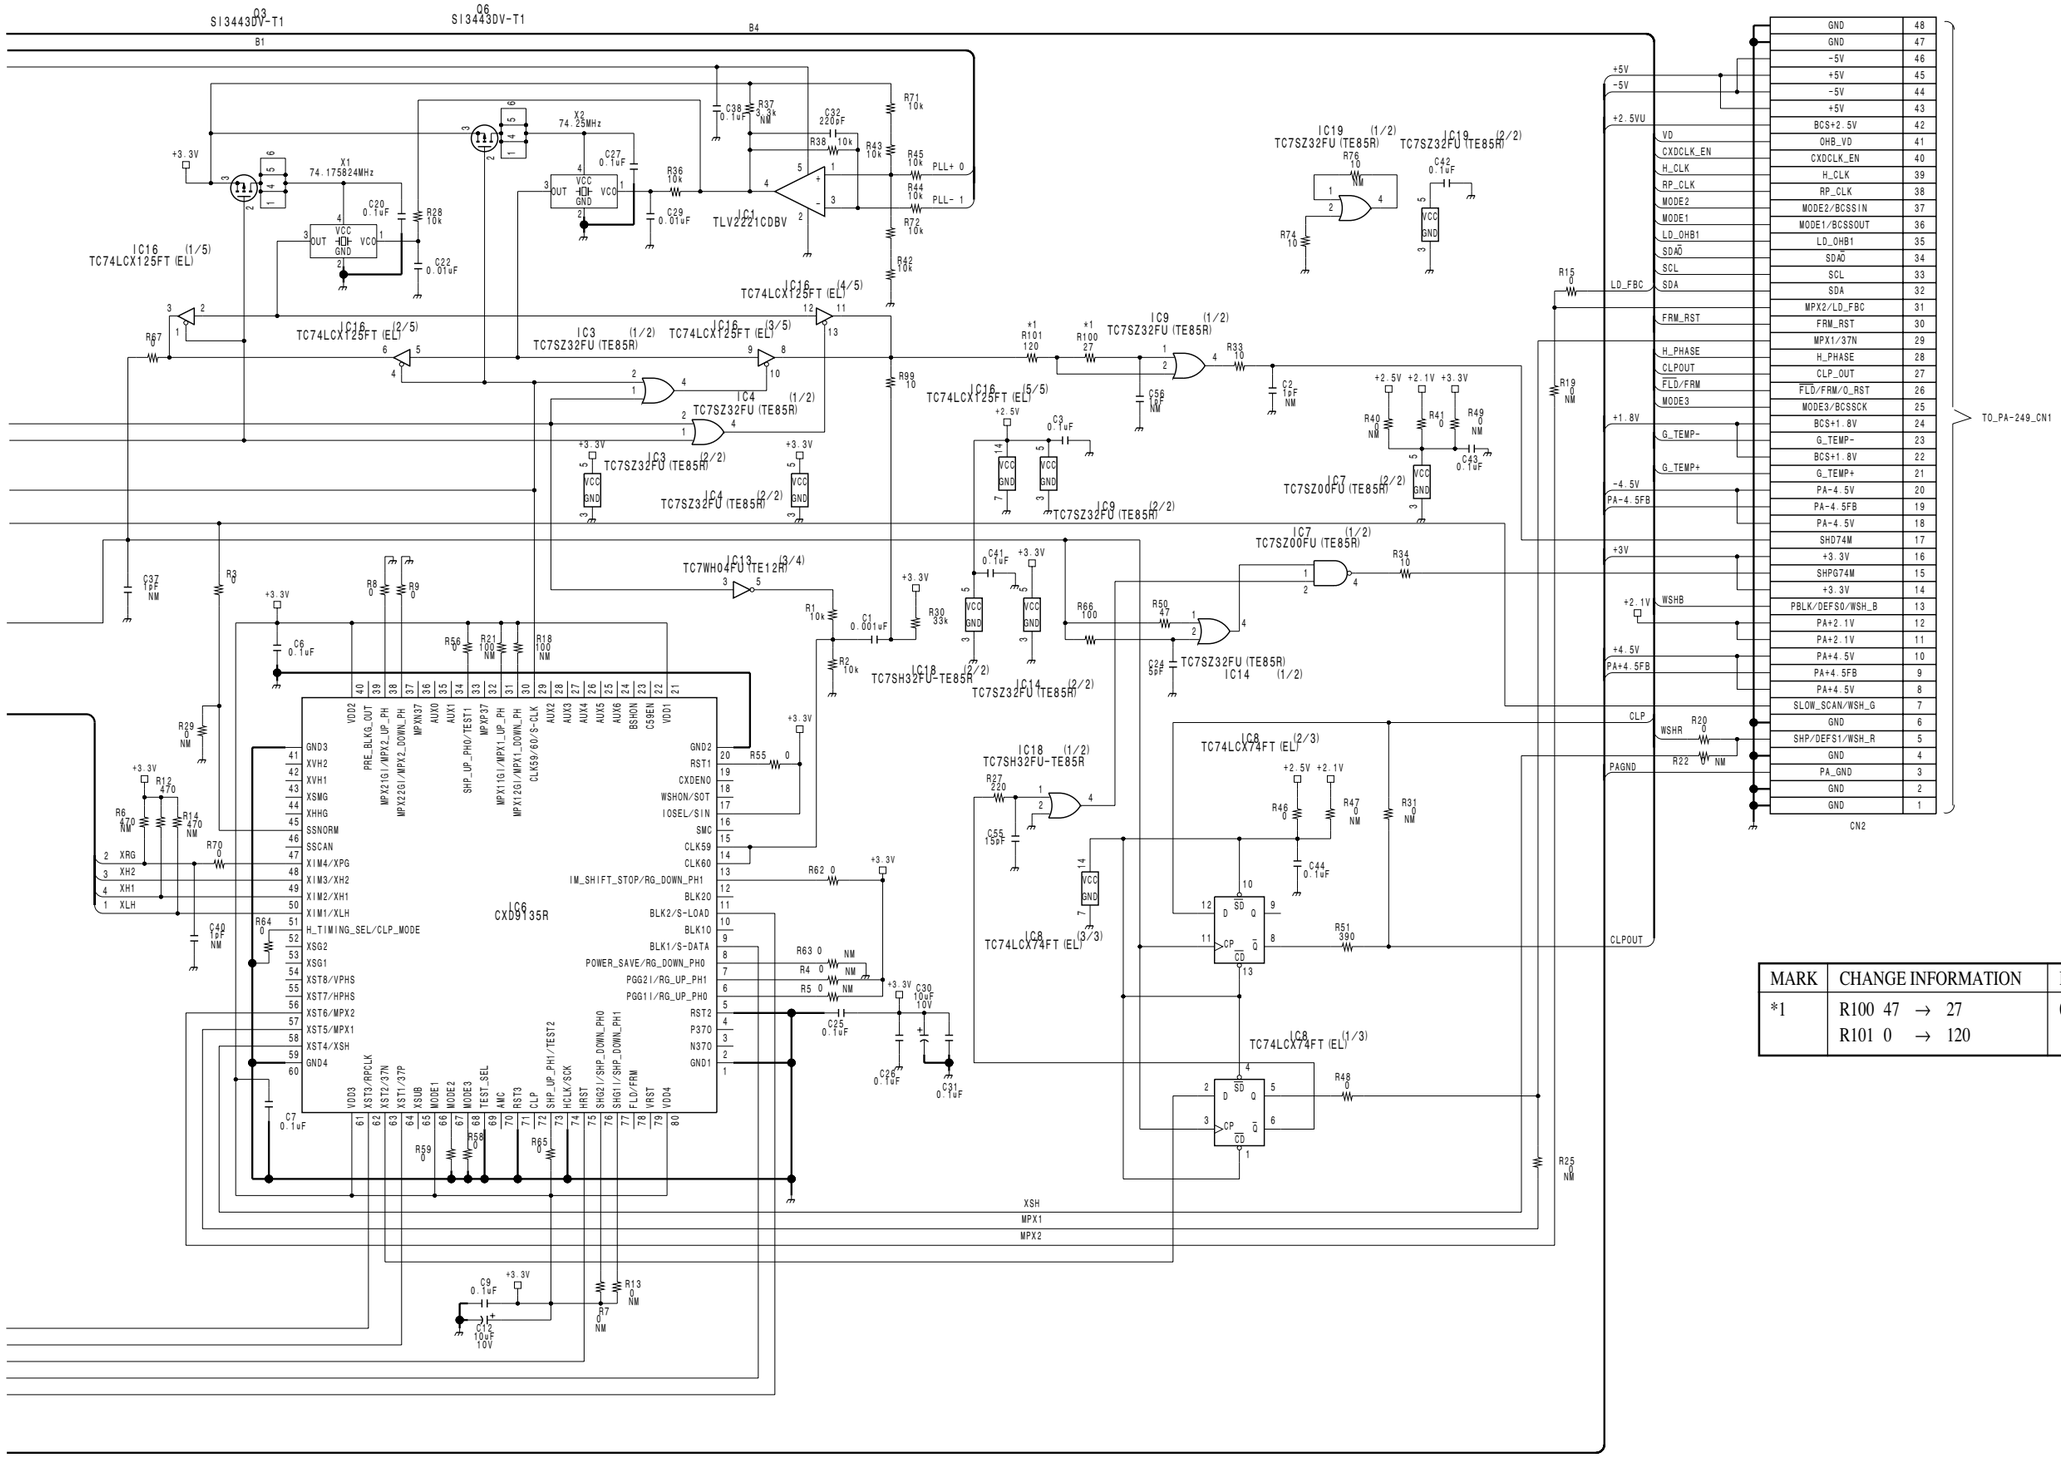

MARK	CHANGE INFORMATION	LOT NO.
*1	R100 47 → 27 R101 0 → 120	0A3-

TG-219
BOARD NO. 1-678-607-14
LOT NO. 0A3-
HDW-750_TG-219_003_1

HDW-750 (J) : S/N 70001 through 70040

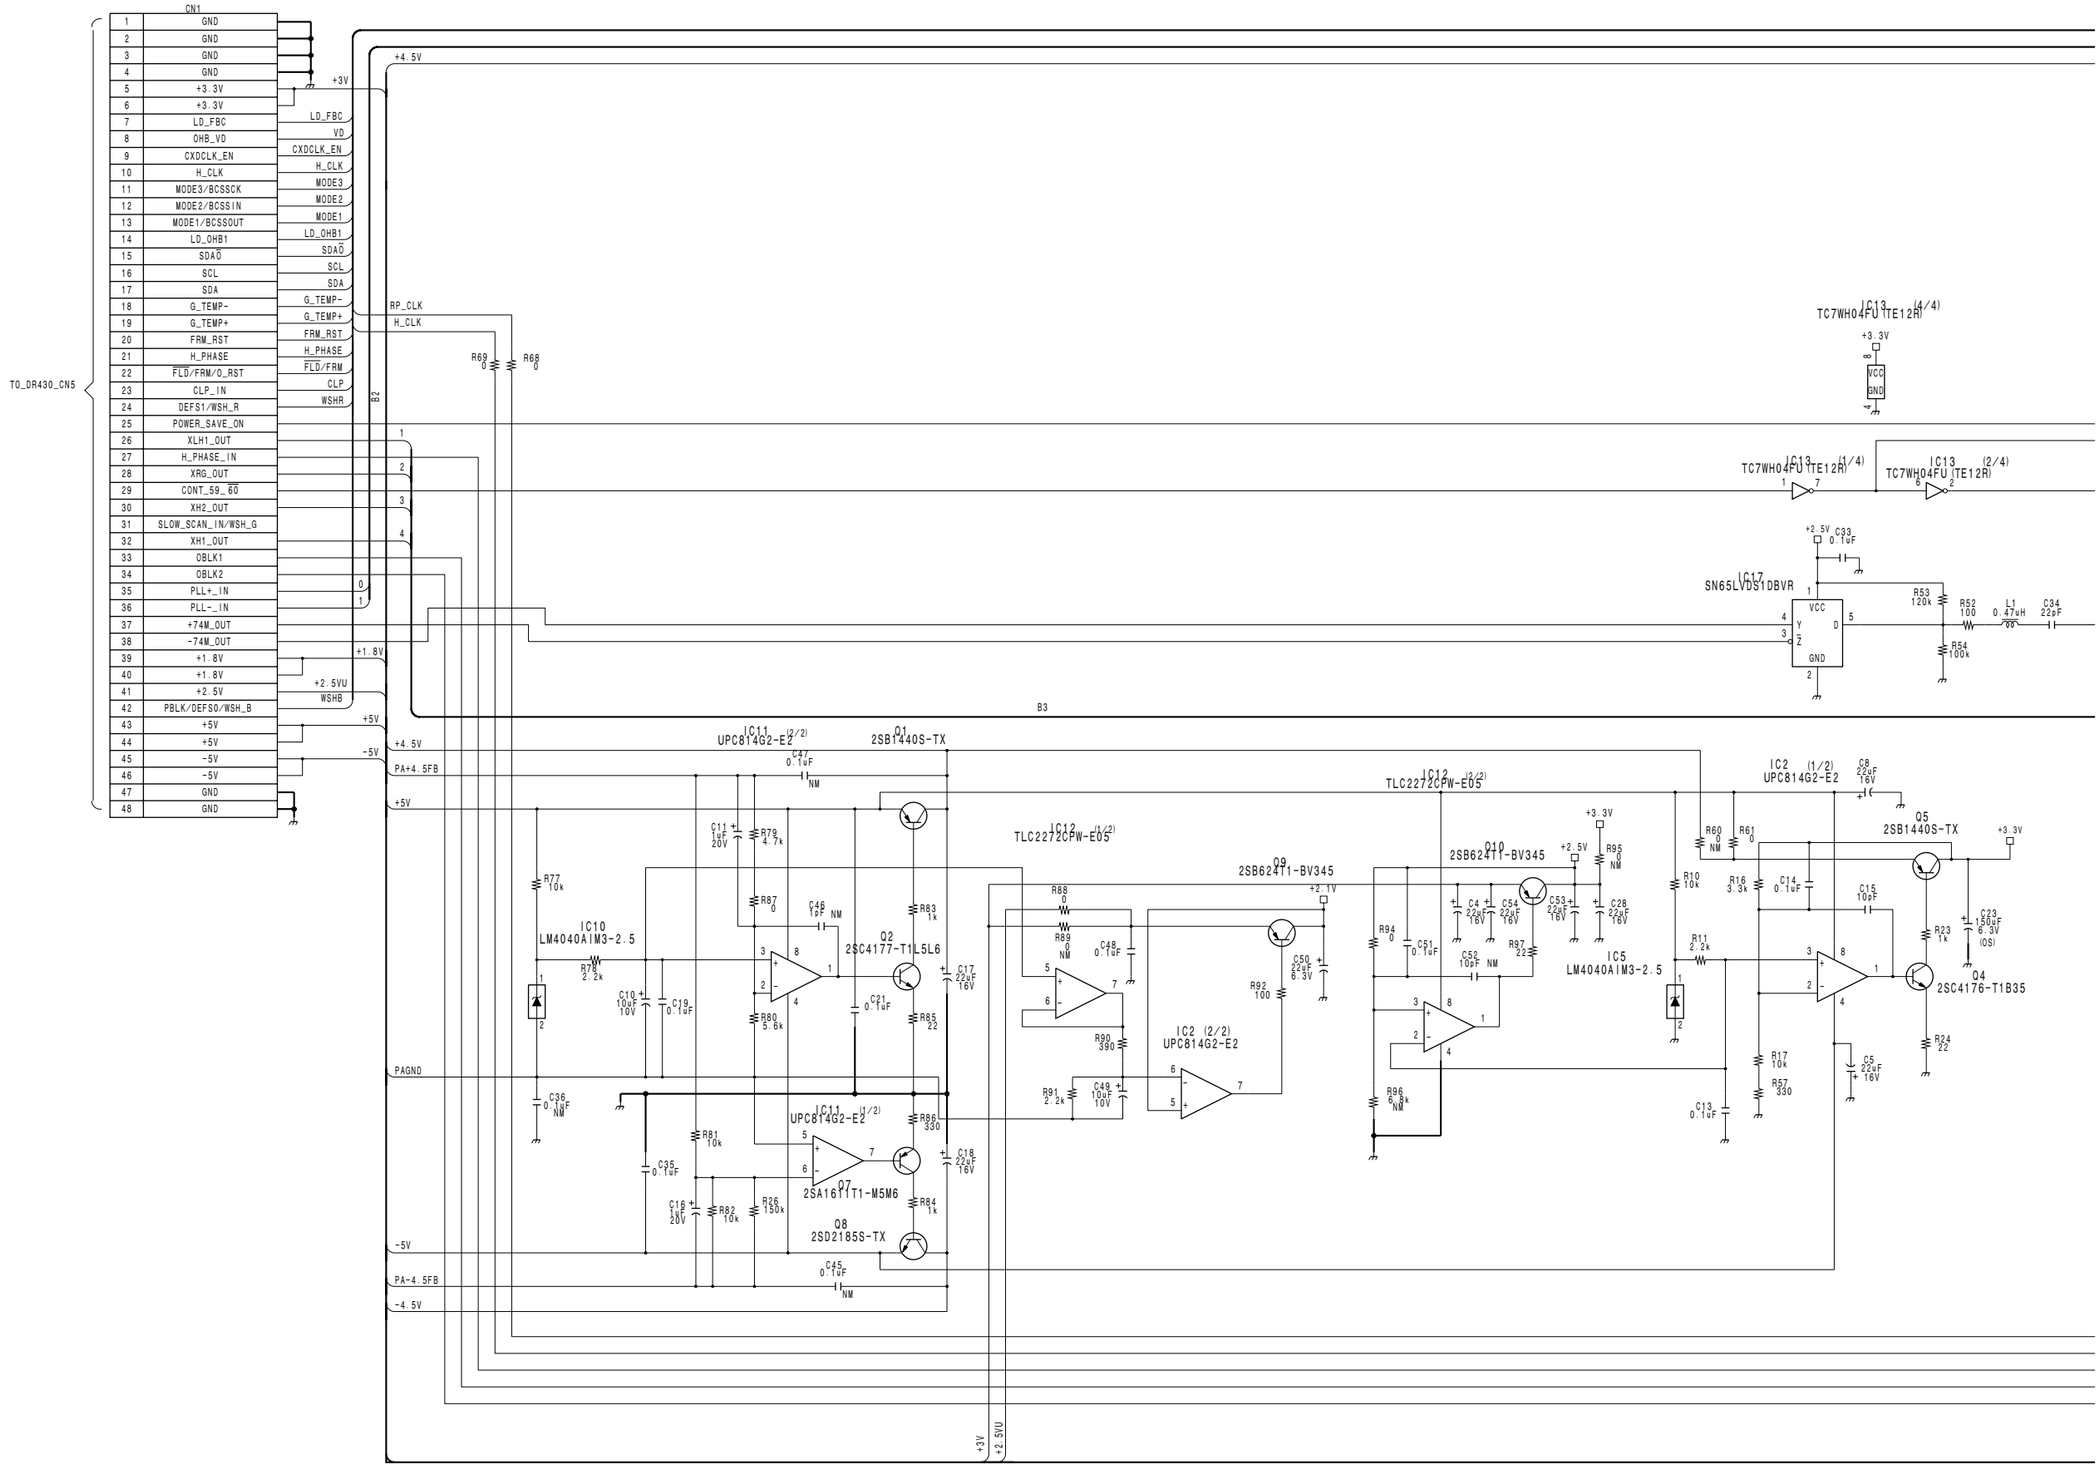

4-8 (a) 4-8 (a)

HDW-750 V2

A B C D E F G H

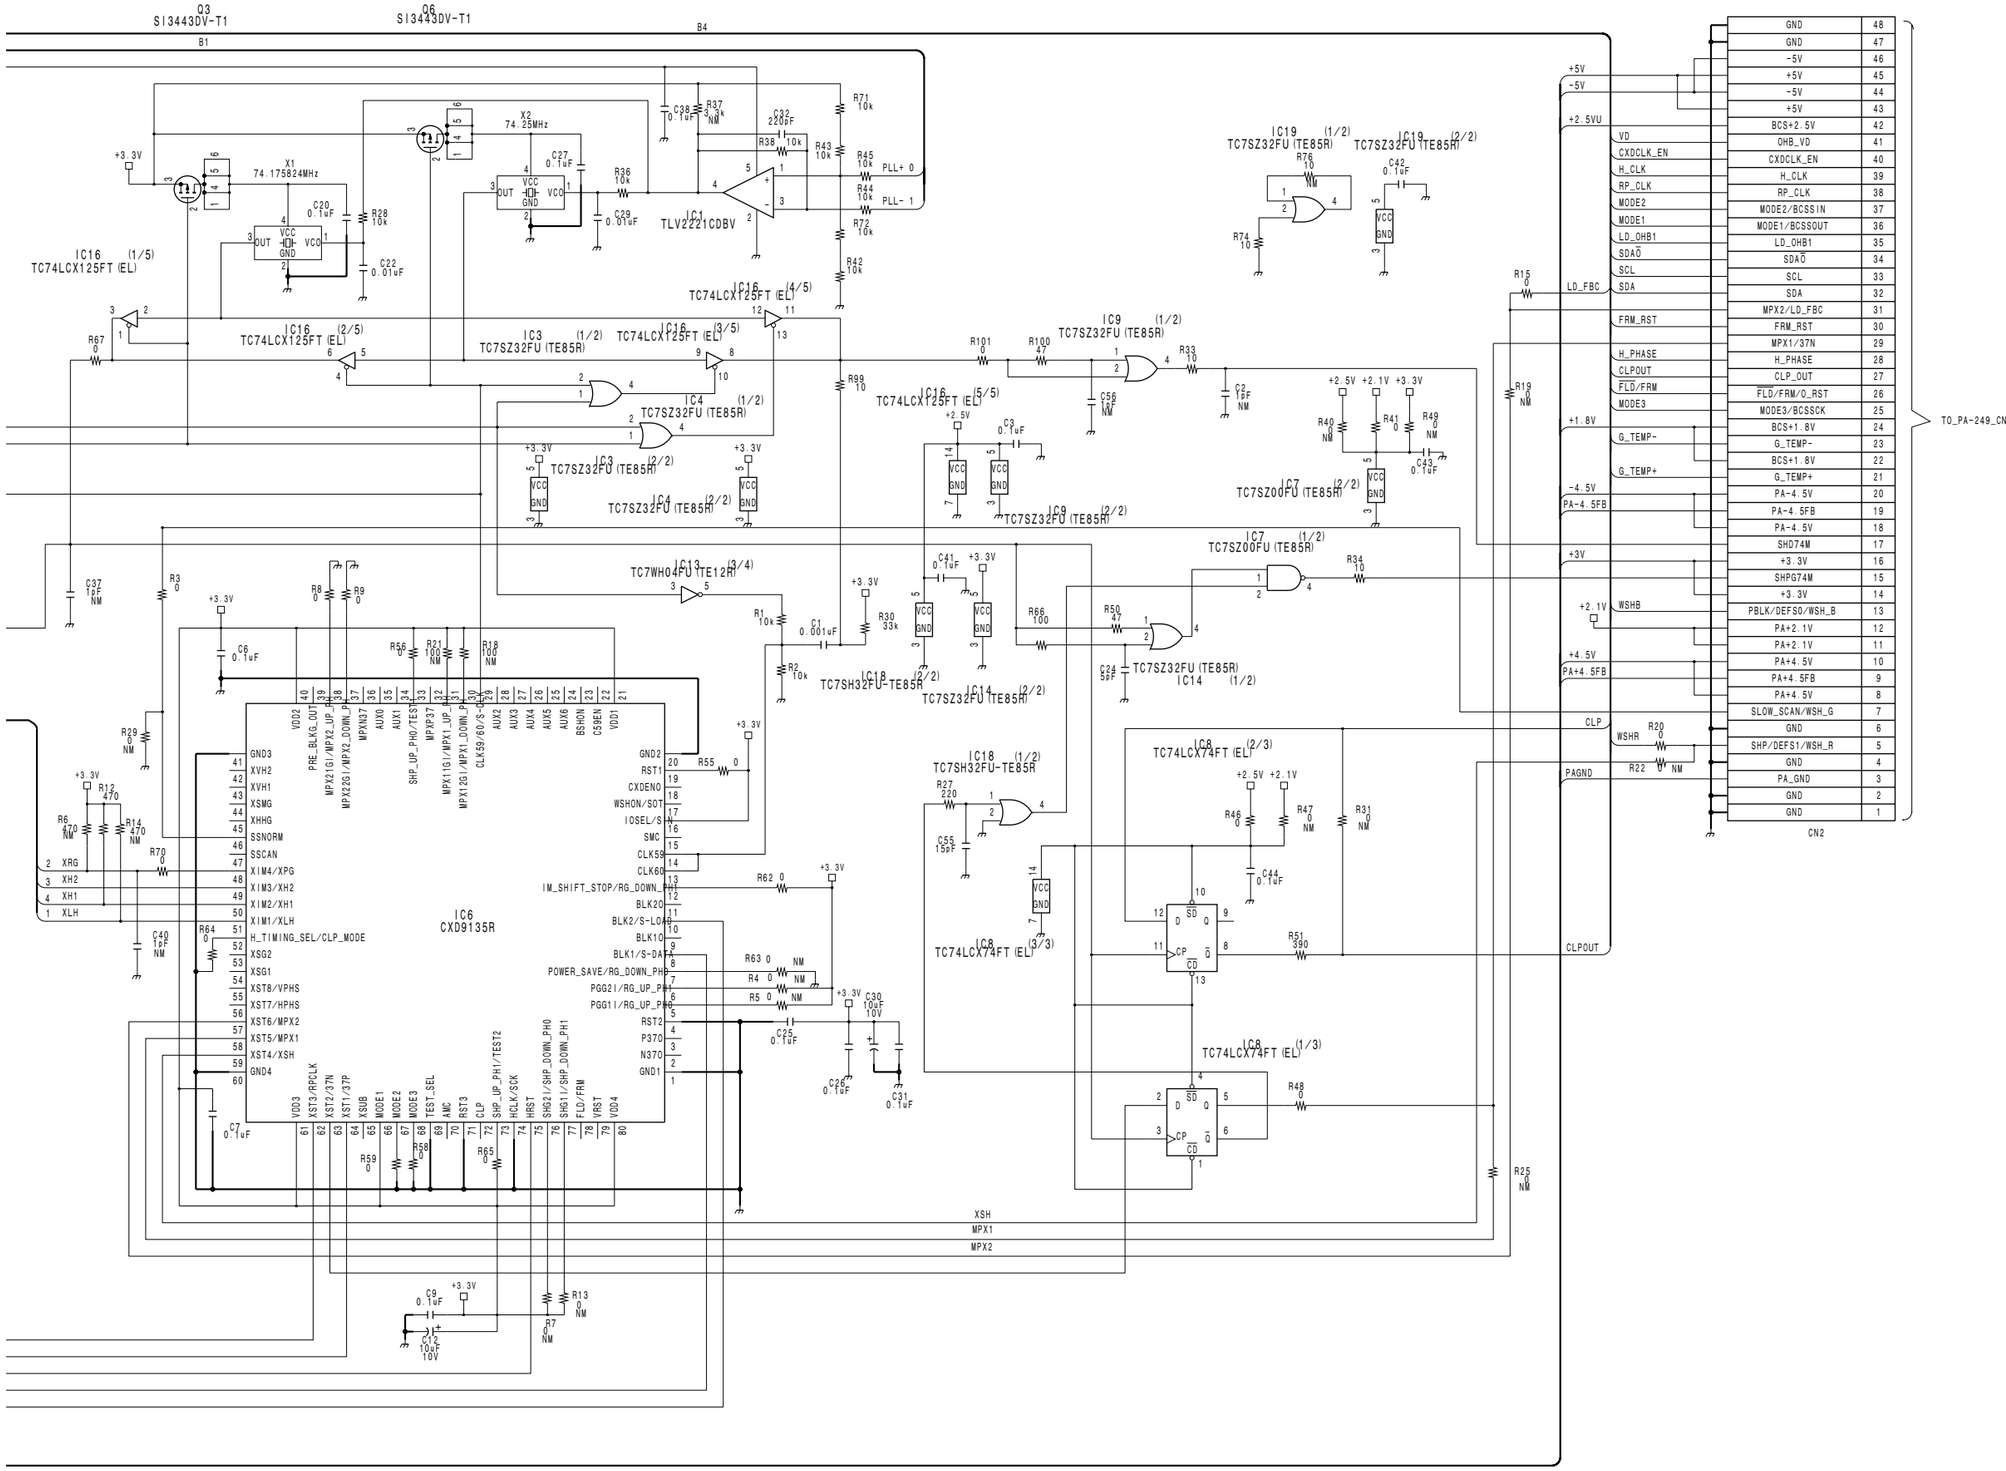

TG-219
BOARD NO. 1-678-607-13
LOT NO. 083-
HDW-750_TG-219_100_1

http://getMANUAL.com

DCP-28 (1/11)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

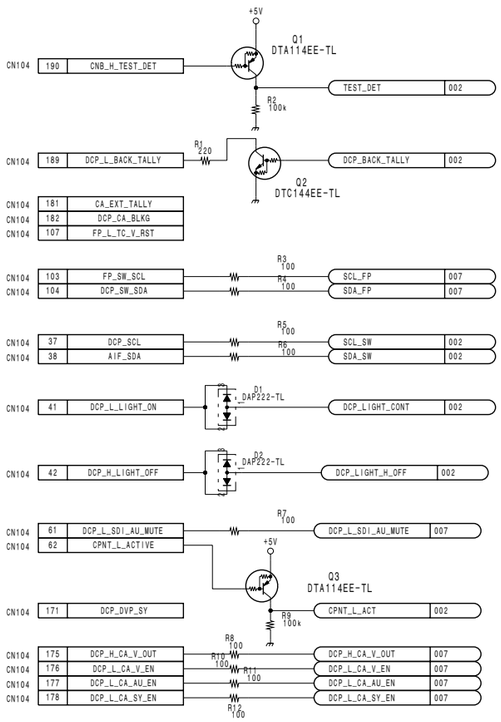

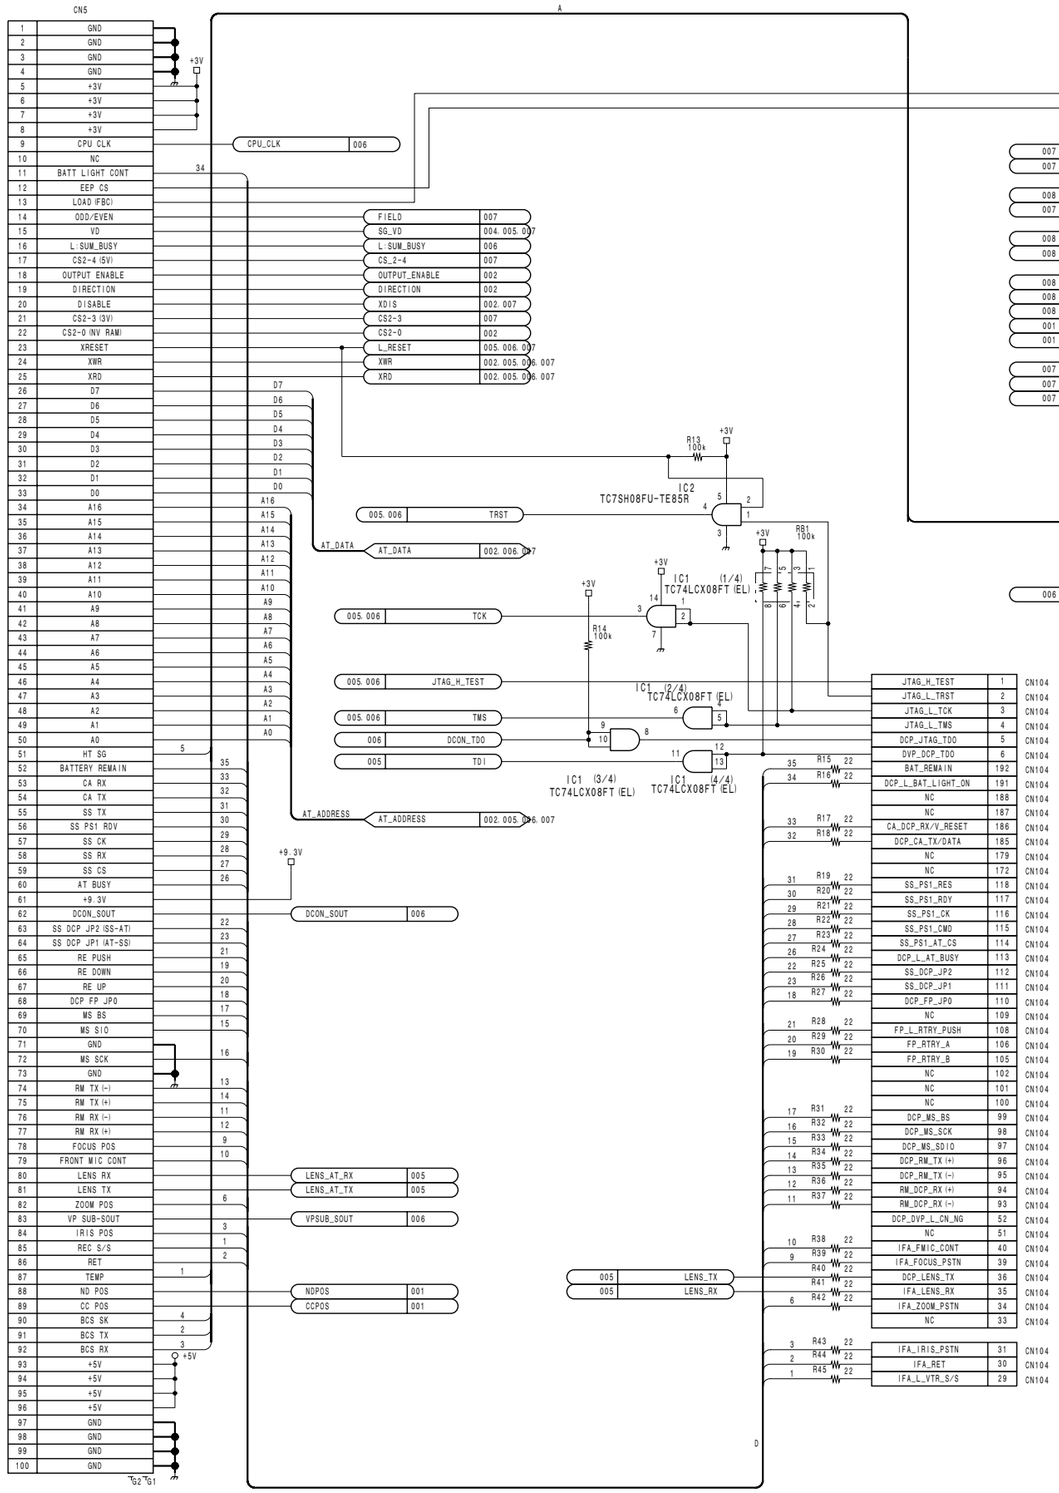

MARK	CHANGE INFORMATION	LOT NO.
*1	R53 DELETED	0A3-

DCP-28 (1/11)
BOARD NO. 1-678-617-12
LOT NO. 083-
HDW-750_DCP-28_003_1

DCP-28 (2/11)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

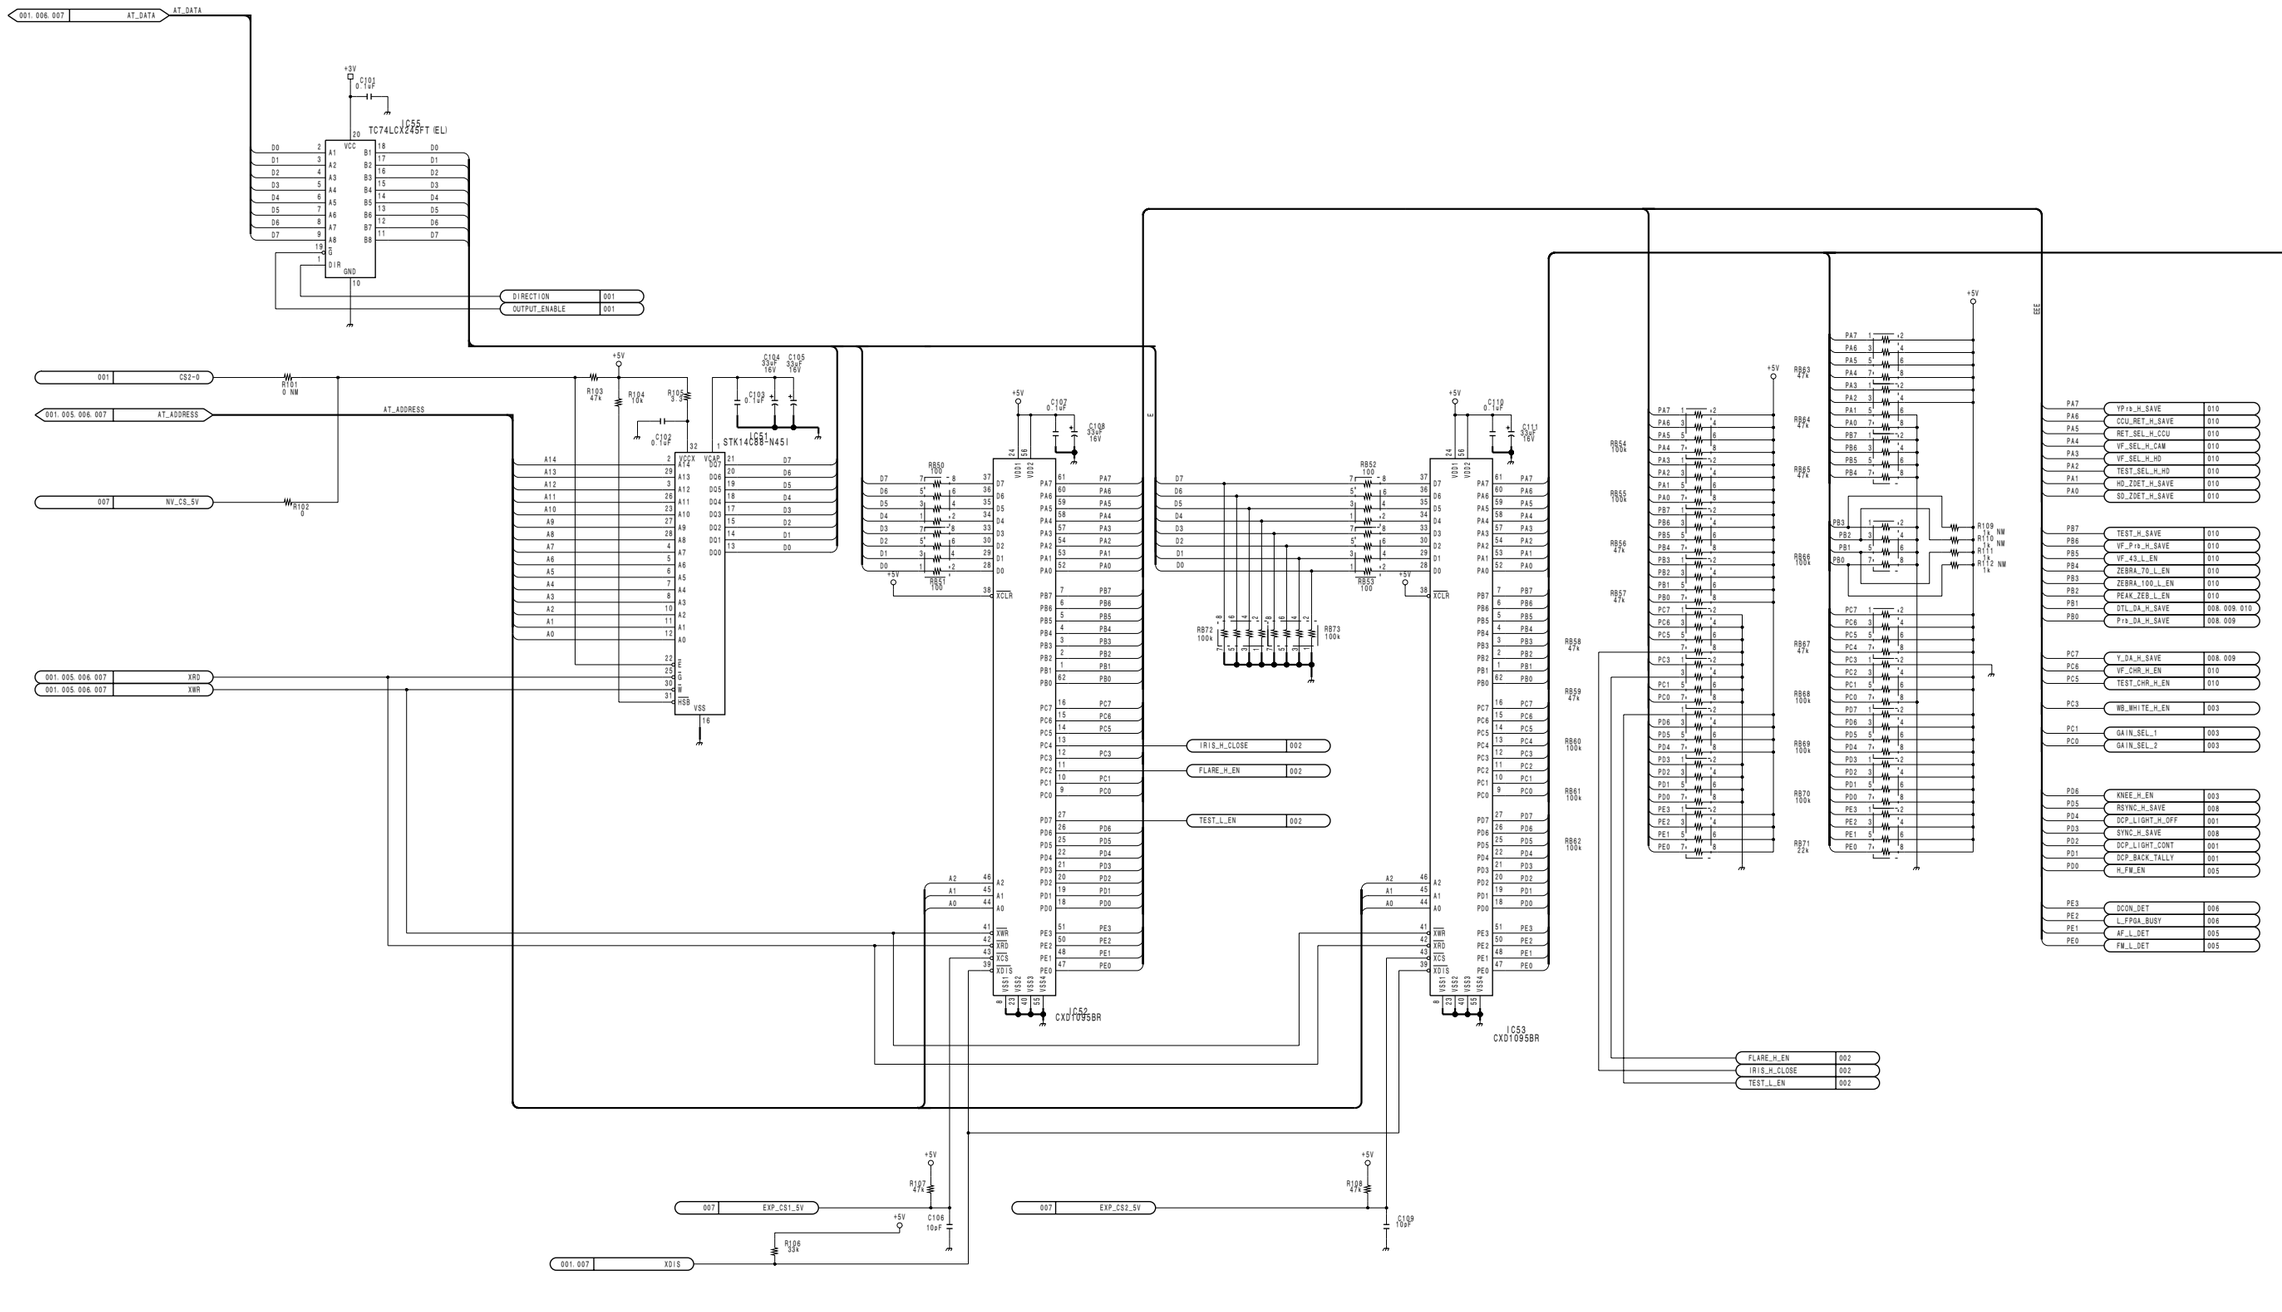

4-12

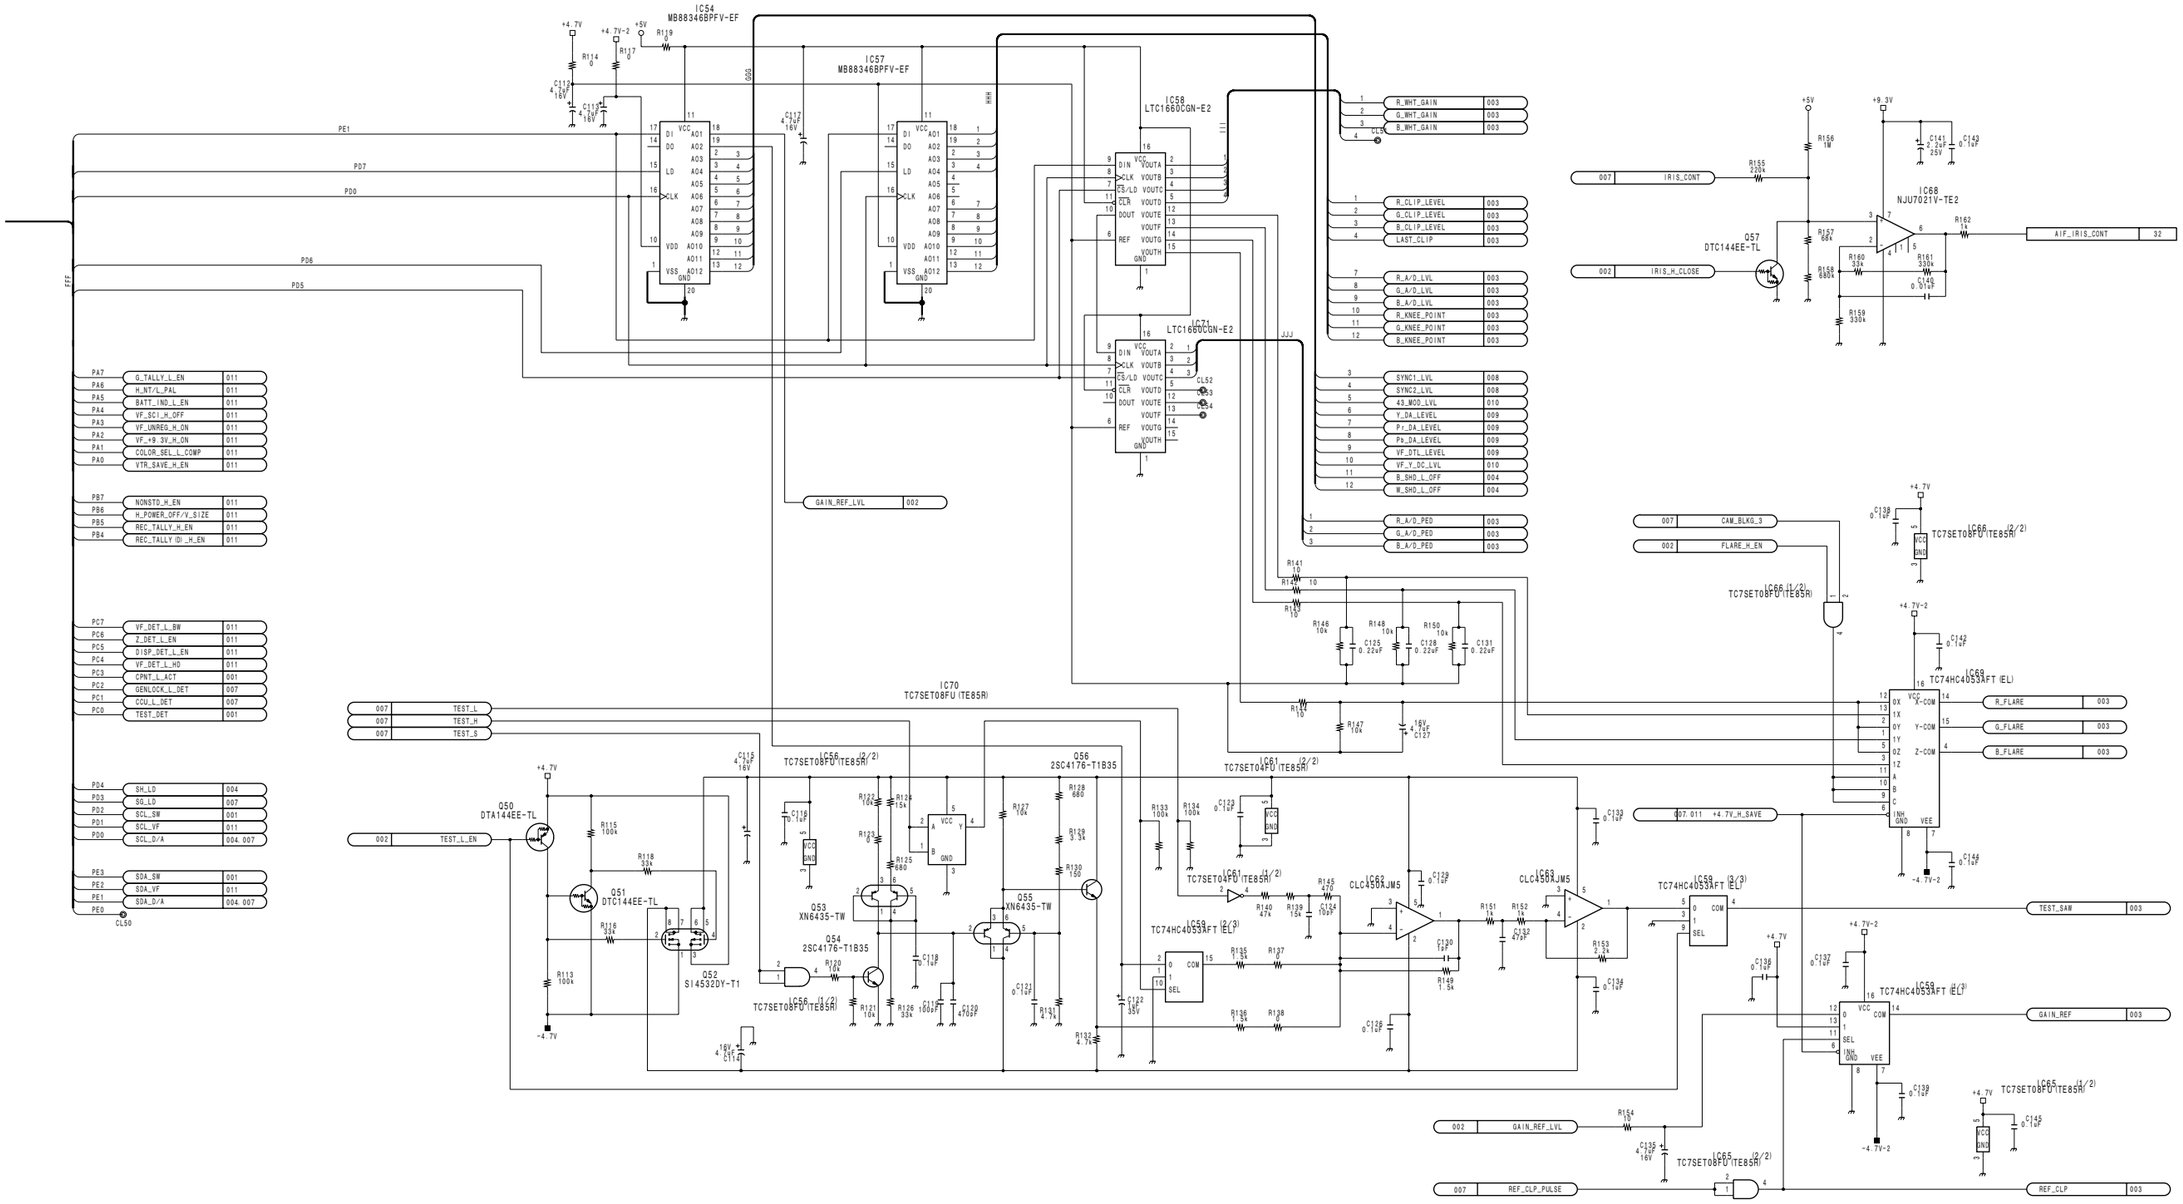

DCP-28 (2/11)

BOARD NO. 1-678-617-12
LOT NO. 083-
HDW-750_DCP-28_003_2

DCP-28 (3/11)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

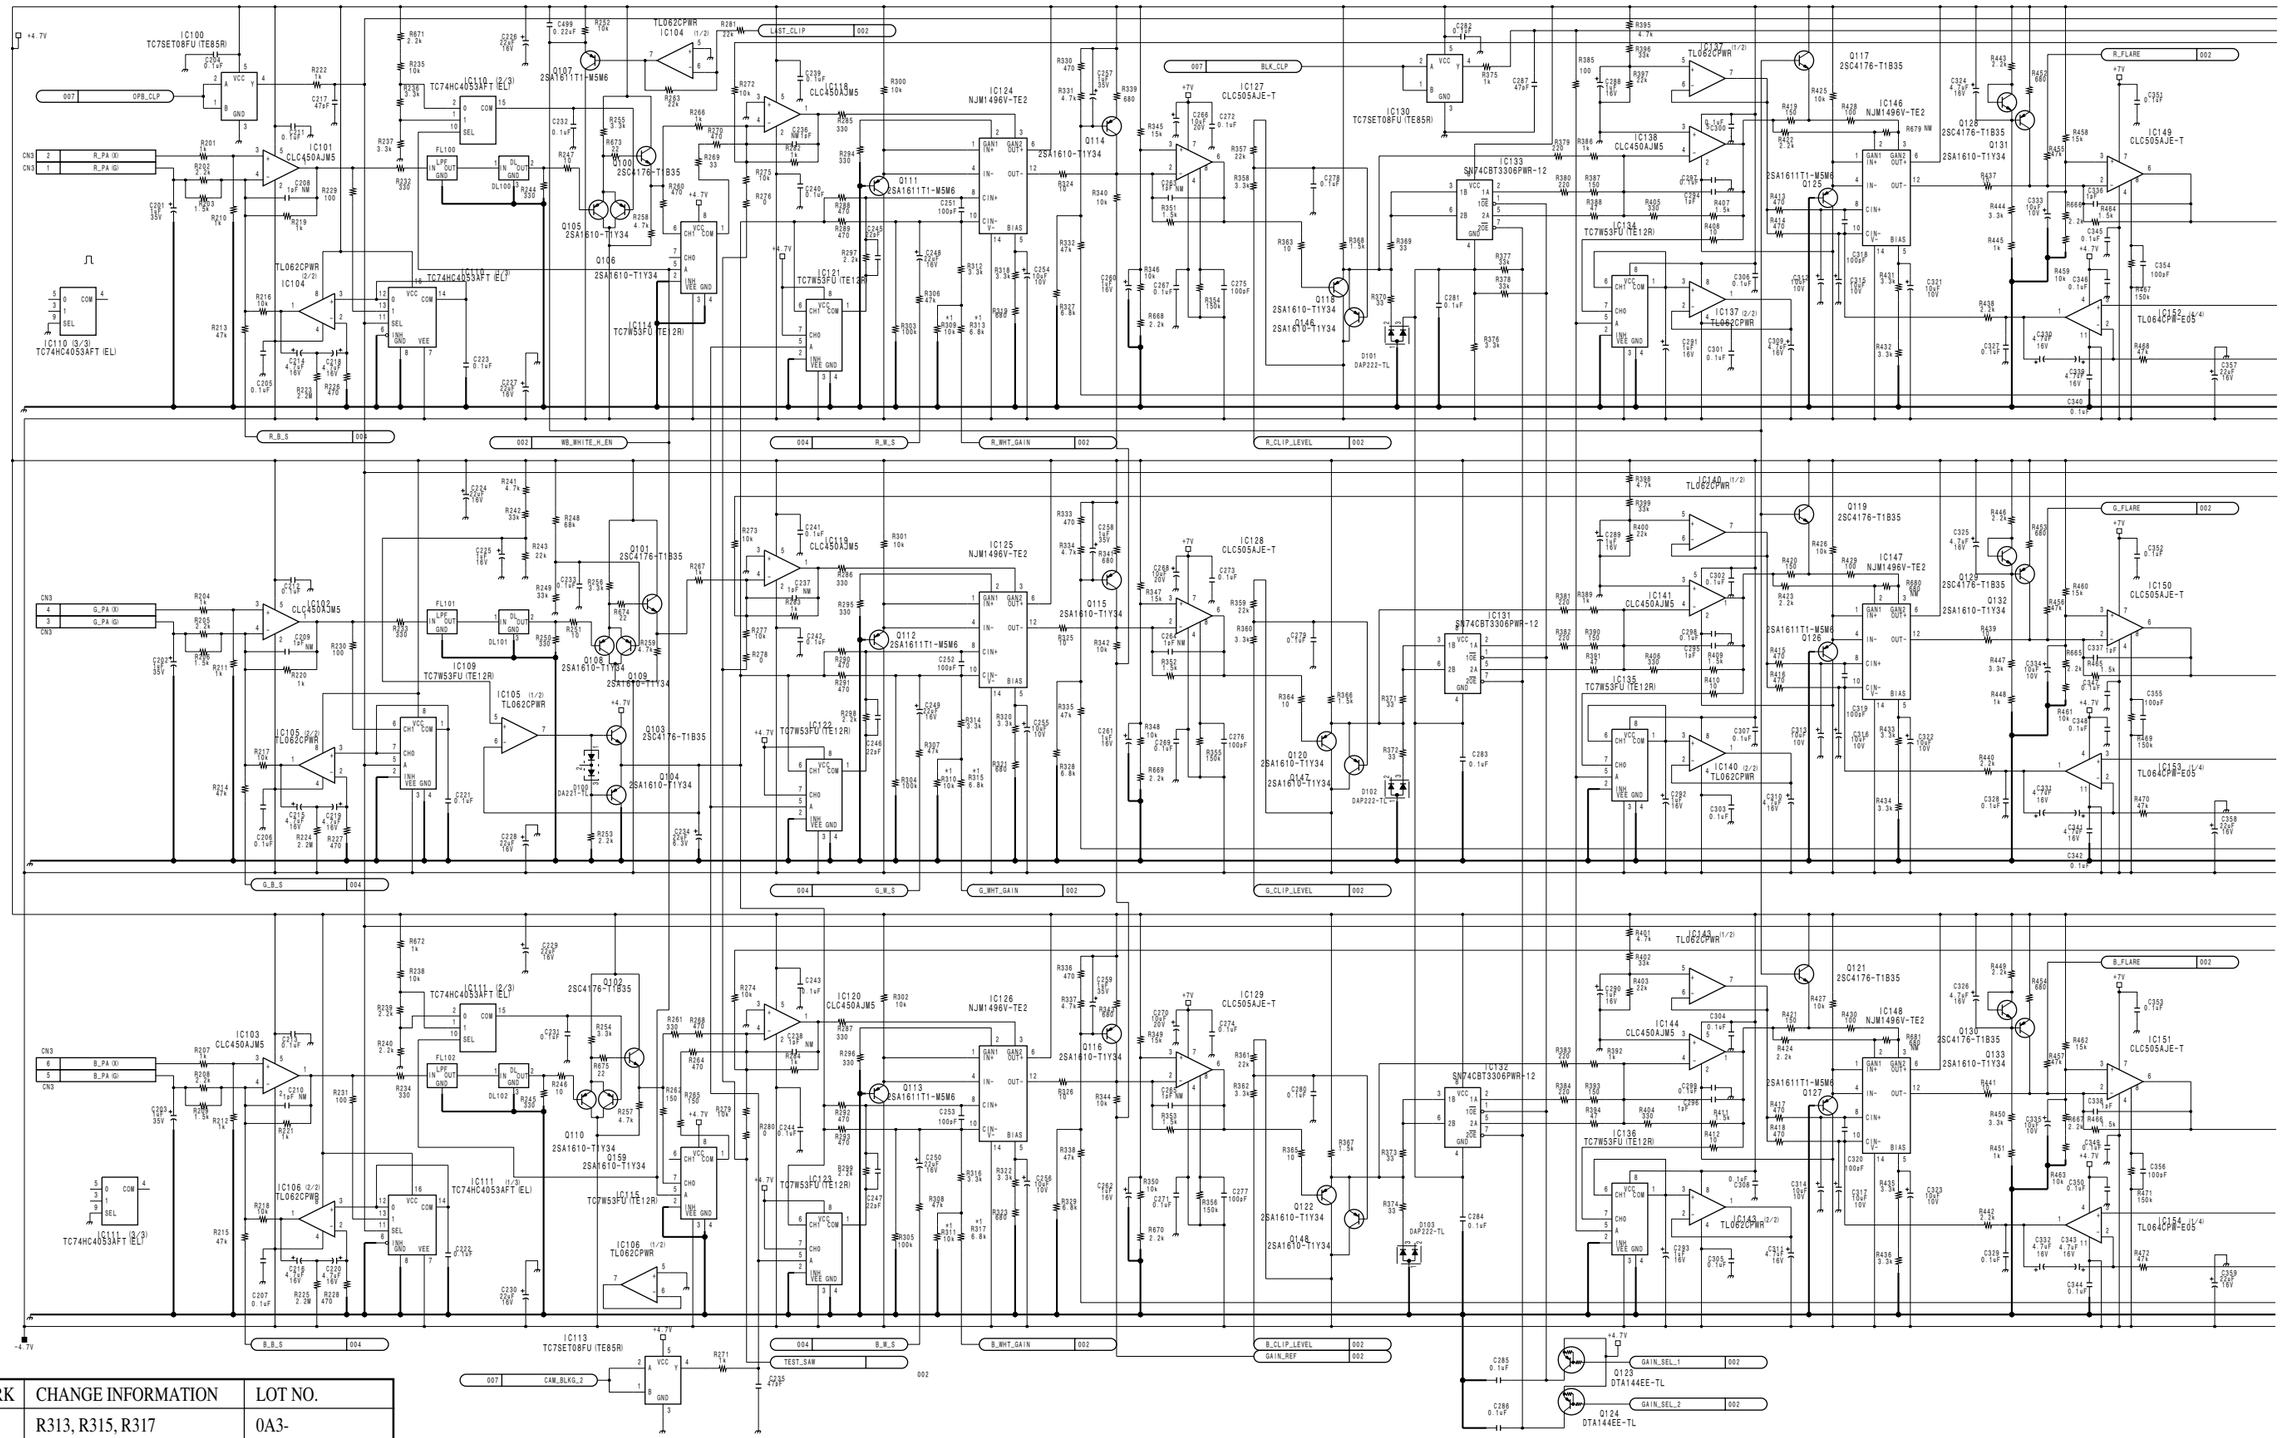

MARK	CHANGE INFORMATION	LOT NO.
*1	R313, R315, R317 10k → 6.8k R309, R310, R311 33k → 10k	0A3-

4-14

DCP-28 (3/11)

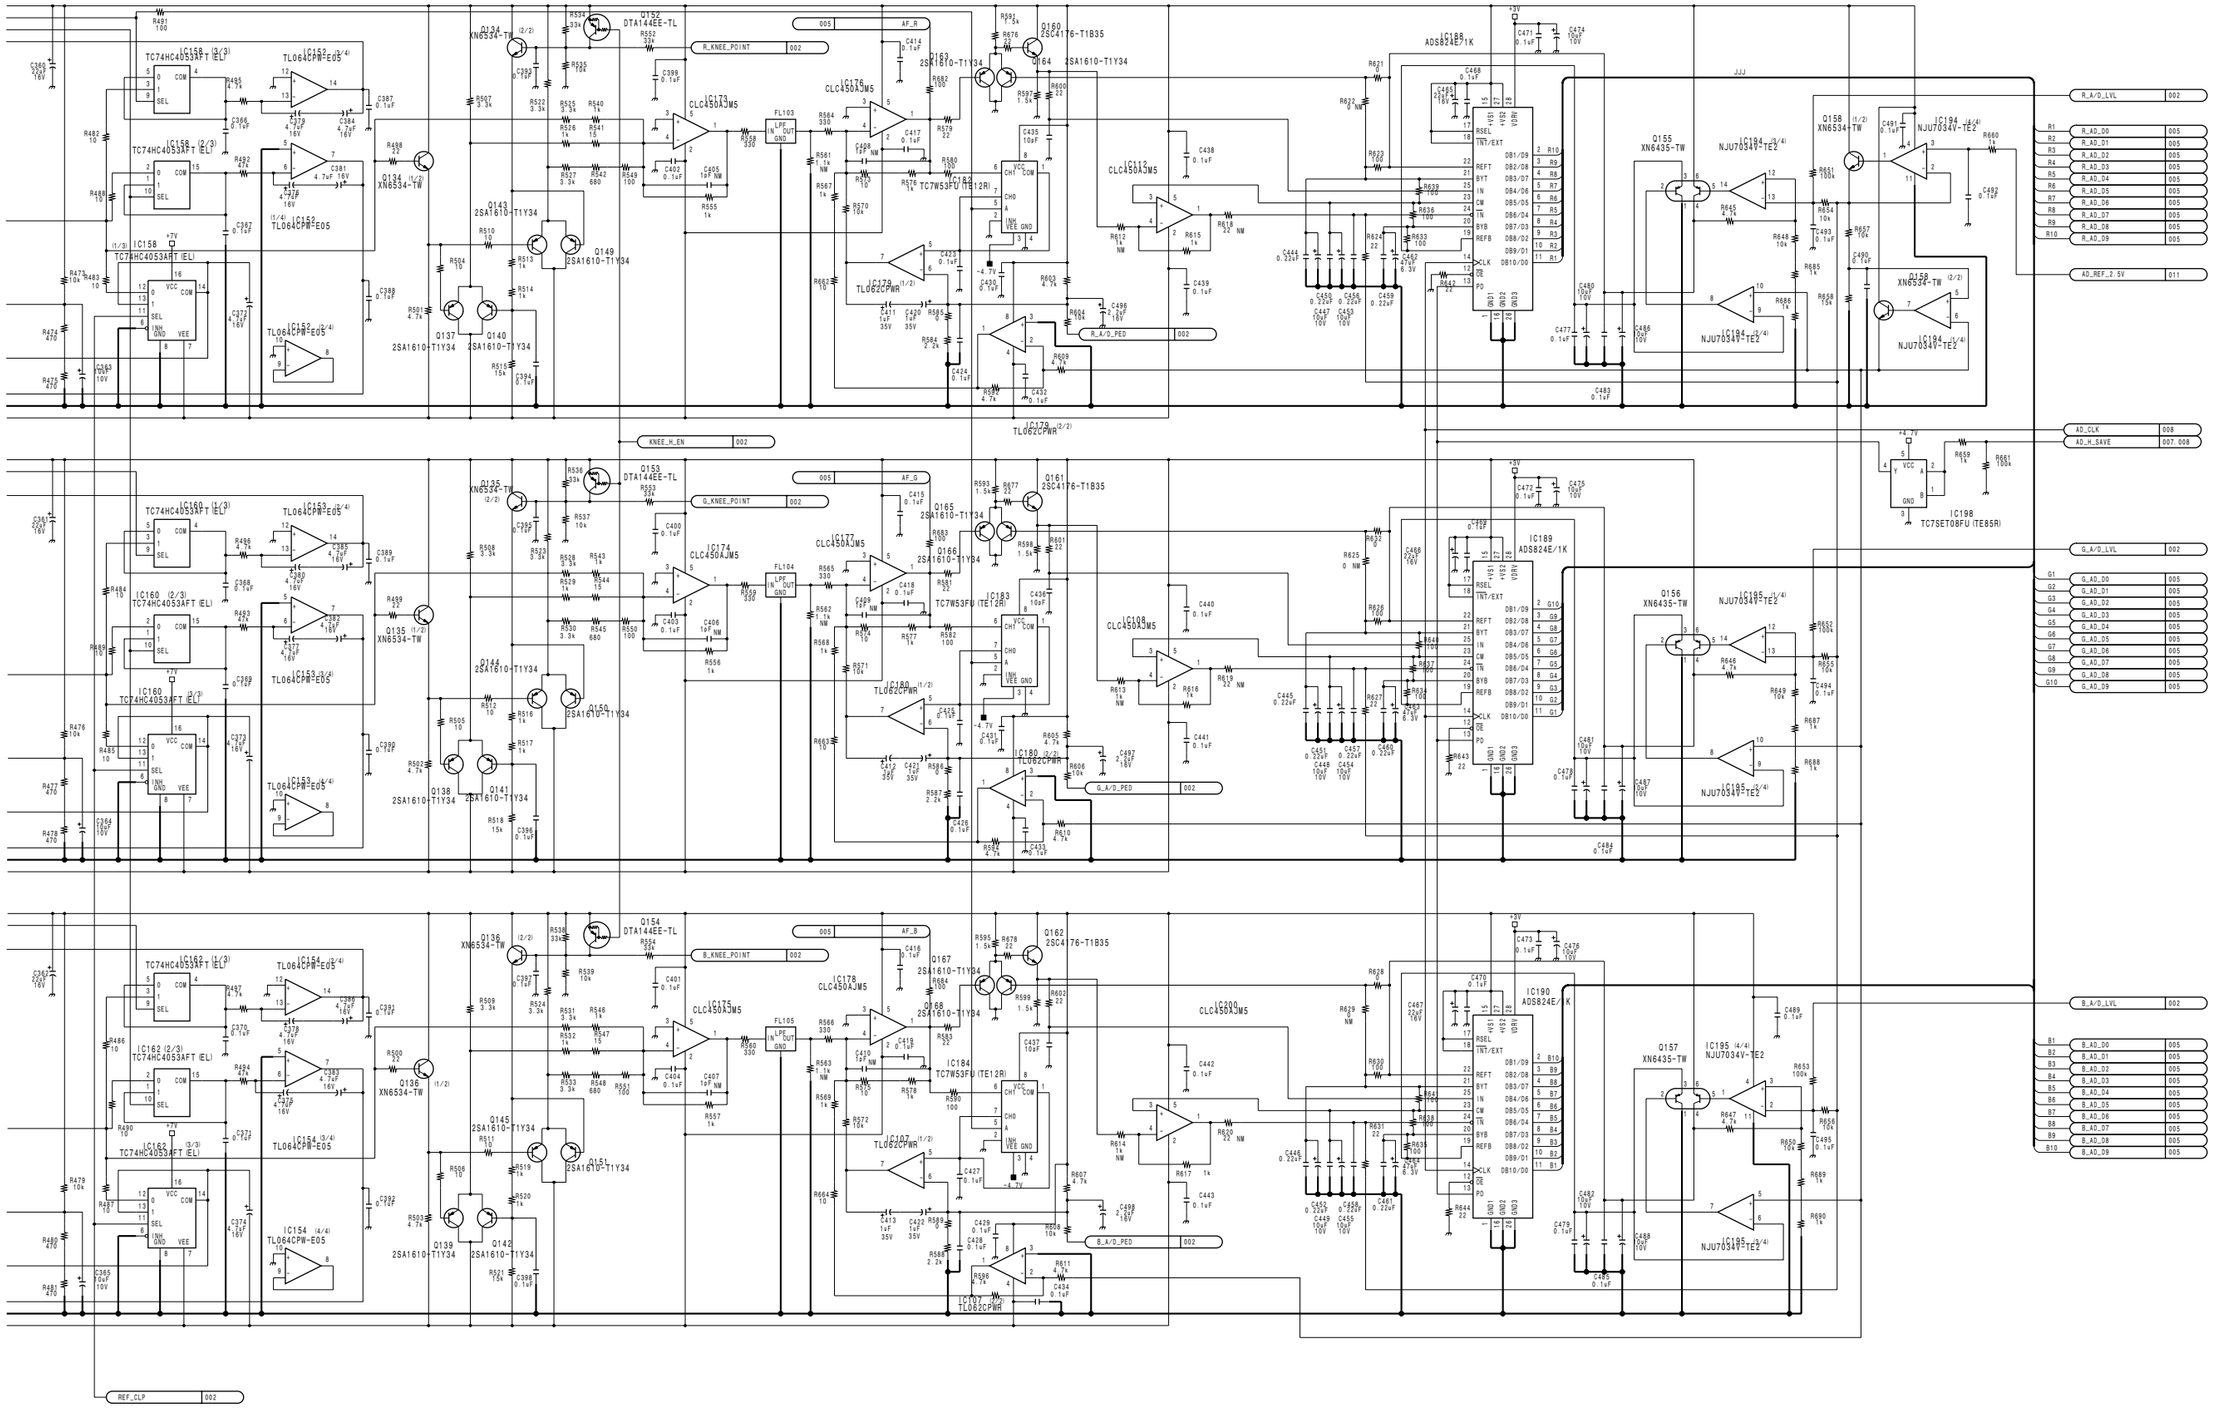

DCP-28 (3/11)

BOARD NO. 1-678-617-12
LOT NO. 083-

HDW-750_DCP-28_003_3

DCP-28 (4/11)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

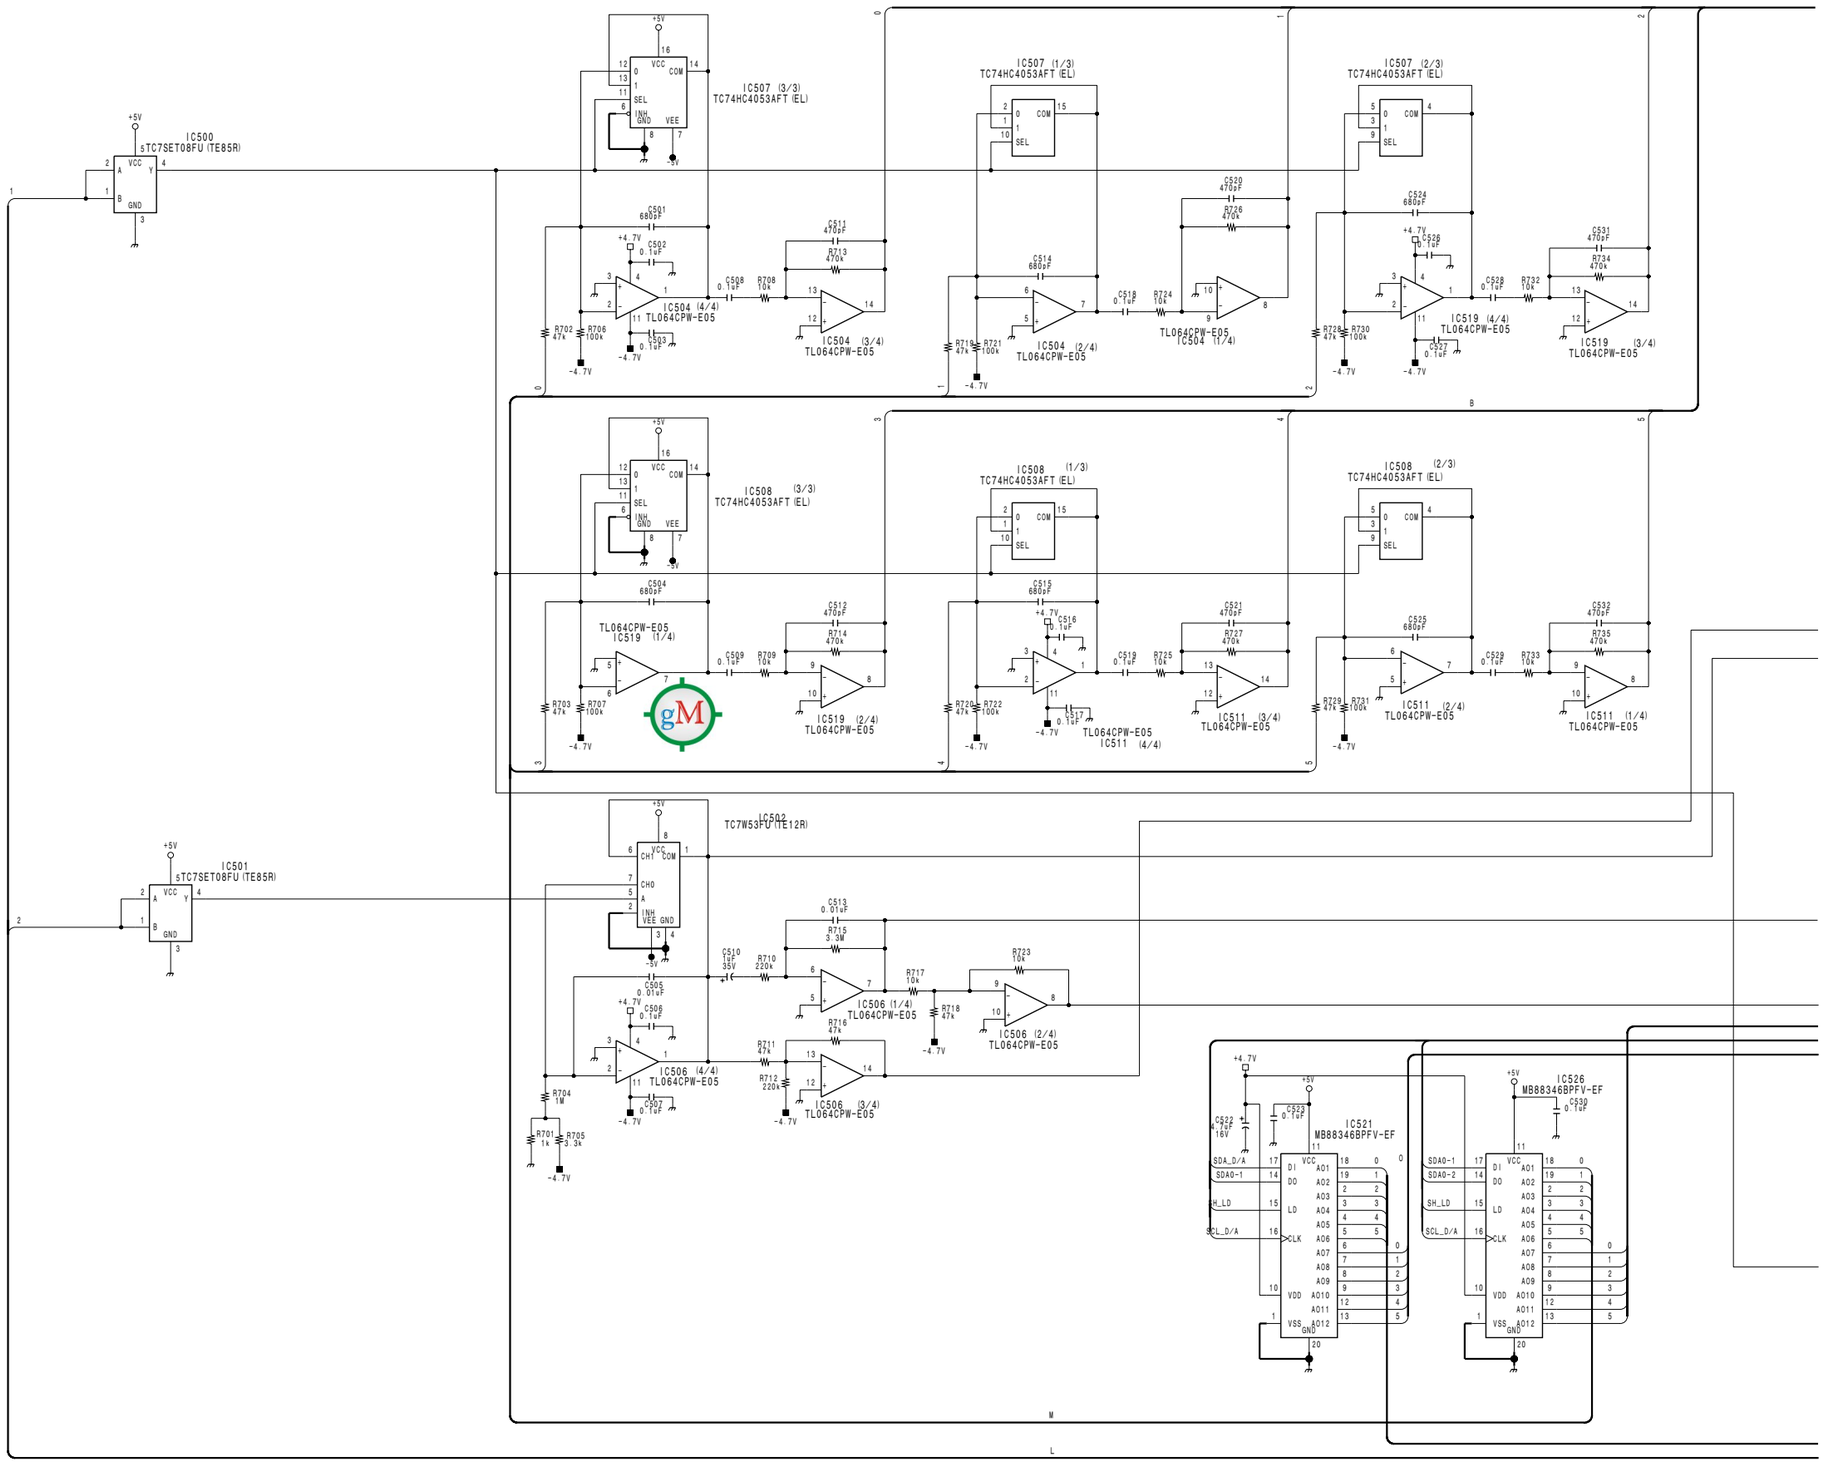

4-16

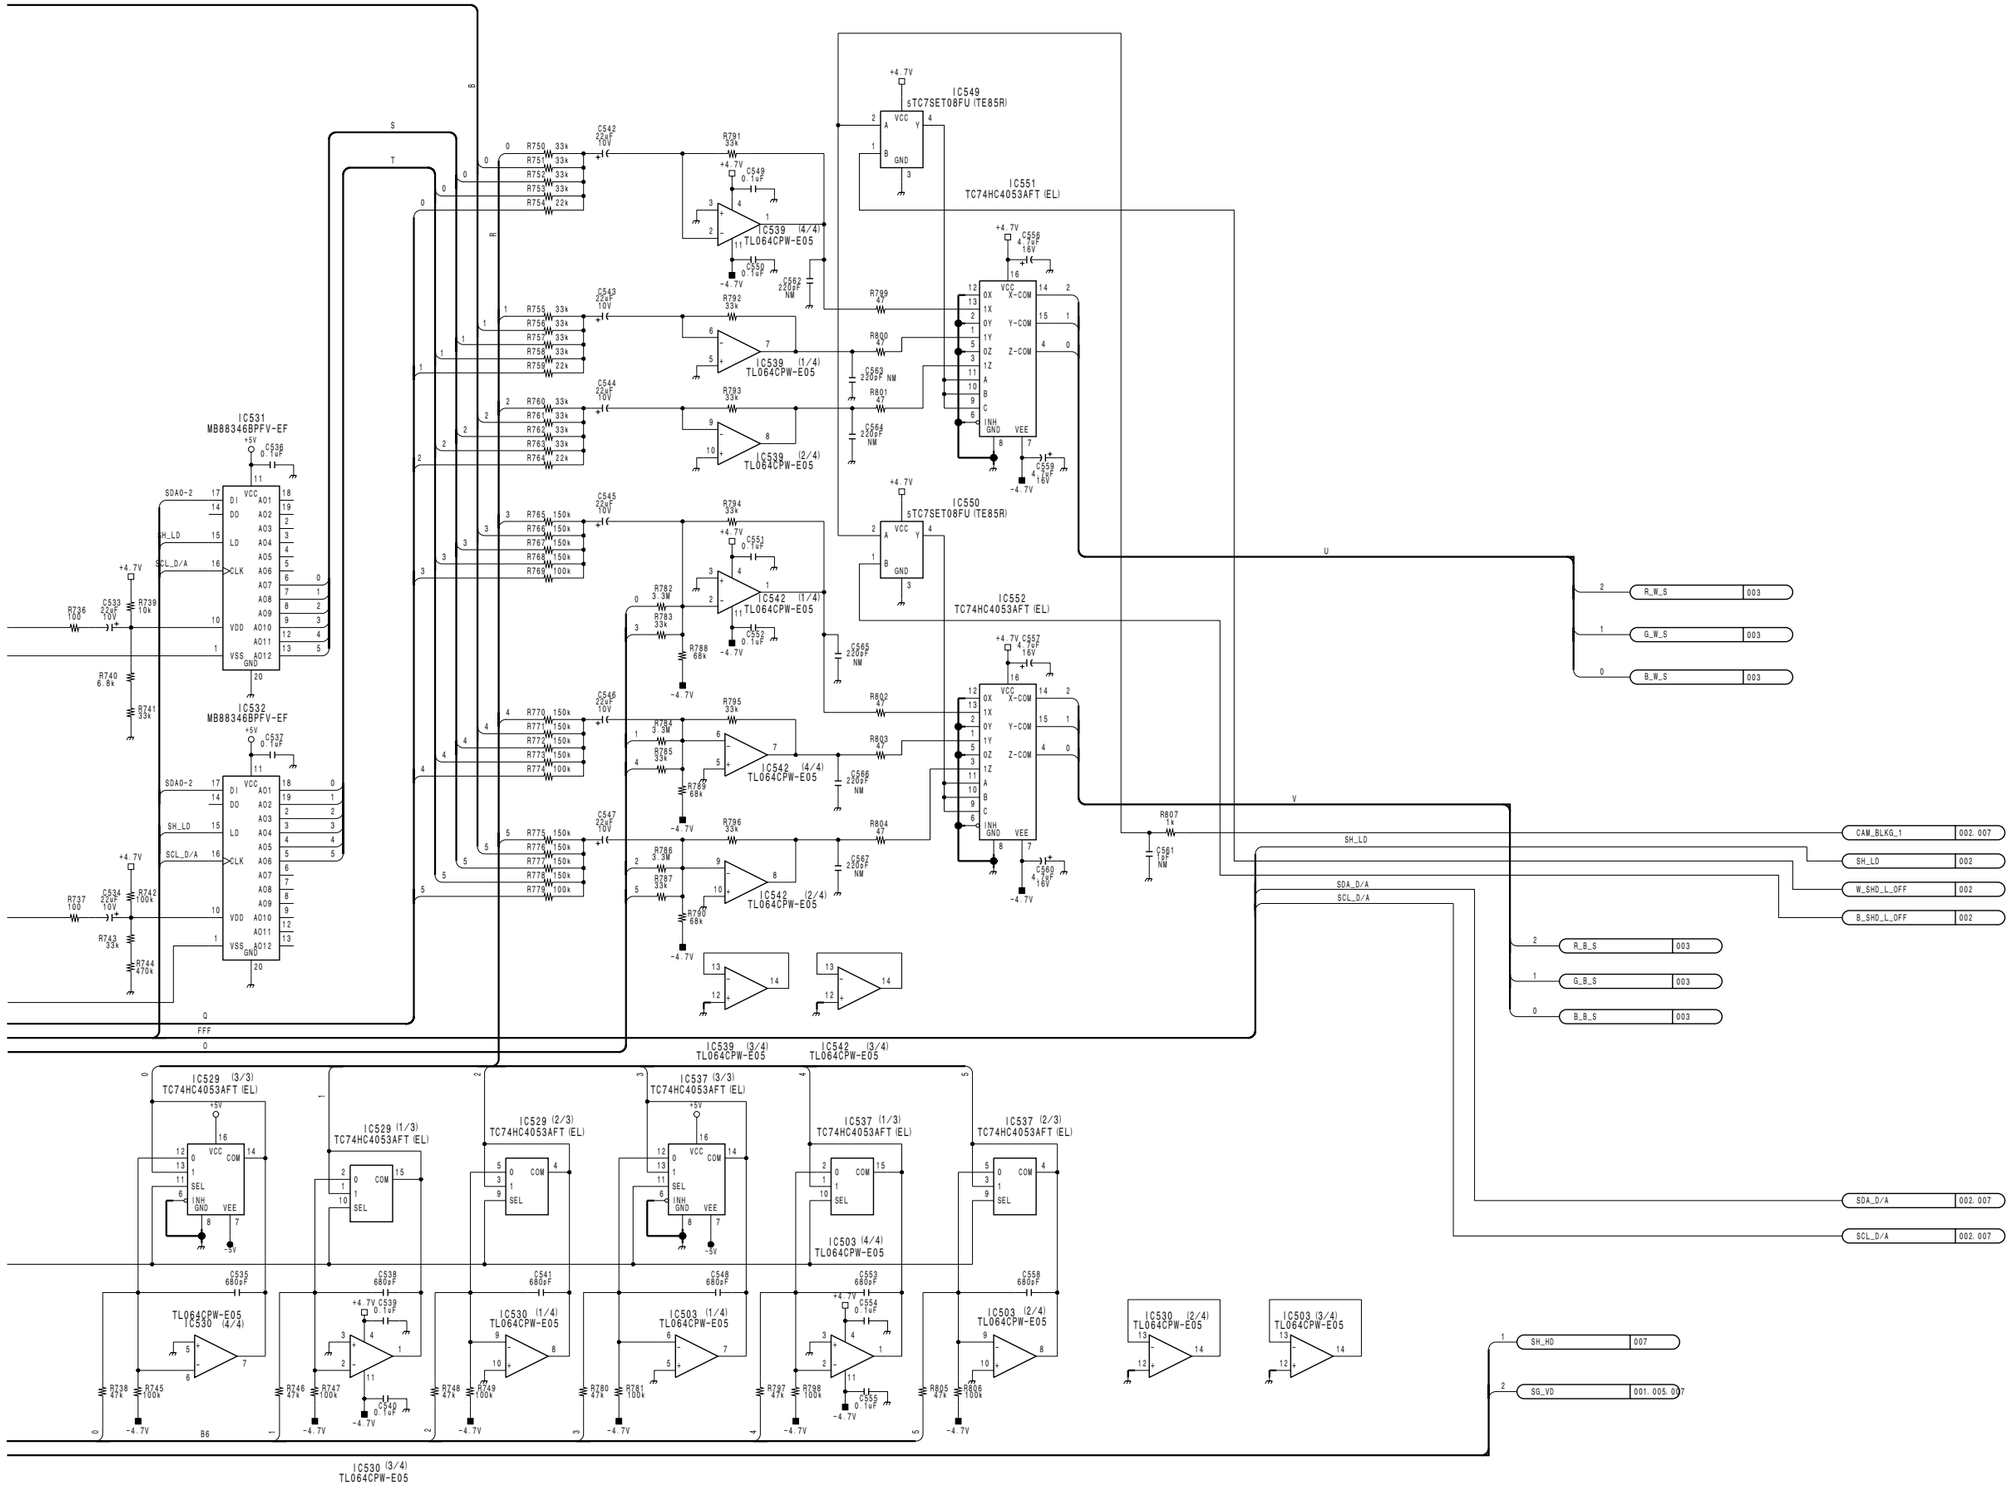

DCP-28 (4/11)
BOARD NO. 1-678-617-12
LOT NO. 083-
HDW-750_DCP-28_003_4

DCP-28 (5/11)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

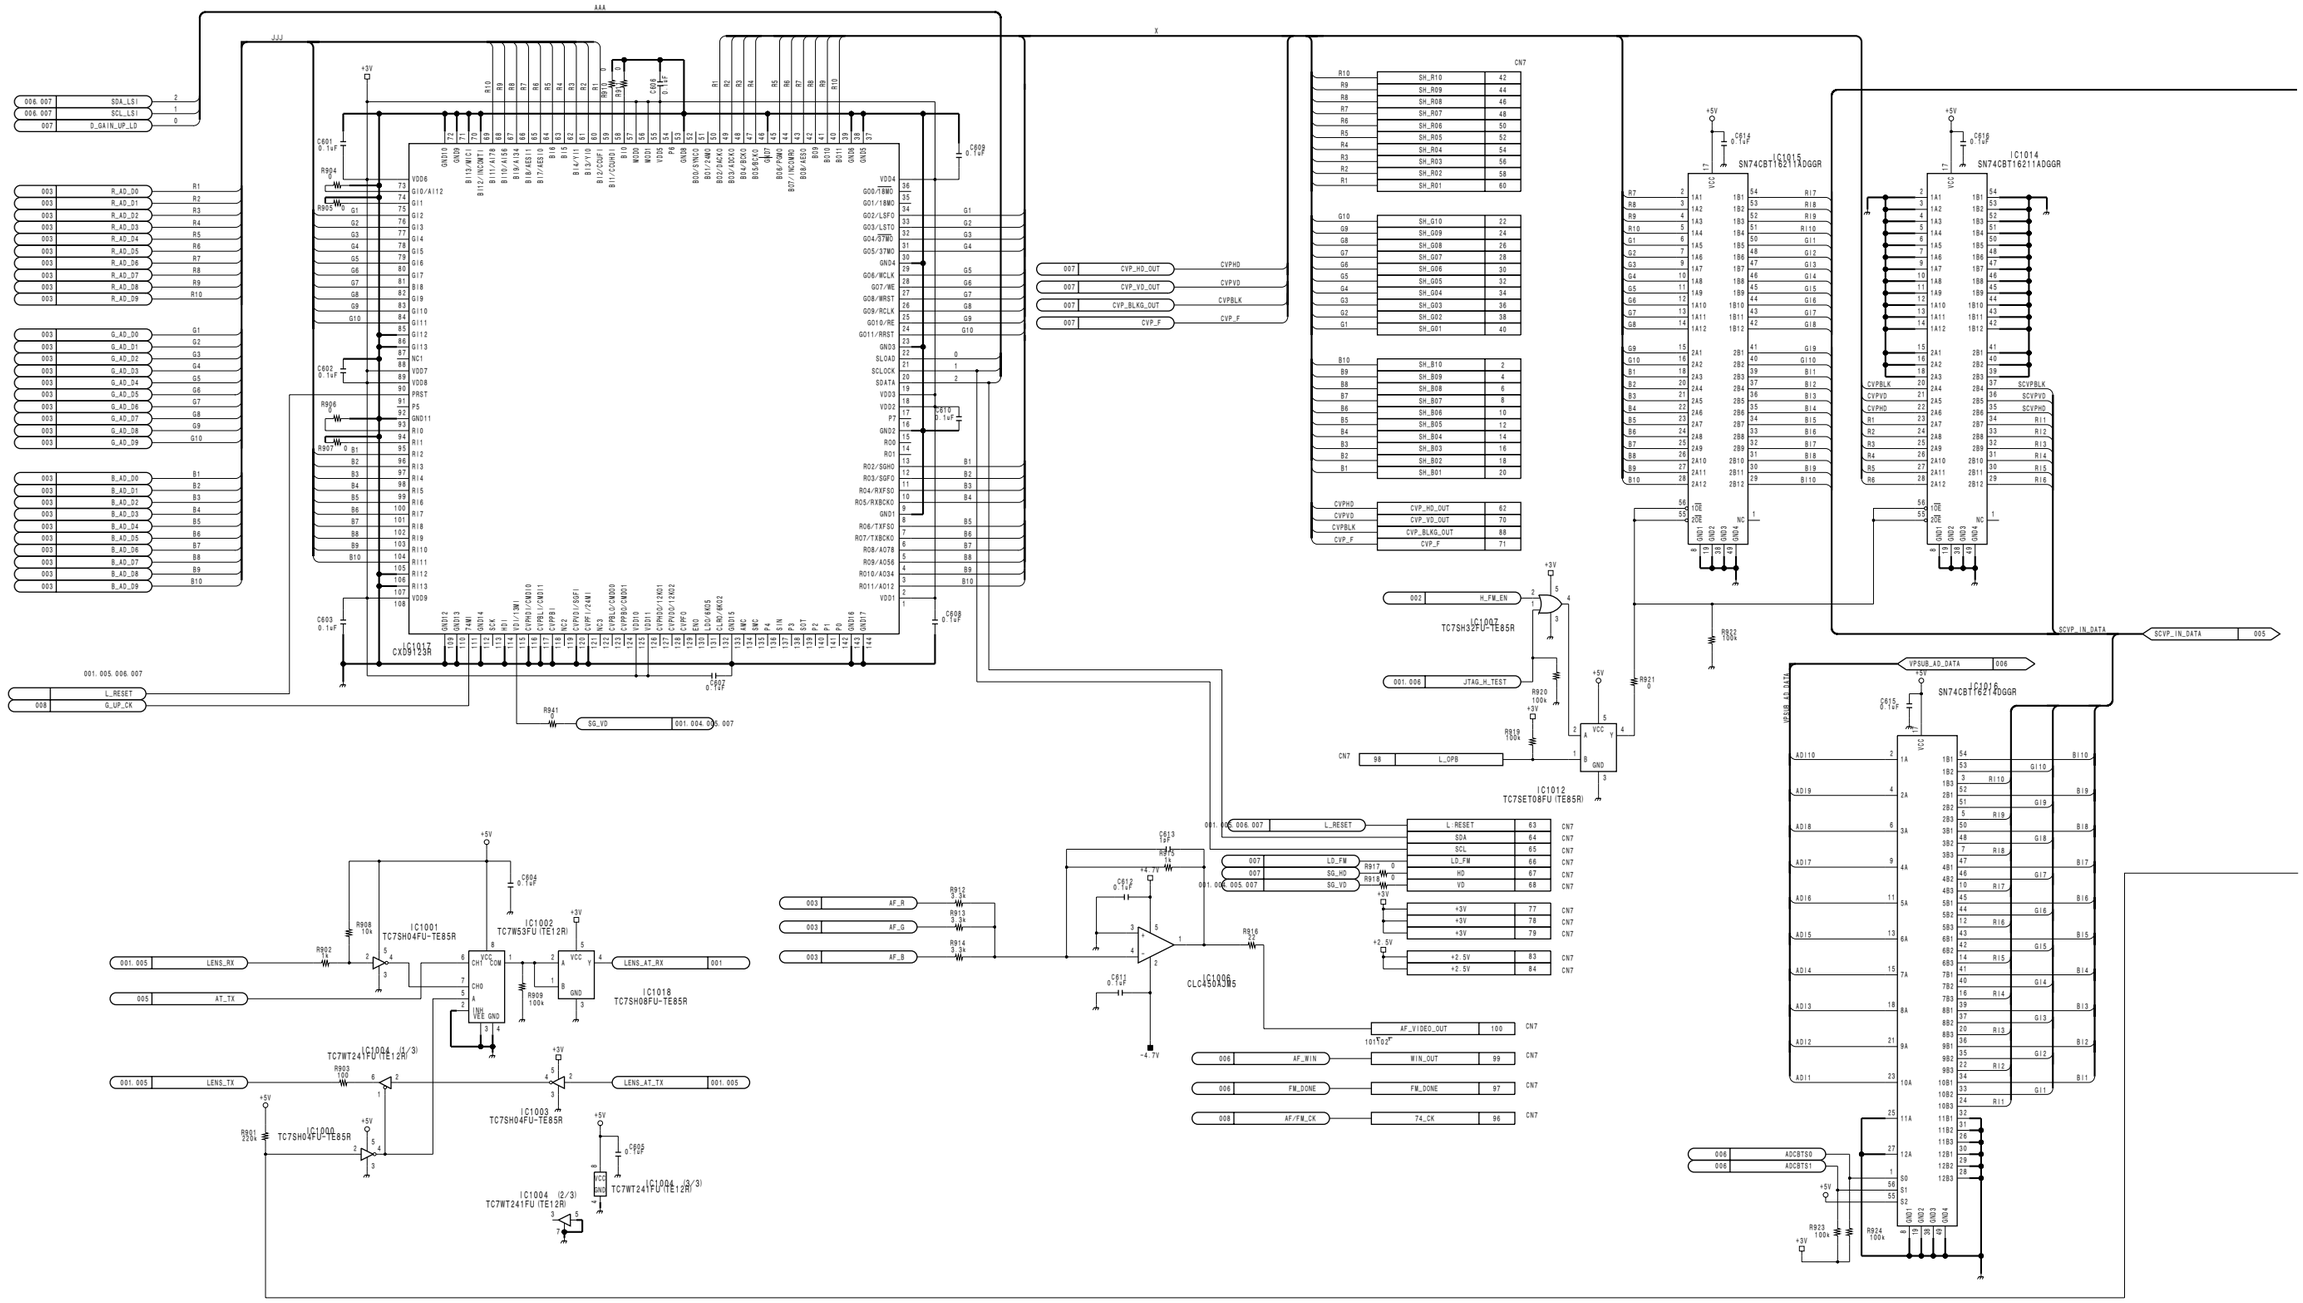

4-18

DCP-28 (5/11)

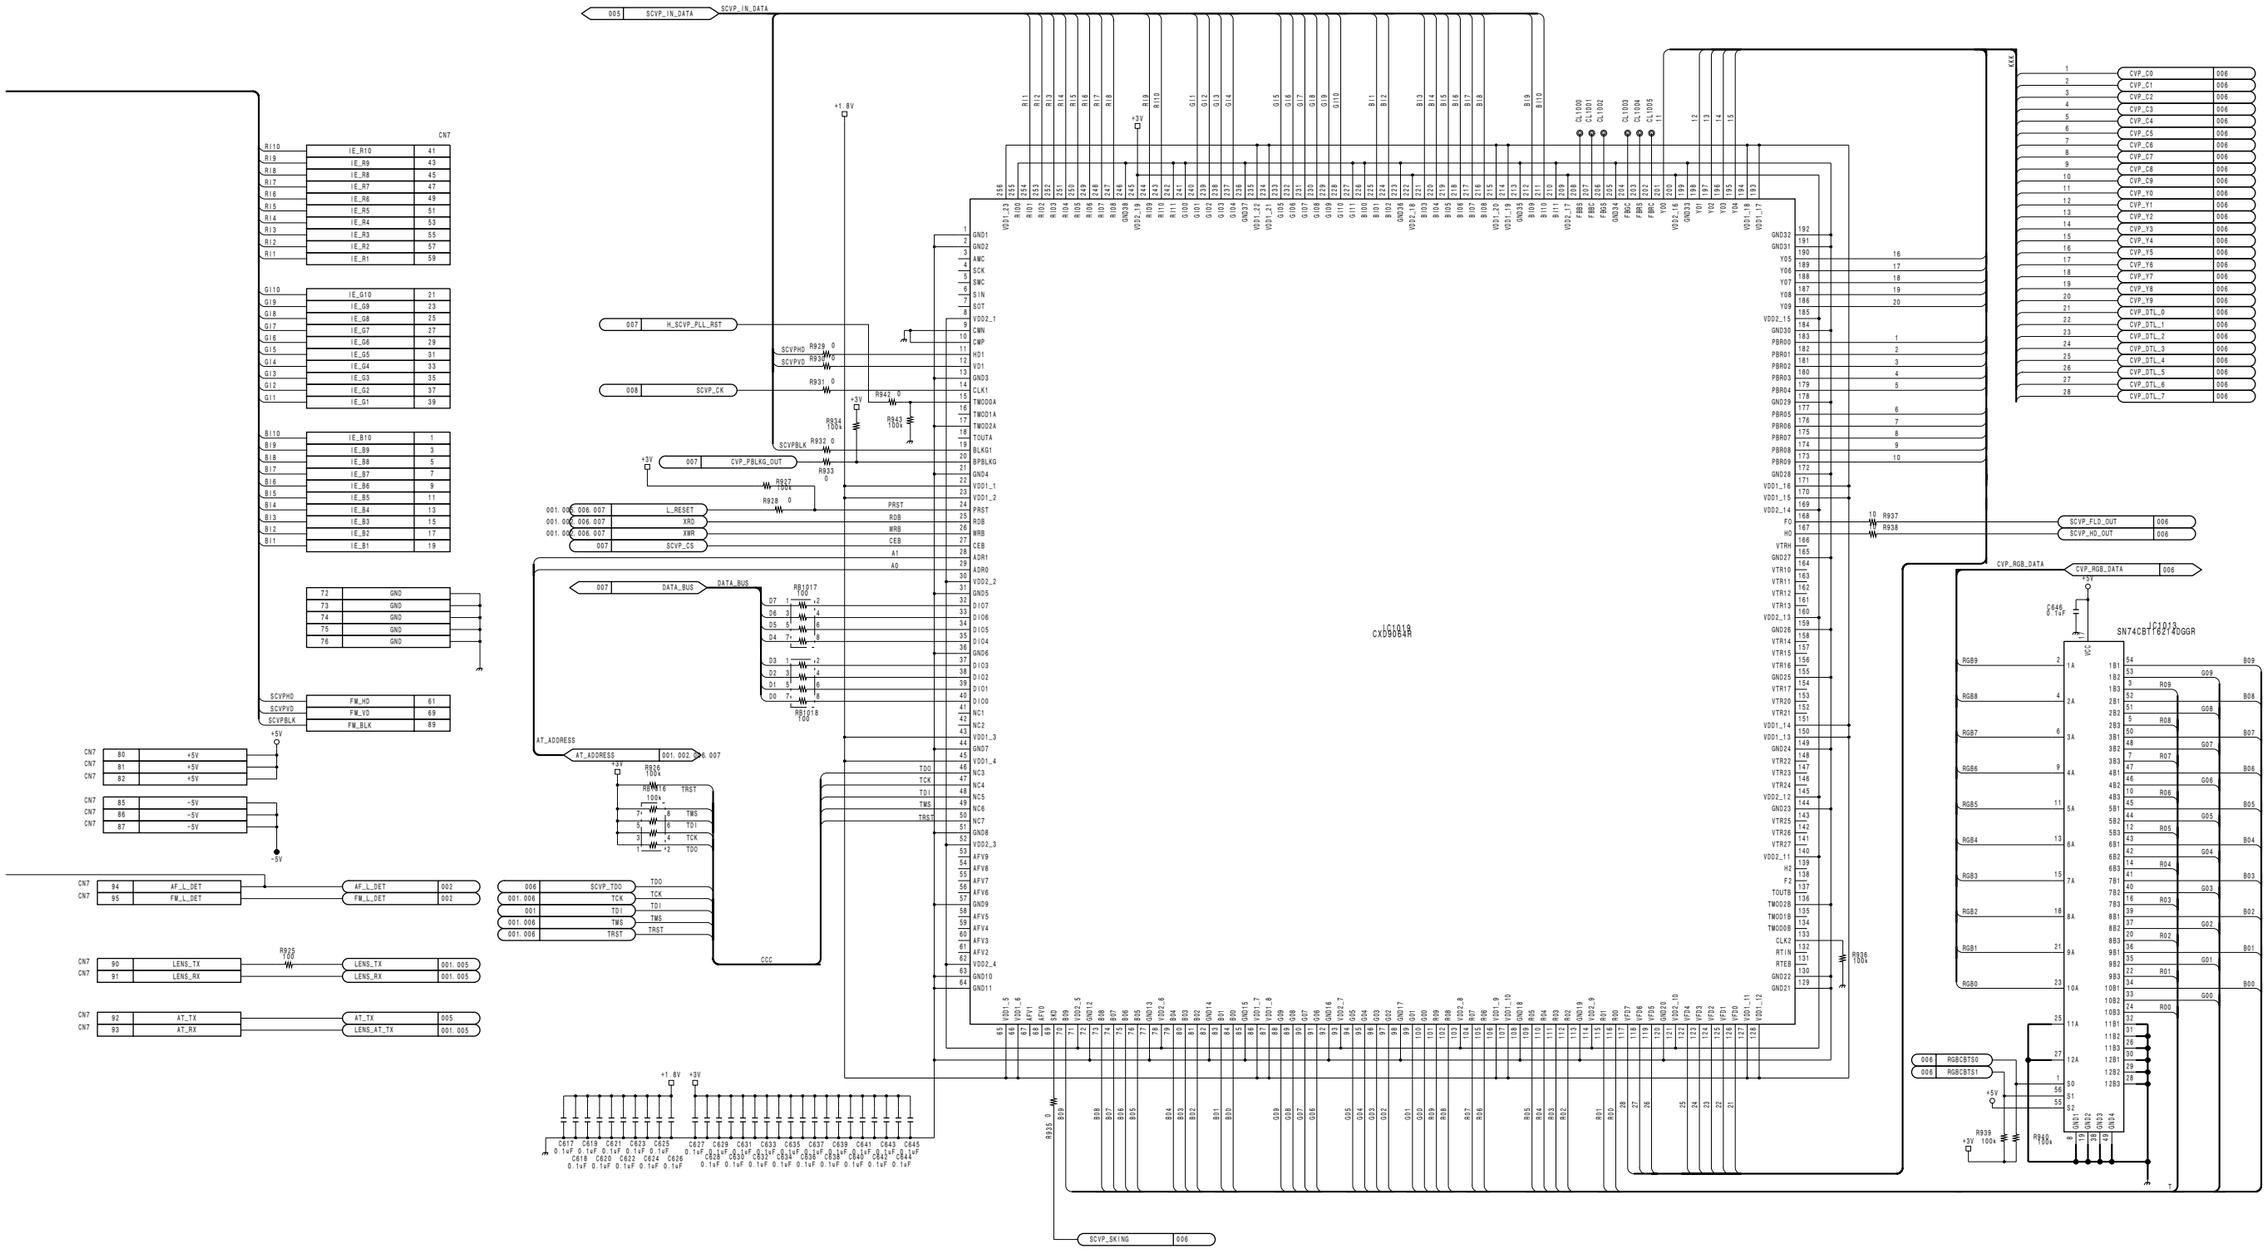

DCP-28 (5/11)

BOARD NO. 1-678-617-12
LOT NO. 083-

HDW-750_DCP-28_003_5

DCP-28 (6/11)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

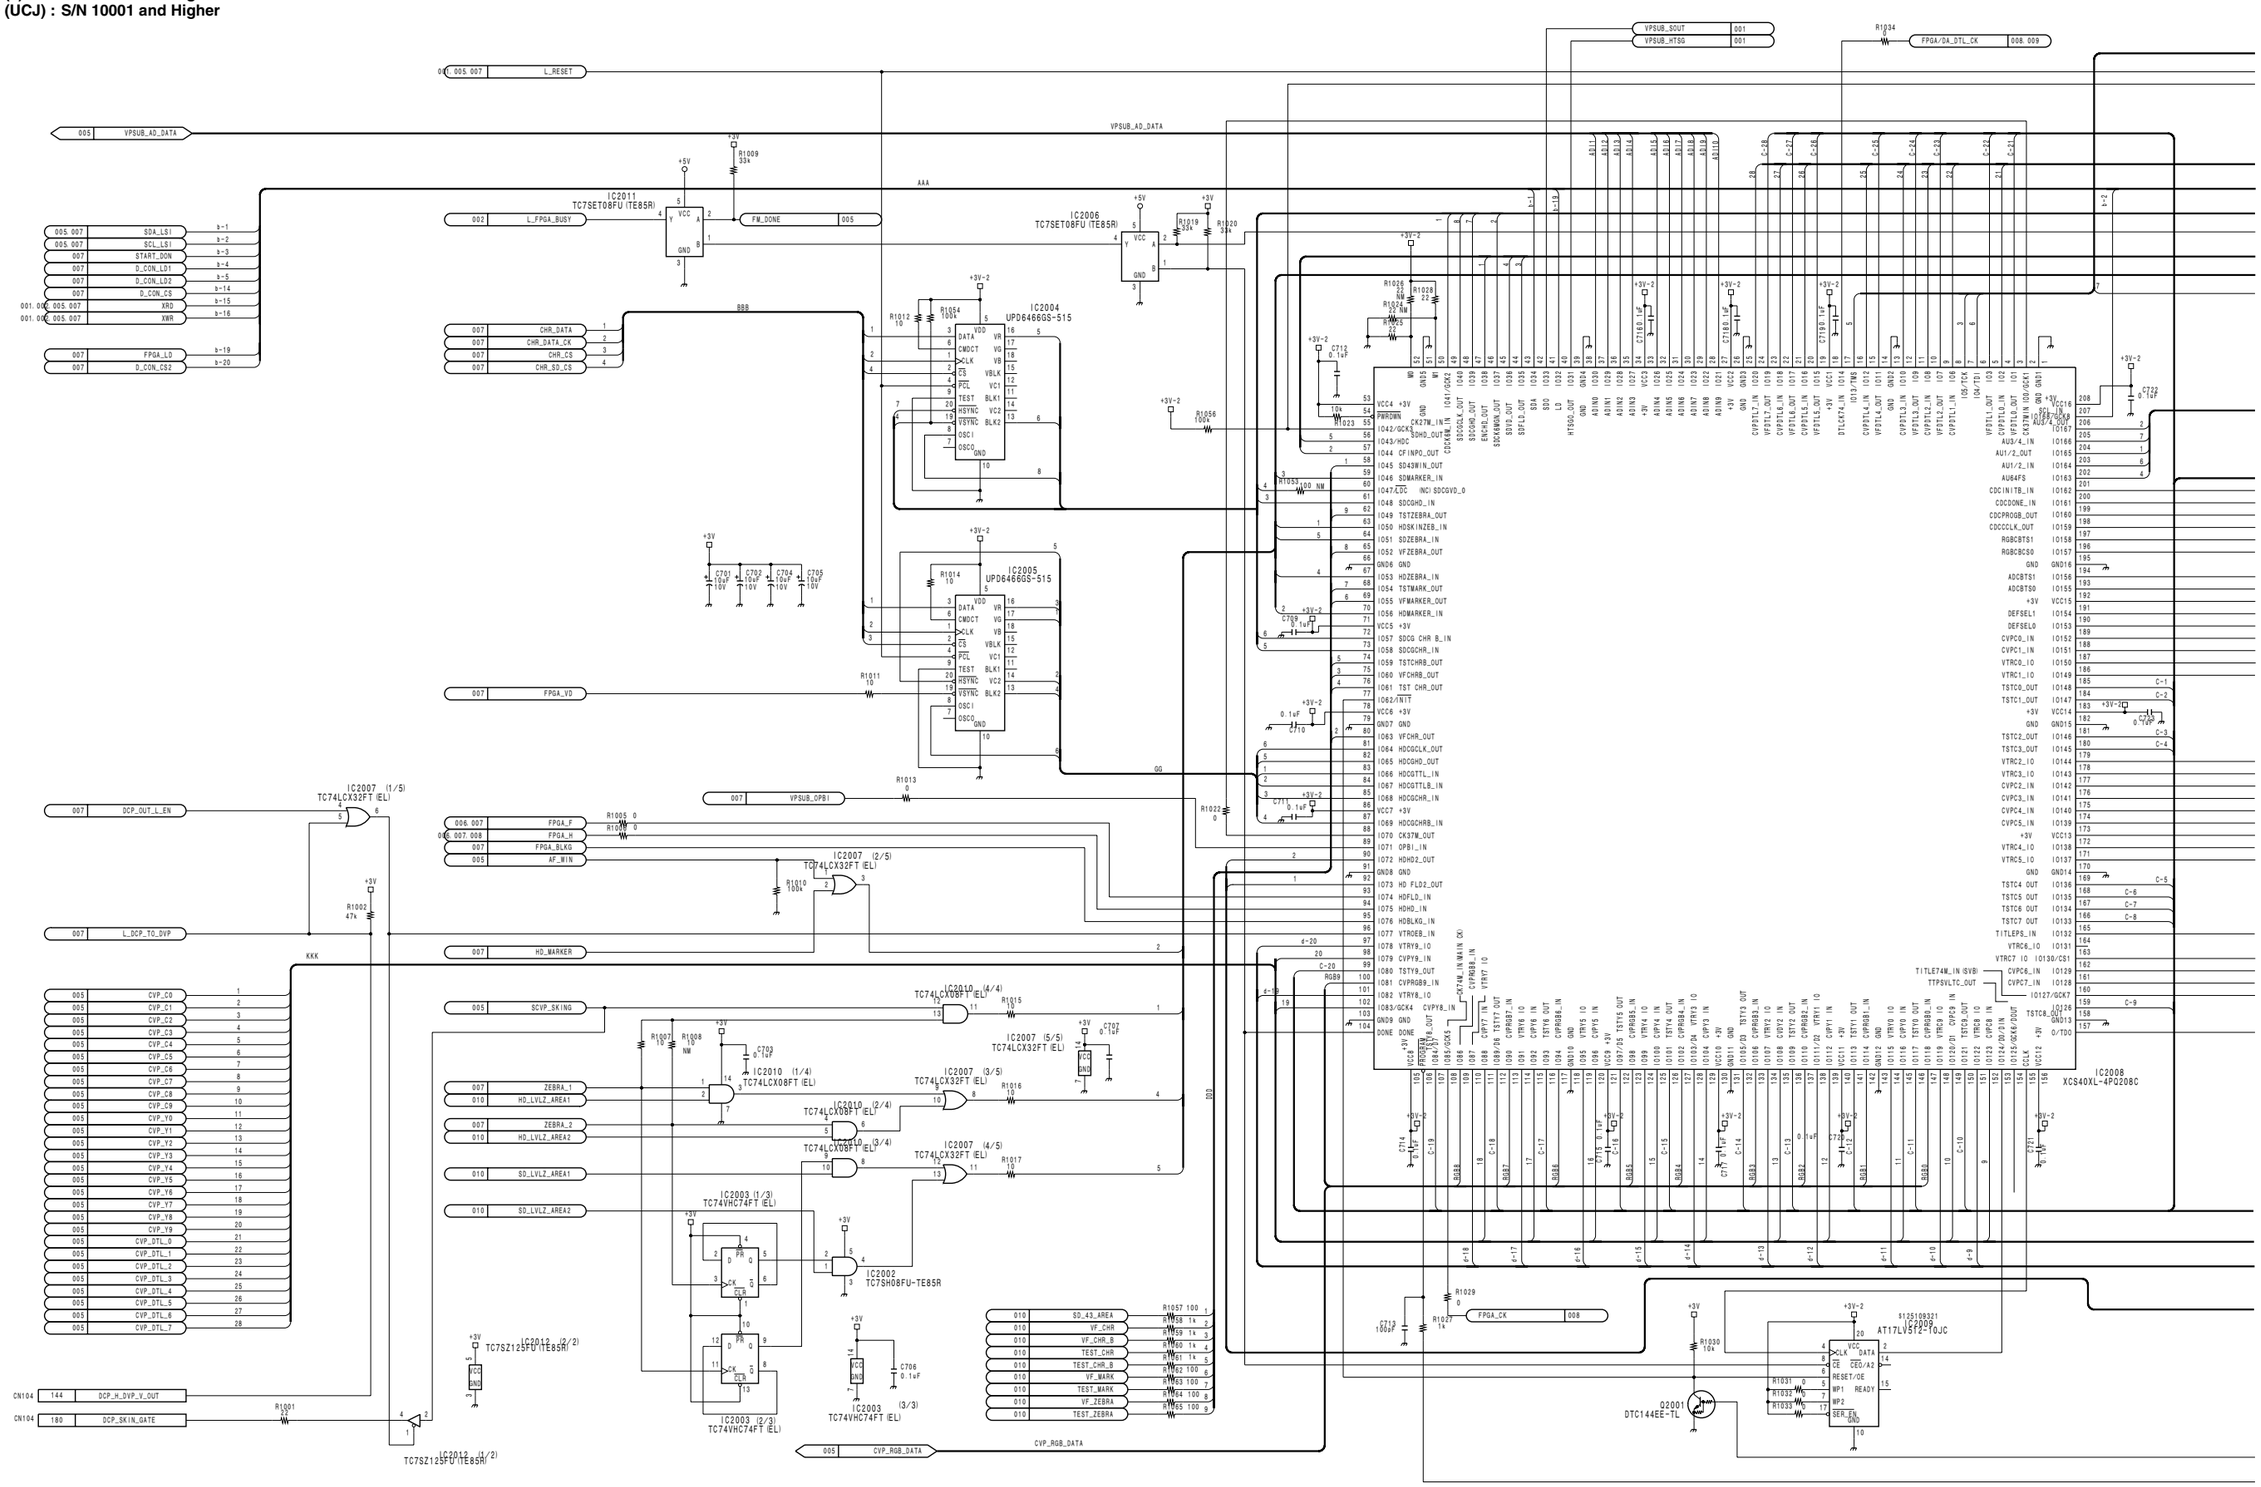

http://getMANUAL.com

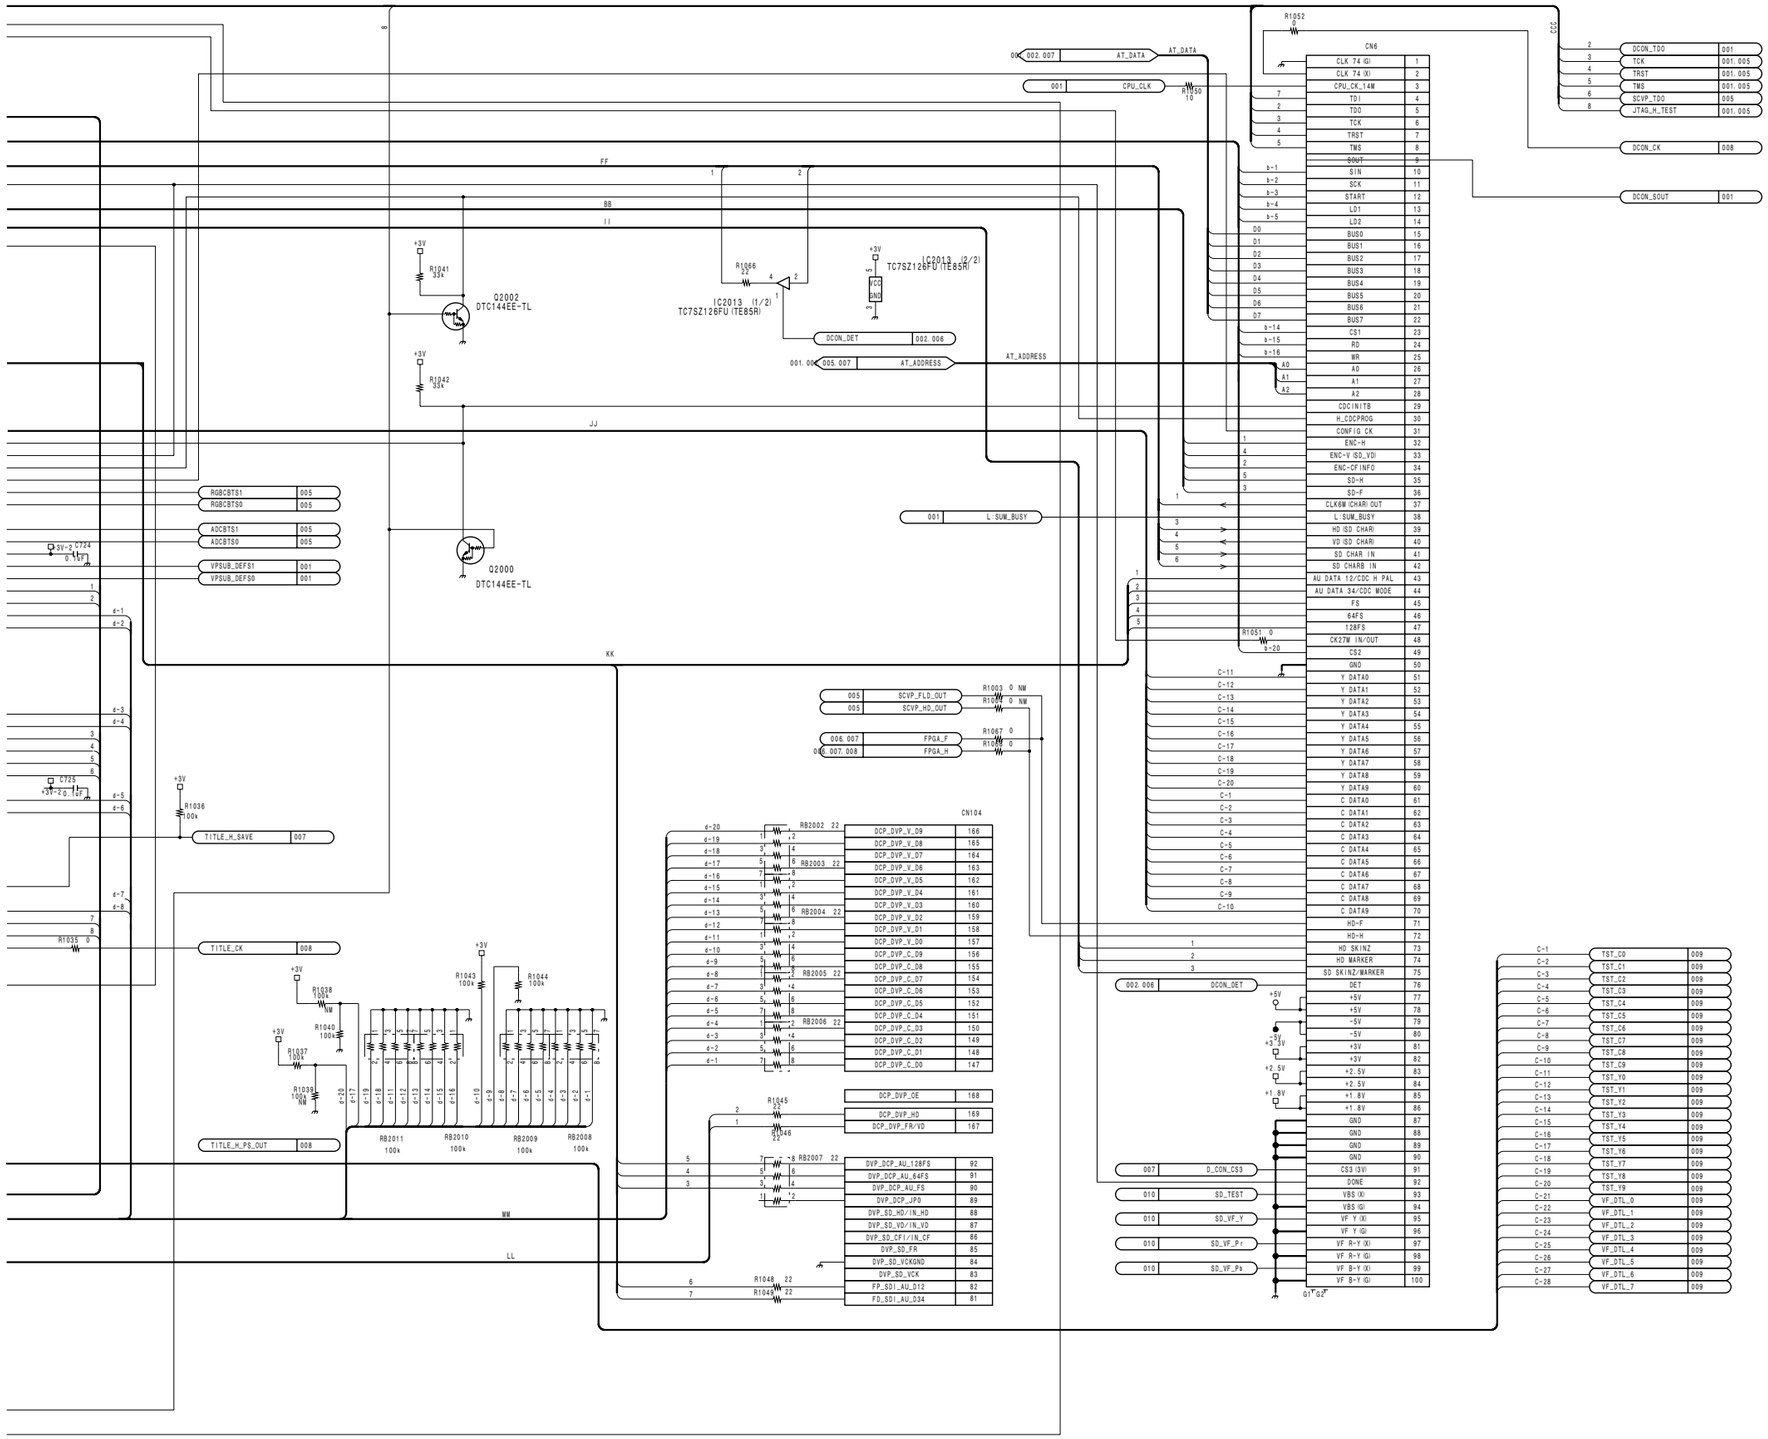

DCP-28 (6/11)

BOARD NO. 1-678-617-12
LOT NO. 083-

HDW-750_DCP-28_003_6

DCP-28 (7/11)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

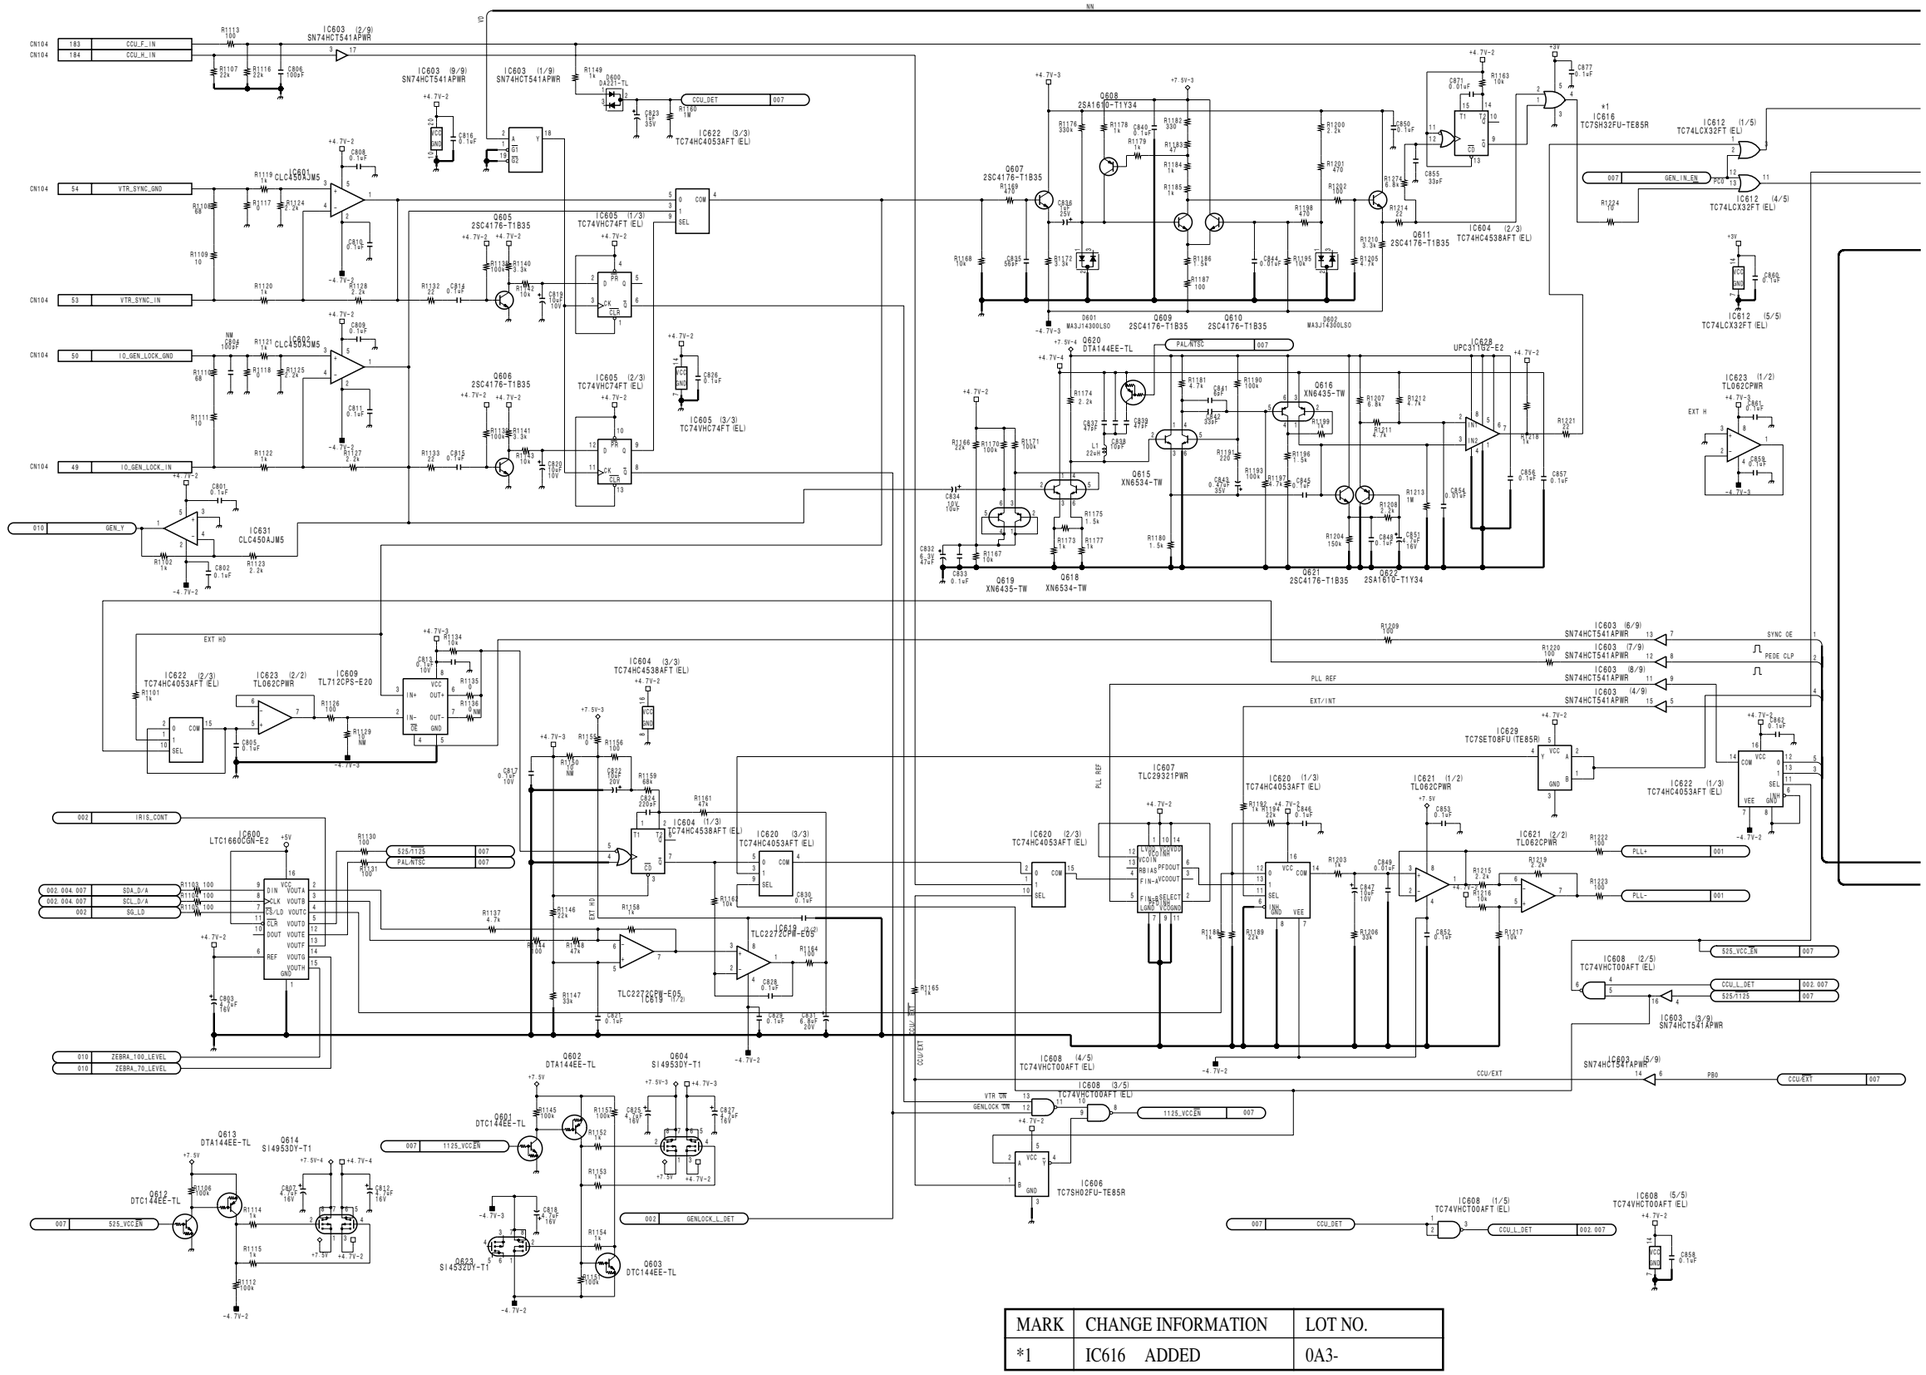

MARK	CHANGE INFORMATION	LOT NO.
*1	IC616 ADDED	0A3-

4-22

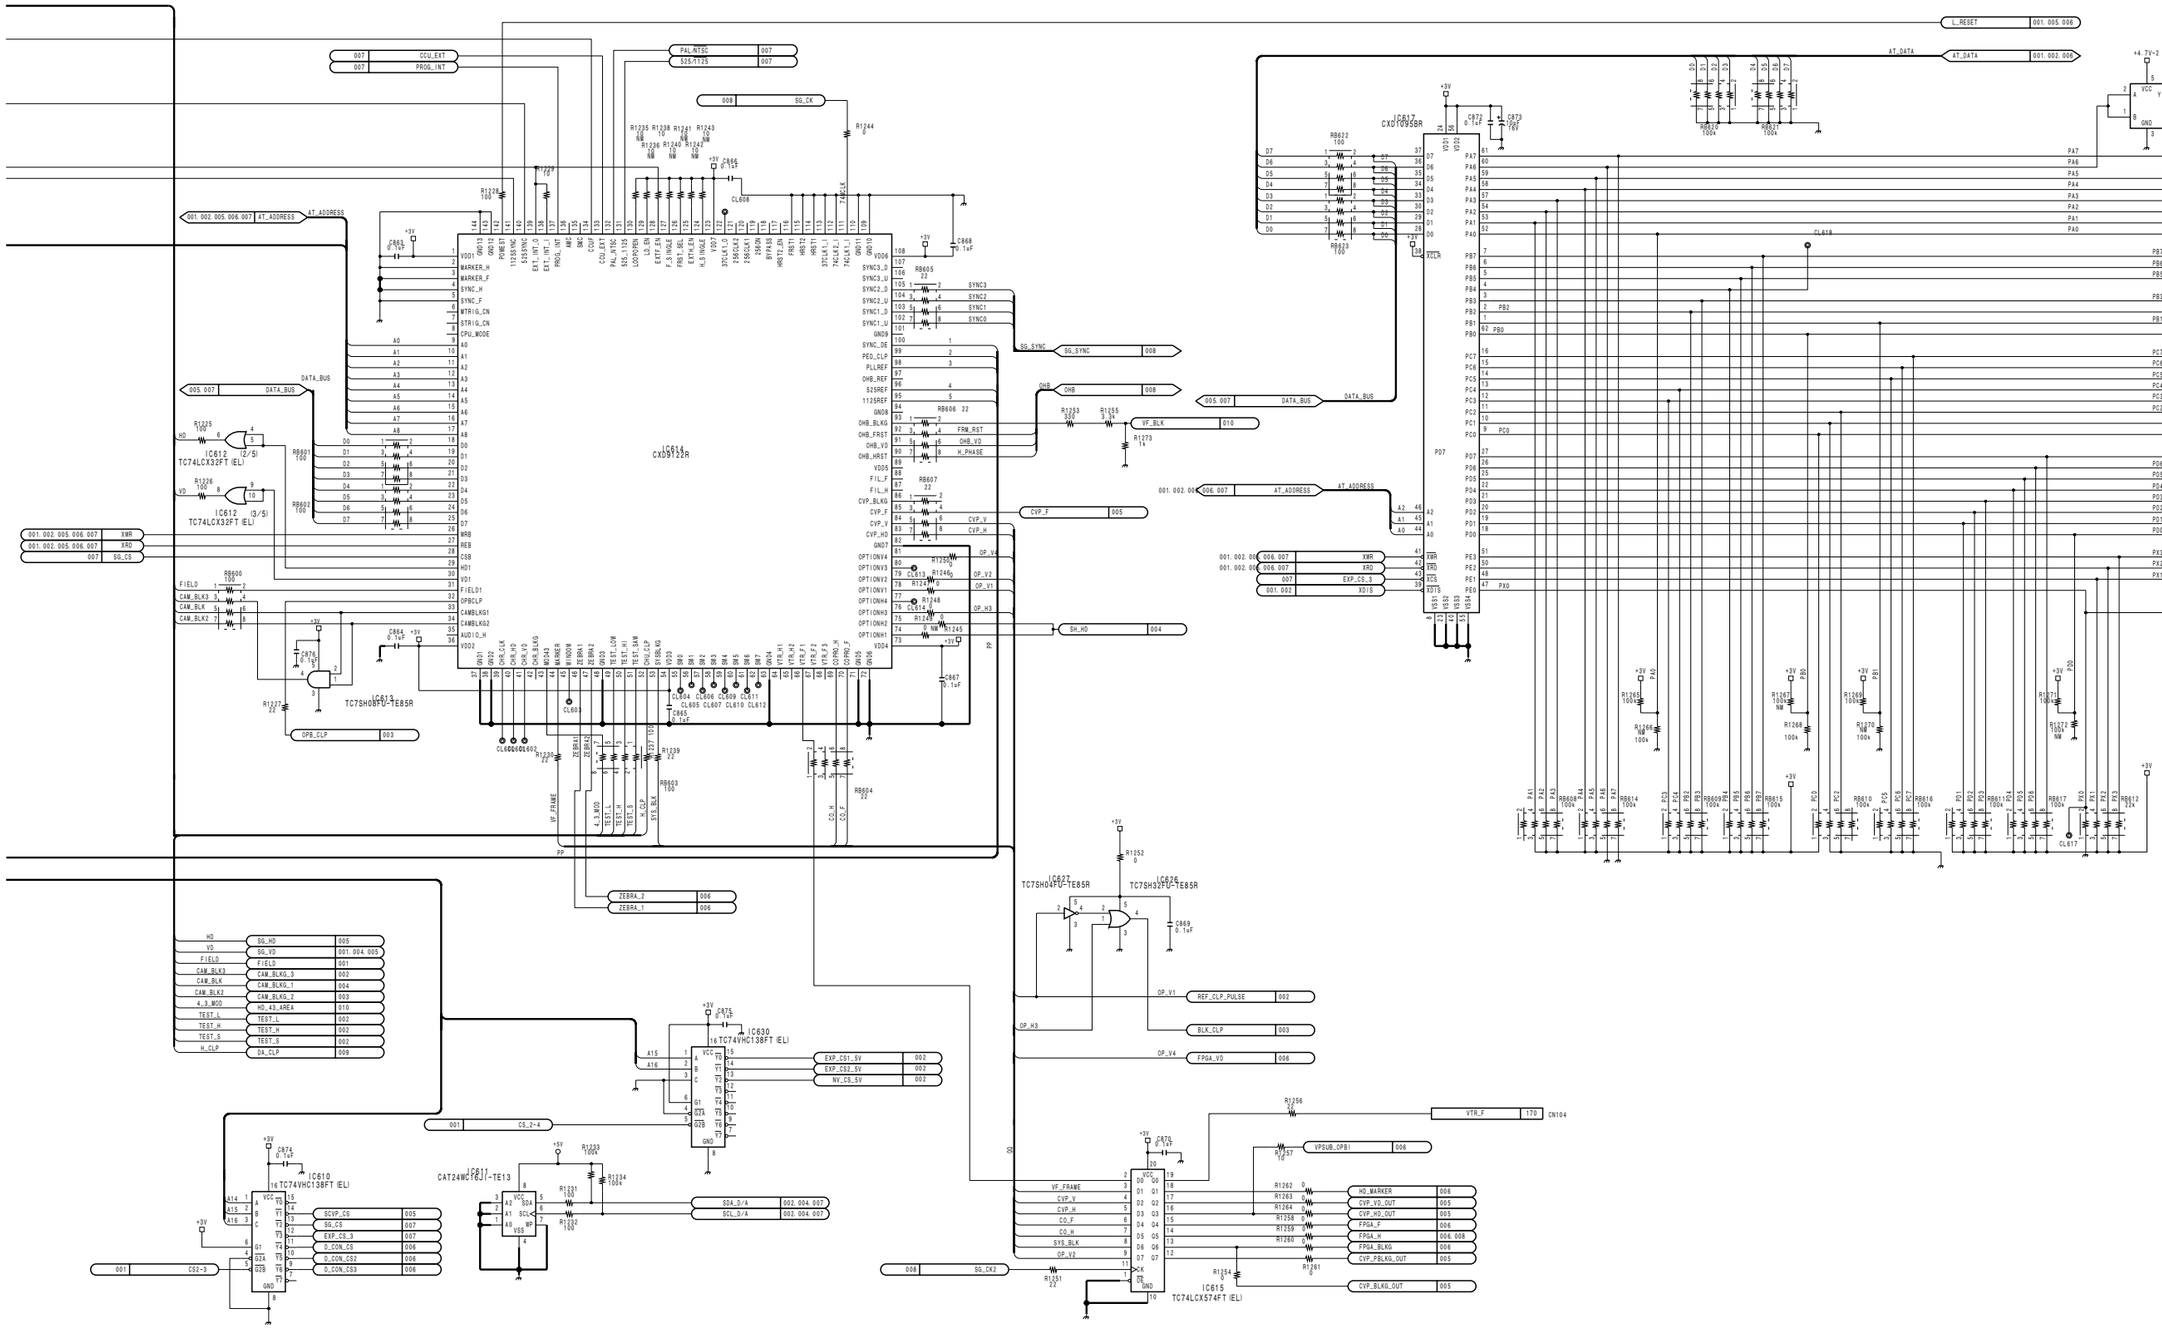

DCP-28 (7/11)

BOARD NO. 1-678-617-12
LOT NO. 083-

HDW-750_DCP-28_003_7

DCP-28 (8/11)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

MARK	CHANGE INFORMATION	LOT NO.
*1	R1311 0 → 33	0A3-

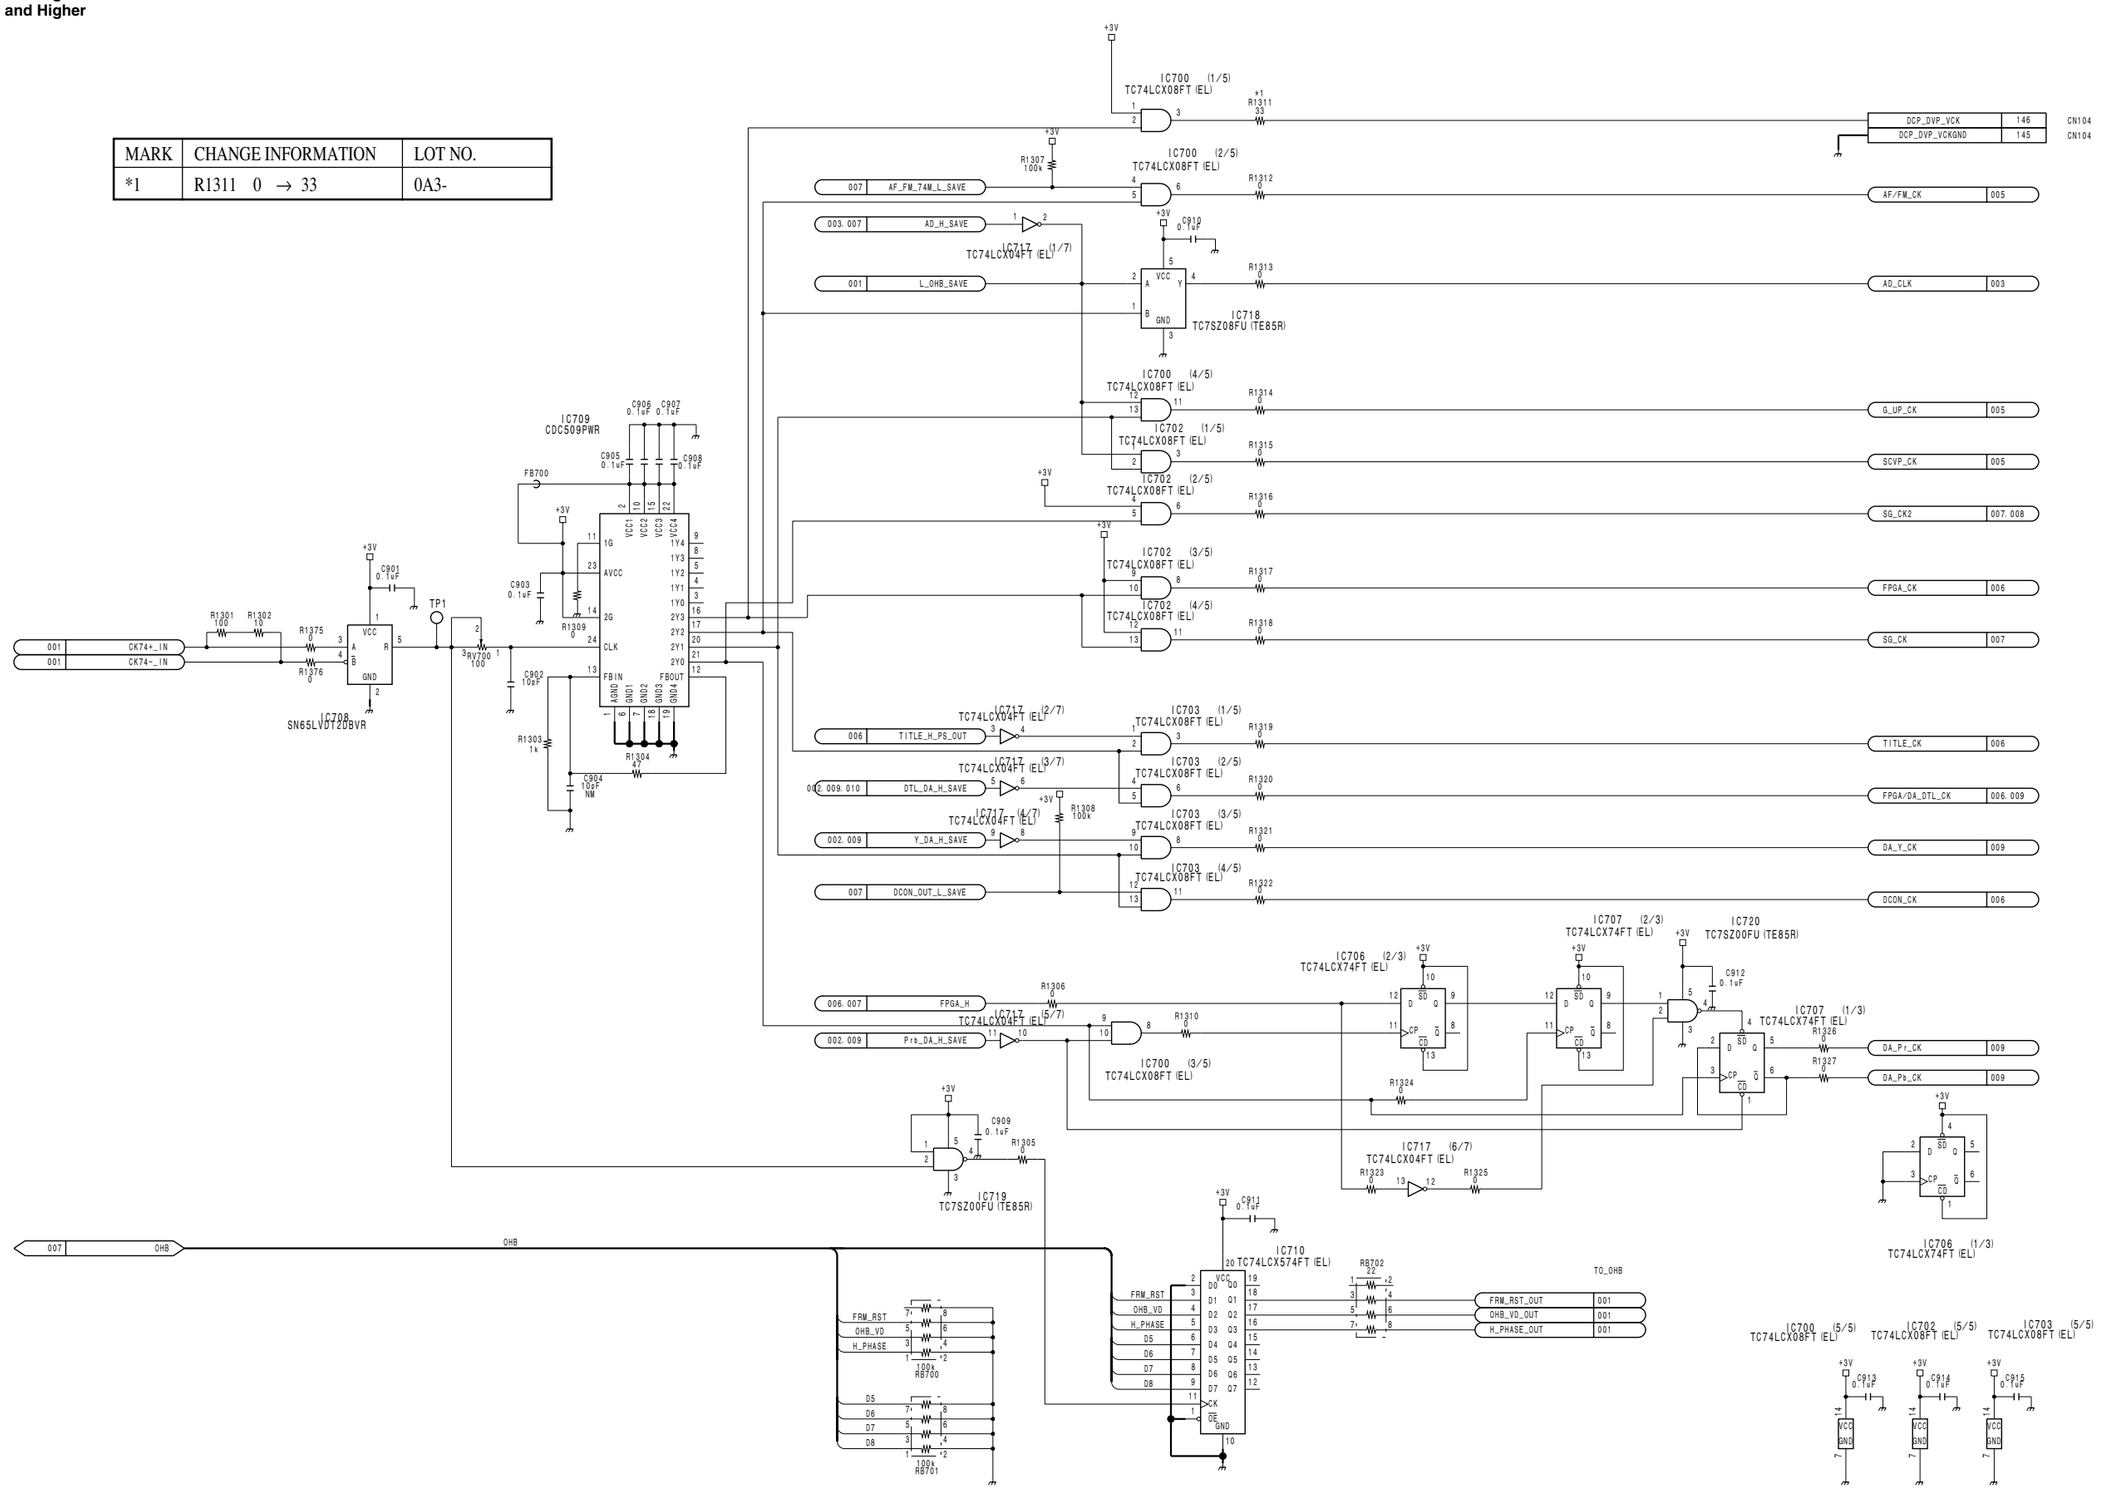

4-24

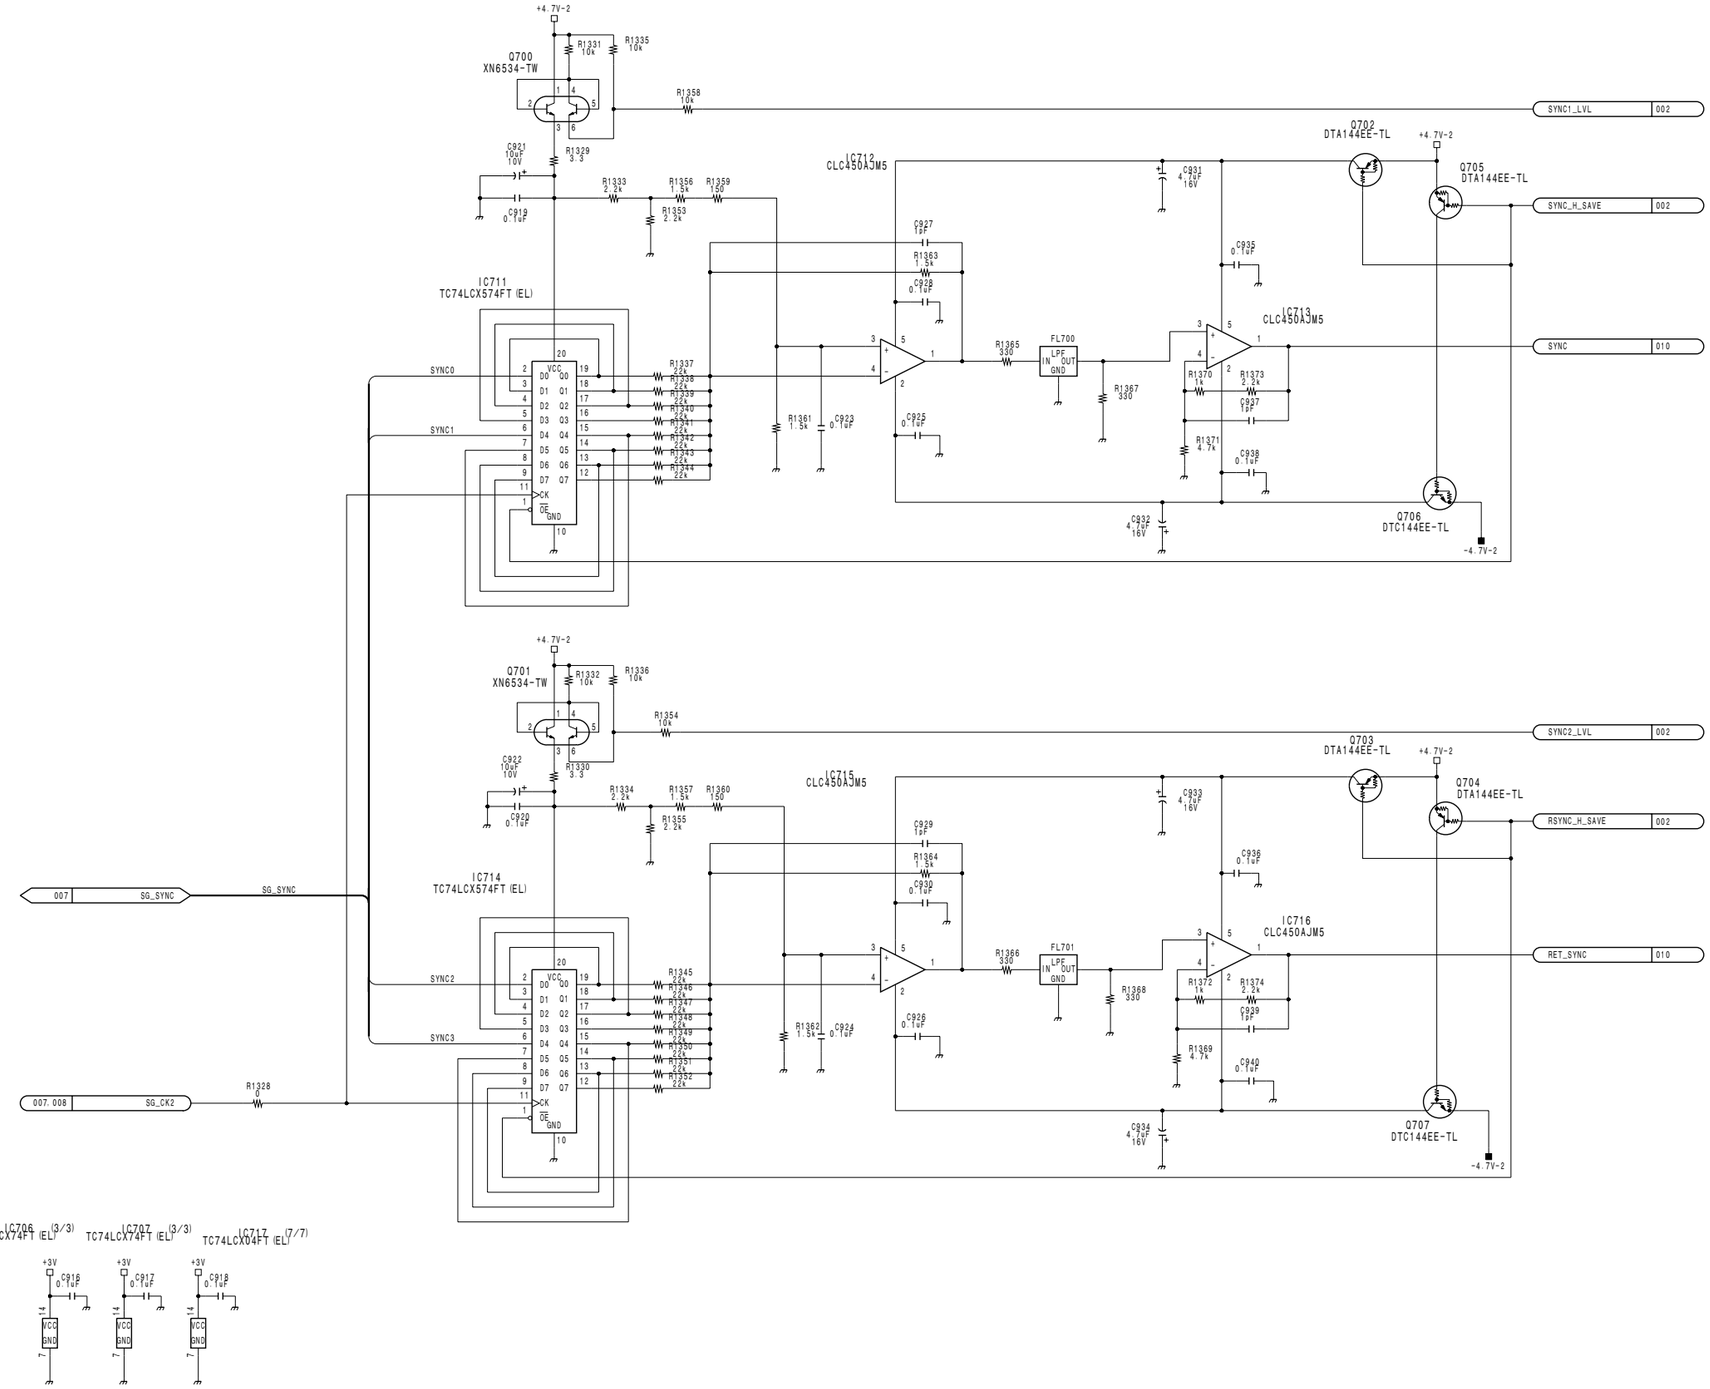

DCP-28 (8/11)

BOARD NO. 1-678-617-12
LOT NO. 083-

HDW-750_DCP-28_003_8

DCP-28 (9/11)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

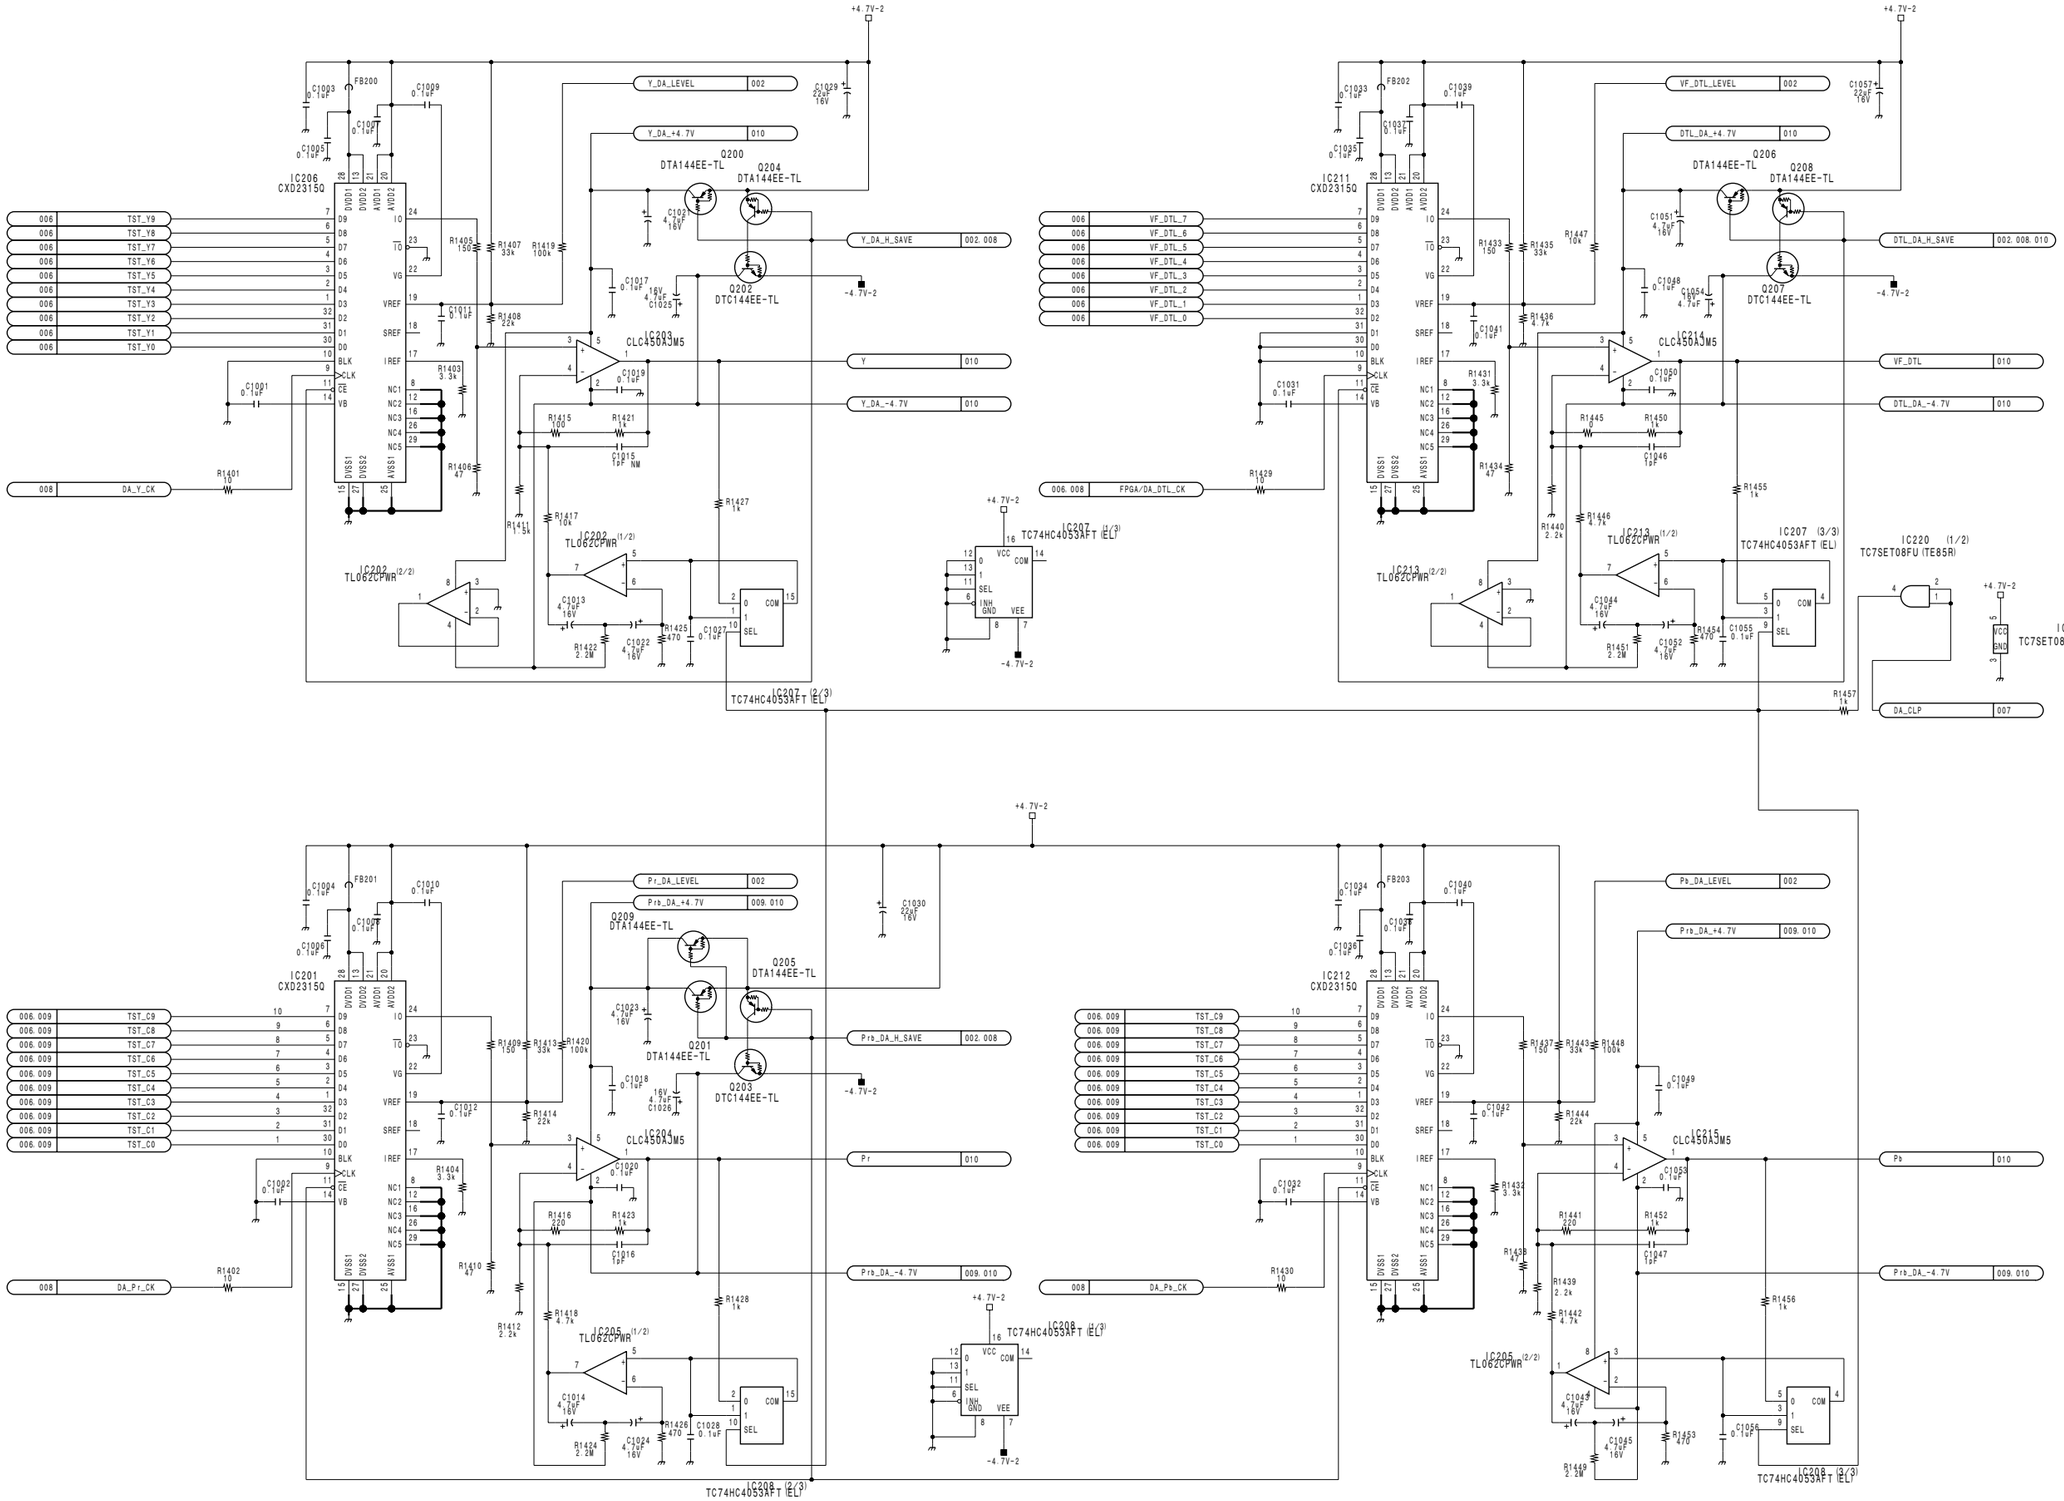

DCP-28 (9/11)
BOARD NO. 1-678-617-12
LOT NO. 083-
HDW-750_DCP-28_003_9

DCP-28 (10/11)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

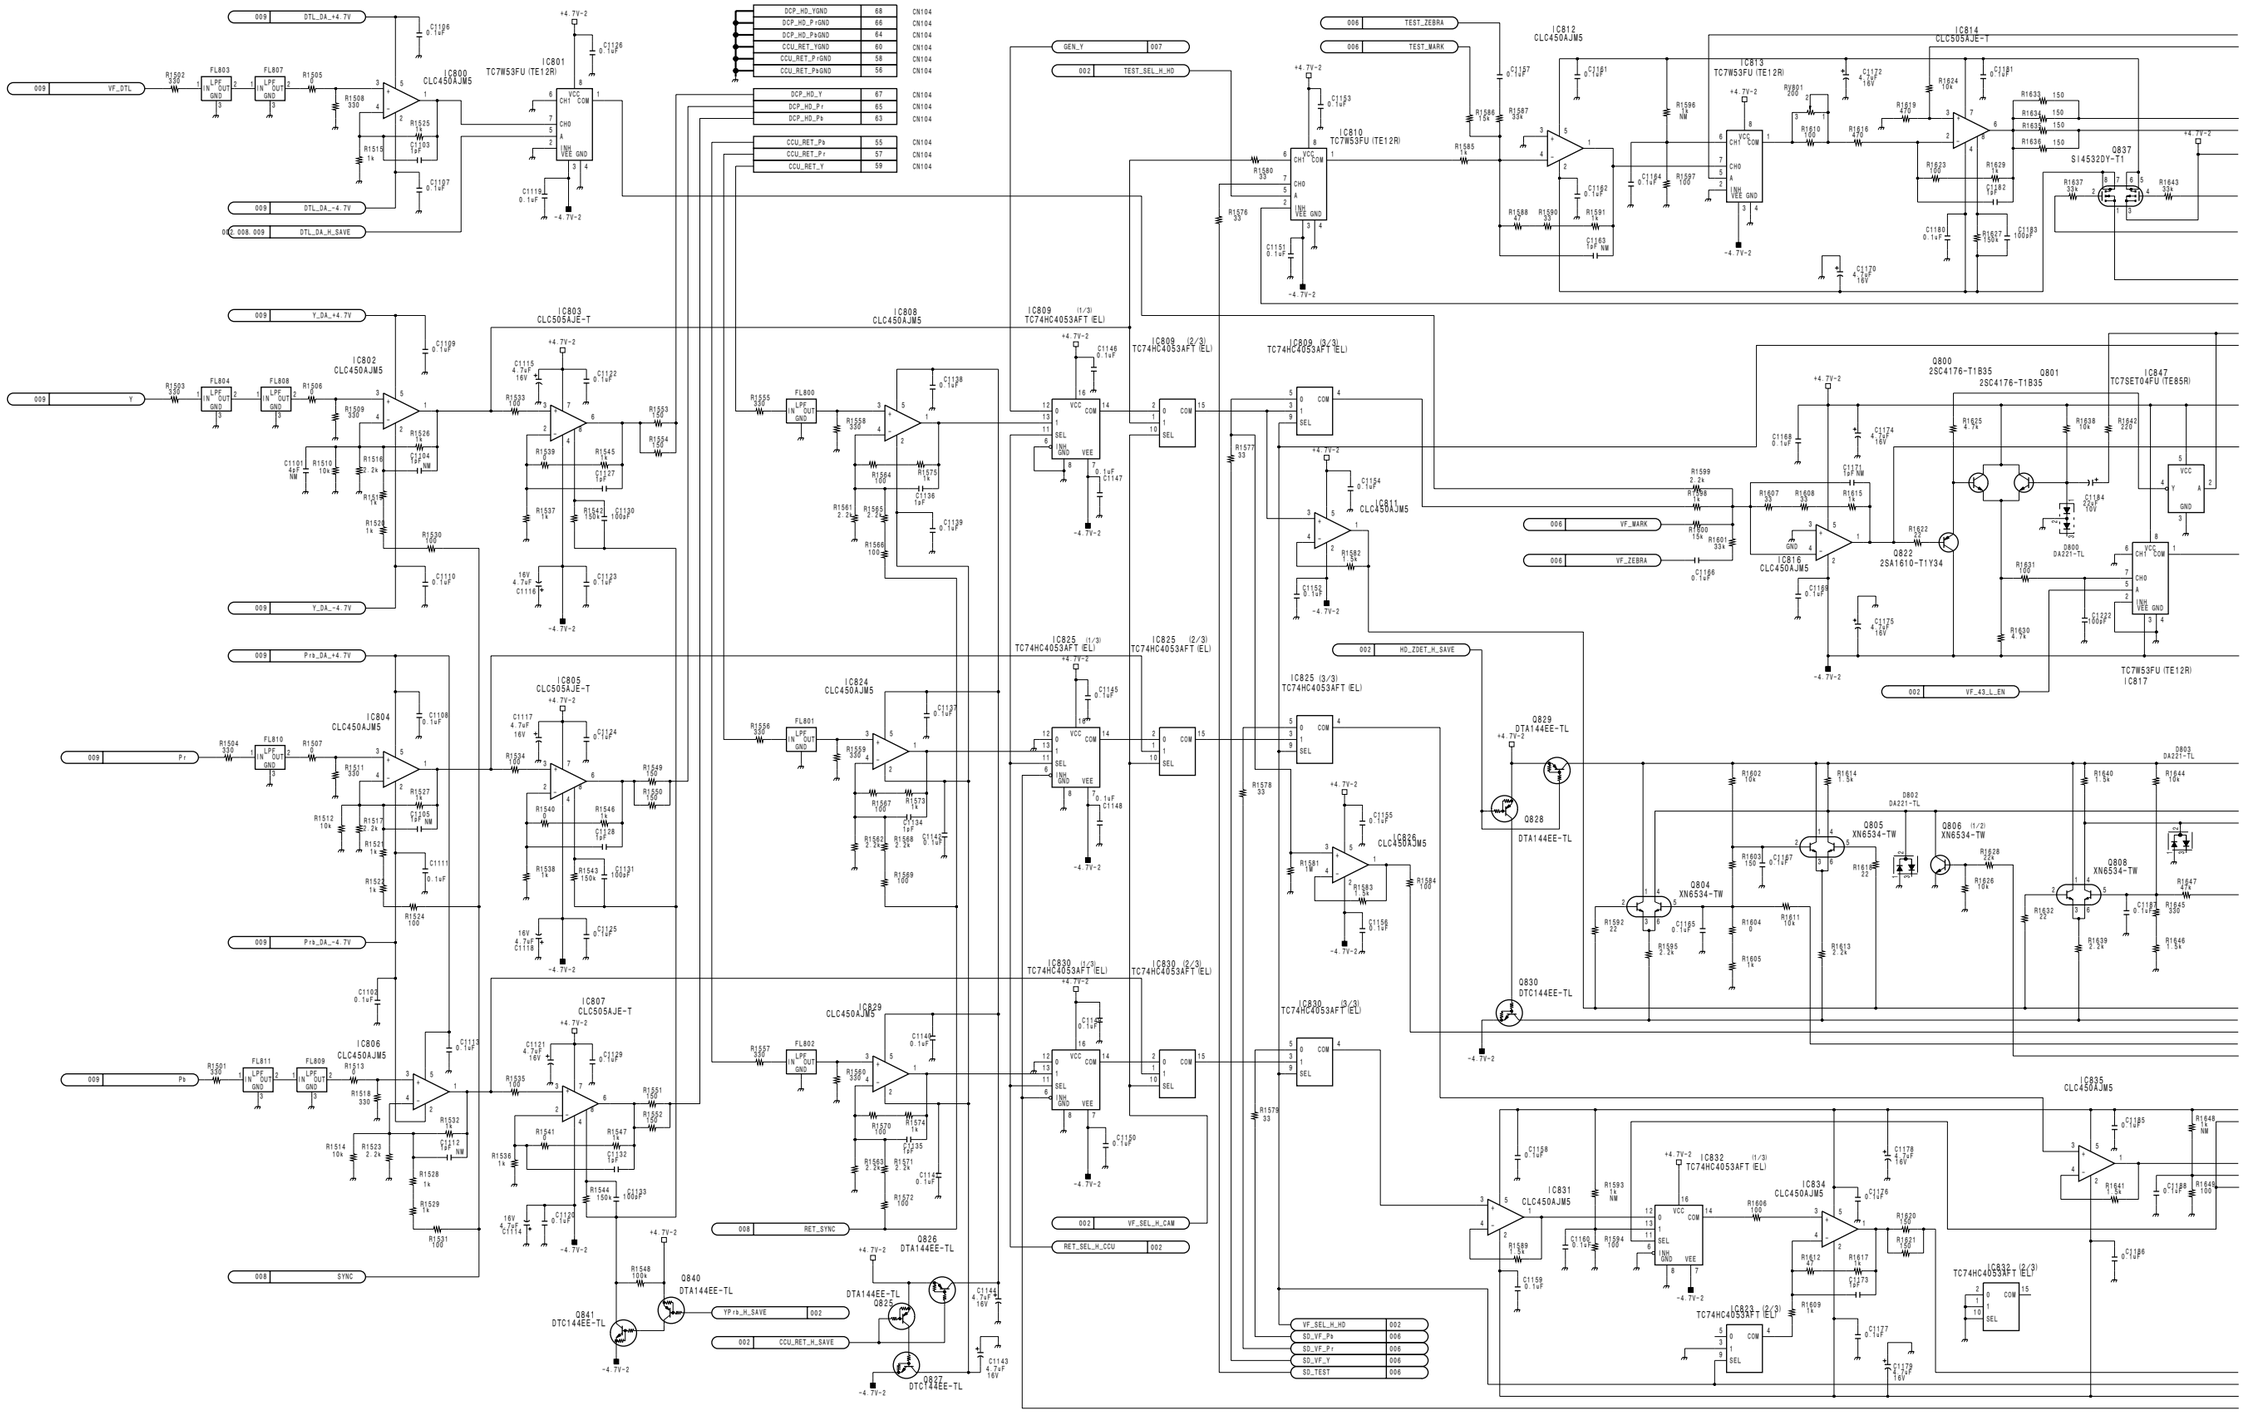

DCP-28 (10/11)

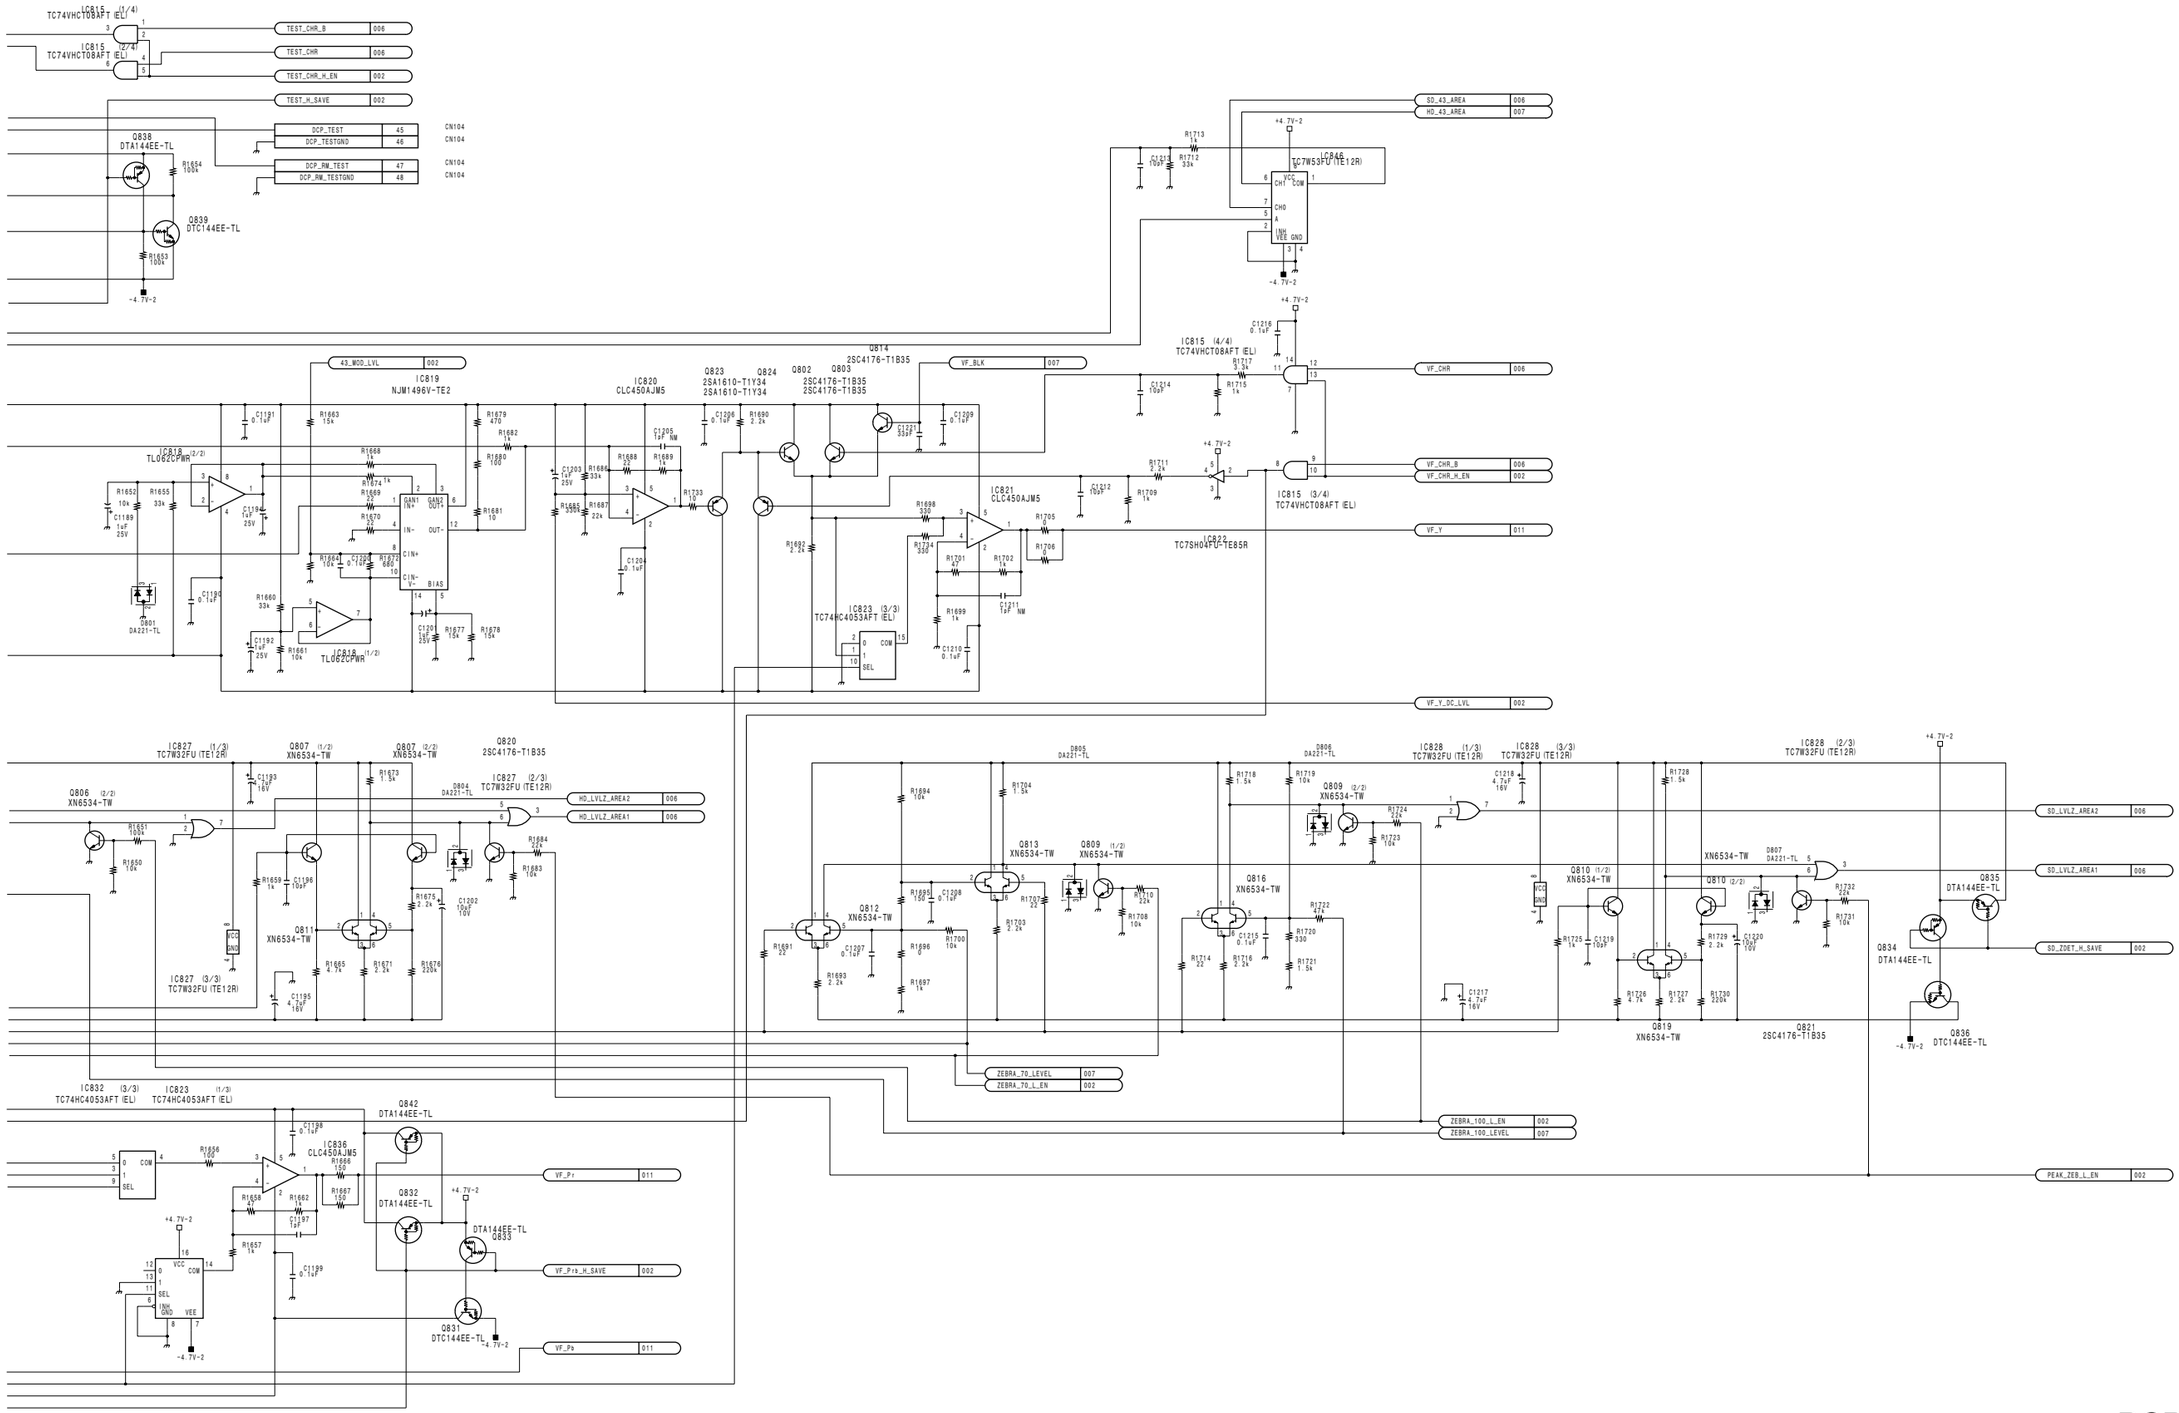

DCP-28 (10/11)
BOARD NO. 1-678-617-12
LOT NO. 083-
HDW-750_DCP-28_003_10

DCP-28 (11/11)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

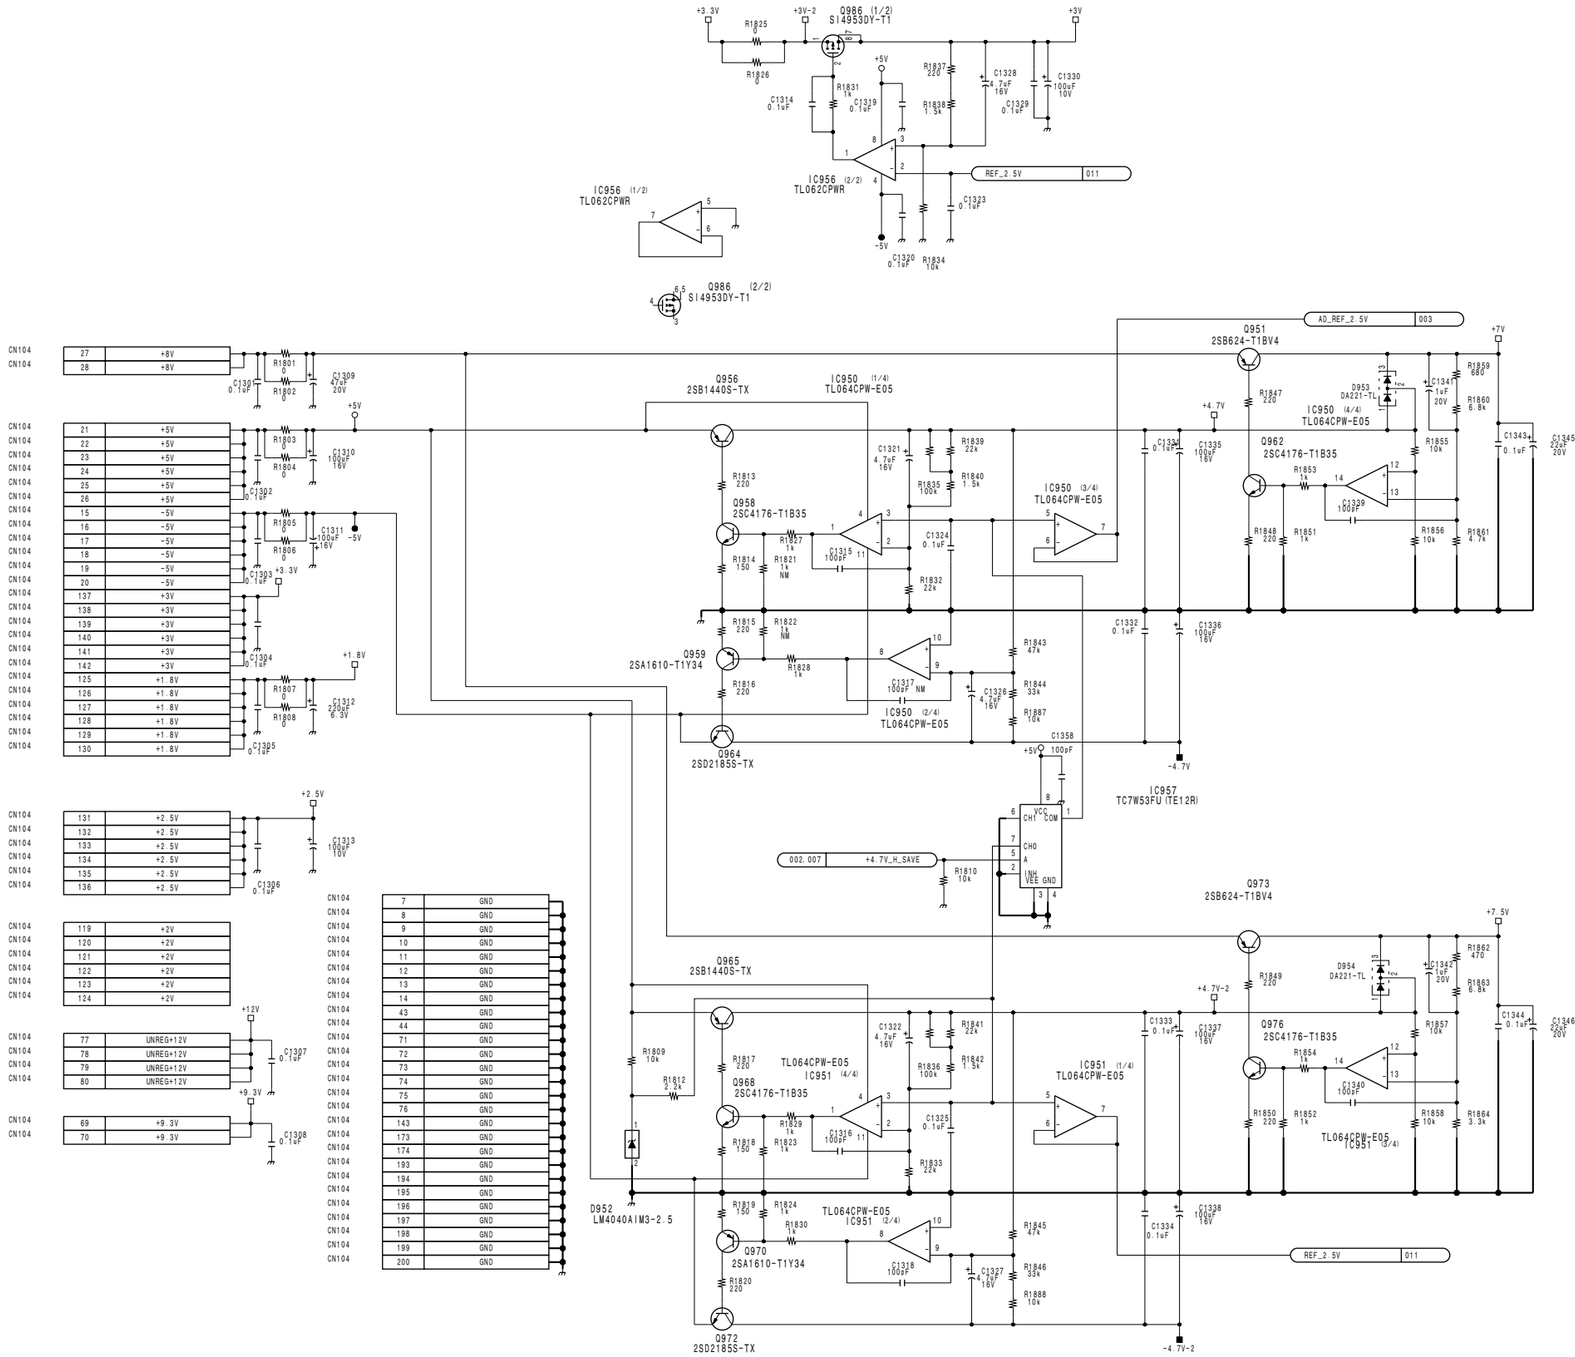

4-30

http://getMANUAL.com

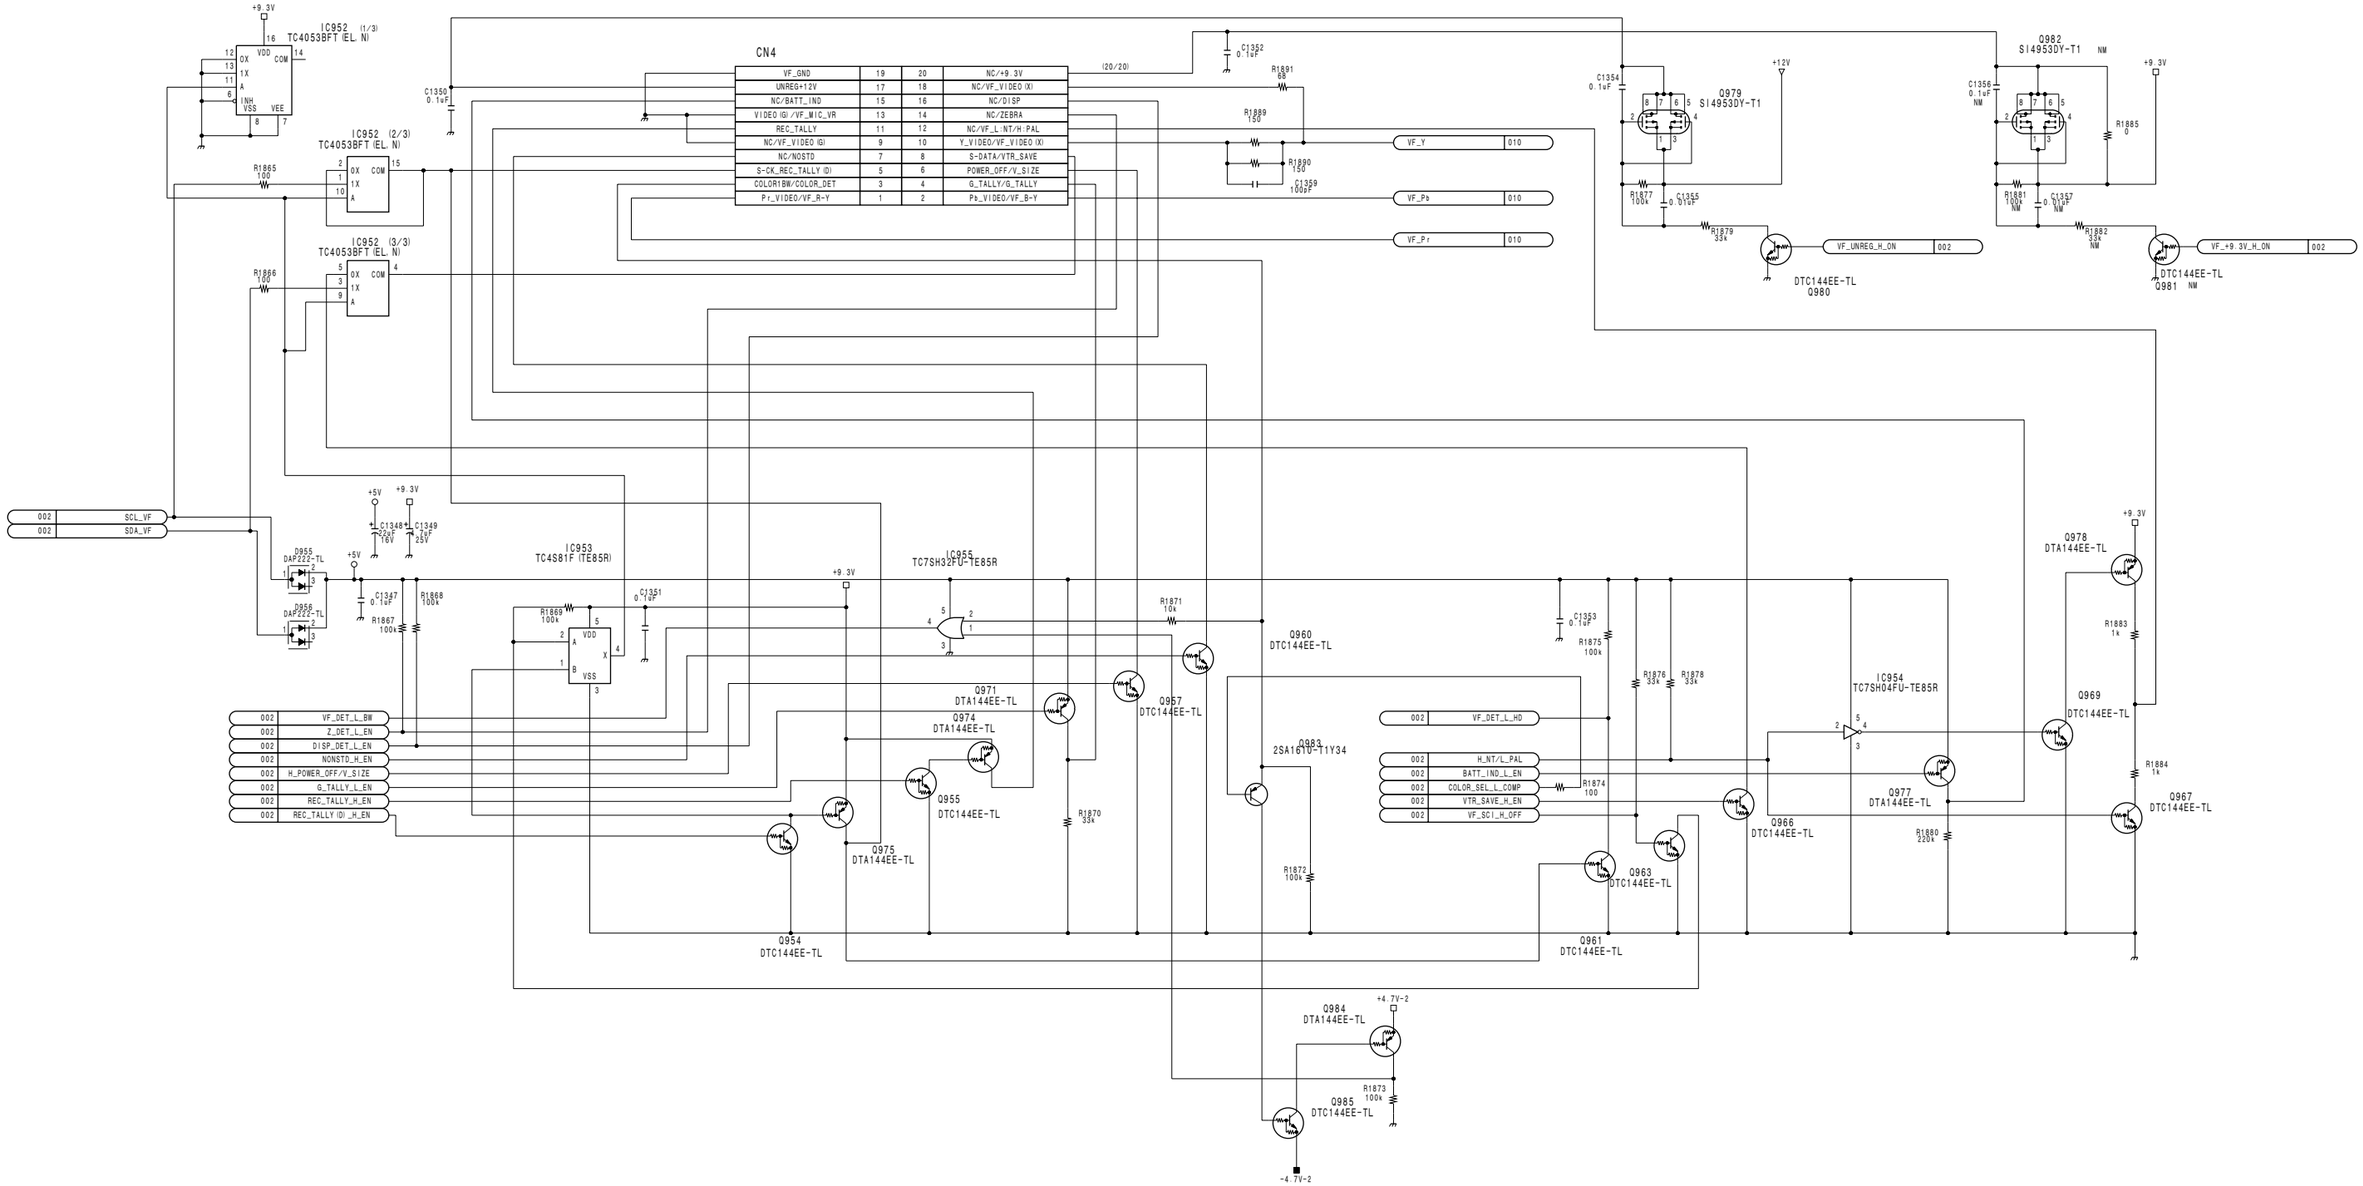

DCP-28 (11/11)

BOARD NO. 1-678-617-12
LOT NO. 083-
HDW-750_DCP-28_003_11

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

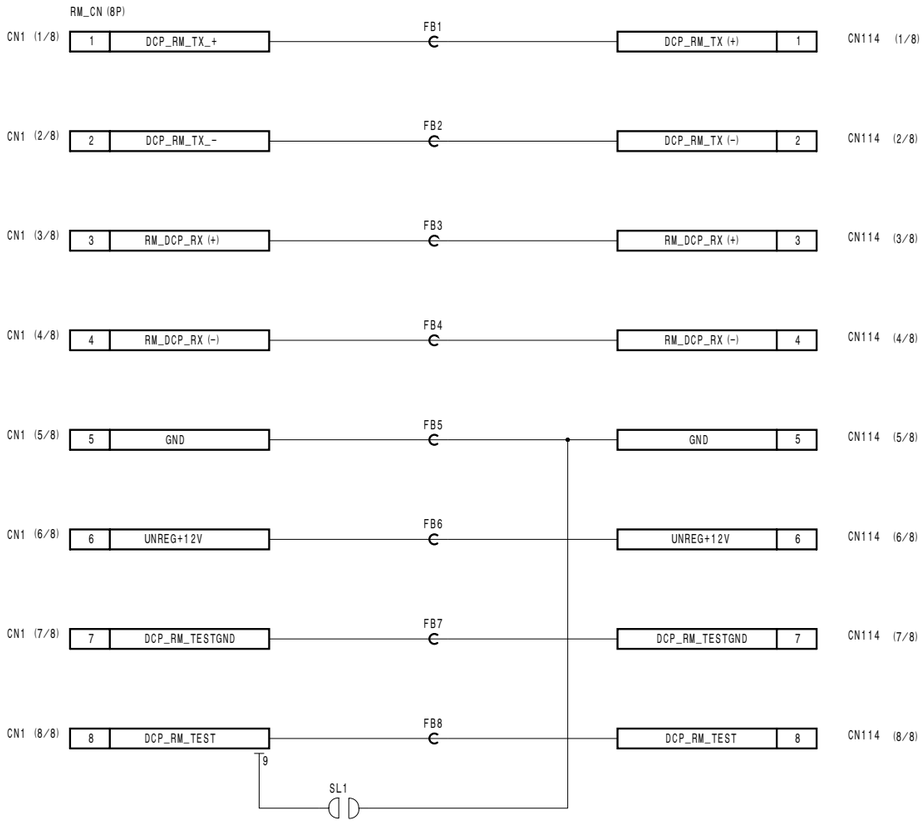

RM-188

BOARD NO. 1-678-624-11
LOT NO. 083-
HDW-750_RM-188_003_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

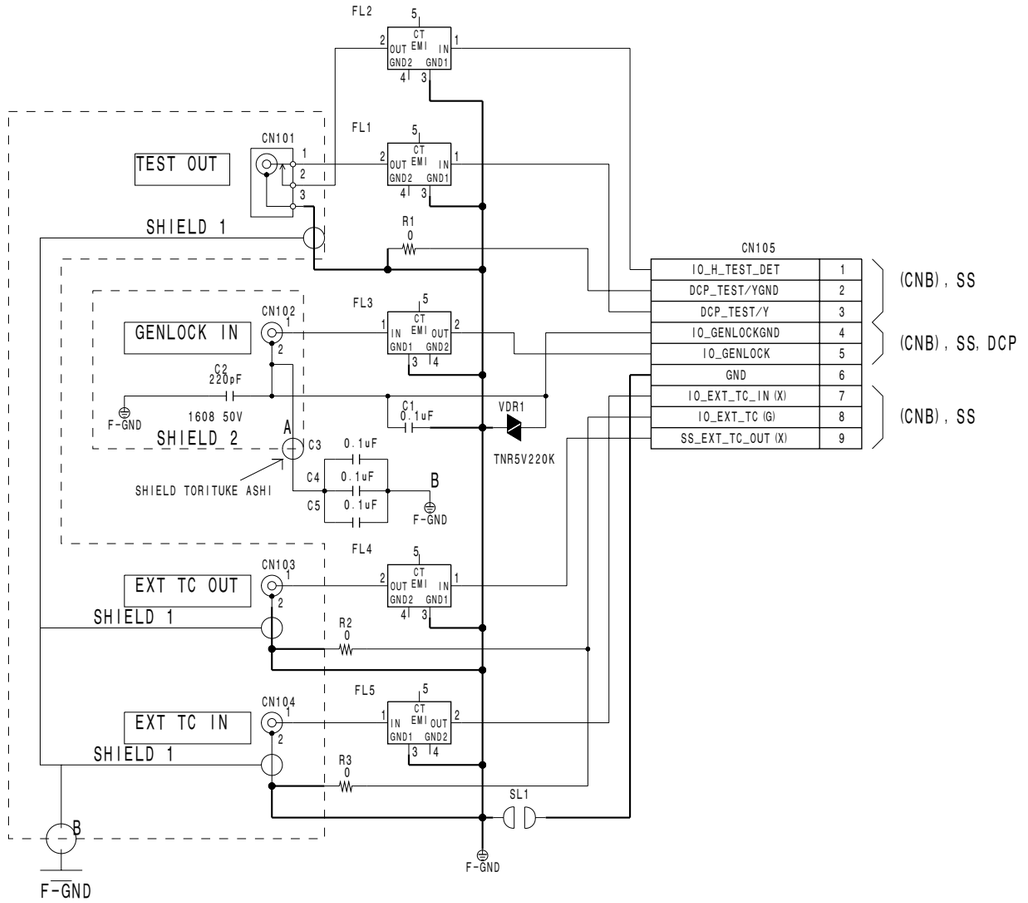

0.1uF=2016 TAIATU 50V

IO-202

BOARD NO. 1-678-749-12
LOT NO. 083-
HDW-750_IO-202_013_1

DC-110 (1/5)

HDW-750 (J) : S/N 70001 and Higher
HKDW-702 (UCJ)

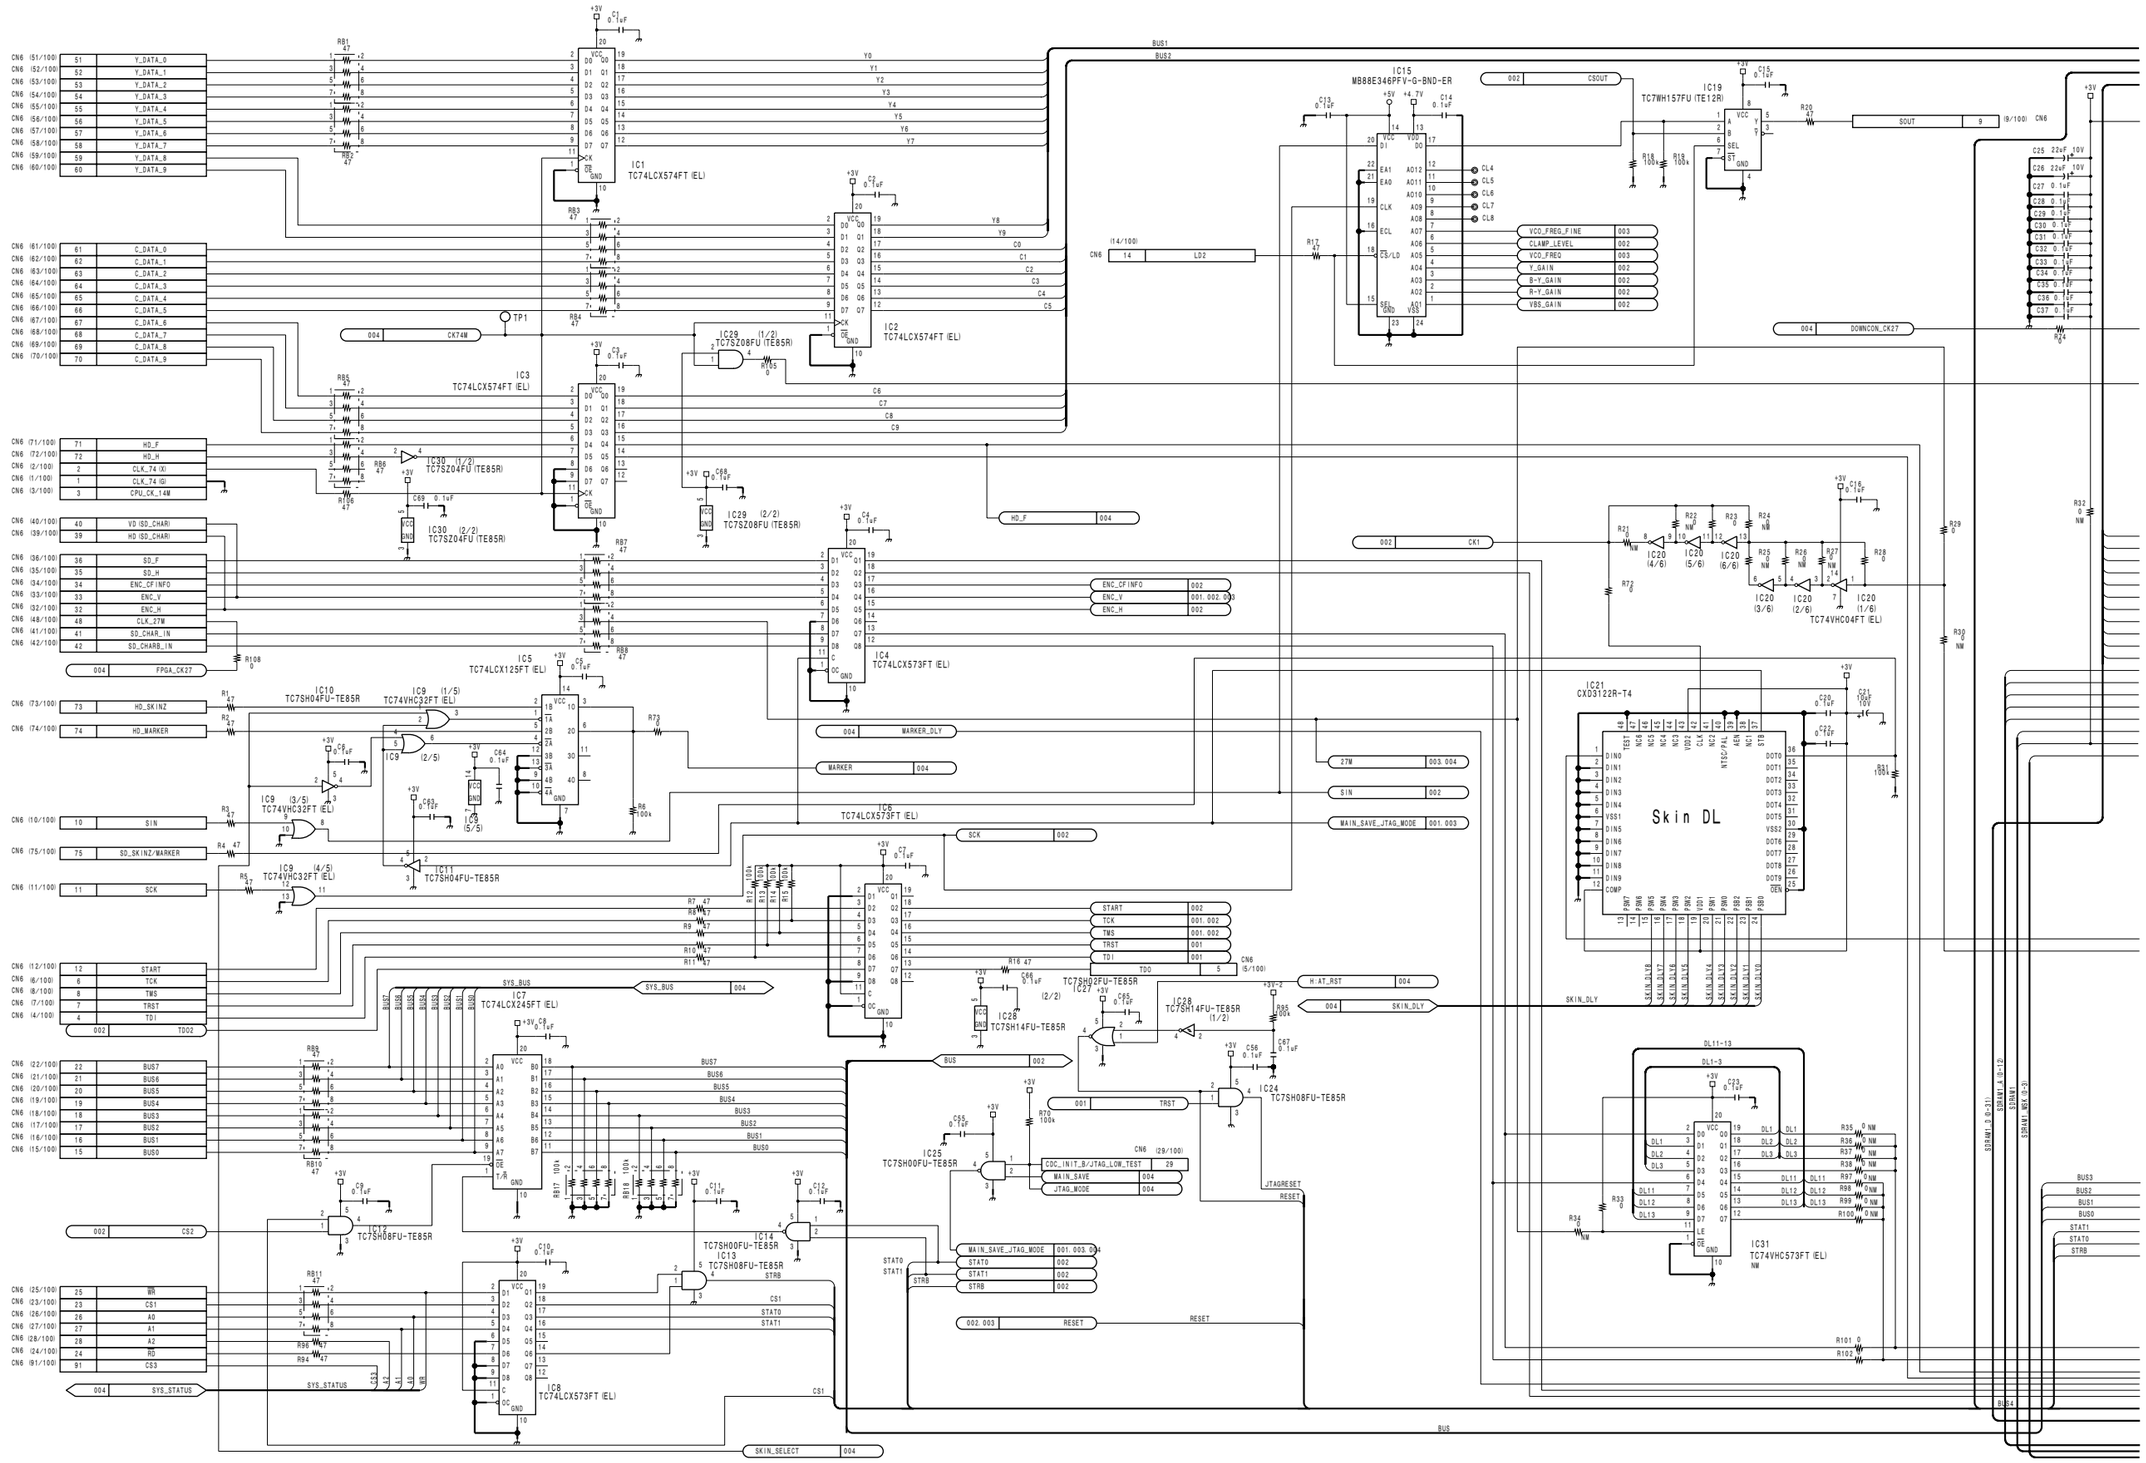

4-34

HDW-750 V2

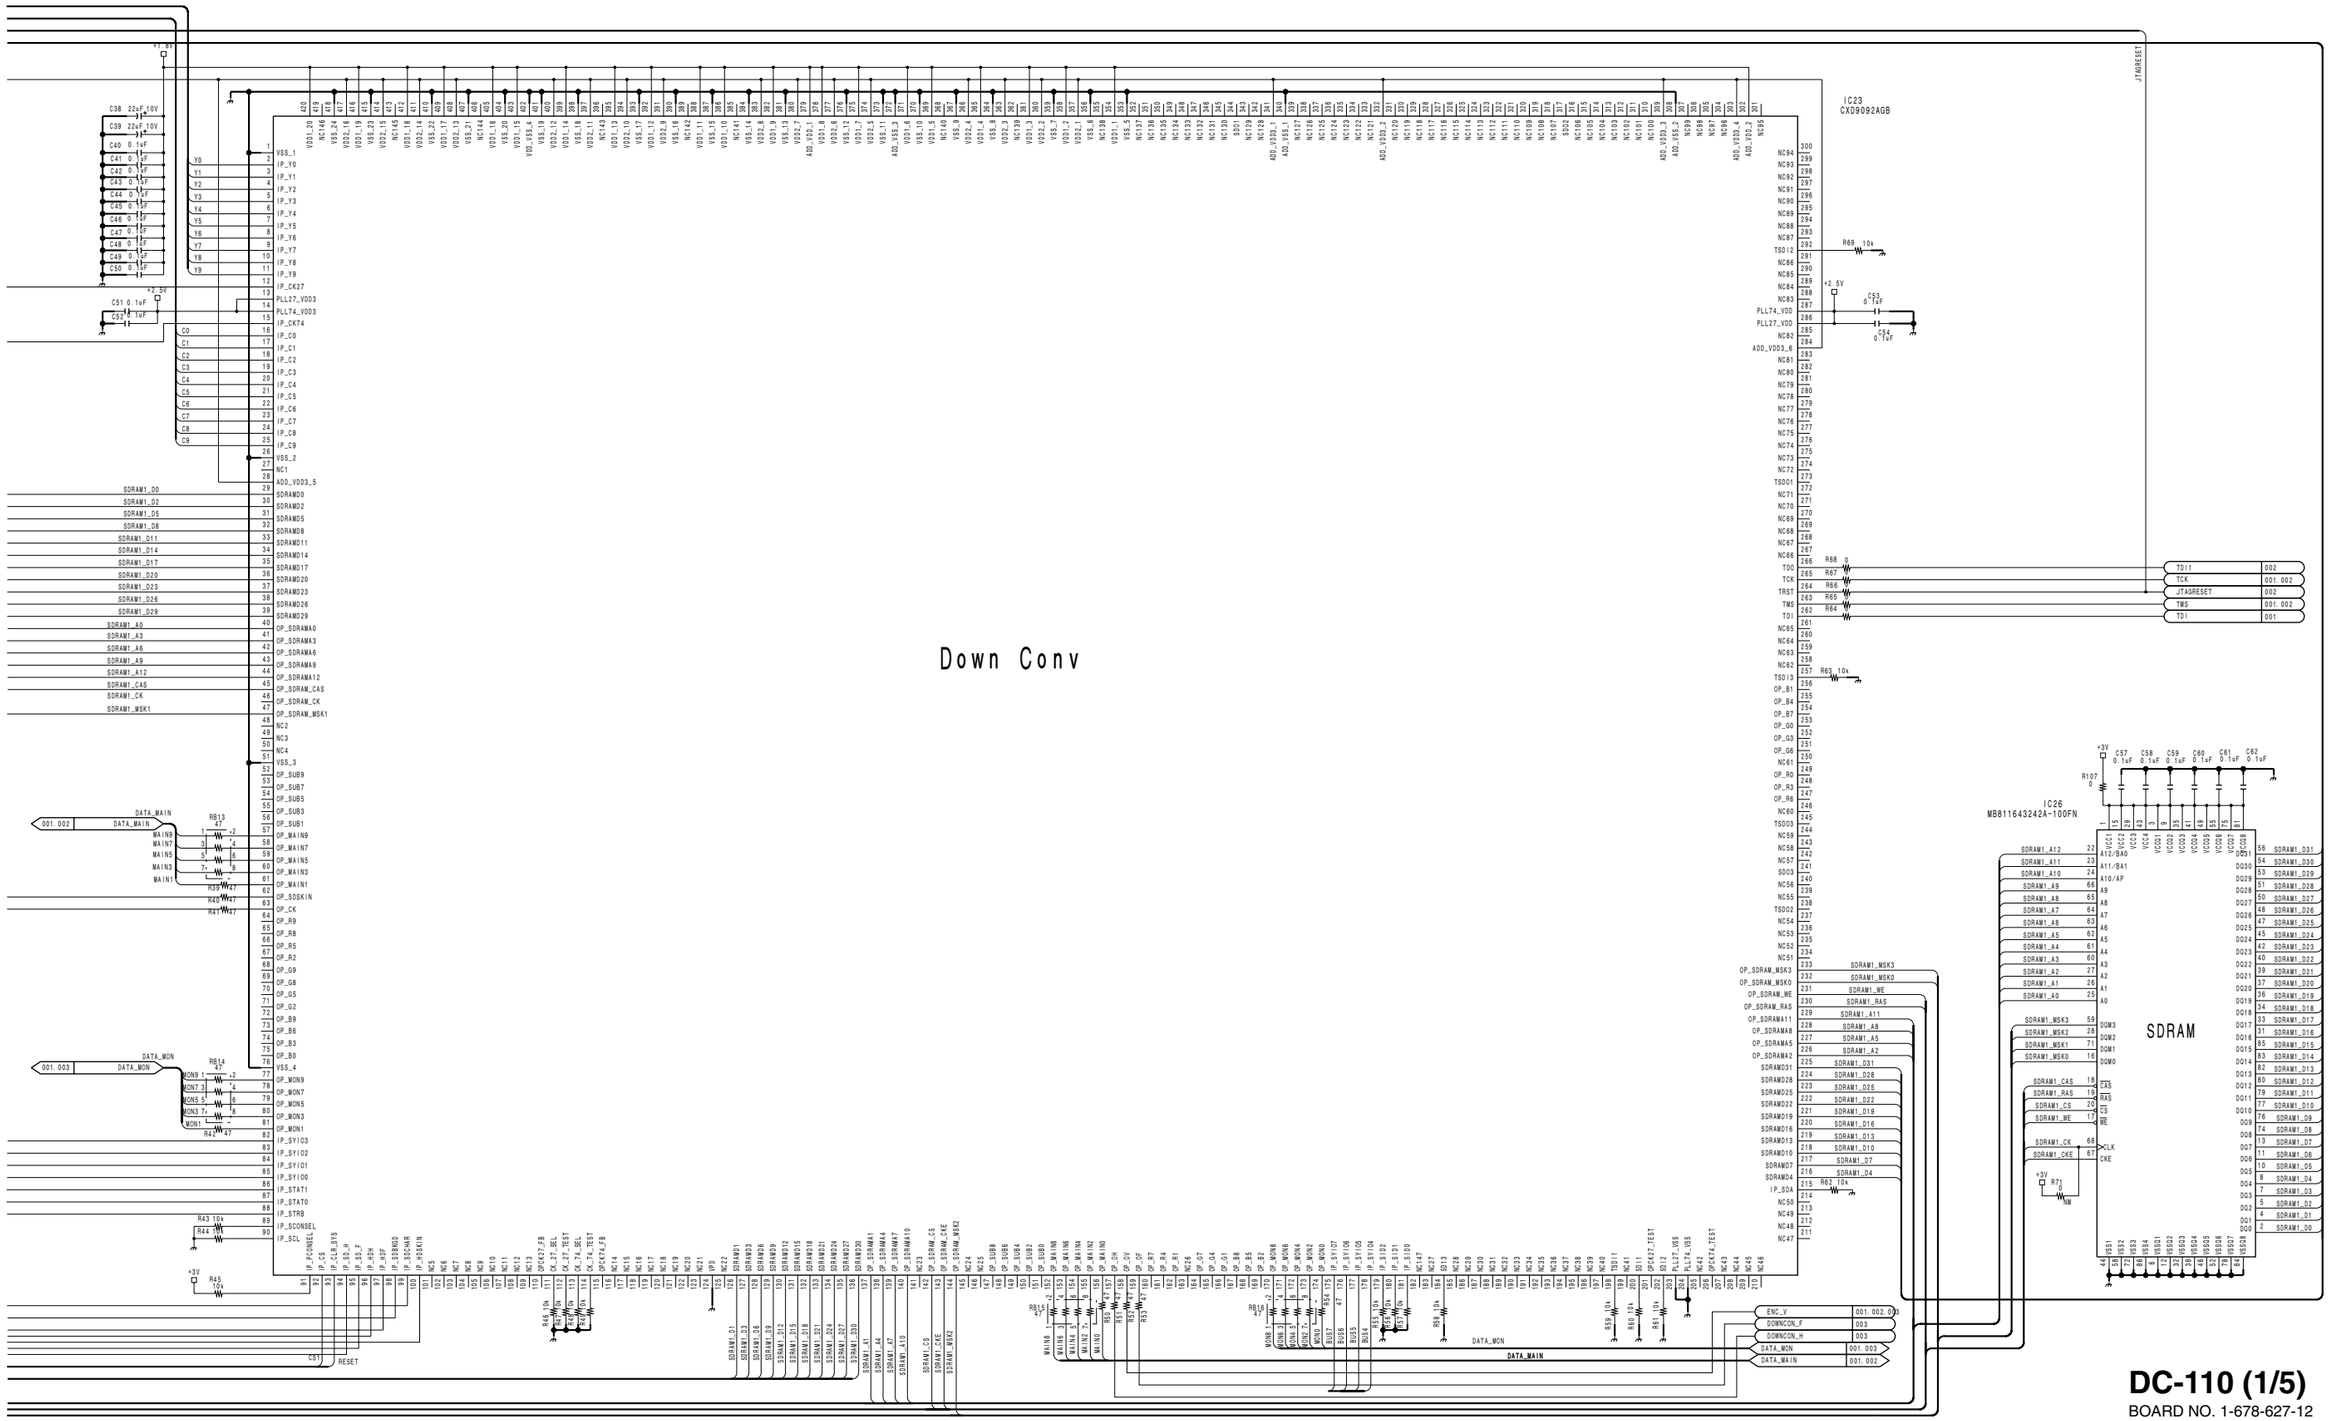

DC-110 (1/5)

BOARD NO. 1-678-627-12

LOT NO. 083-

HDW-750_DC-110_004_1

HDW-750 (J) : S/N 70001 and Higher
HKDW-702 (UCJ)

C-ENC
(Nice)

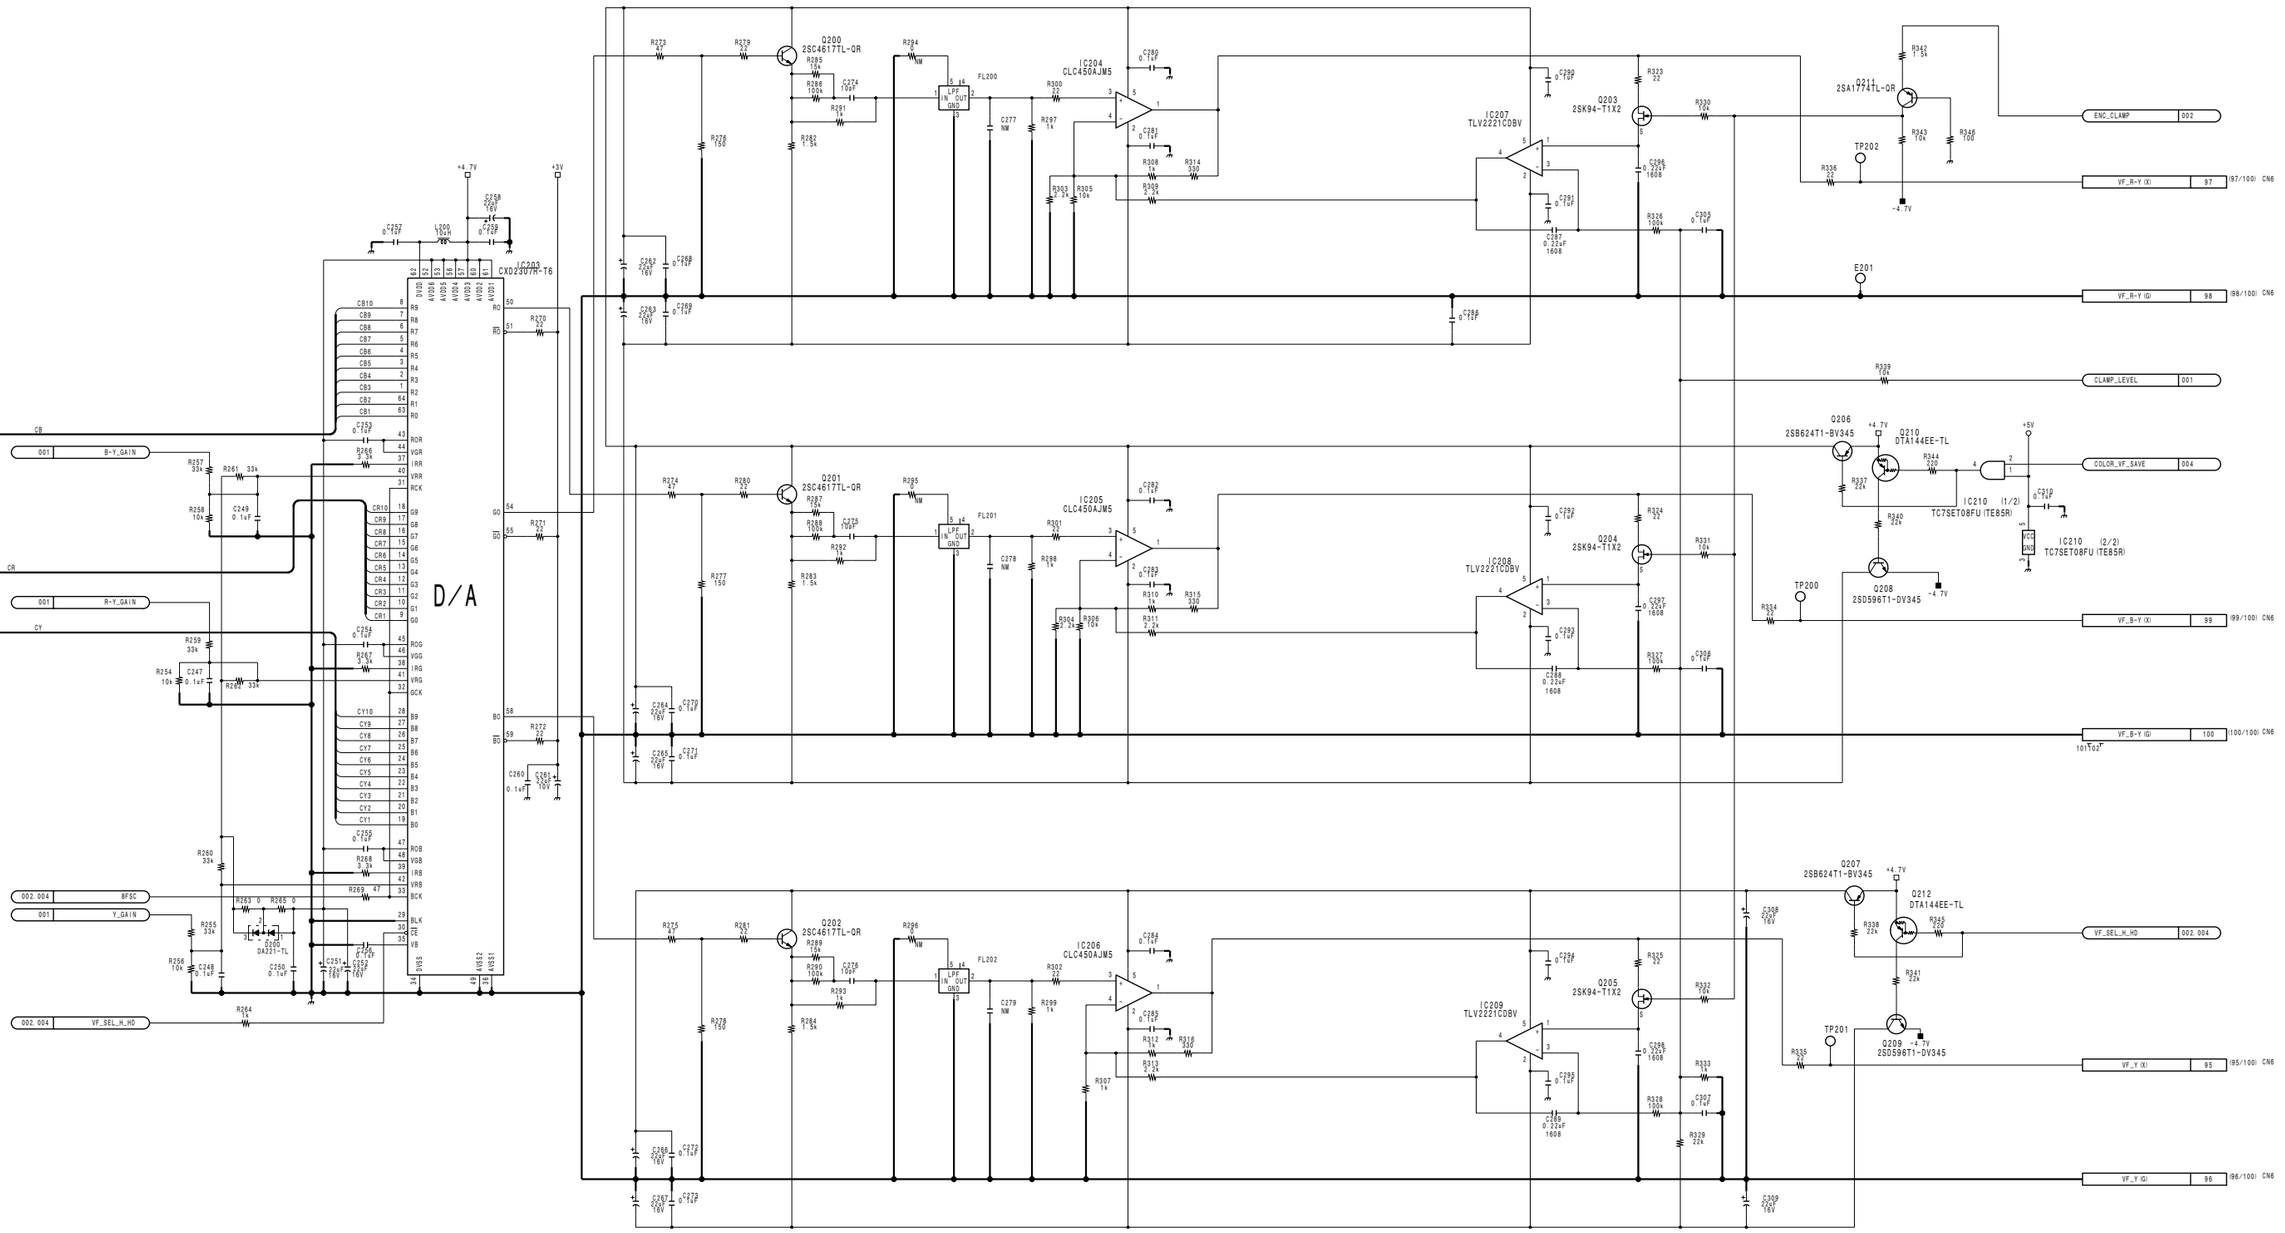

DC-110 (2/5)

BOARD NO. 1-678-627-12
LOT NO. 083-

HDW-750_DC-110_004_2

HDW-750 (J) : S/N 70001 and Higher
HKDW-702 (UCJ)

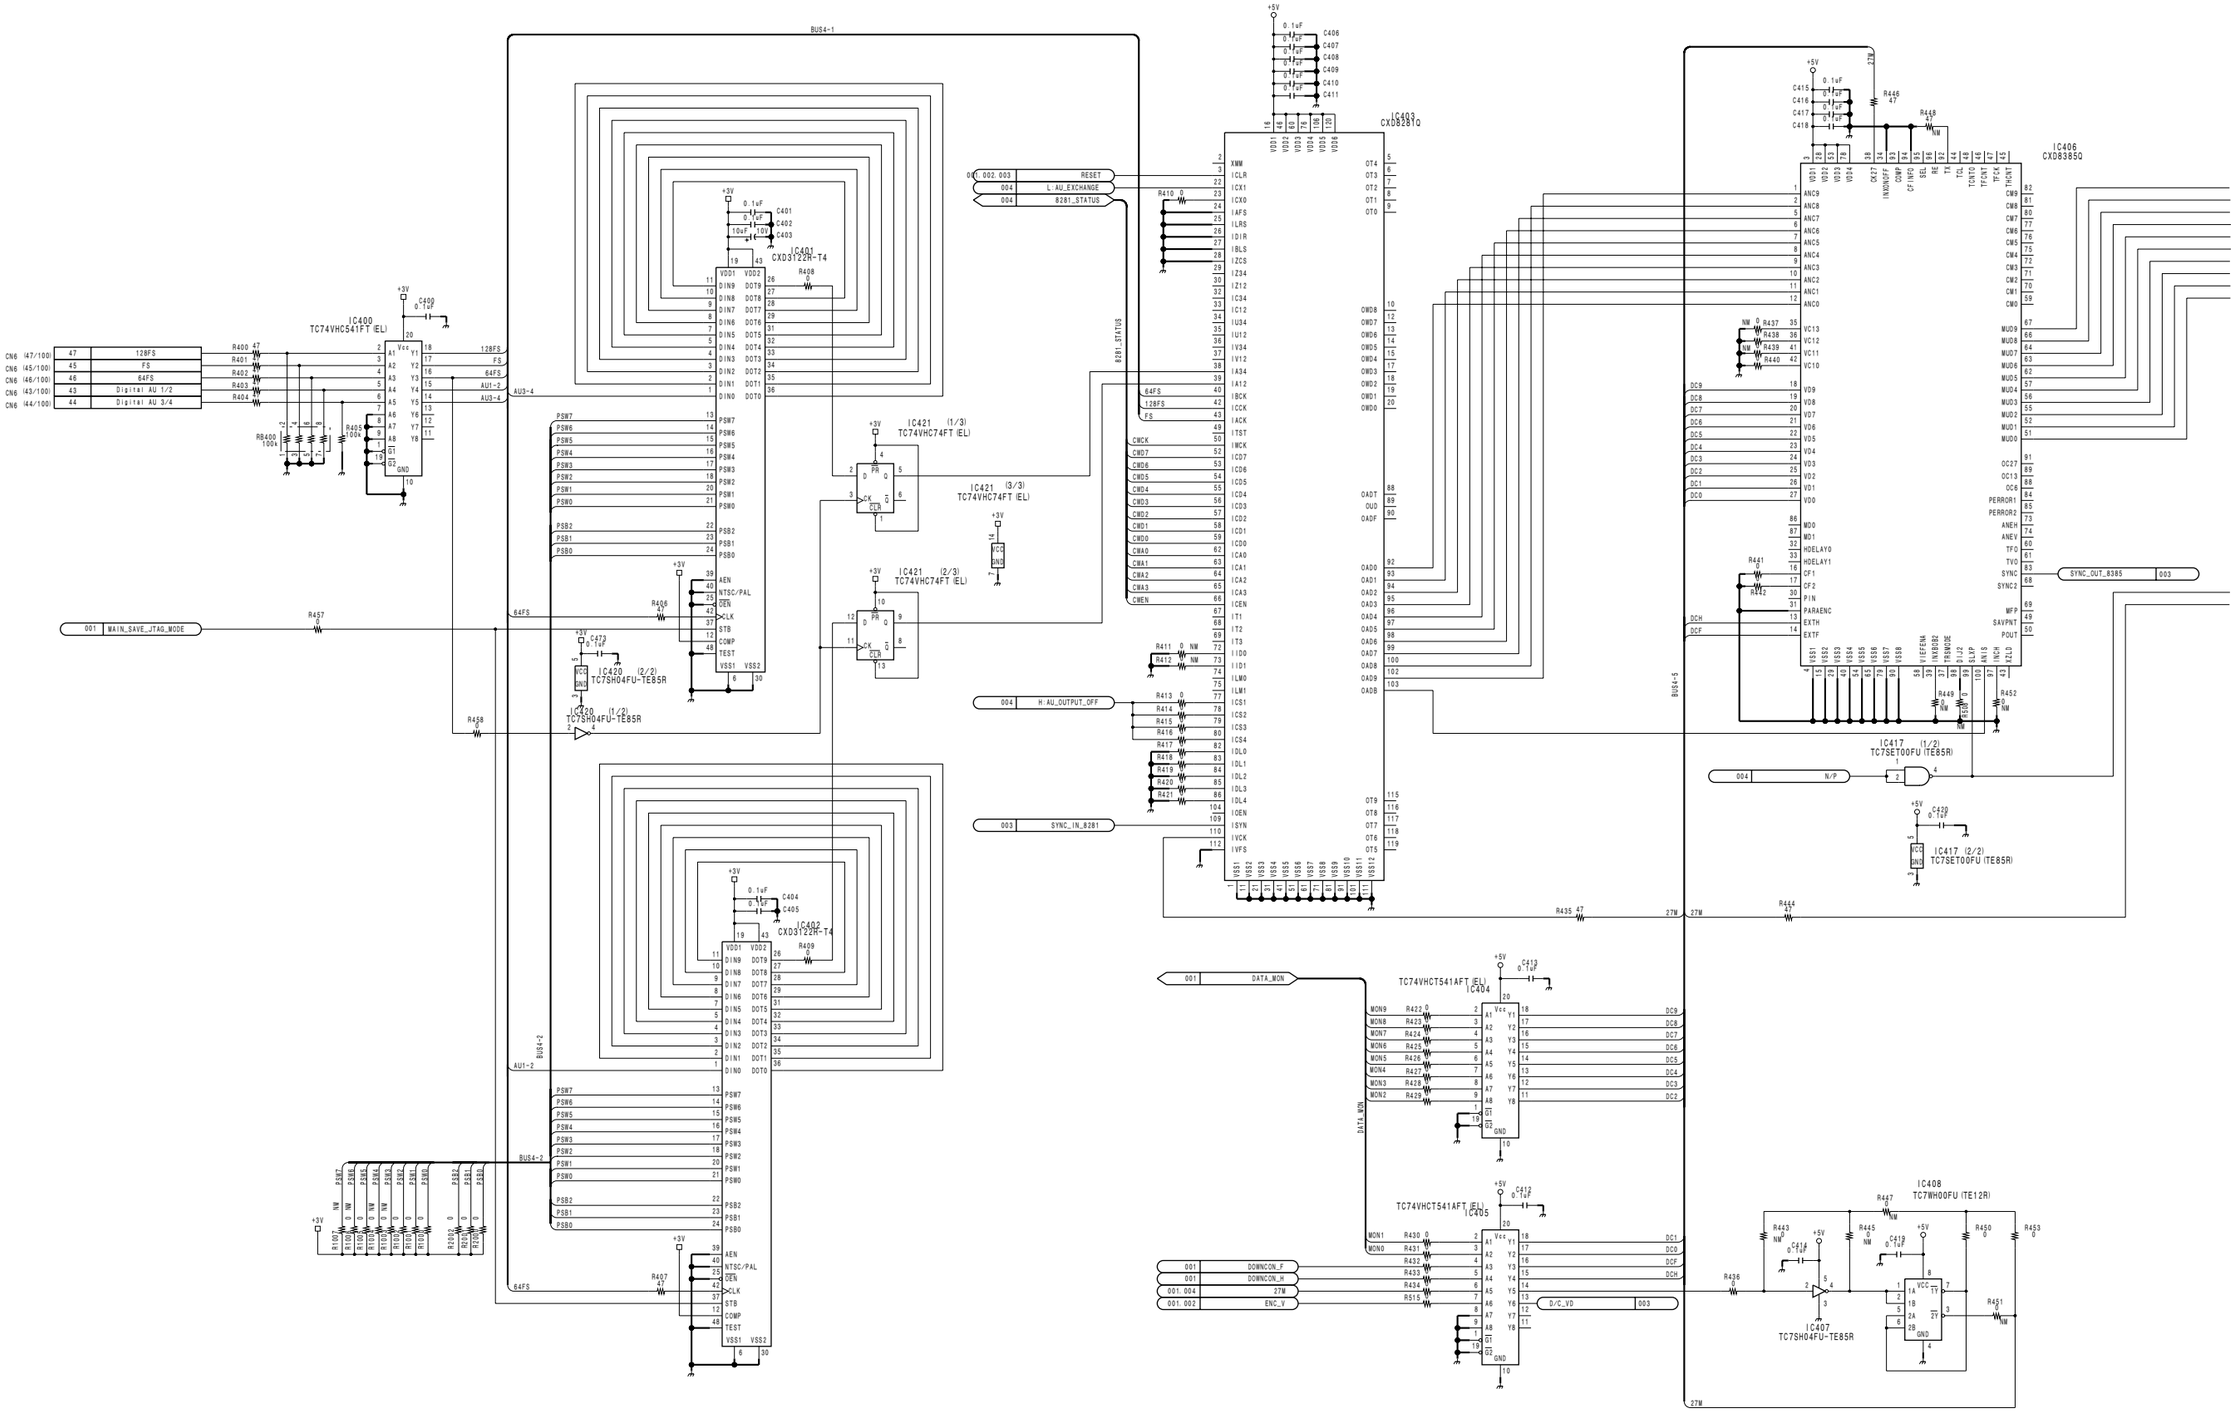

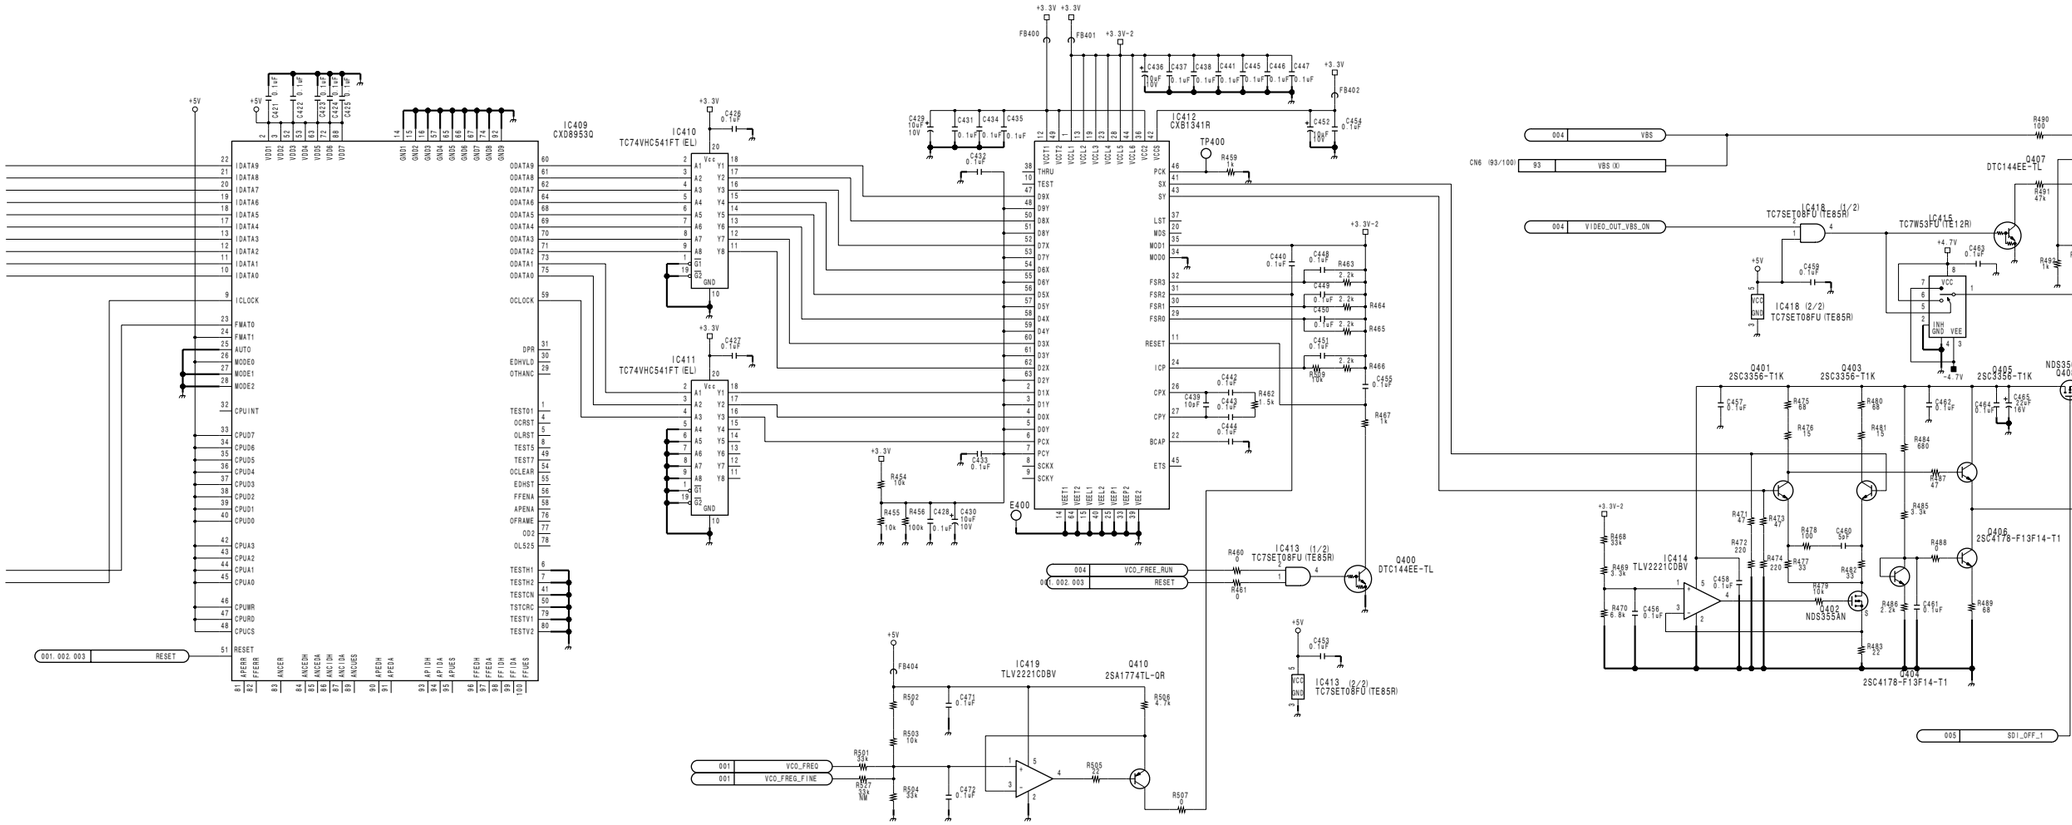

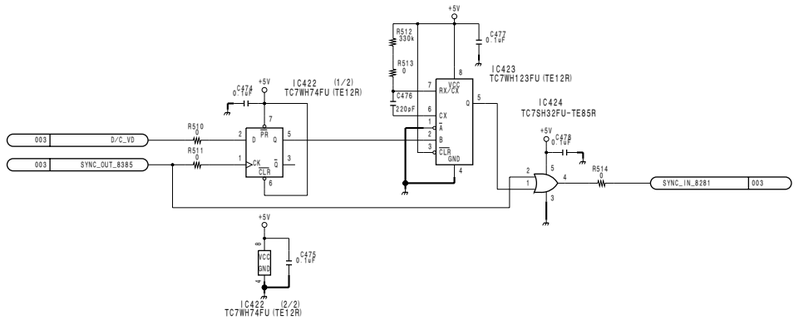

DC-110 (3/5)

BOARD NO. 1-678-627-12
LOT NO. 083-
HDW-750_DC-110_004_3

DC-110 (4/5)

HDW-750 (J) : S/N 70001 and Higher
HKDW-702 (UCJ)

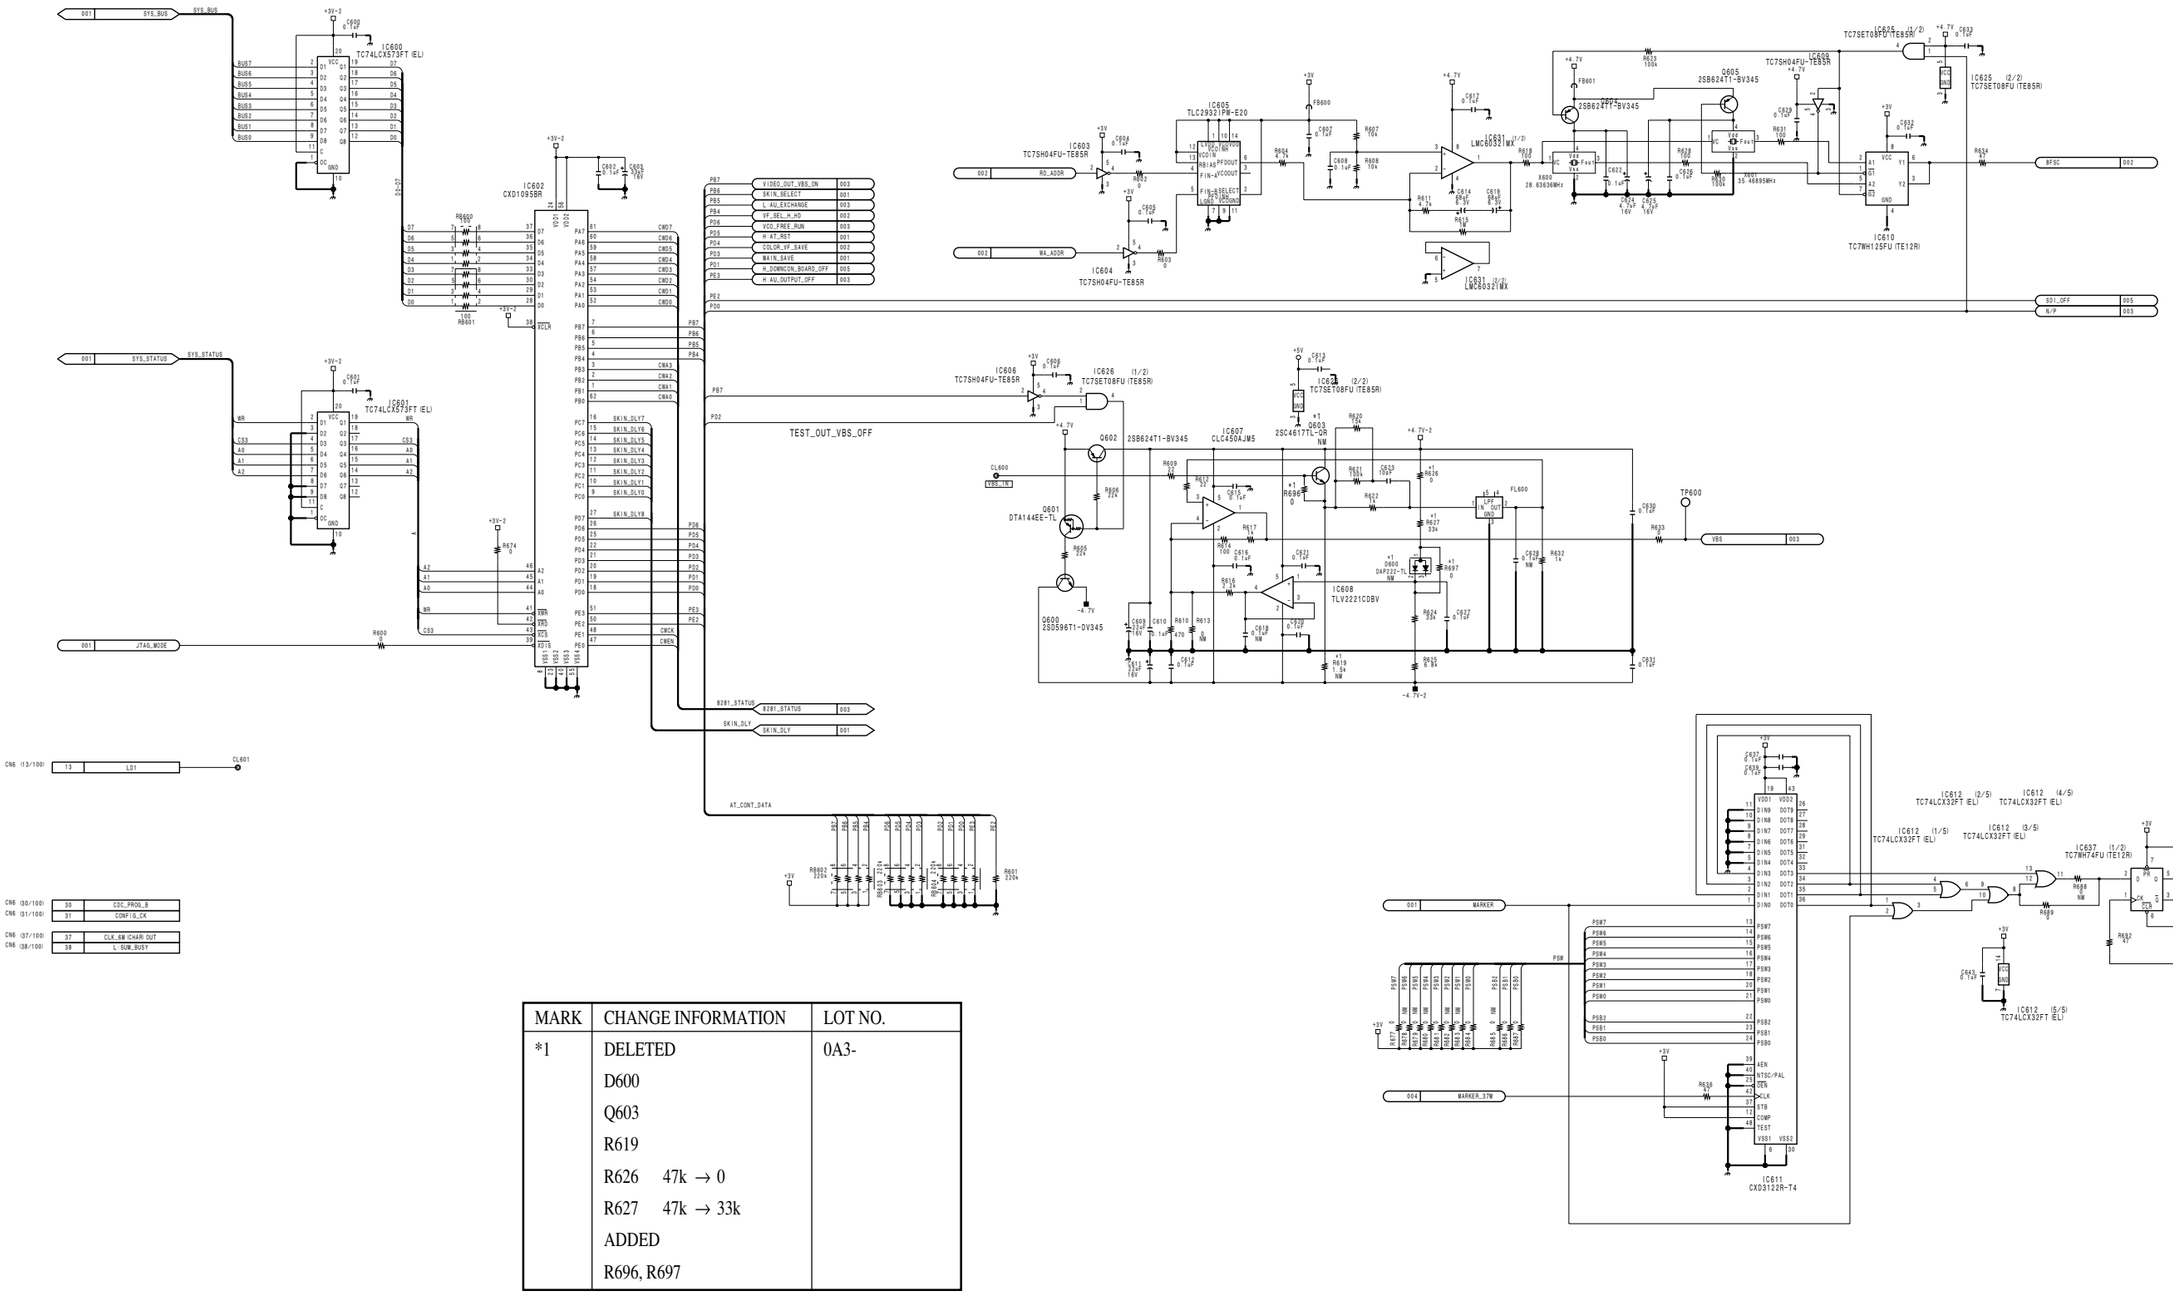

MARK	CHANGE INFORMATION	LOT NO.
*1	DELETED	0A3-
	D600	
	Q603	
	R619	
	R626 47k → 0	
	R627 47k → 33k	
	ADDED	
	R696, R697	

4-40

http://getMANUAL.com

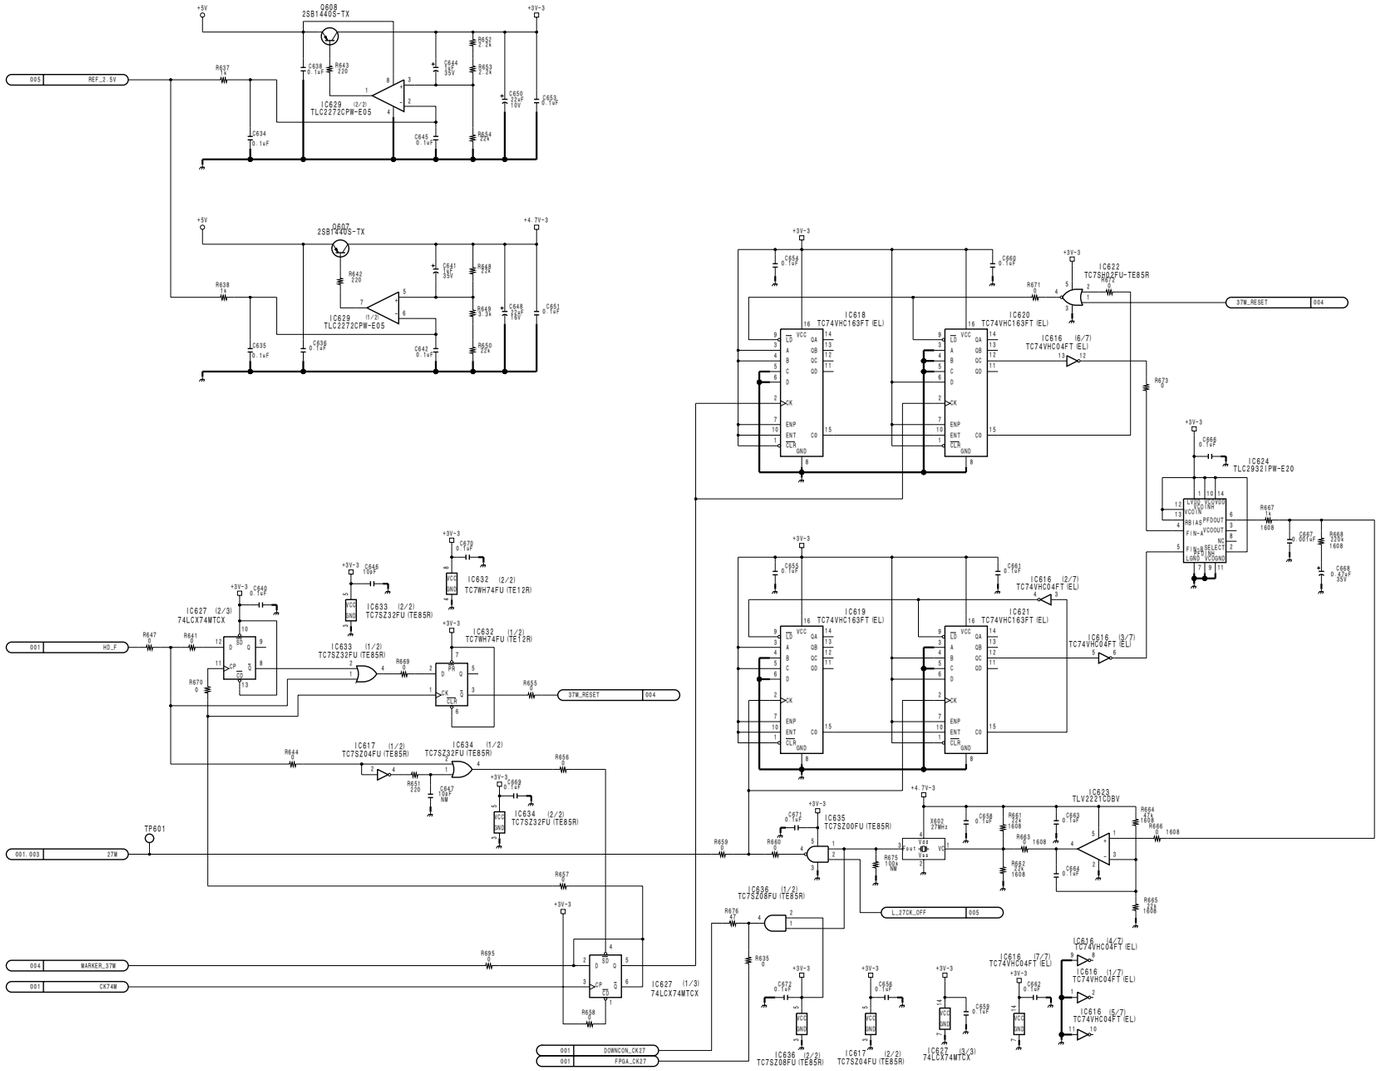

DC-110 (4/5)

BOARD NO. 1-678-627-12
LOT NO. 083-

HDW-750_DC-110_004_4

DC-110 (5/5)

HDW-750 (J) : S/N 70001 and Higher
HKDW-702 (UCJ)

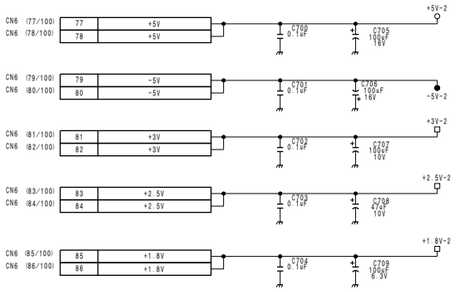

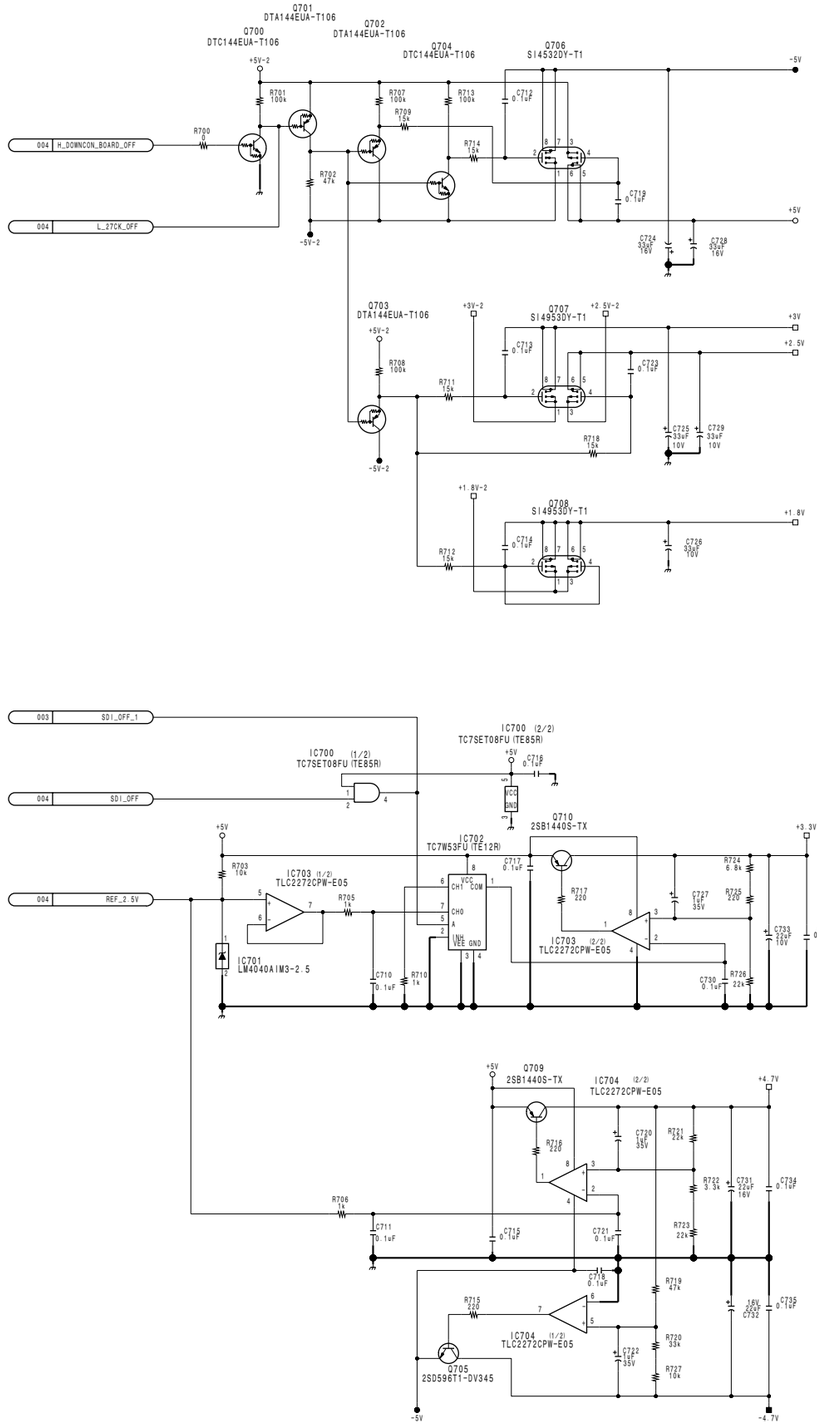

DC-110 (5/5)
BOARD NO. 1-678-627-12
LOT NO. 083-
HDW-750_DC-110_004_5

AT-143 (1/2)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

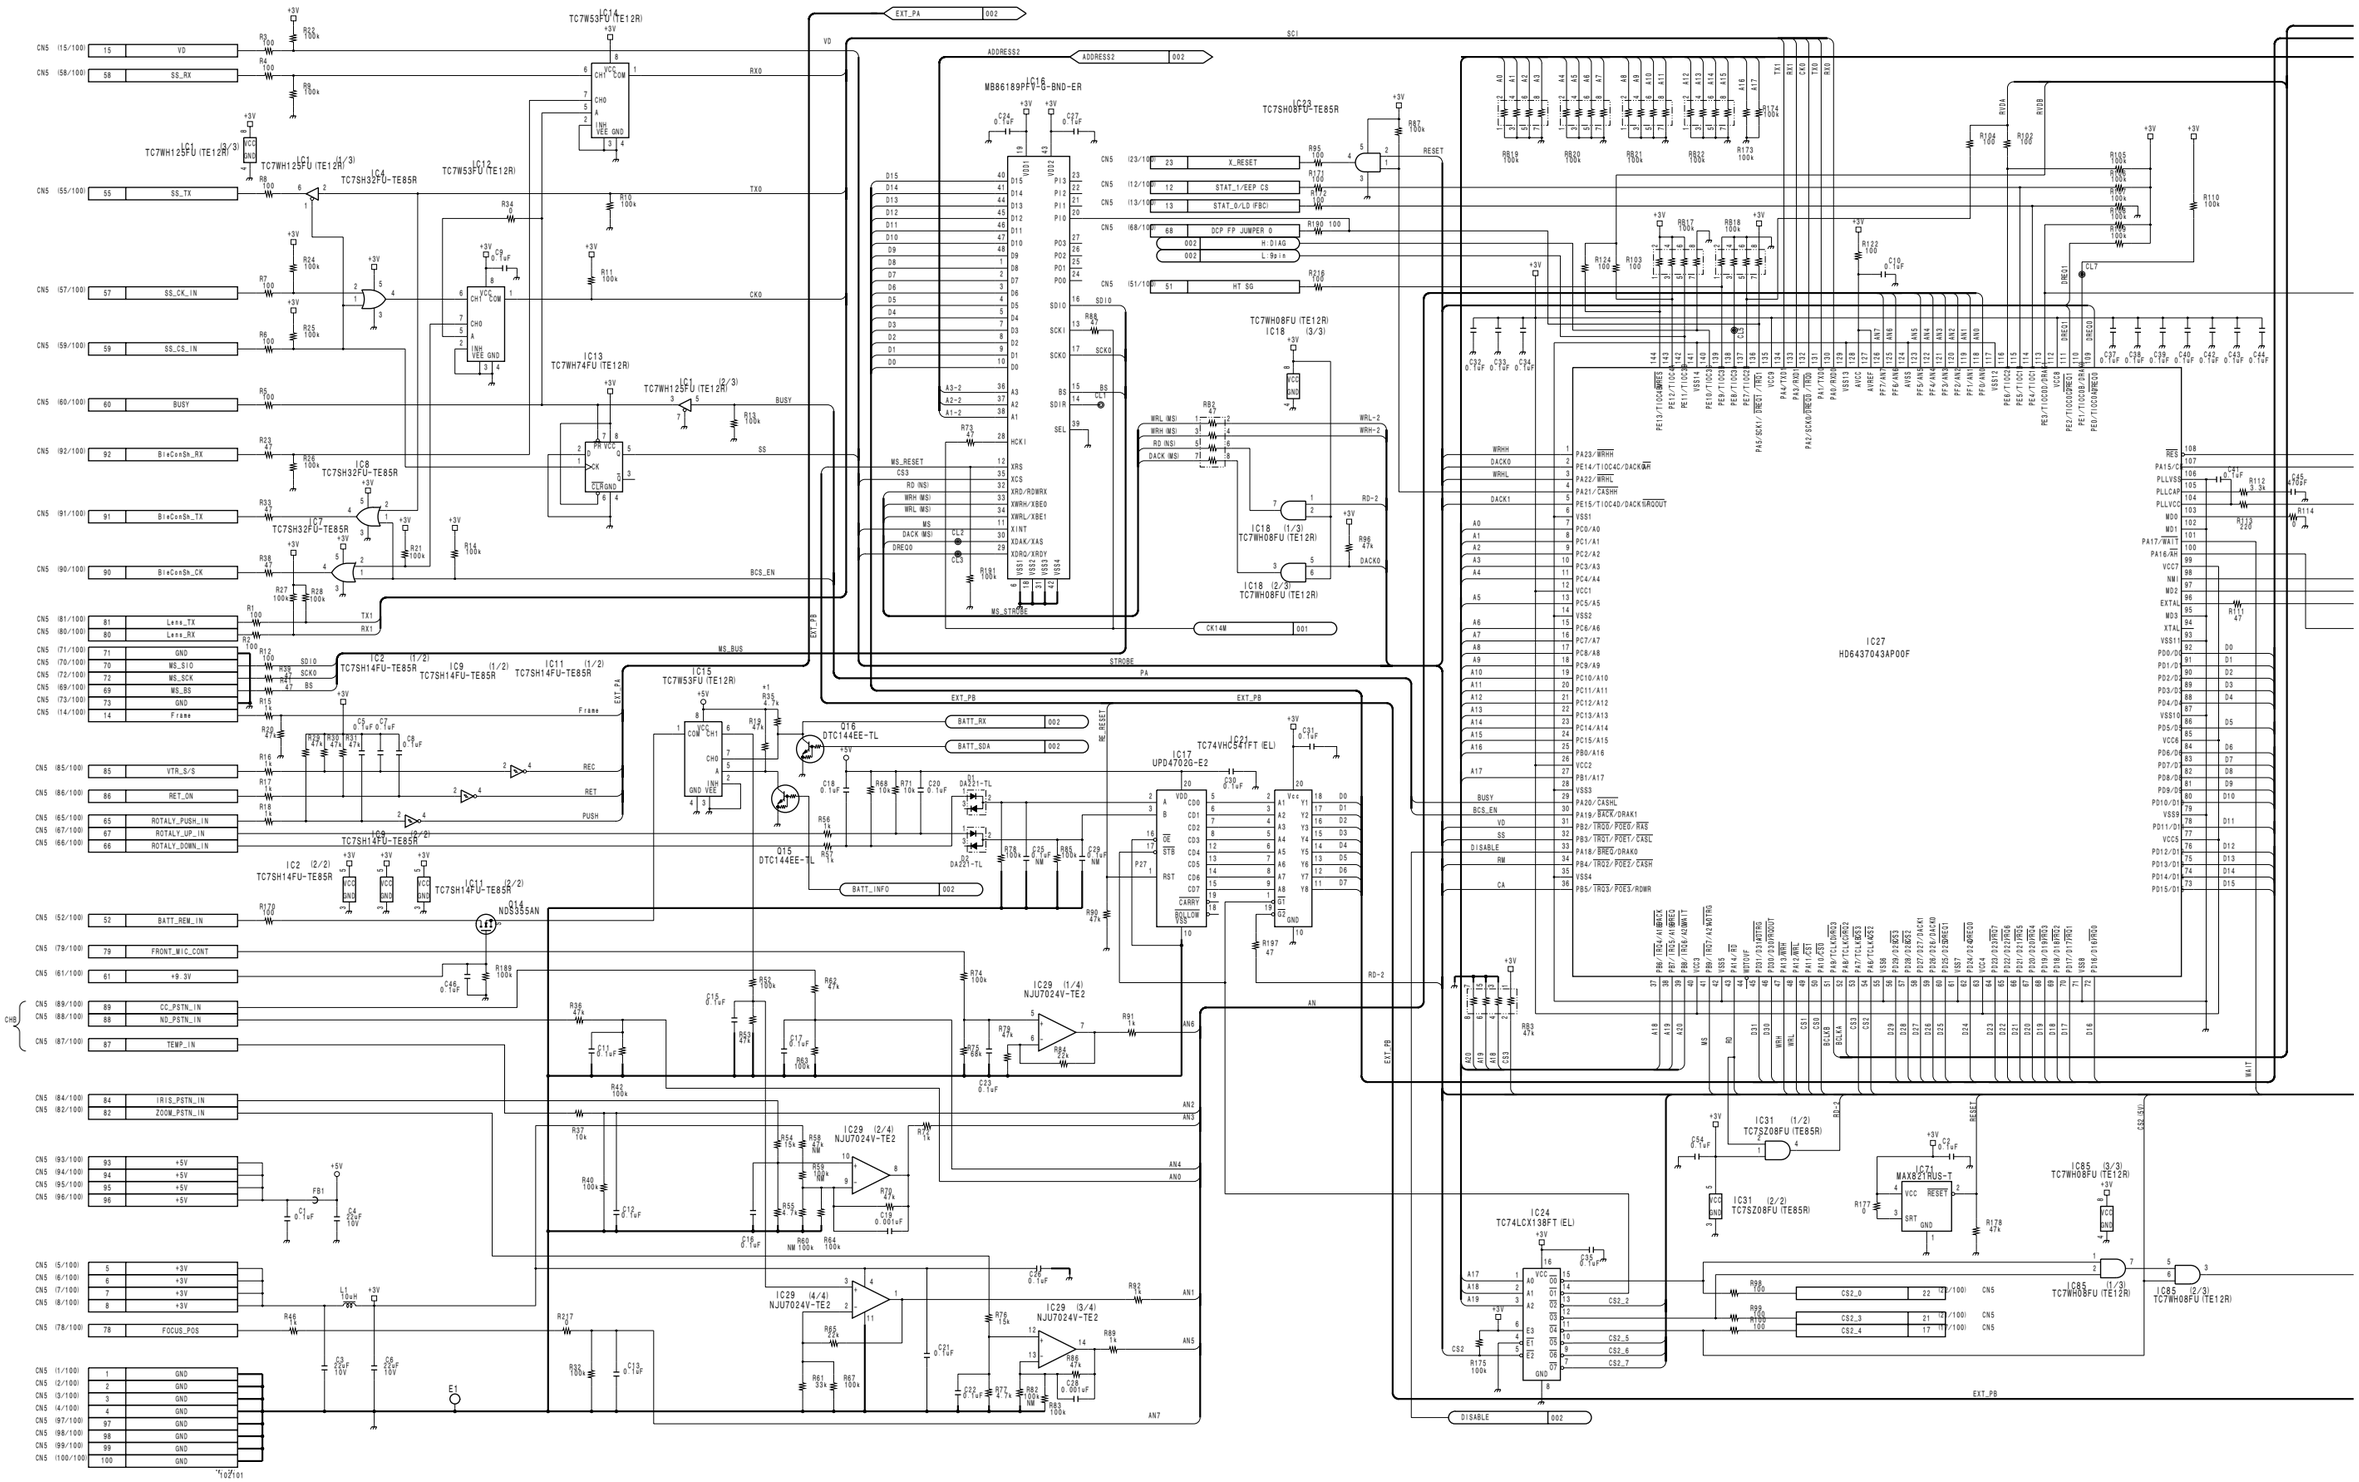

4-44

MARK	CHANGE INFORMATION	LOT NO.
*1	C48, C51 18p → 15P R35 47k → 4.7k	112-

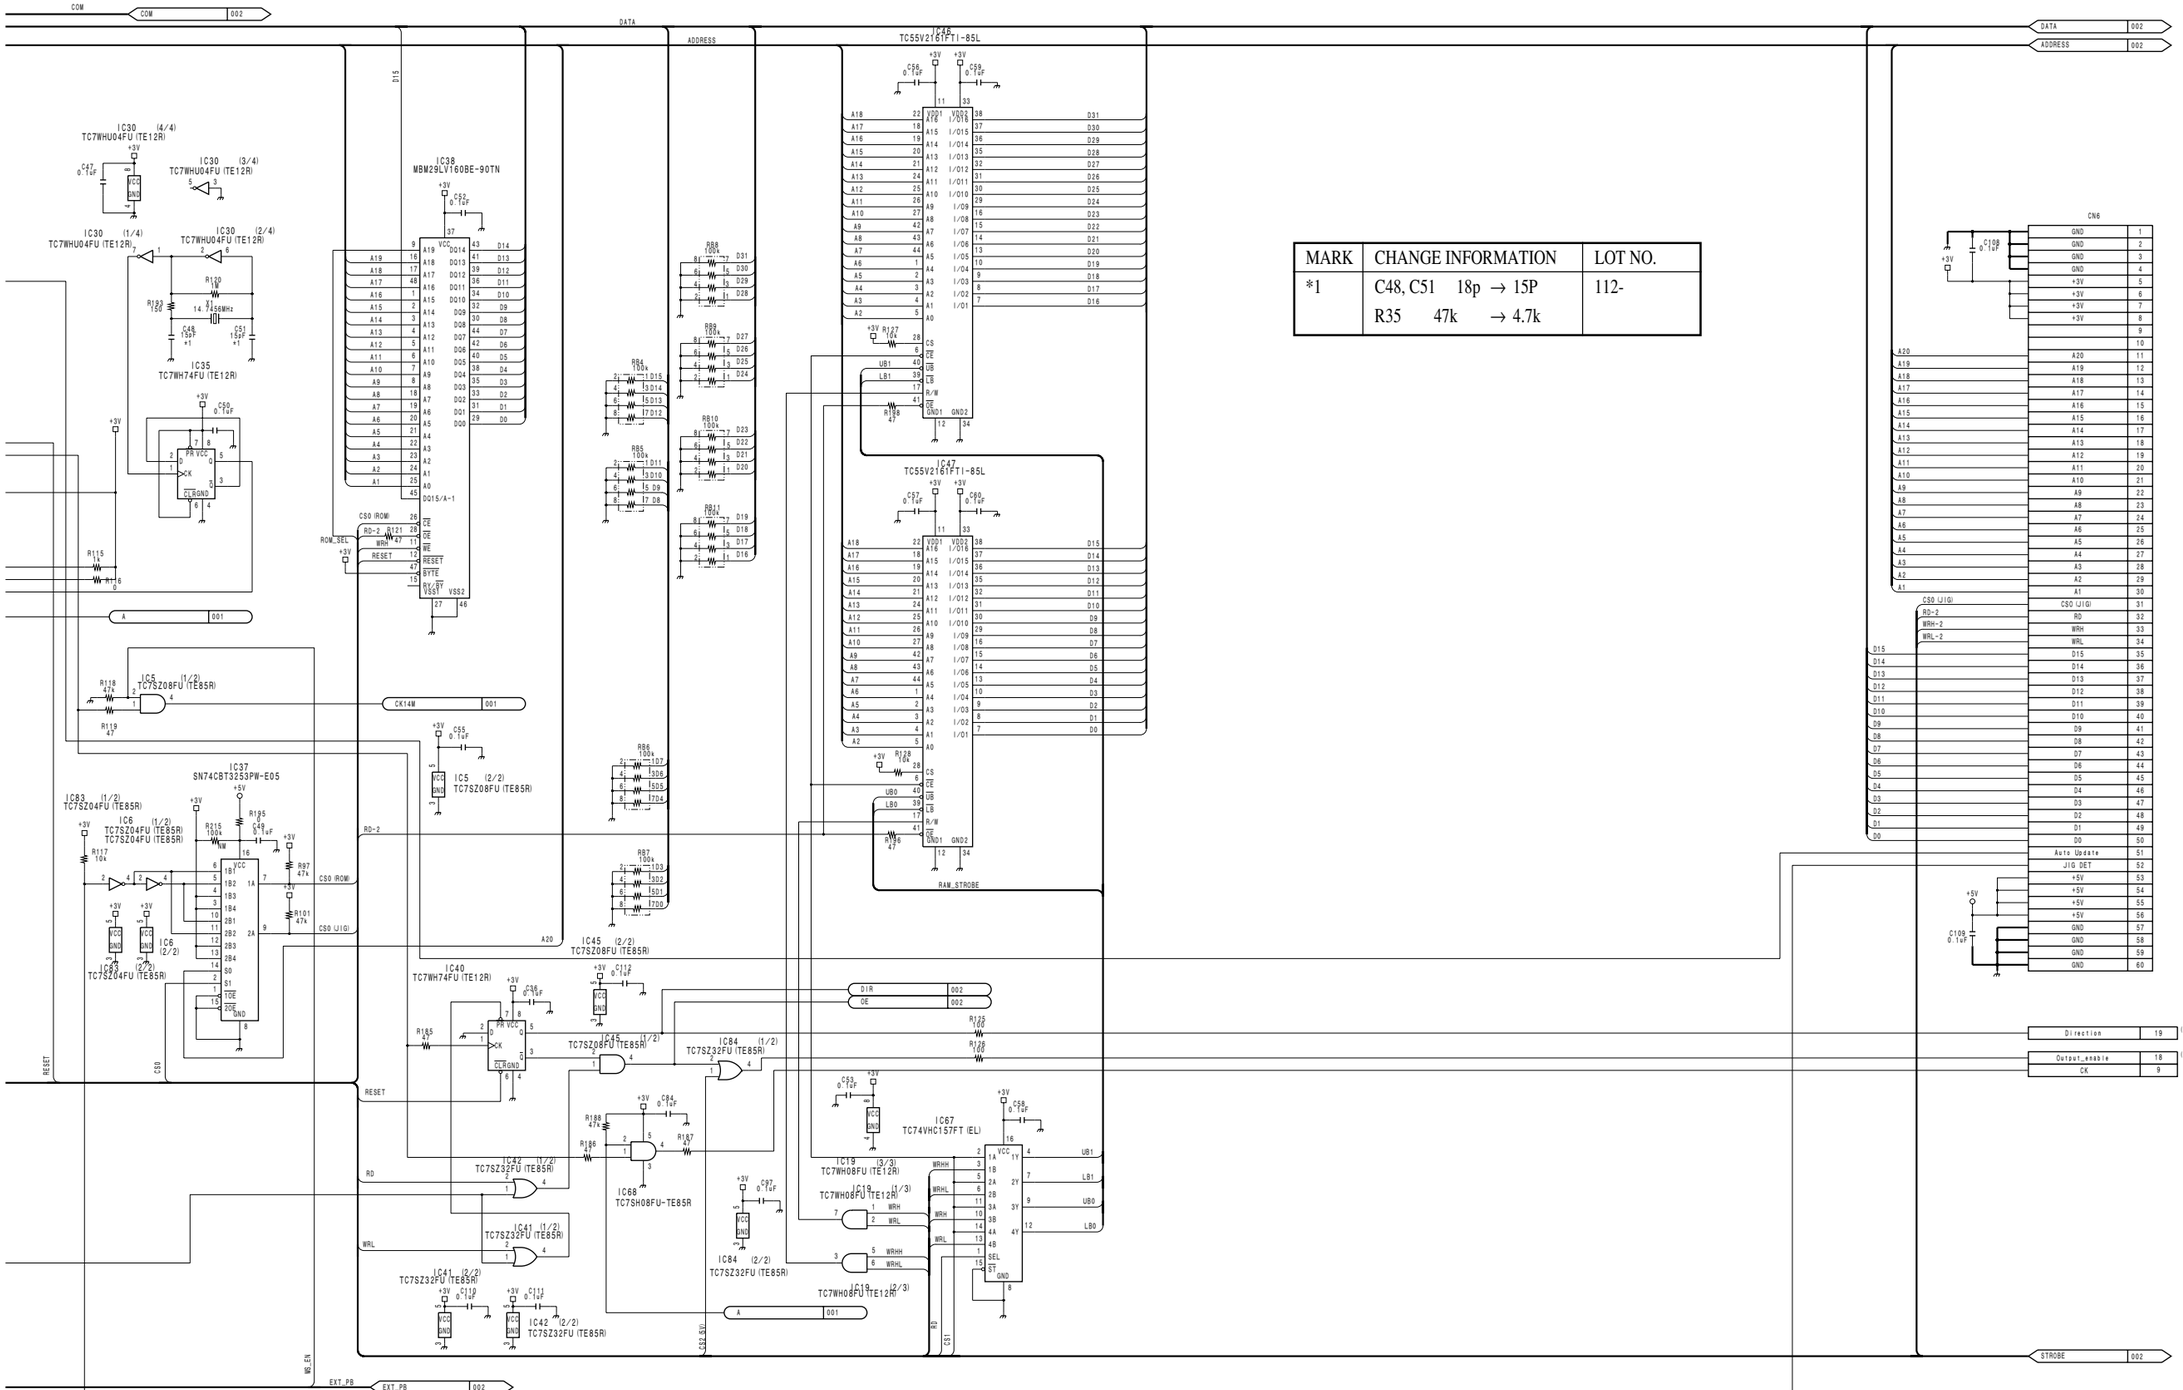

1-678-621-12
0-178-397-02
A-8326-023-A
A-0407-114-A

AT-143 (1/2)

BOARD NO. 1-678-621-11, 12
LOT NO. 083-

HDW-750_AT-143_002_1

AT-143 (2/2)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

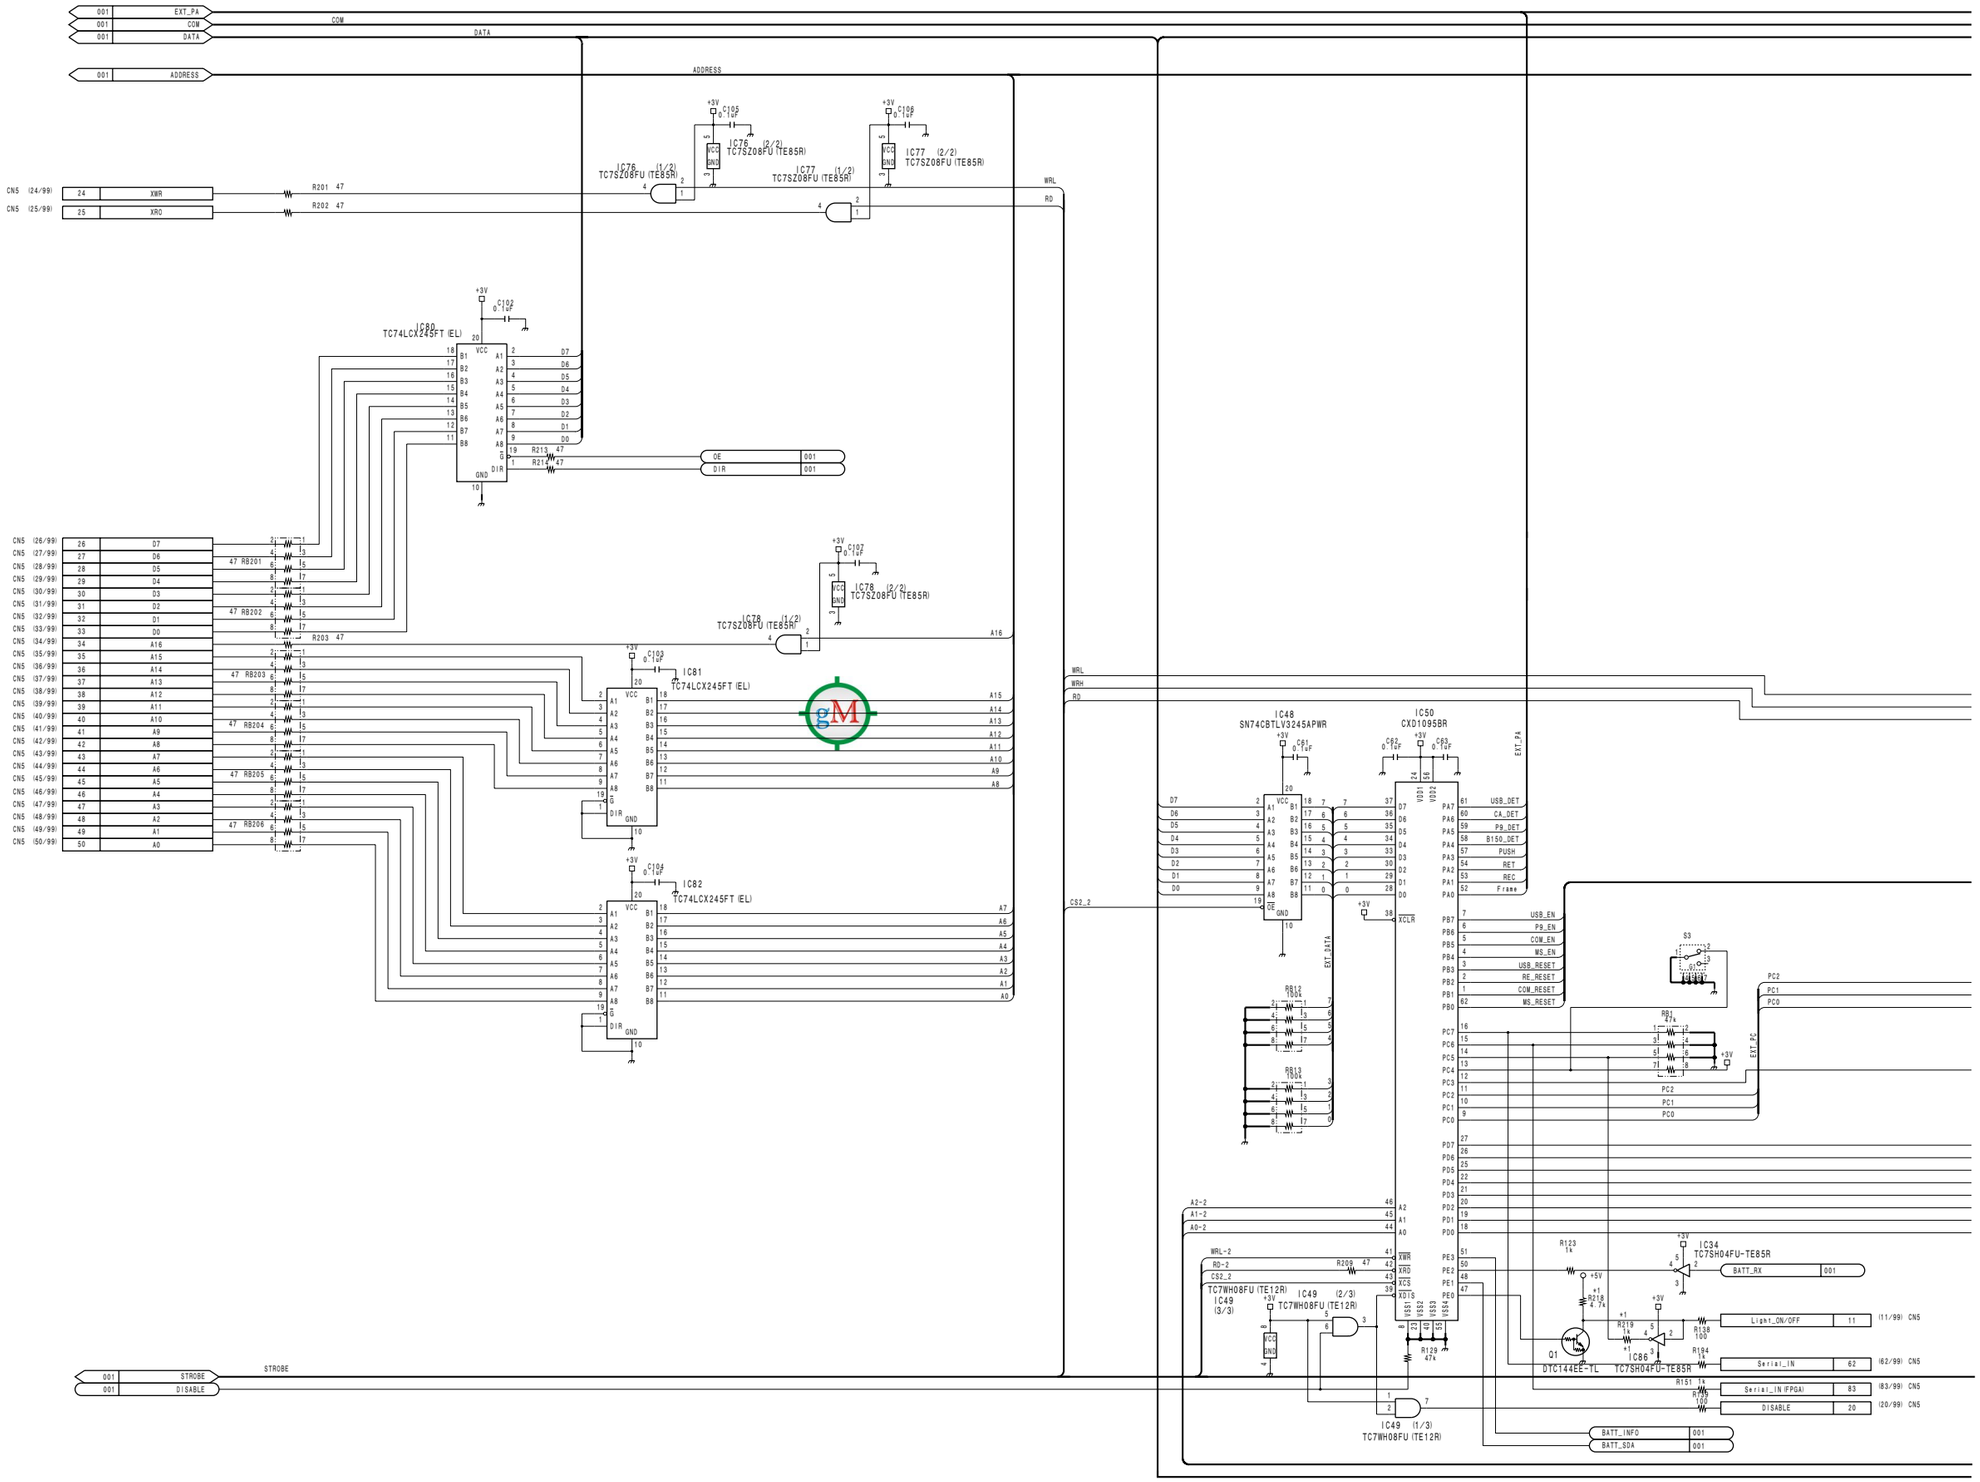

4-46

AT-143 (2/2)

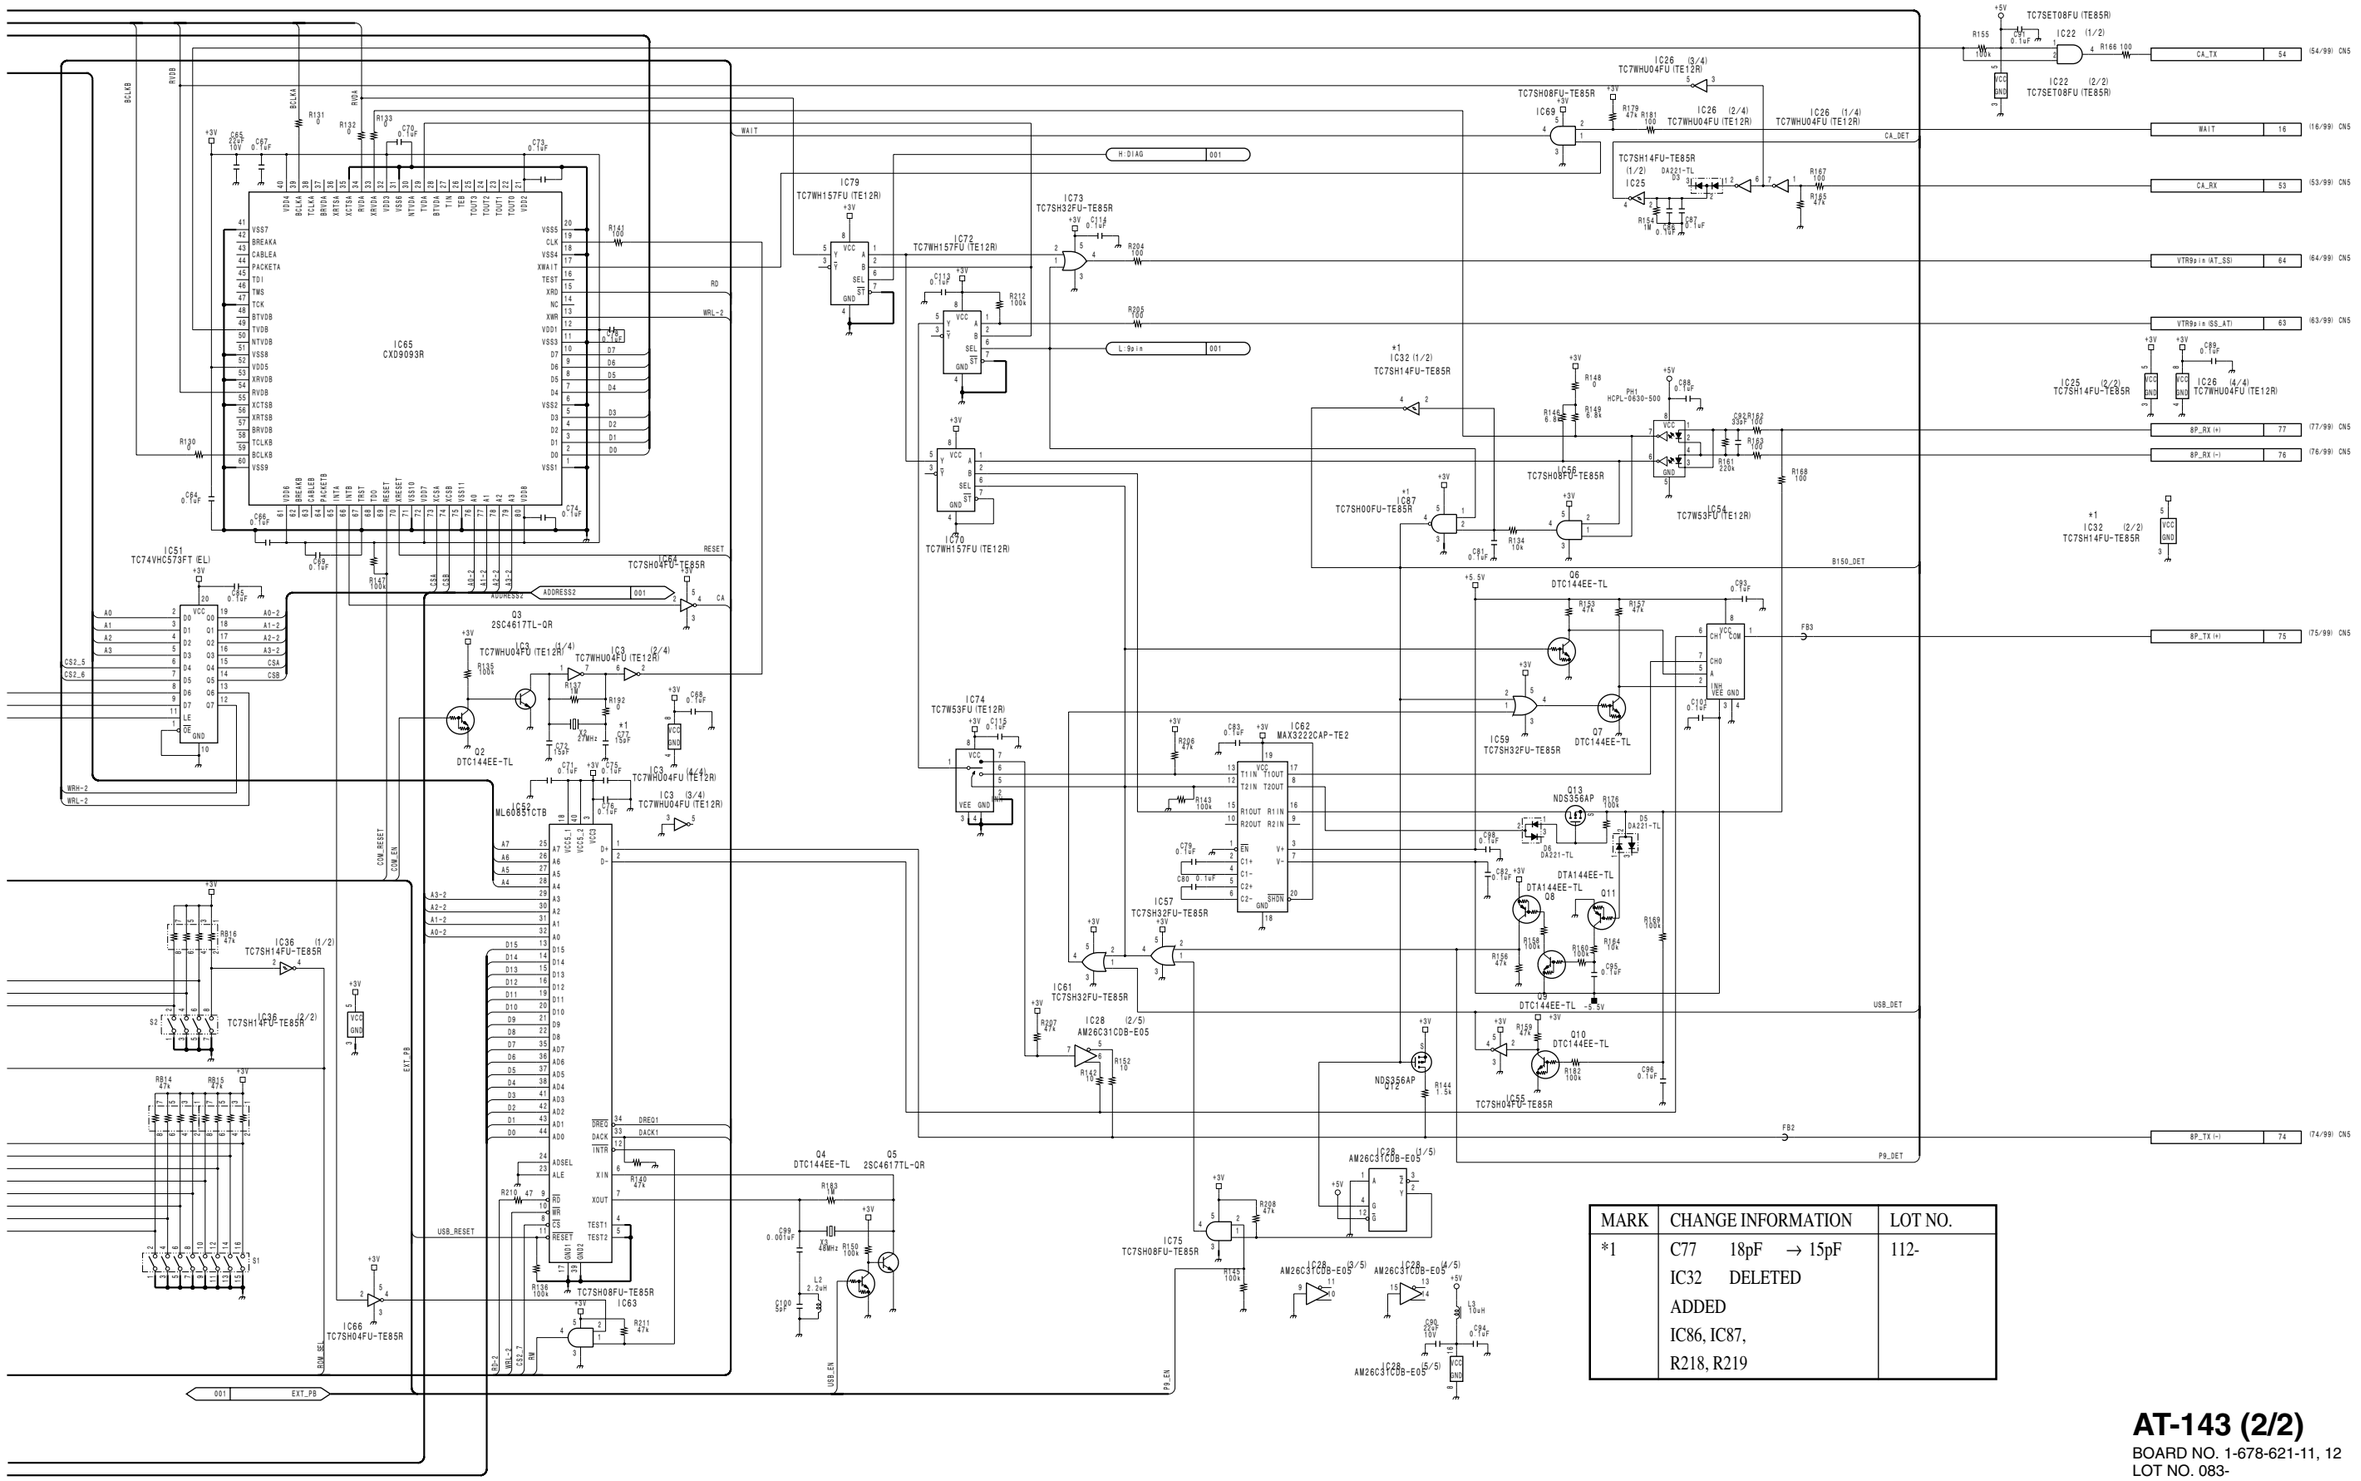

MARK	CHANGE INFORMATION	LOT NO.
*1	C77 18pF → 15pF IC32 DELETED ADDED IC86, IC87, R218, R219	112-

AT-143 (2/2)
BOARD NO. 1-678-621-11, 12
LOT NO. 083-
HDW-750_AT-143_002_2

DVP-18 (1/13)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

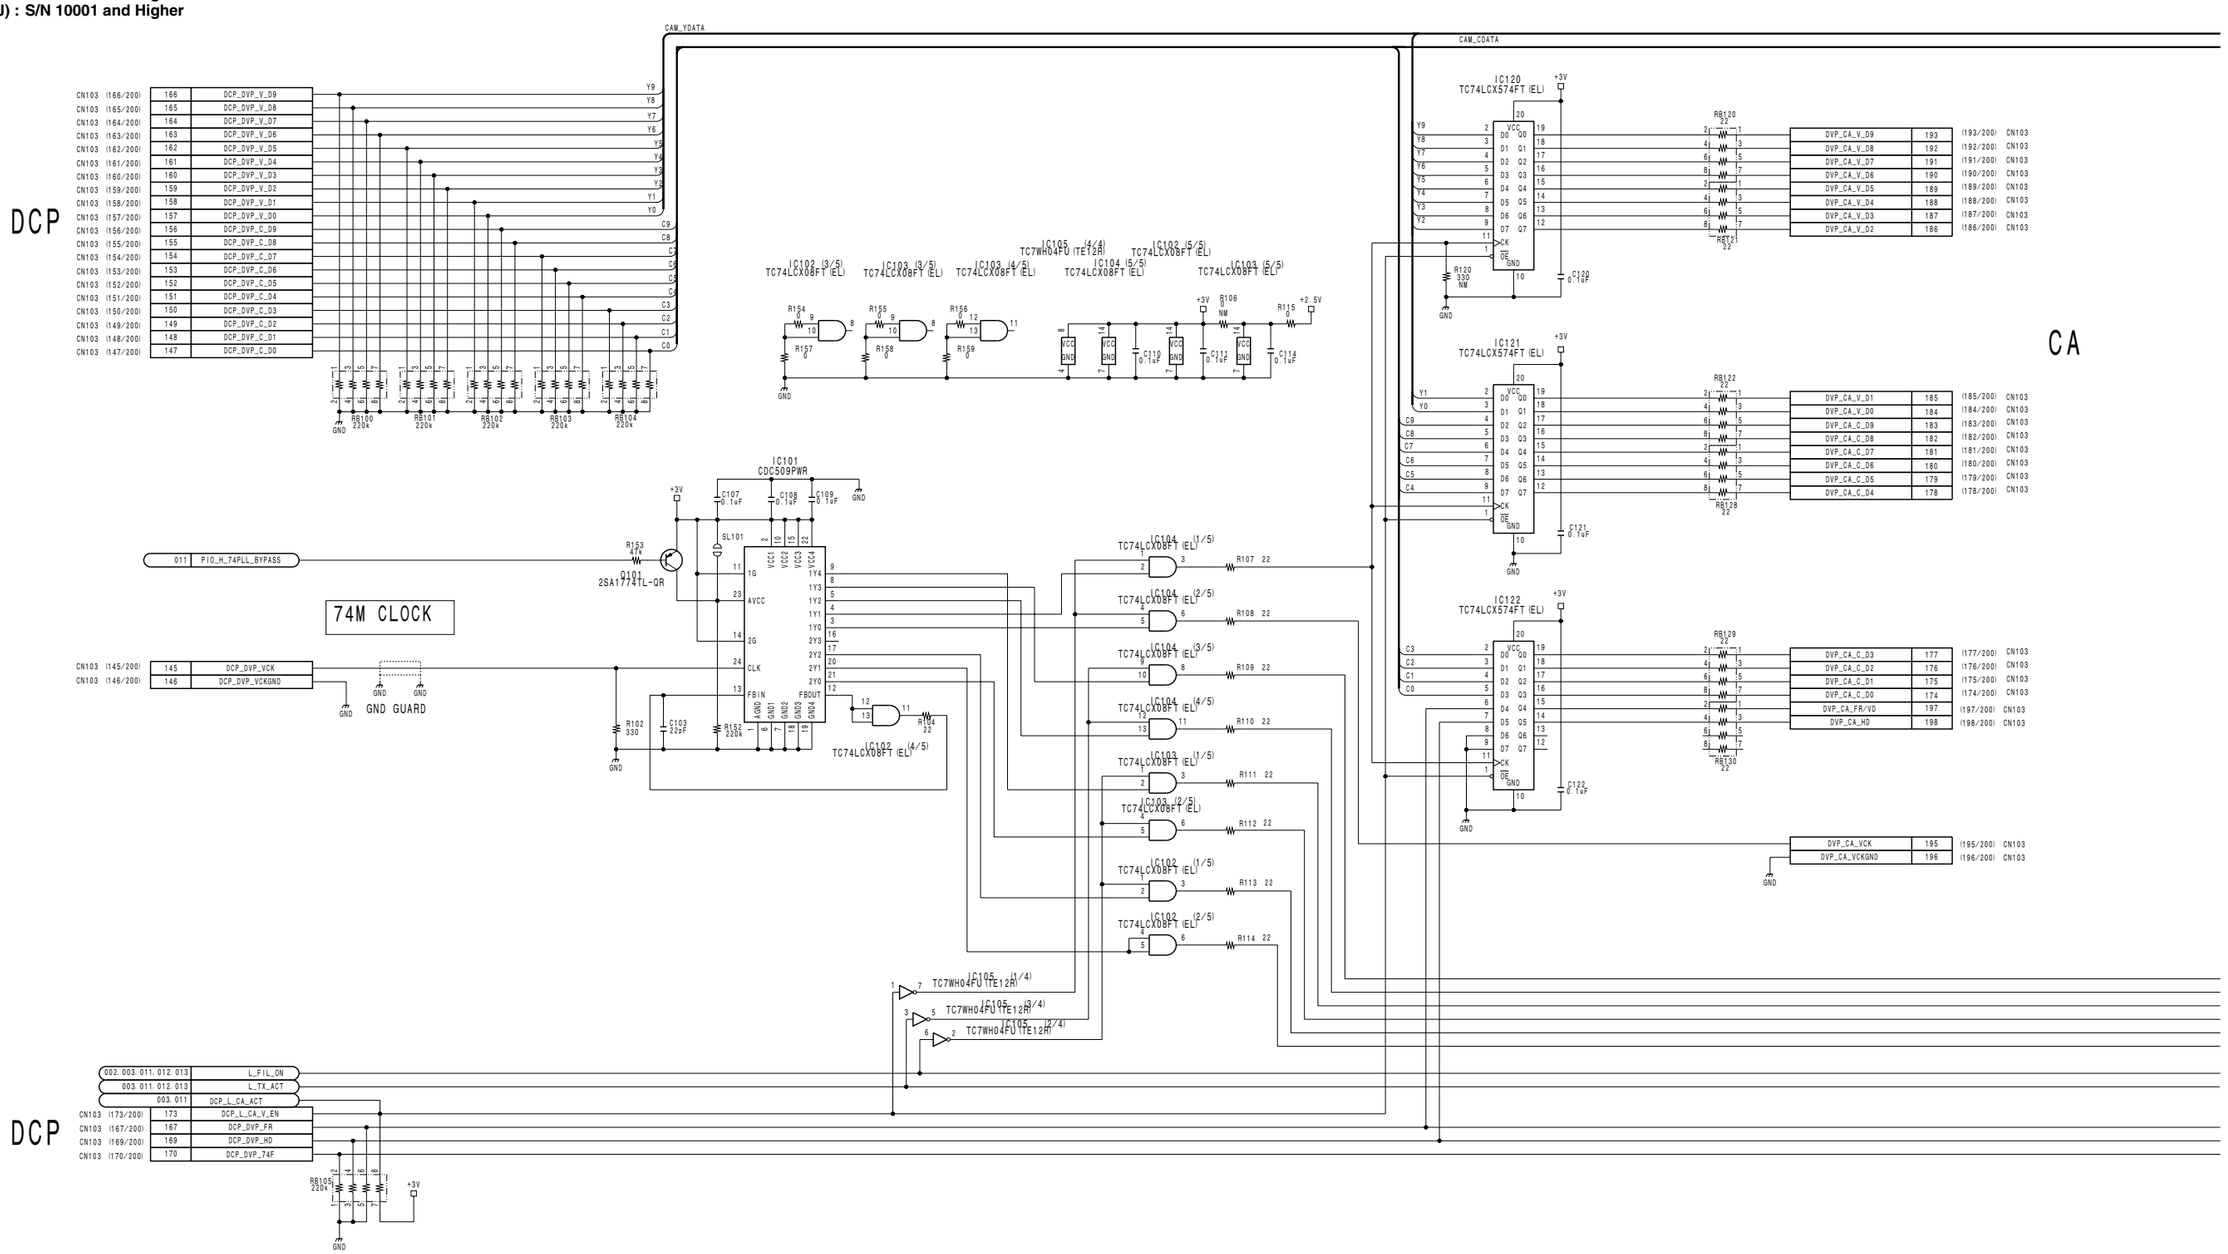

4-48

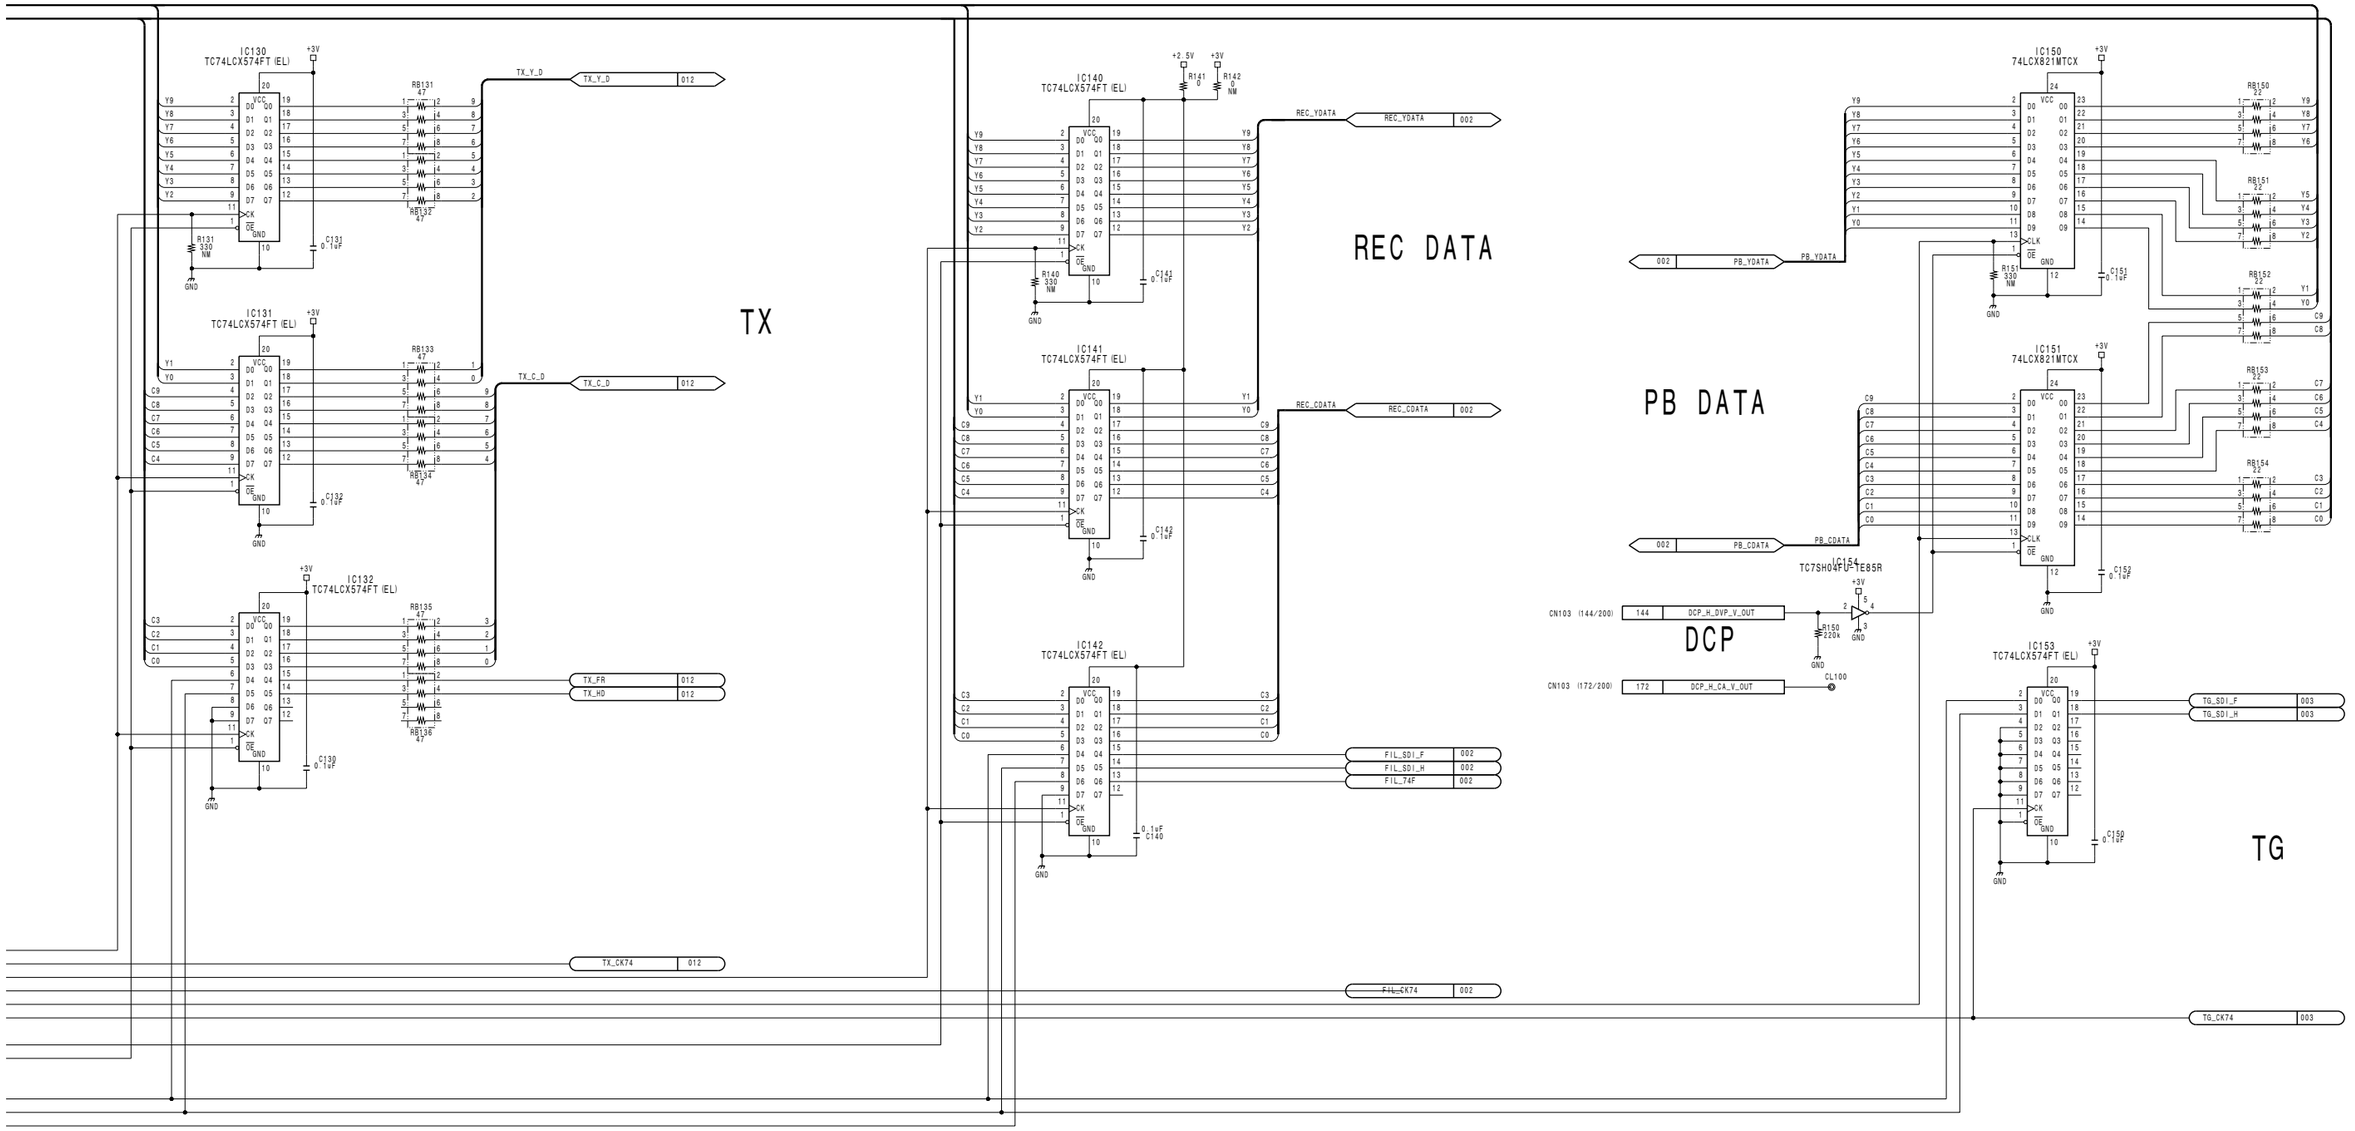

DVP-18 (1/13)
BOARD NO. 1-678-731-12, 13
LOT NO. 083-
HDW-750_DVP-18_015_1

http://getMANUAL.com

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

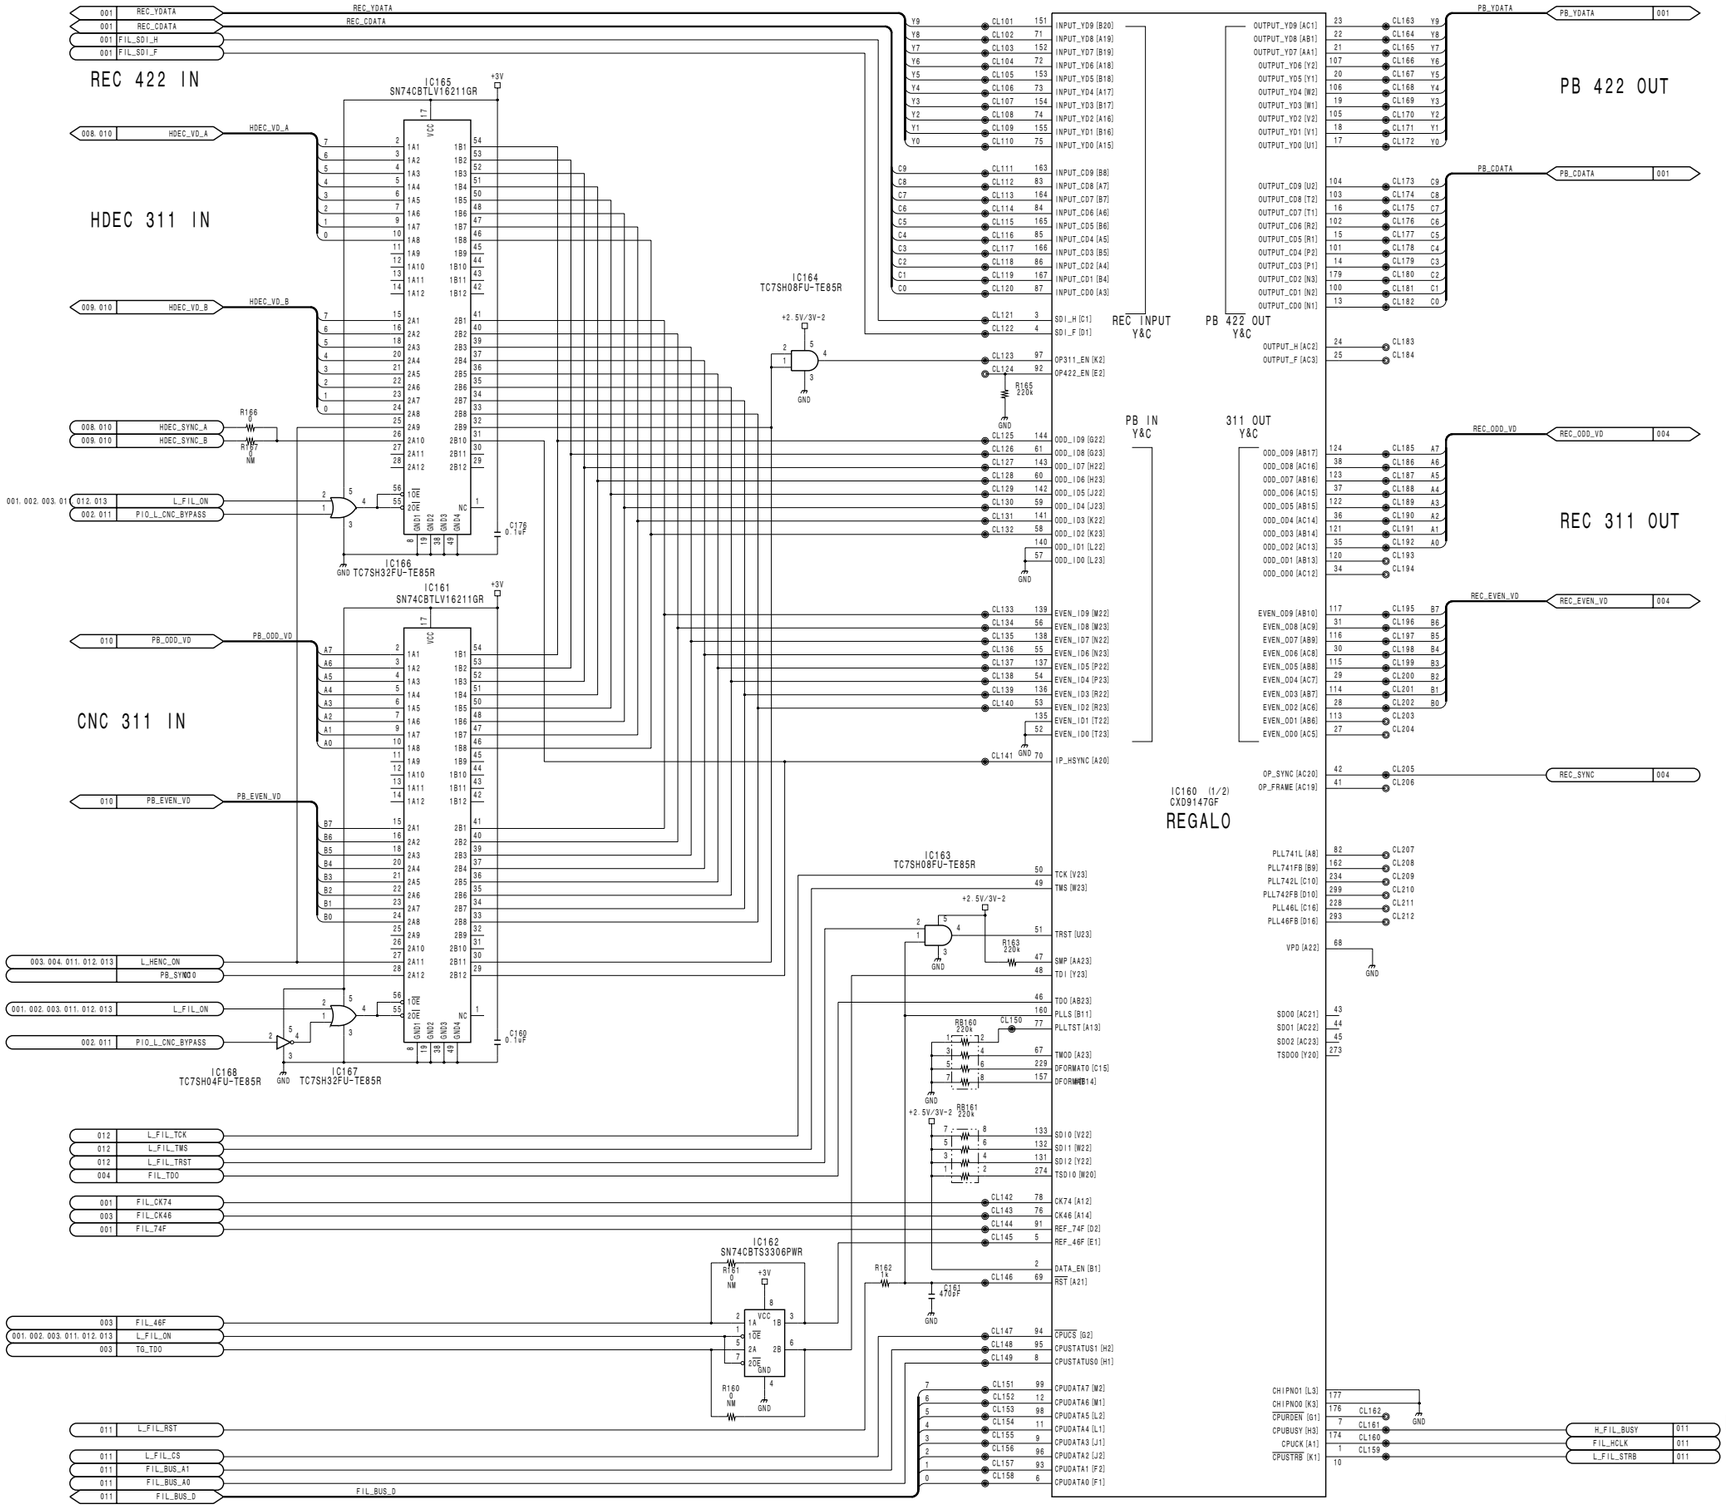

HDW-750 V2

DVP-18 (3/13)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

1

2

3

4

5

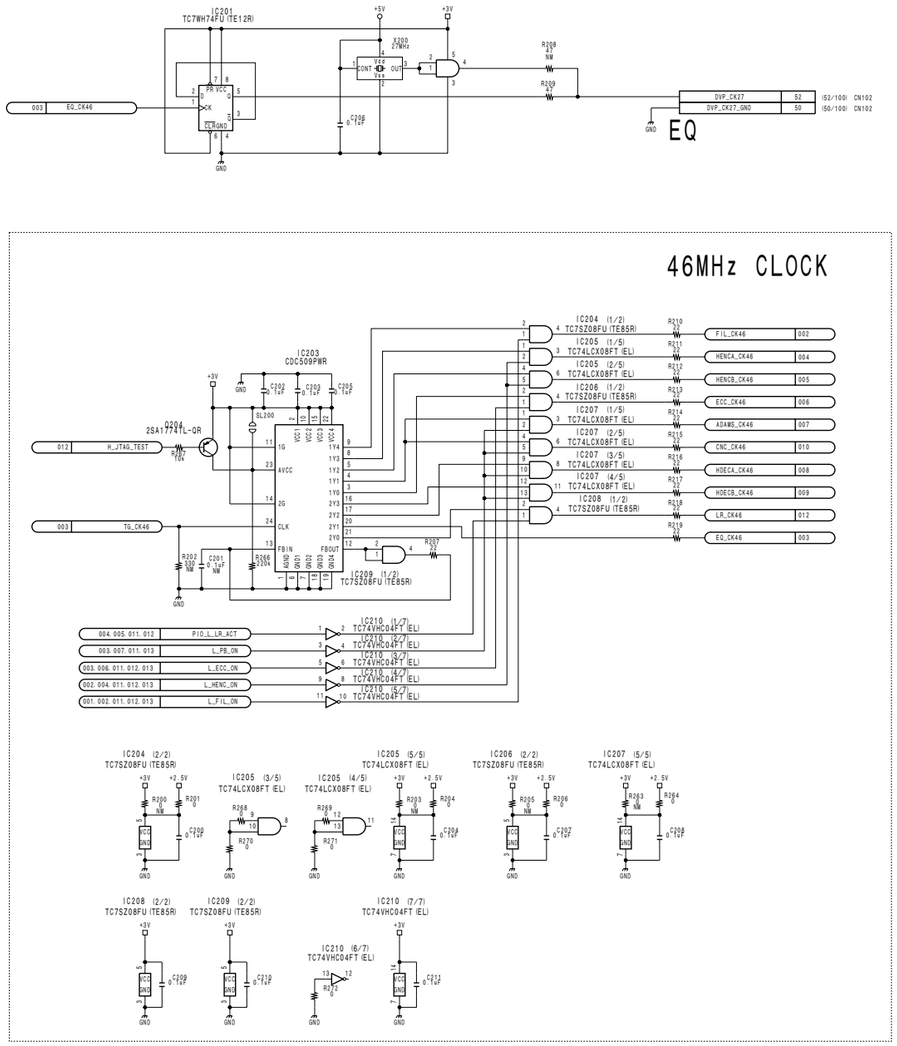

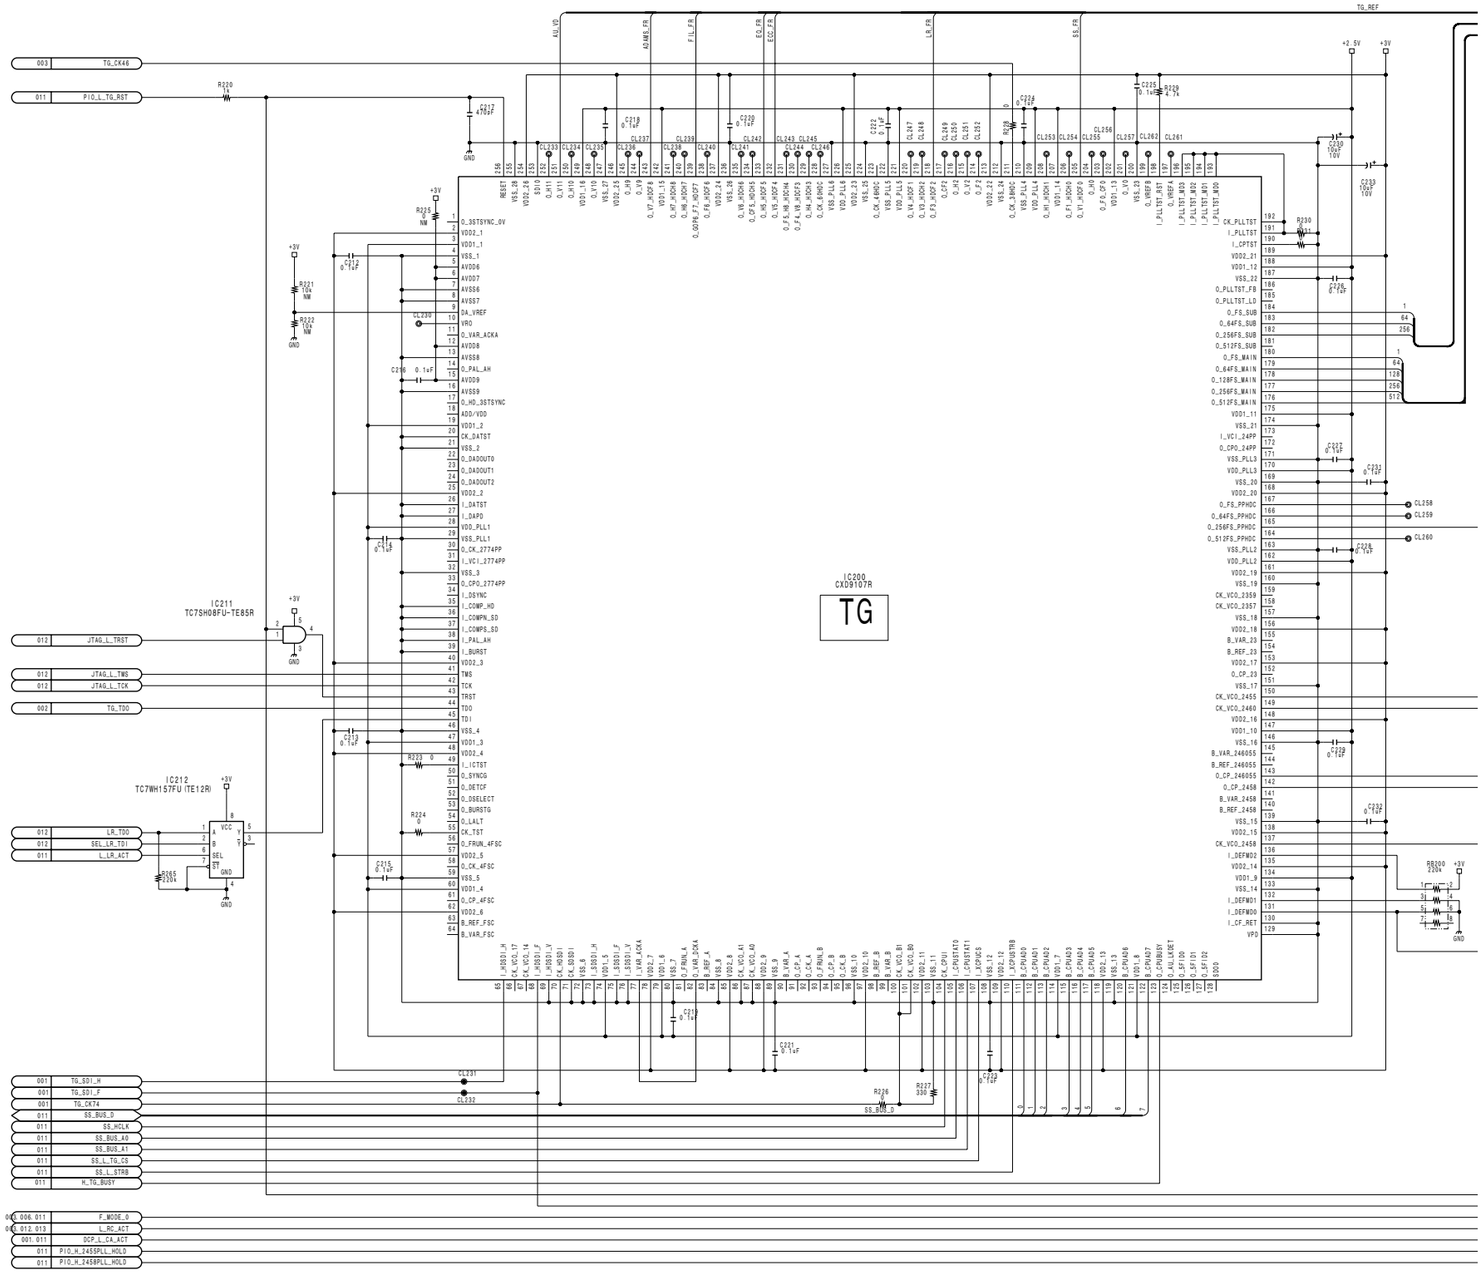

4-52

A B C D E F G H

DVP-18 (3/13)

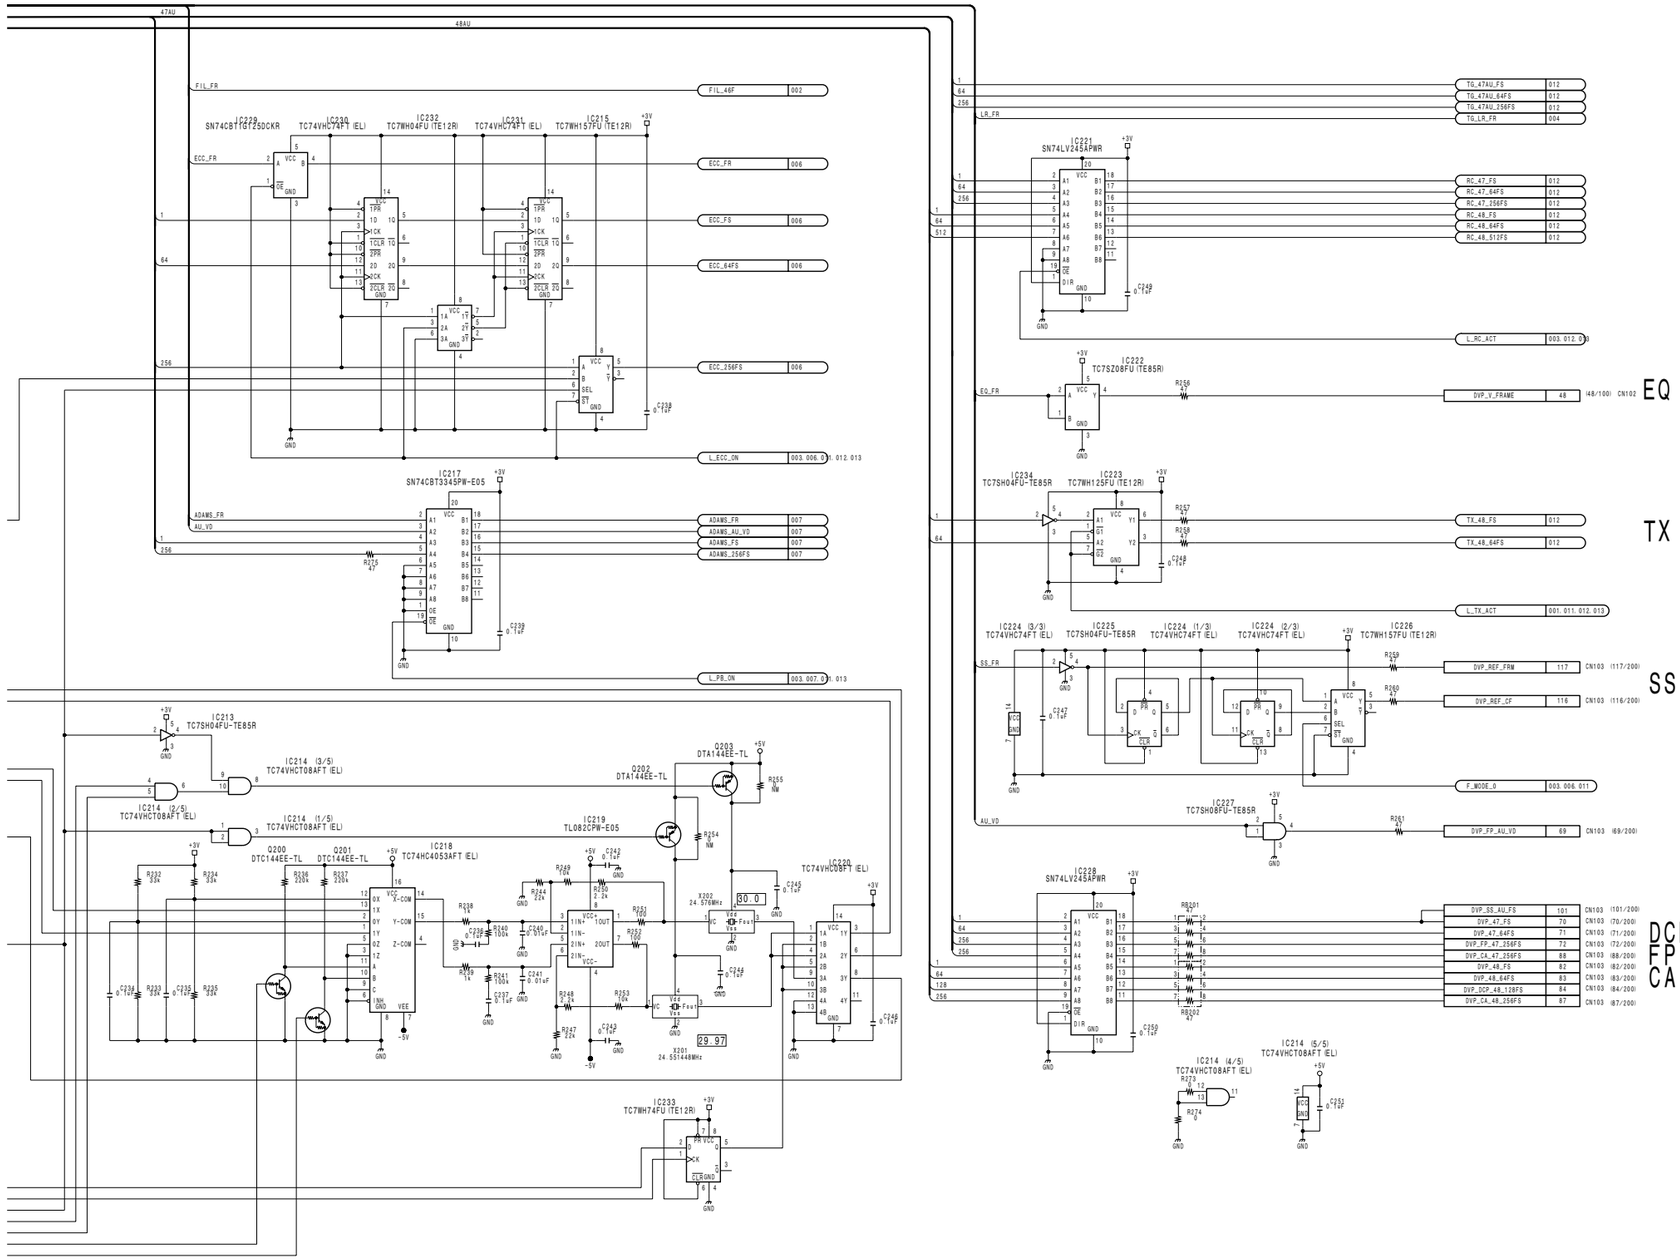

DVP-18 (3/13)
BOARD NO. 1-678-731-12, 13
LOT NO. 083-
HDW-750_DVP-18_015_3

DVP-18 (4/13)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

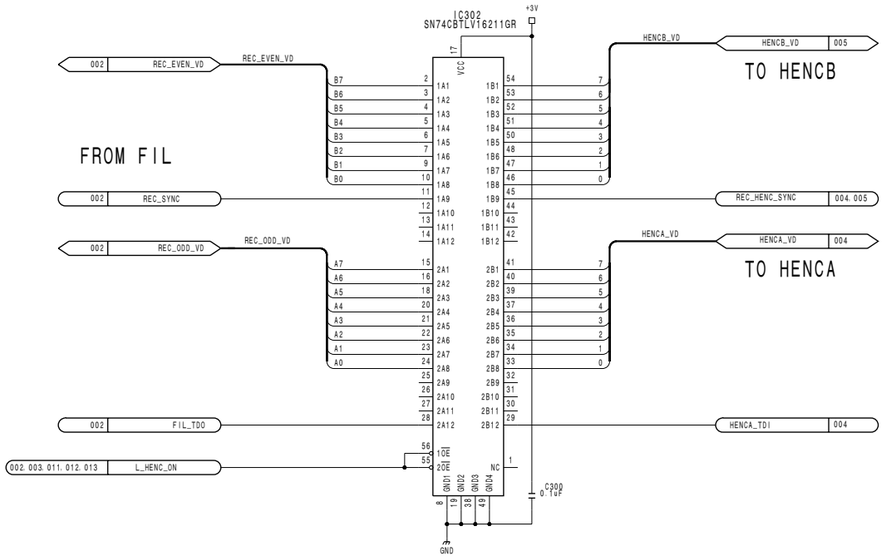

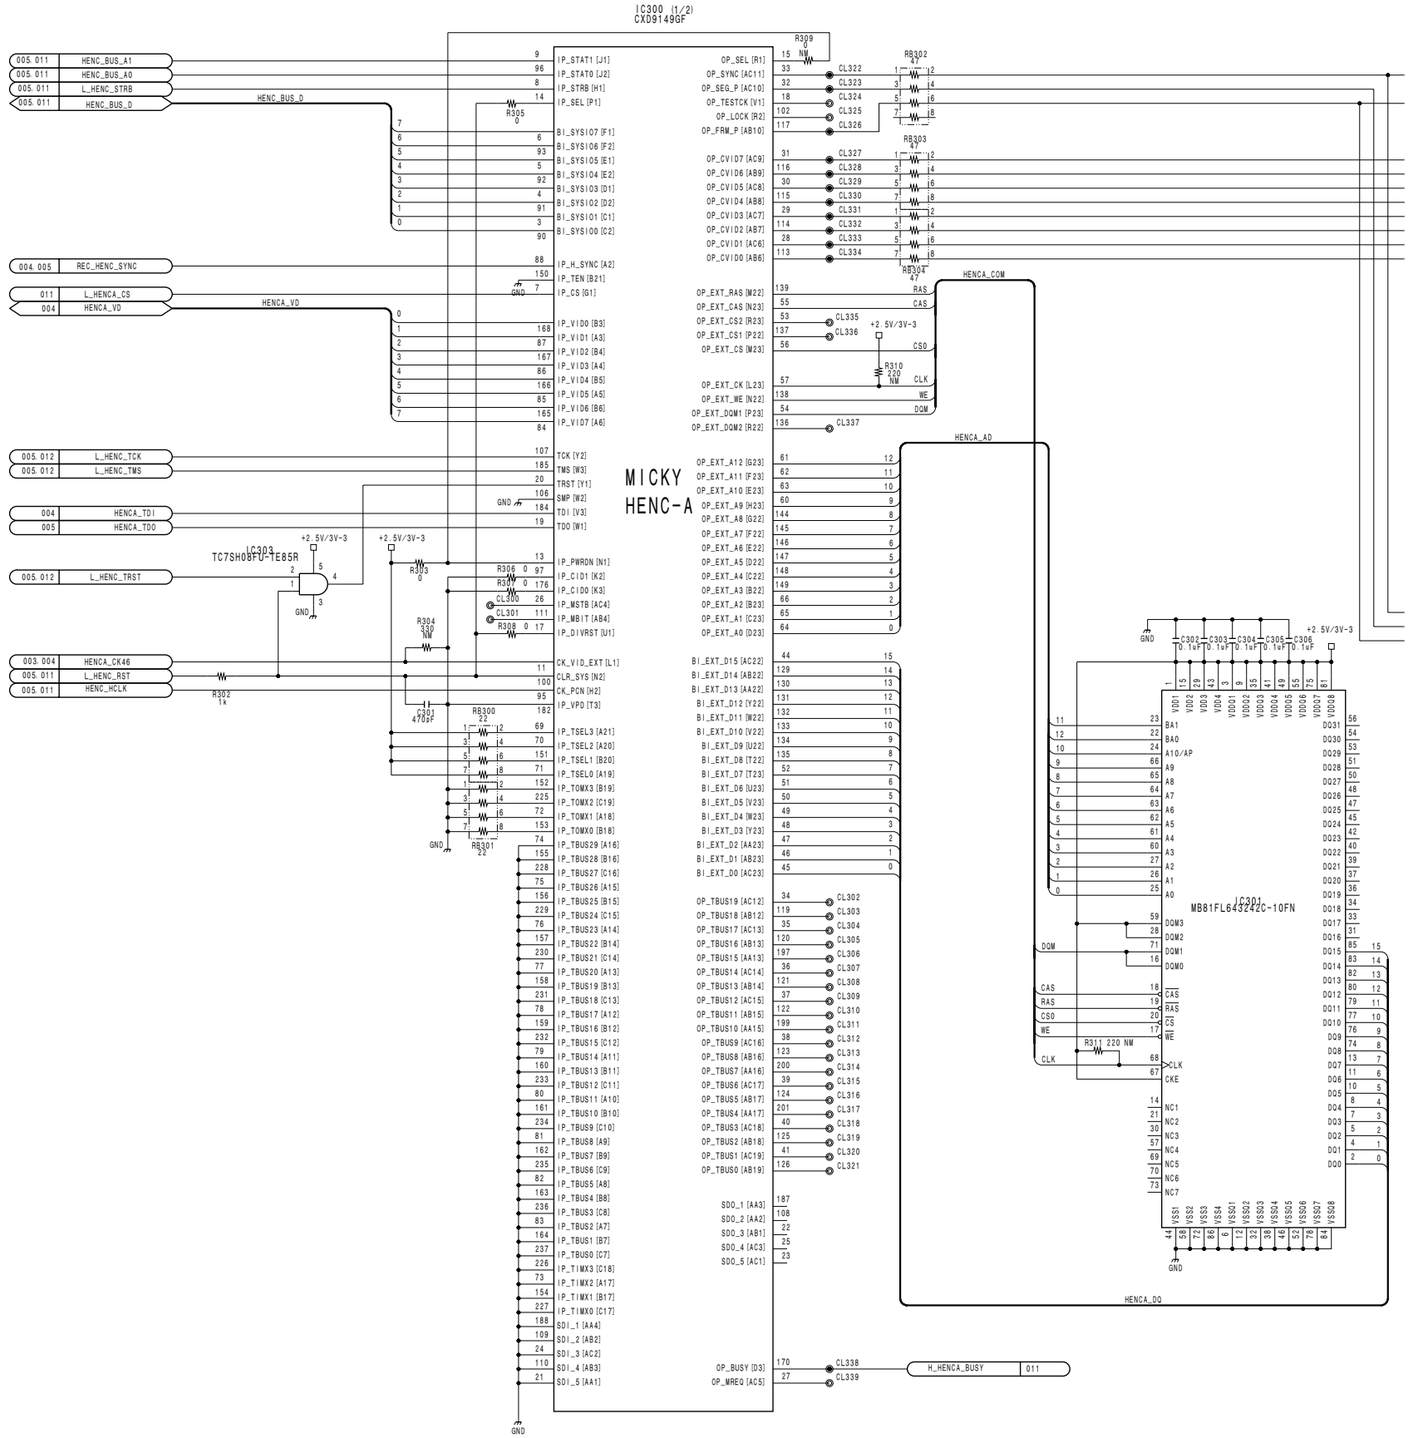

4-54

DVP-18 (4/13)

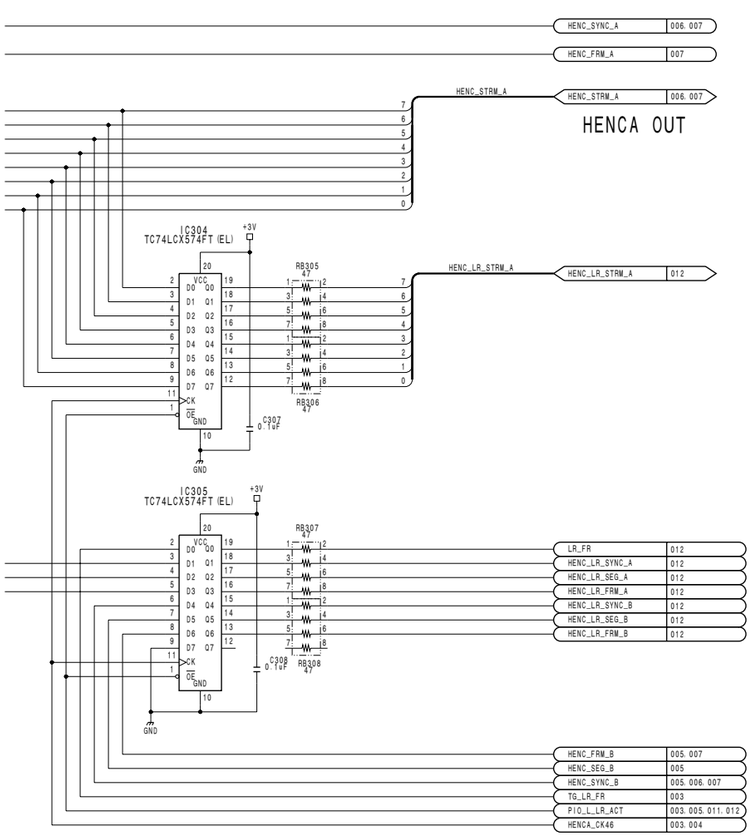

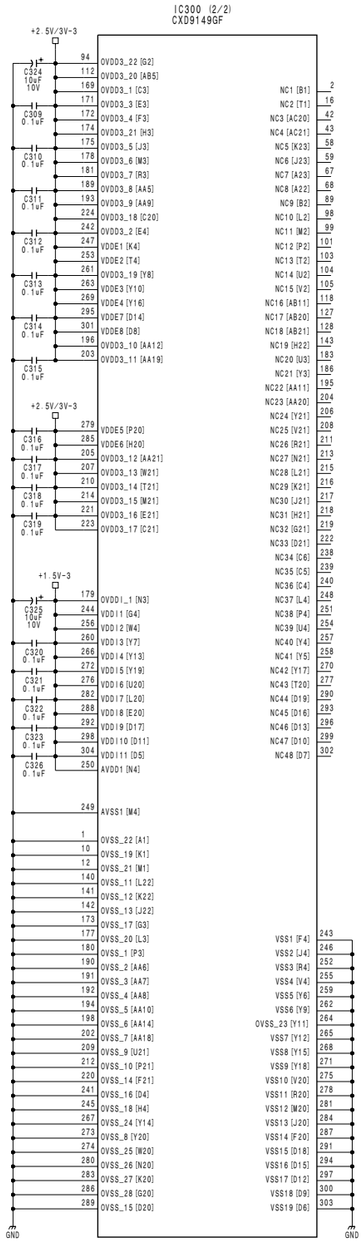

DVP-18 (4/13)

BOARD NO. 1-678-731-12, 13
LOT NO. 083-
HDW-750_DVP-18_015_4

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

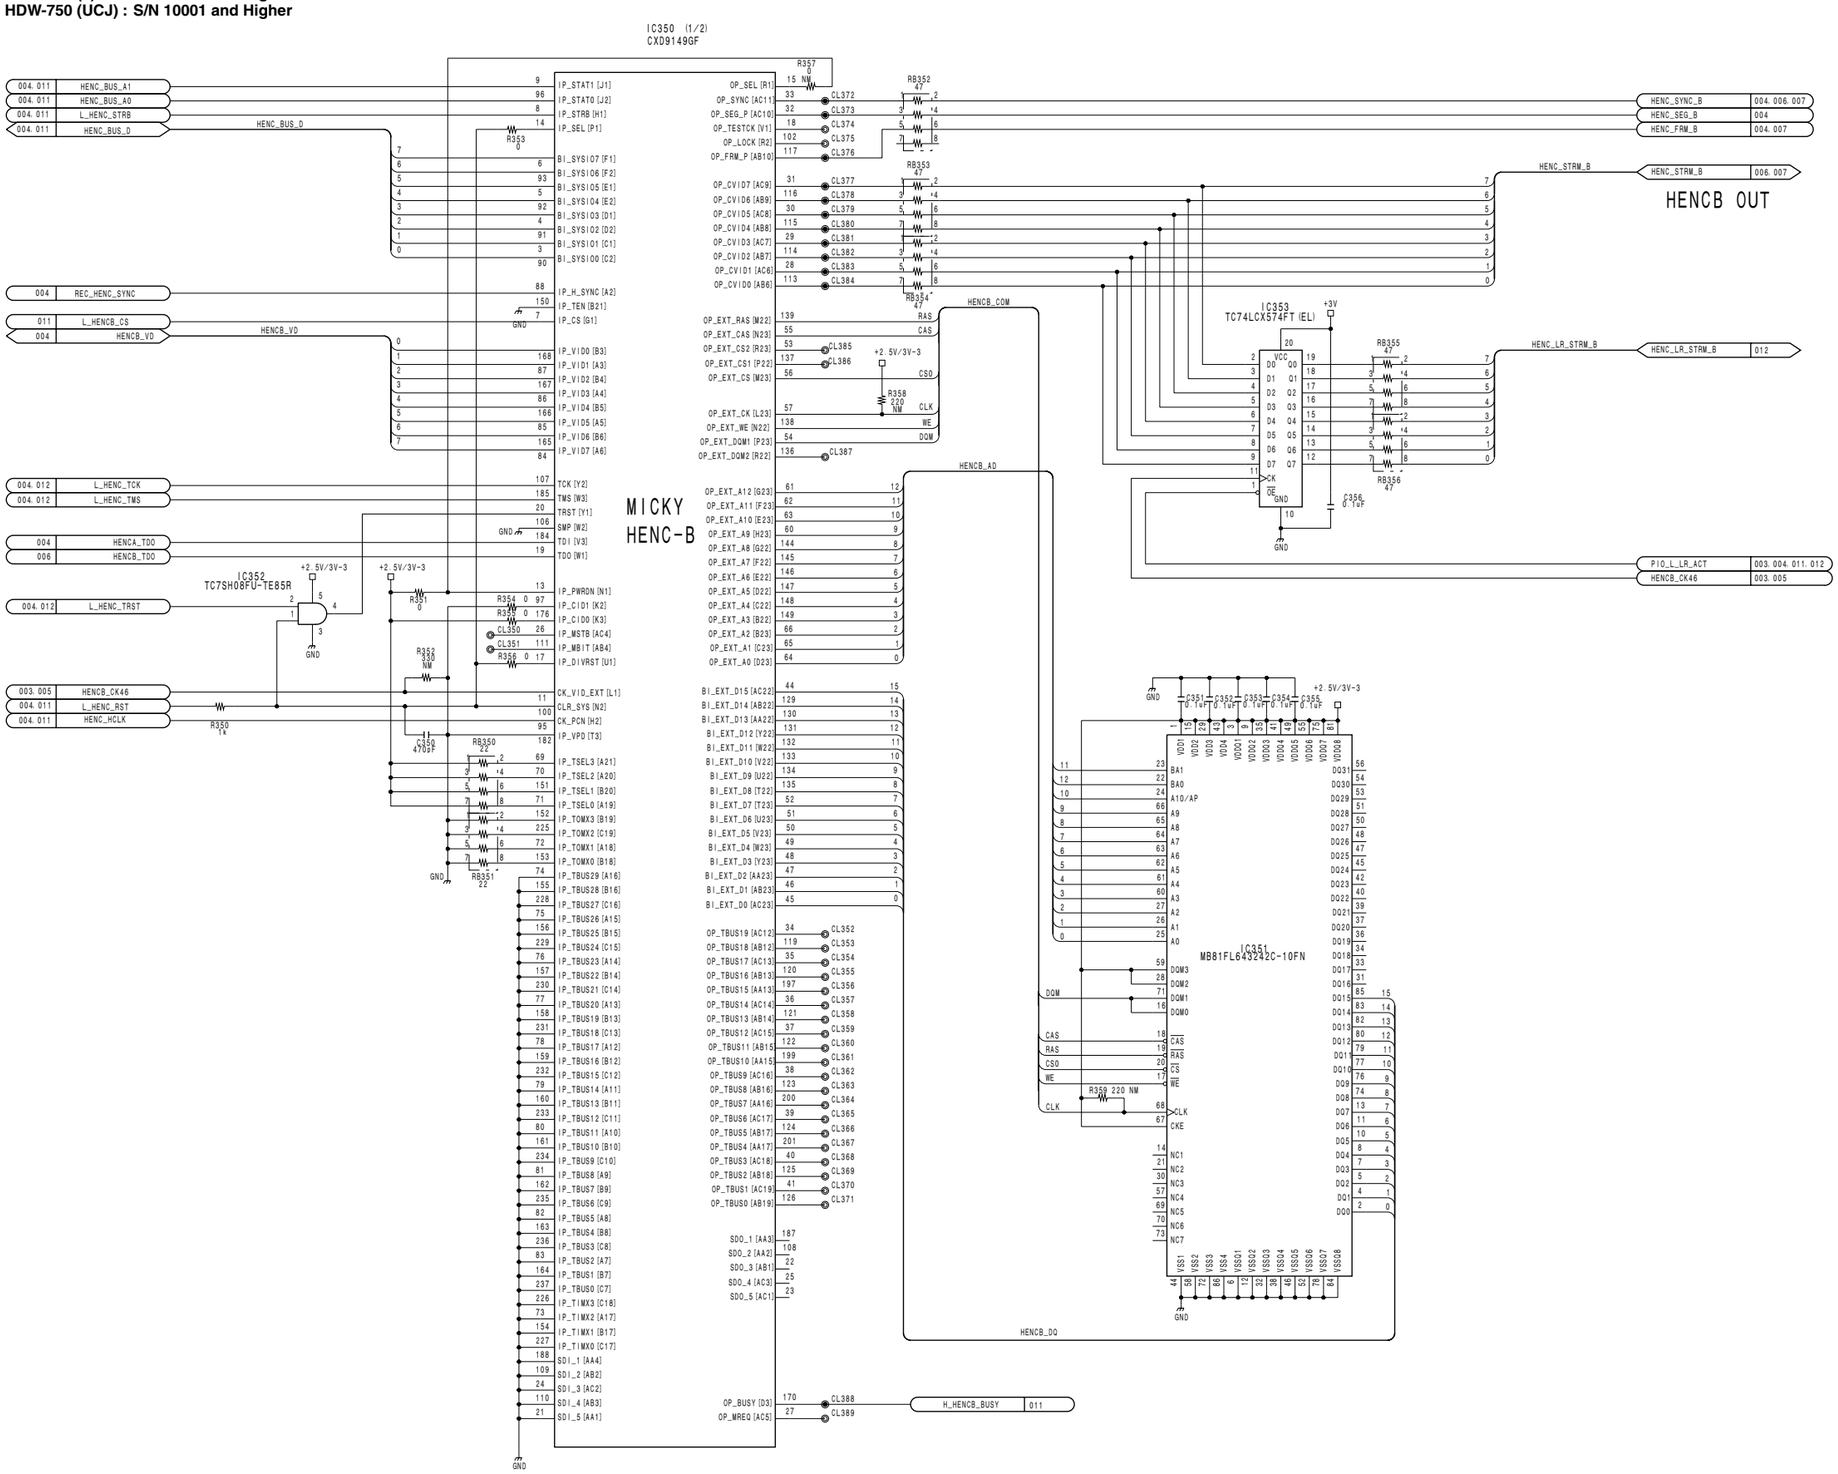

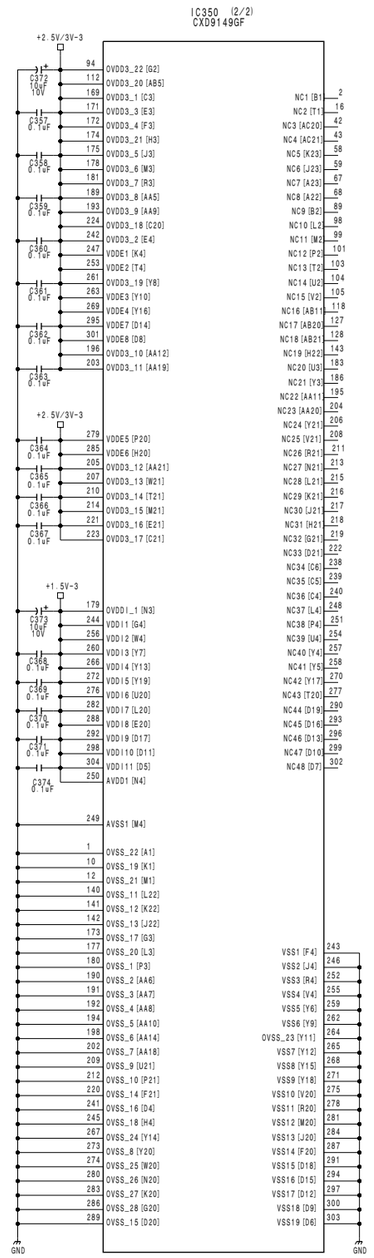

DVP-18 (5/13)
BOARD NO. 1-678-731-12, 13
LOT NO. 083-
HDW-750_DVP-18_015_5

DVP-18 (6/13)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

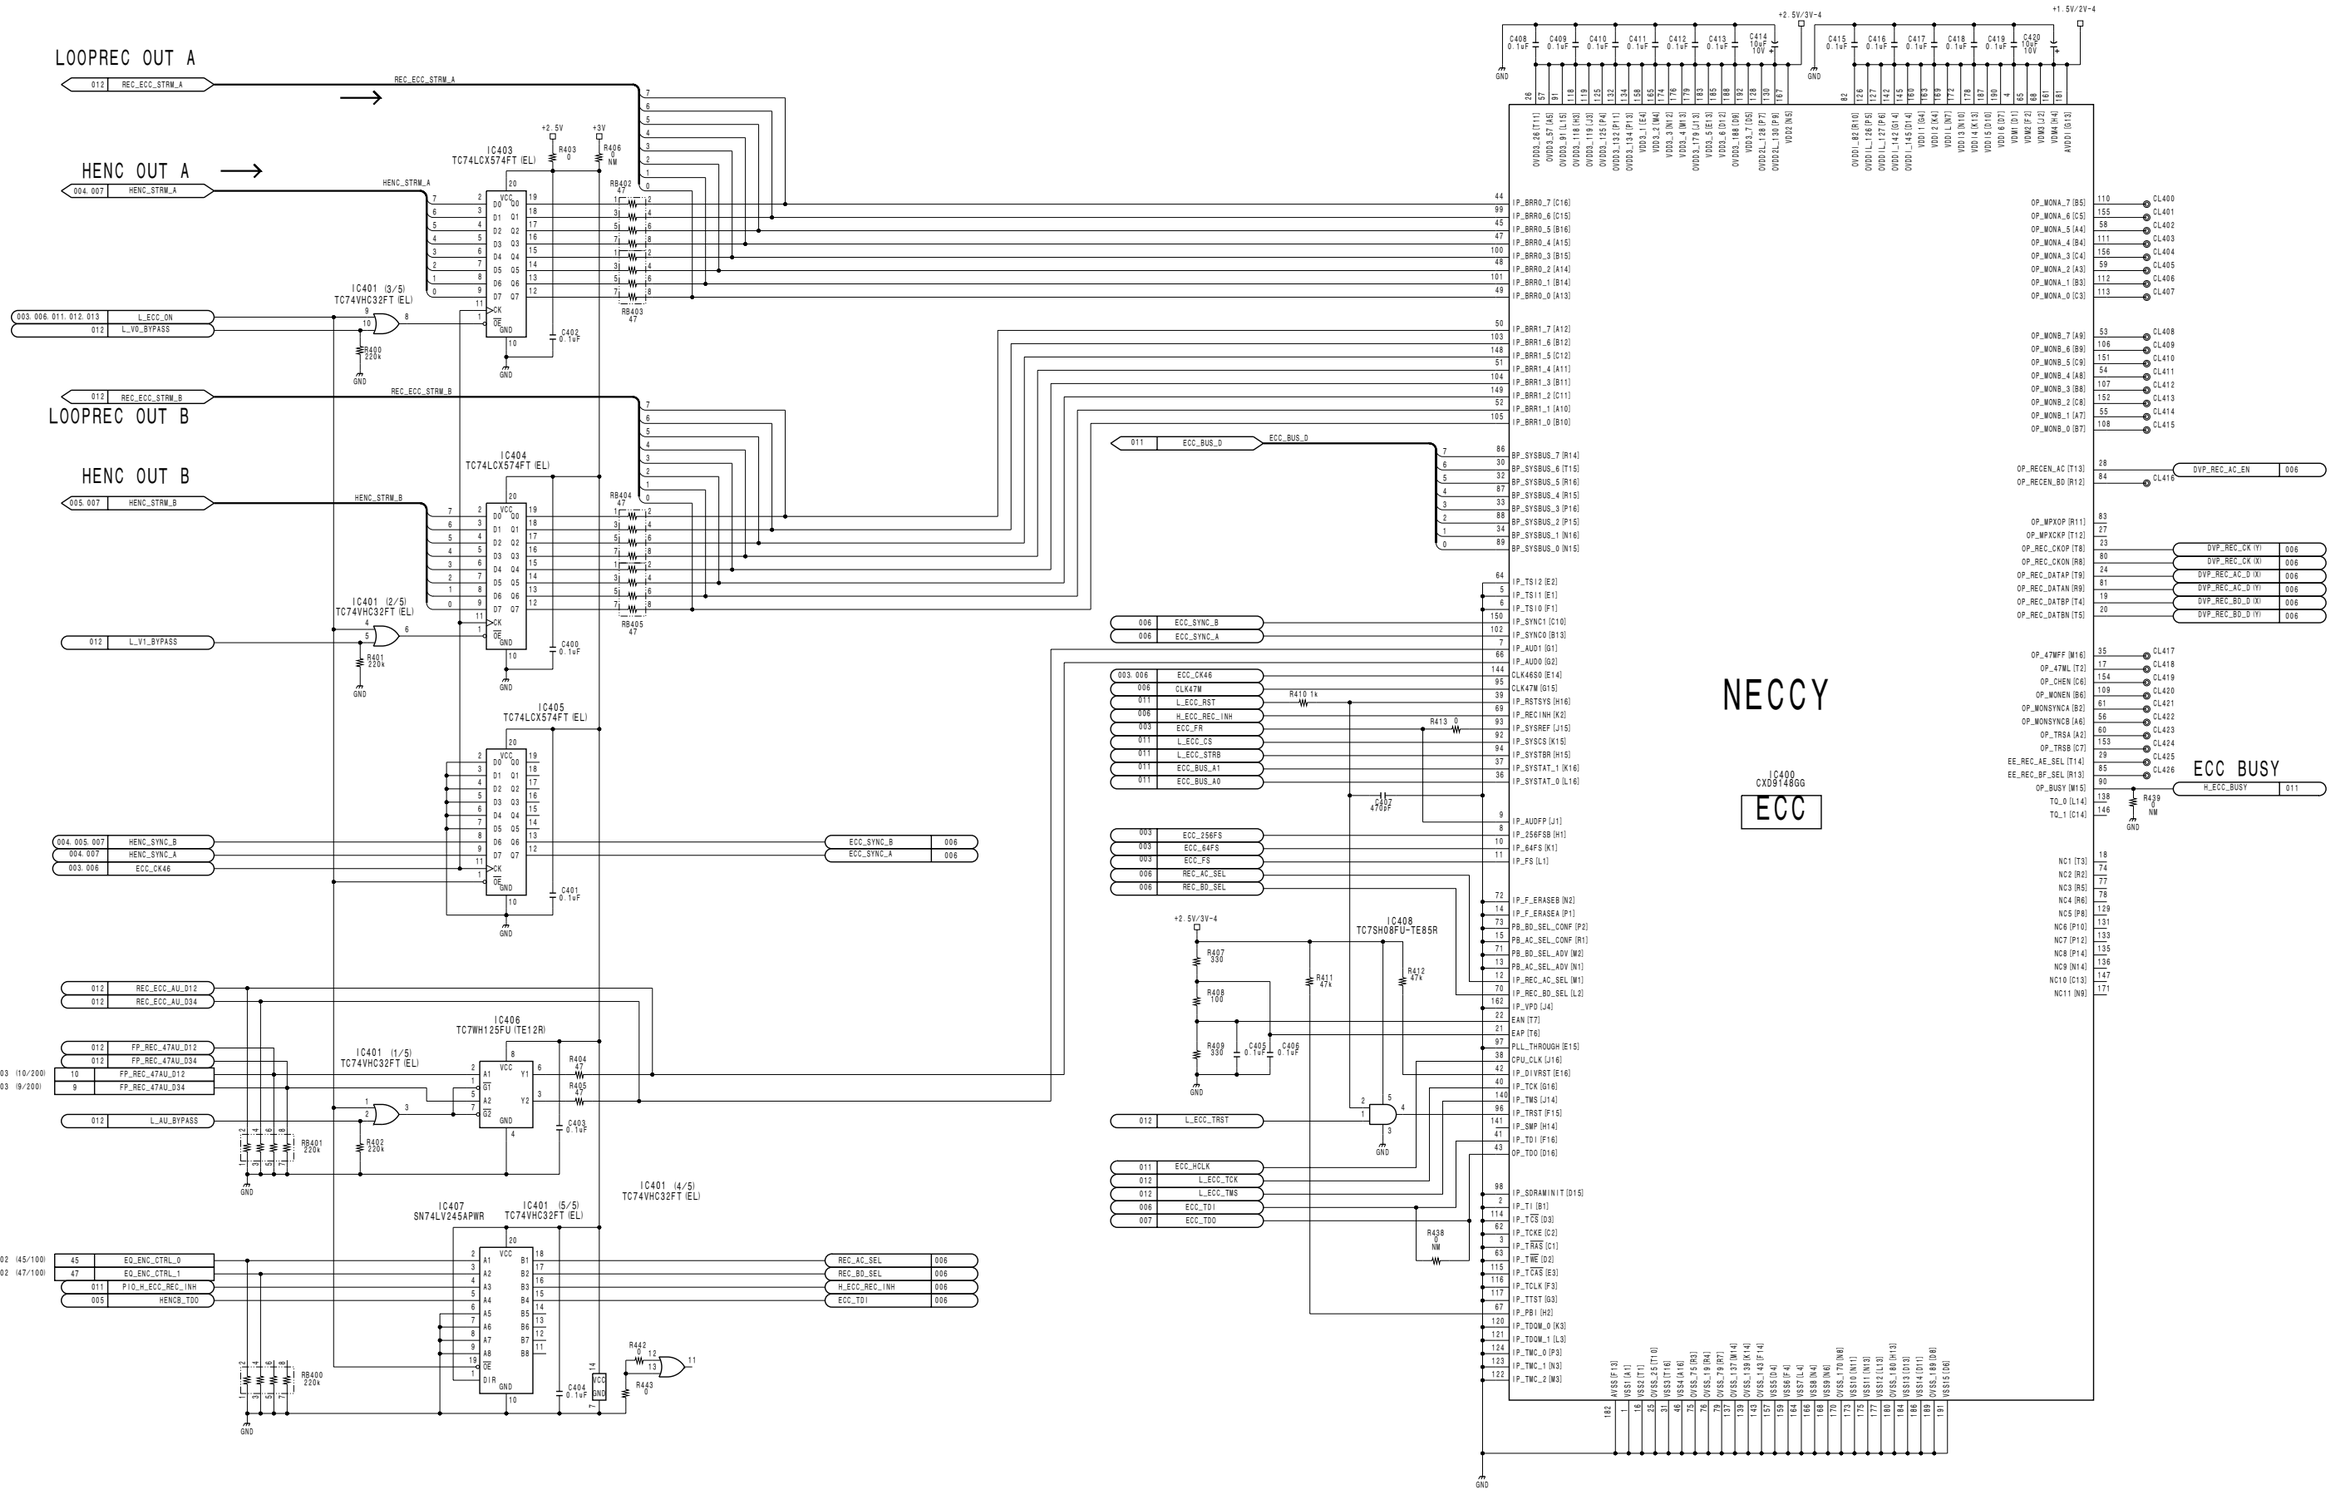

4-58

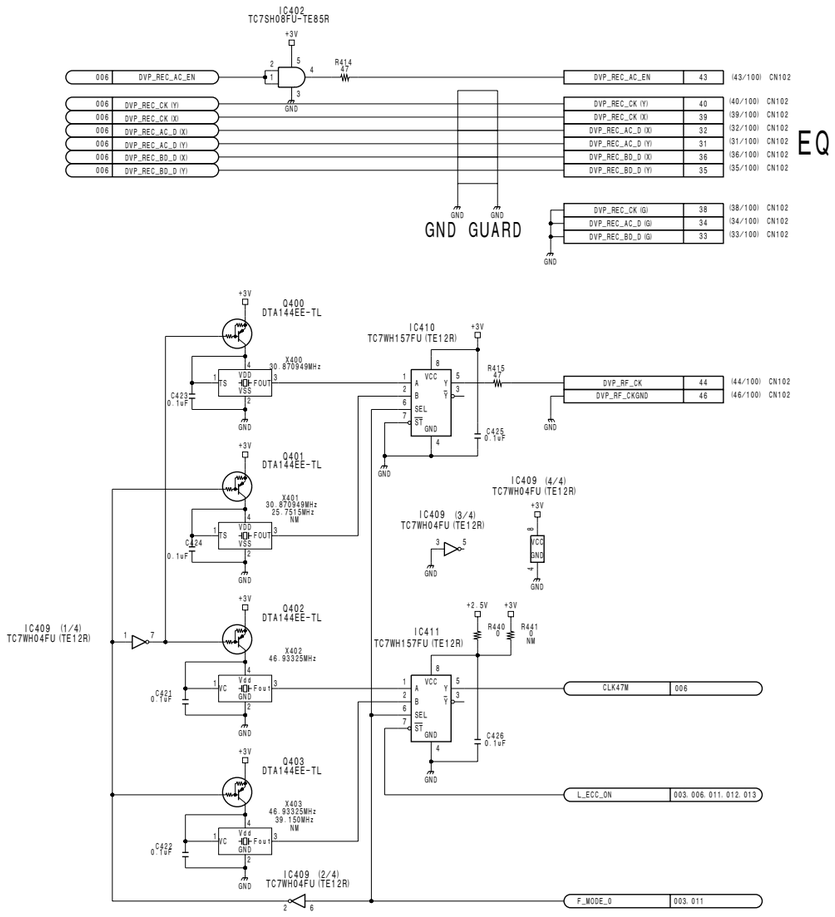

DVP-18 (6/13)

BOARD NO. 1-678-731-12, 13
LOT NO. 083-

HDW-750_DVP-18_015_6

DVP-18 (7/13)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

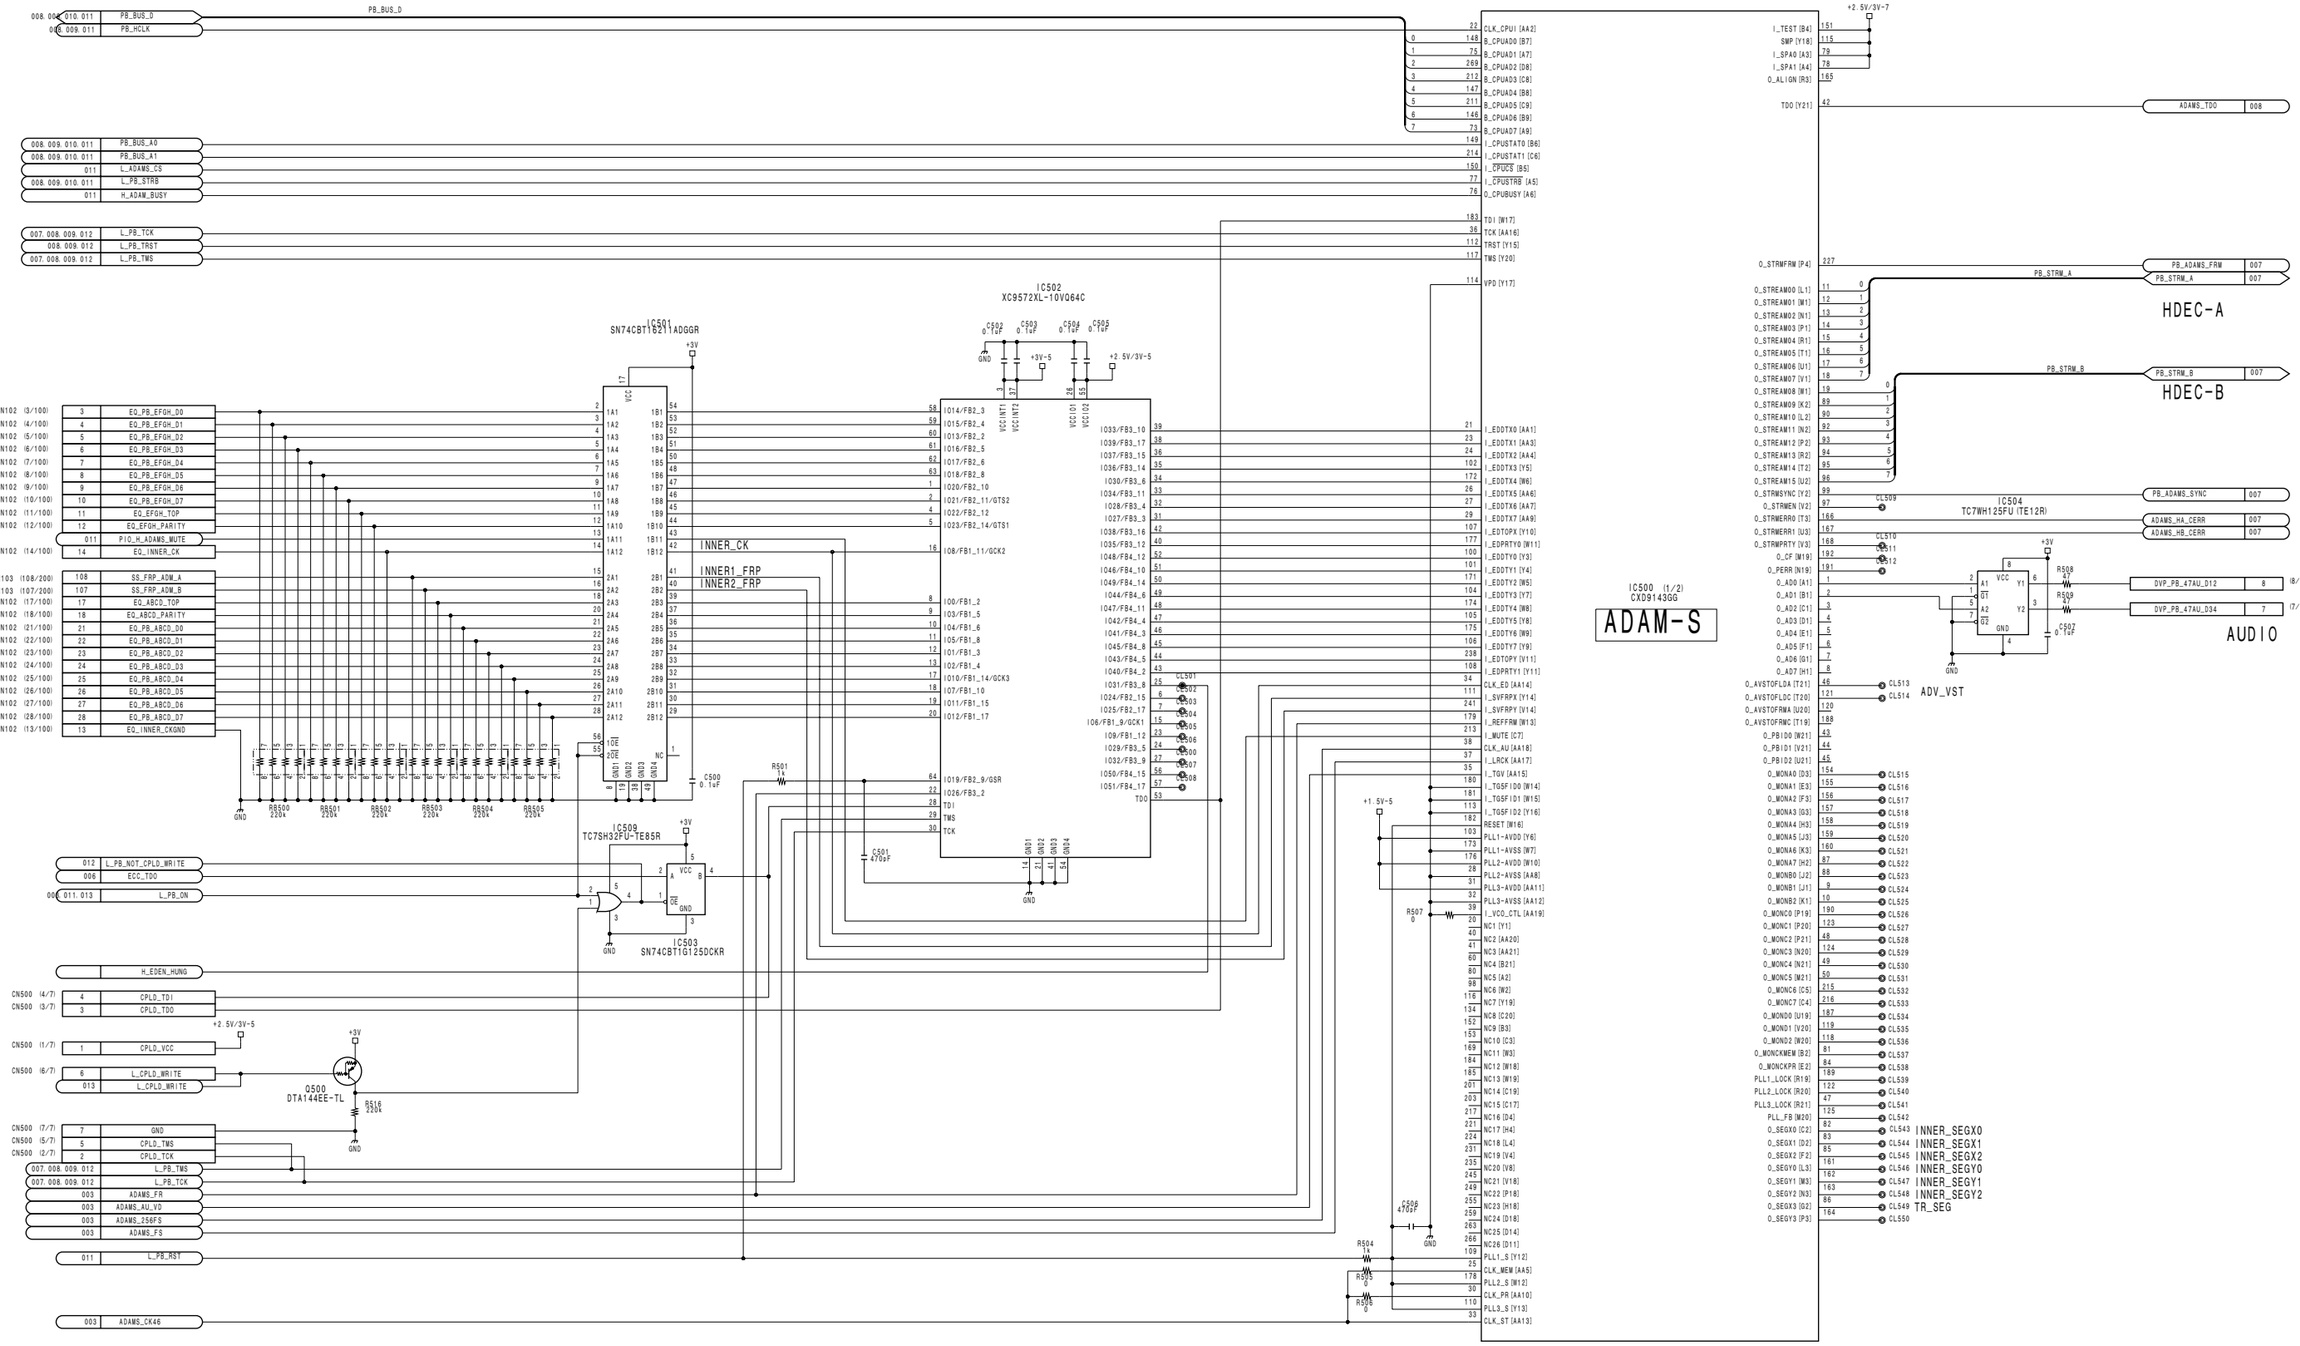

4-60

http://getMANUAL.com

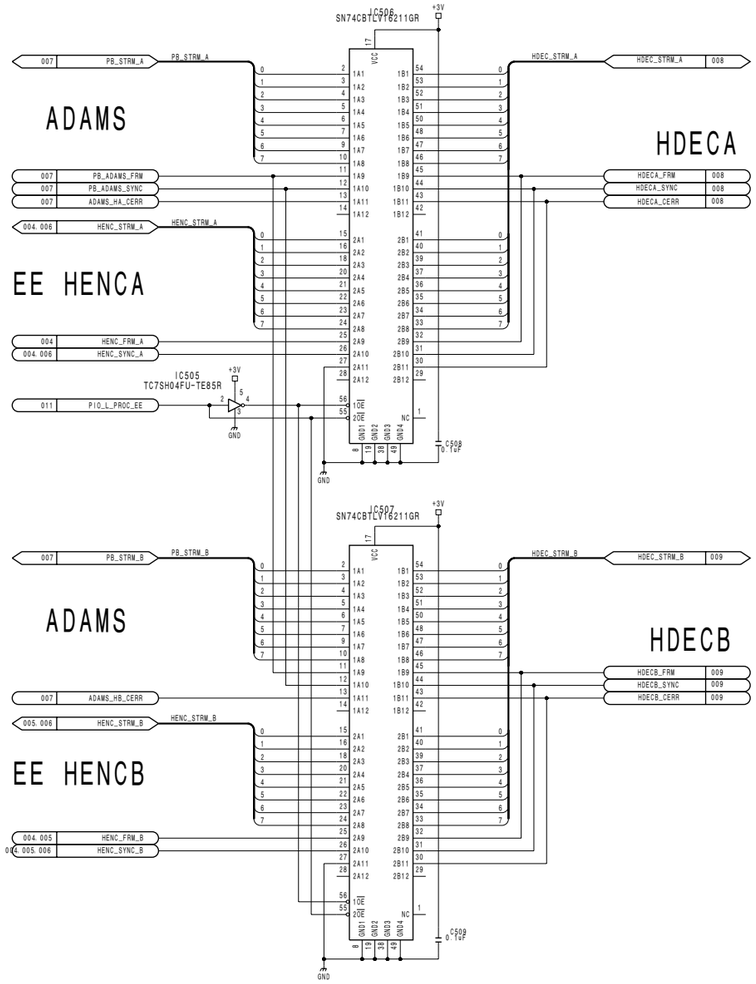

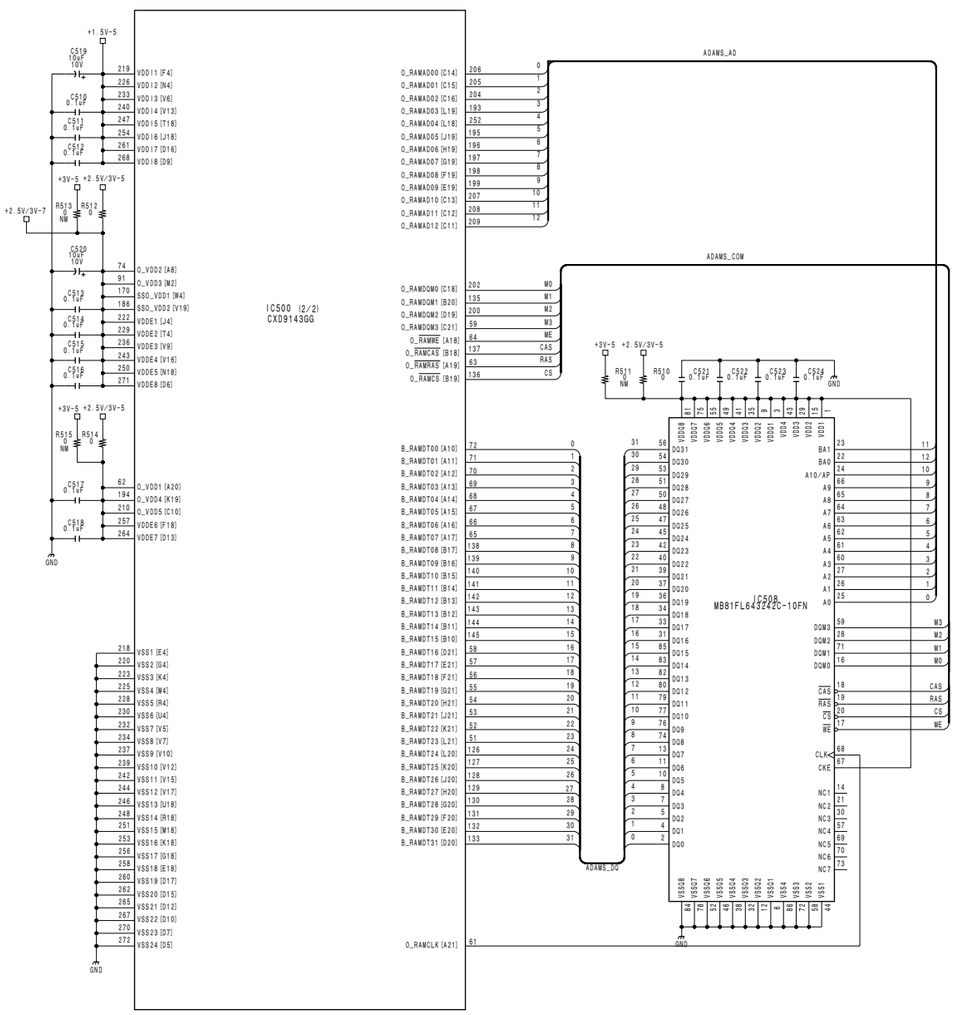

DVP-18 (7/13)

BOARD NO. 1-678-731-12, 13
LOT NO. 083-
HDW-750_DVP-18_015_7

DVP-18 (8/13)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

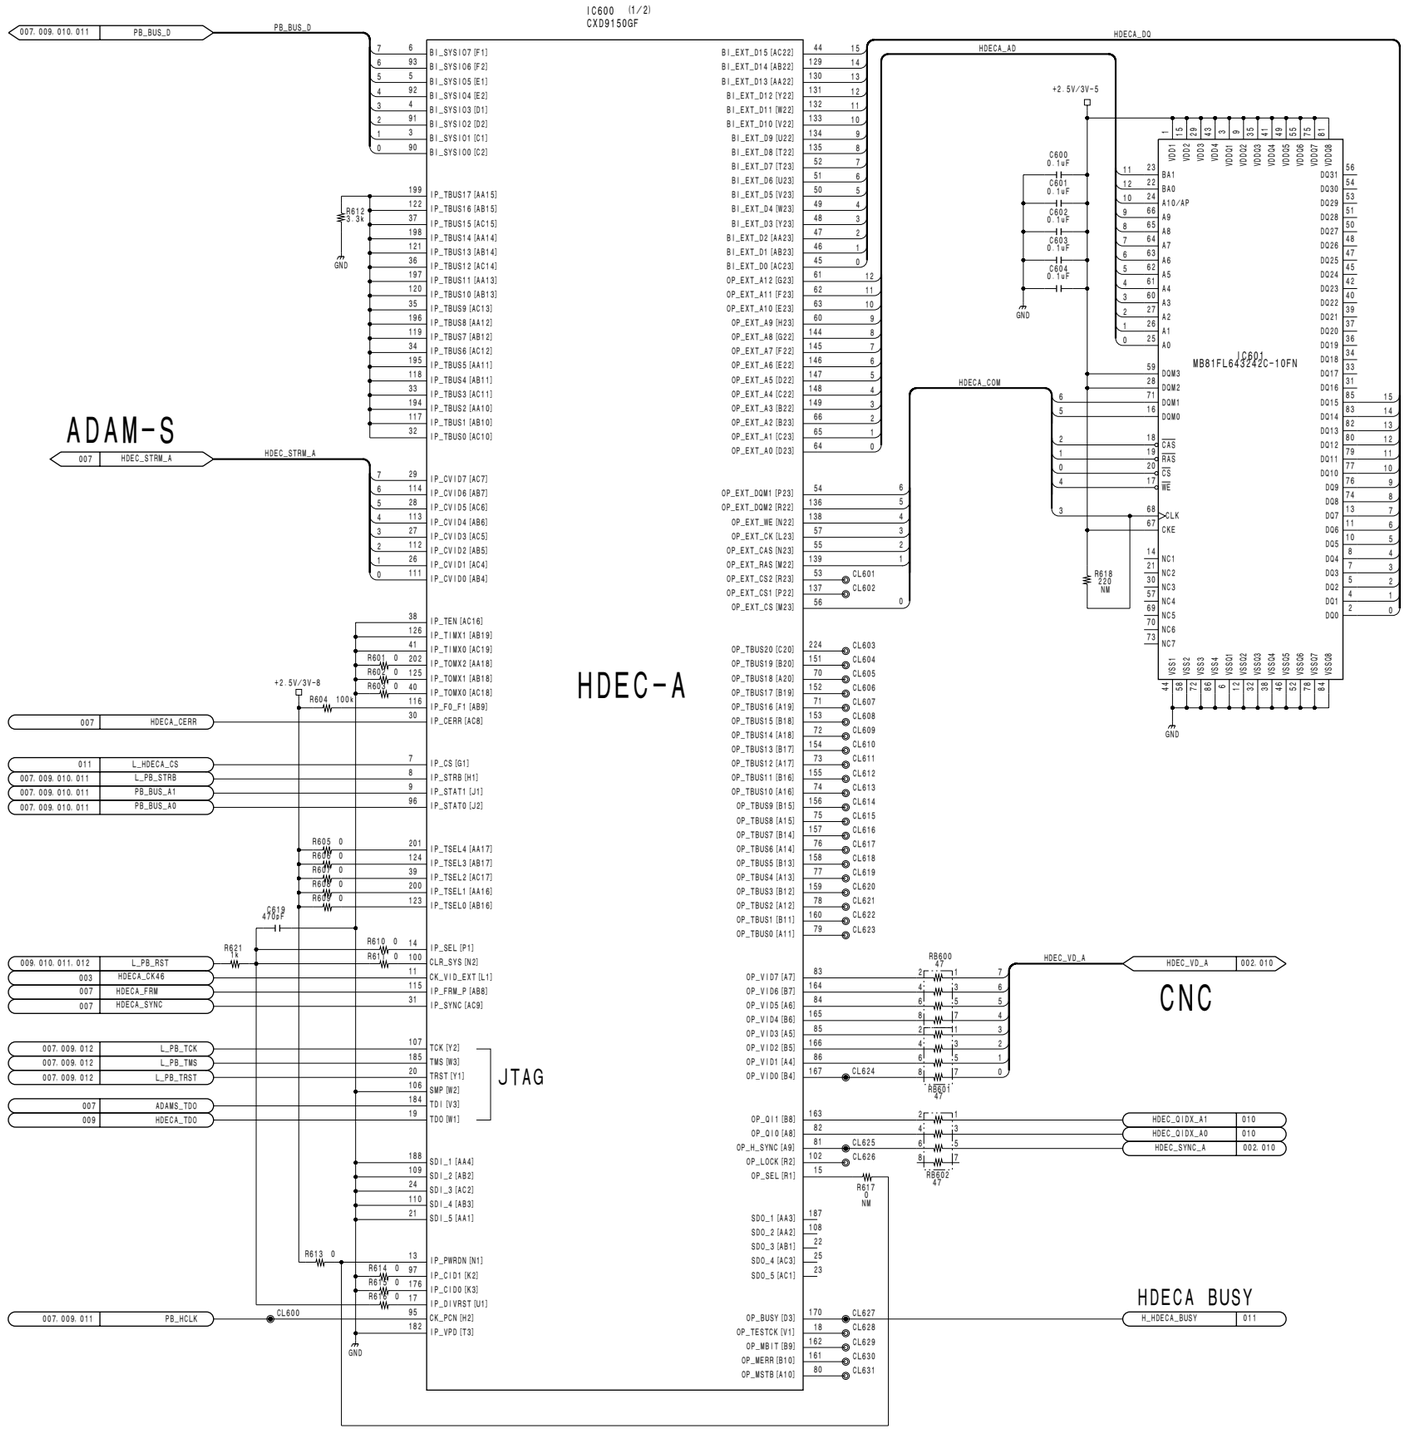

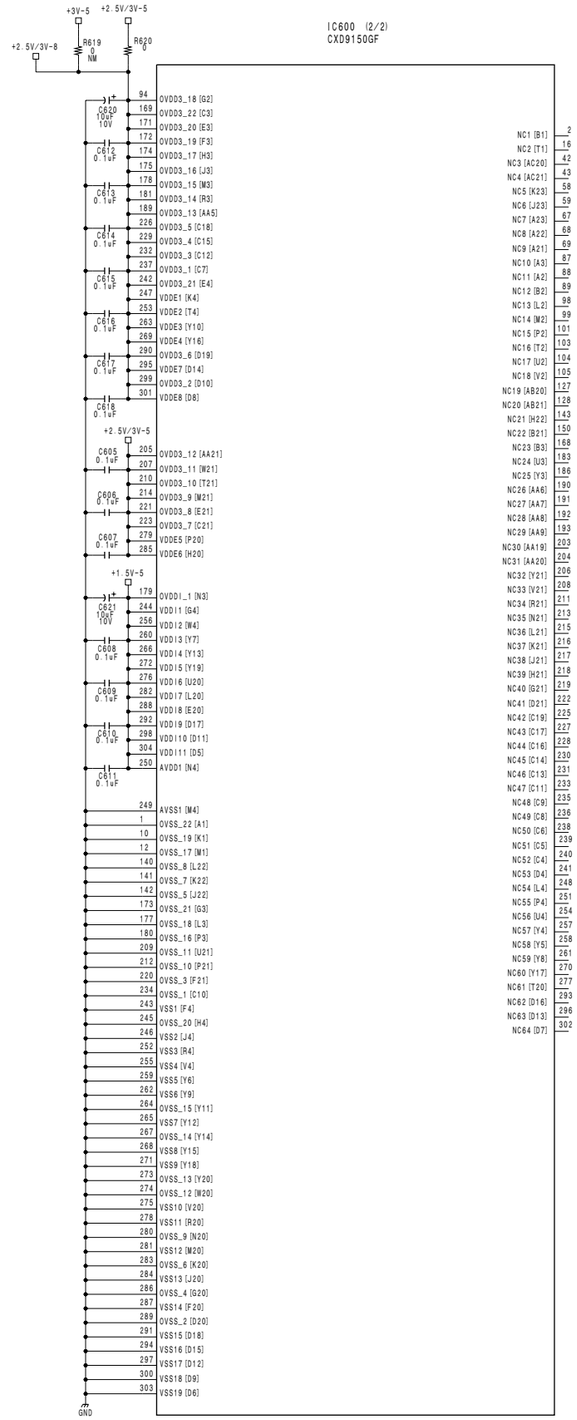

DVP-18 (8/13)

BOARD NO. 1-678-731-12, 13
LOT NO. 083-

HDW-750_DVP-18_015_8

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

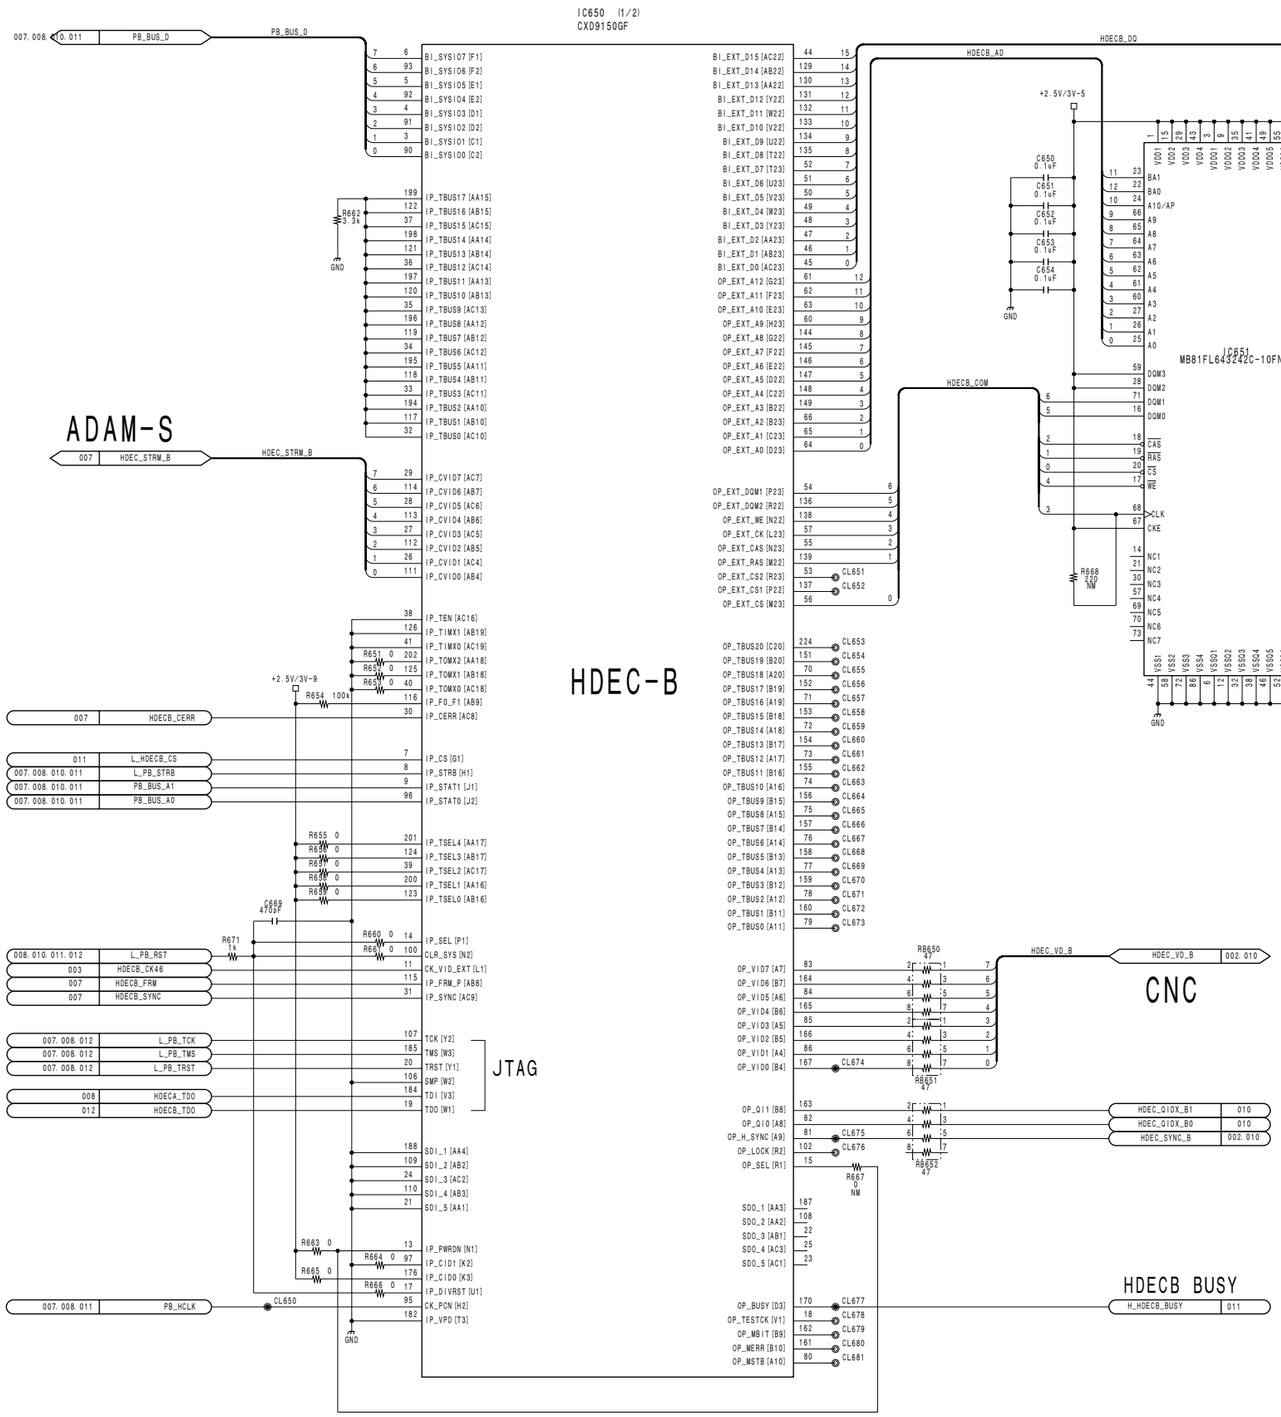

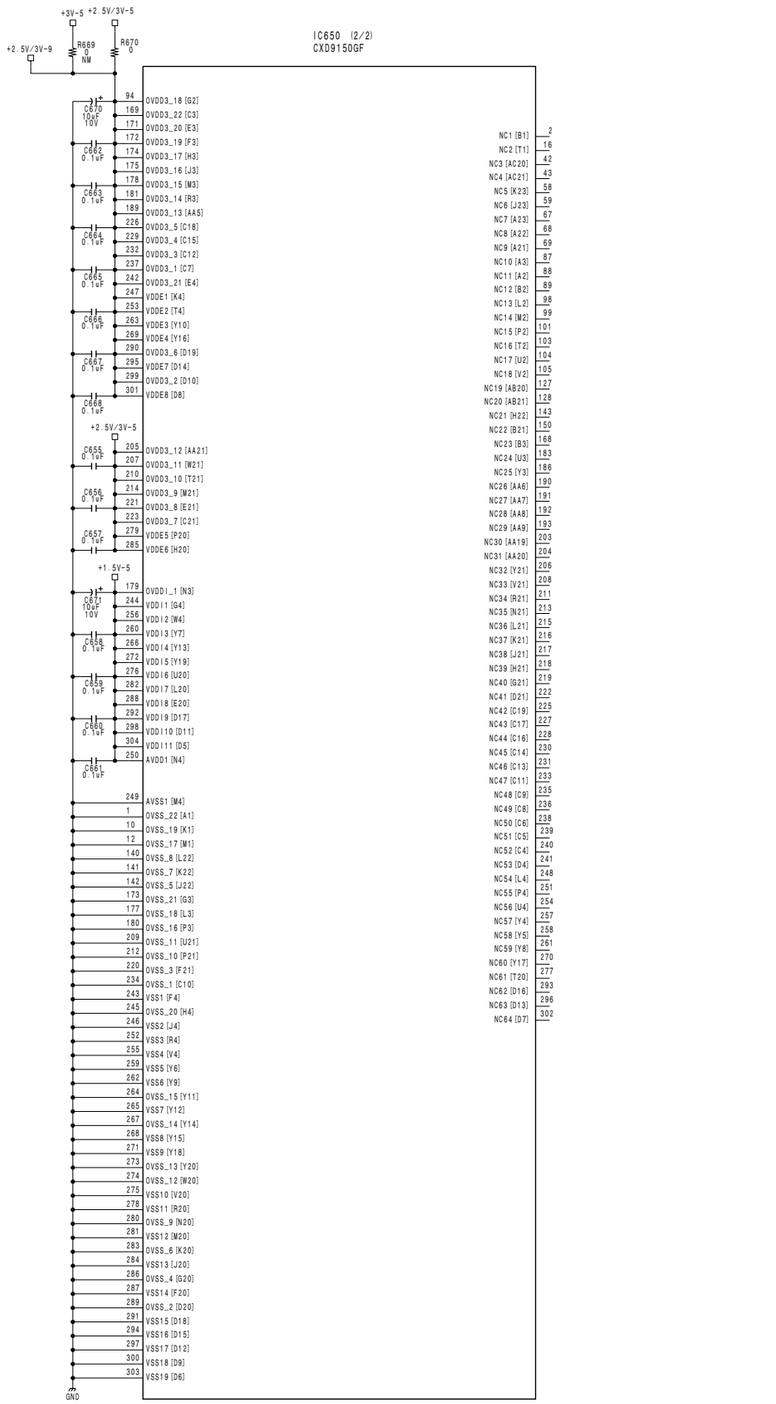

DVP-18 (9/13)

BOARD NO. 1-678-731-12, 13
LOT NO. 083-

HDW-750_DVP-18_015_9

DVP-18 (10/13)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

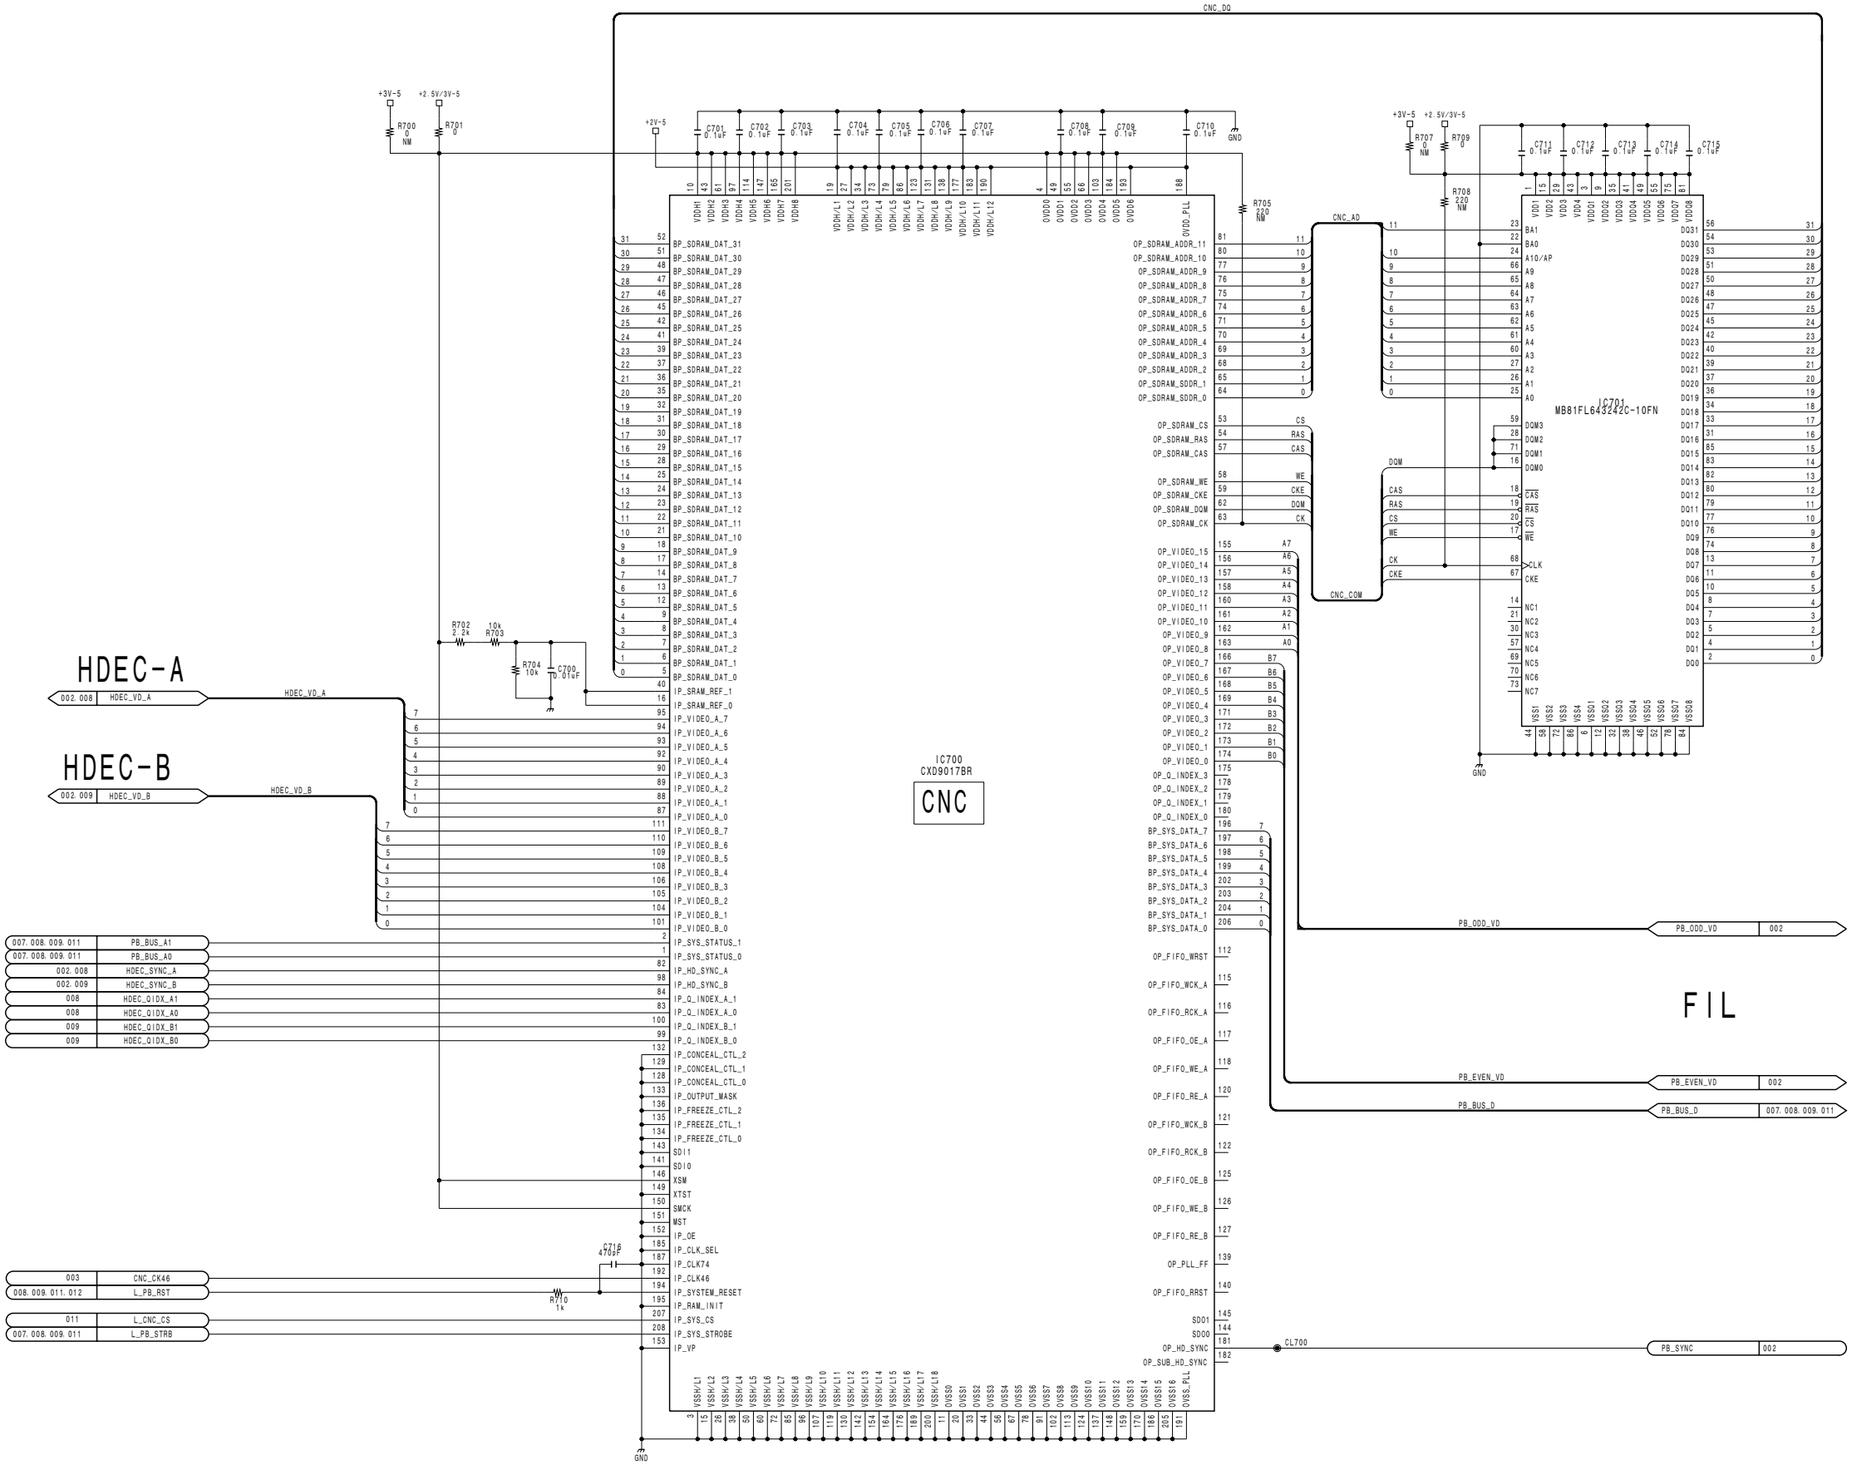

DVP-18 (10/13)
BOARD NO. 1-678-731-12, 13
LOT NO. 083-
HDW-750_DVP-18_015_10

DVP-18 (11/13)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

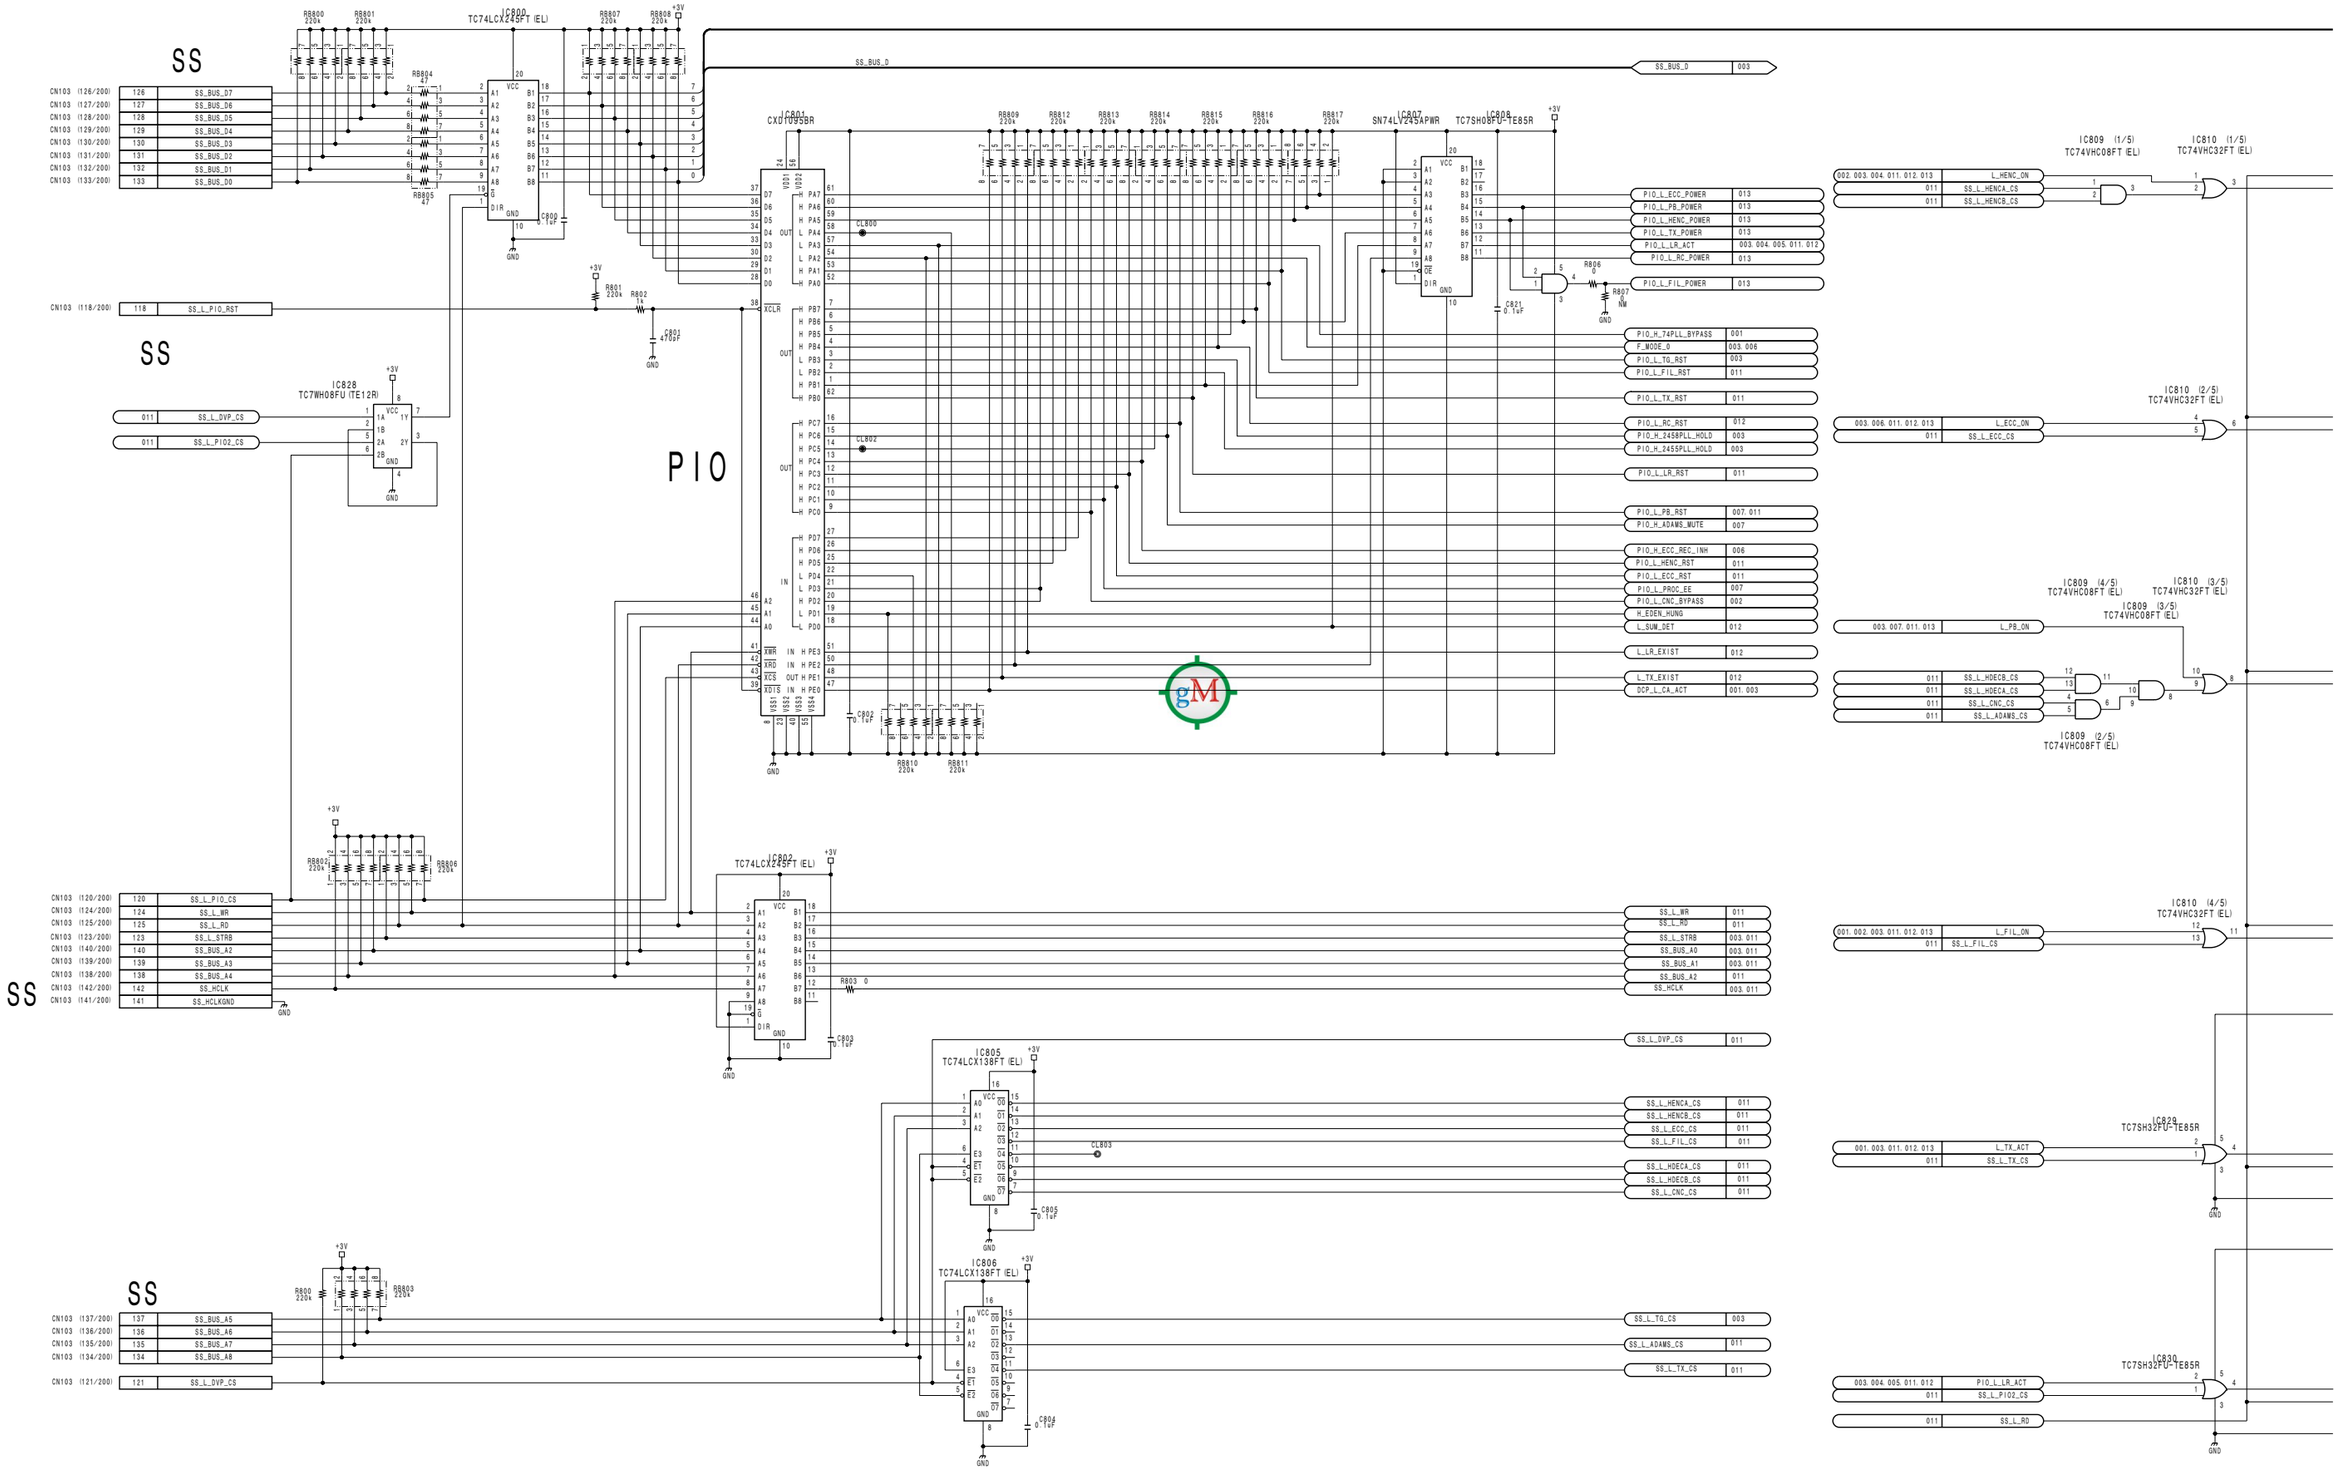

4-66

DVP-18 (11/13)

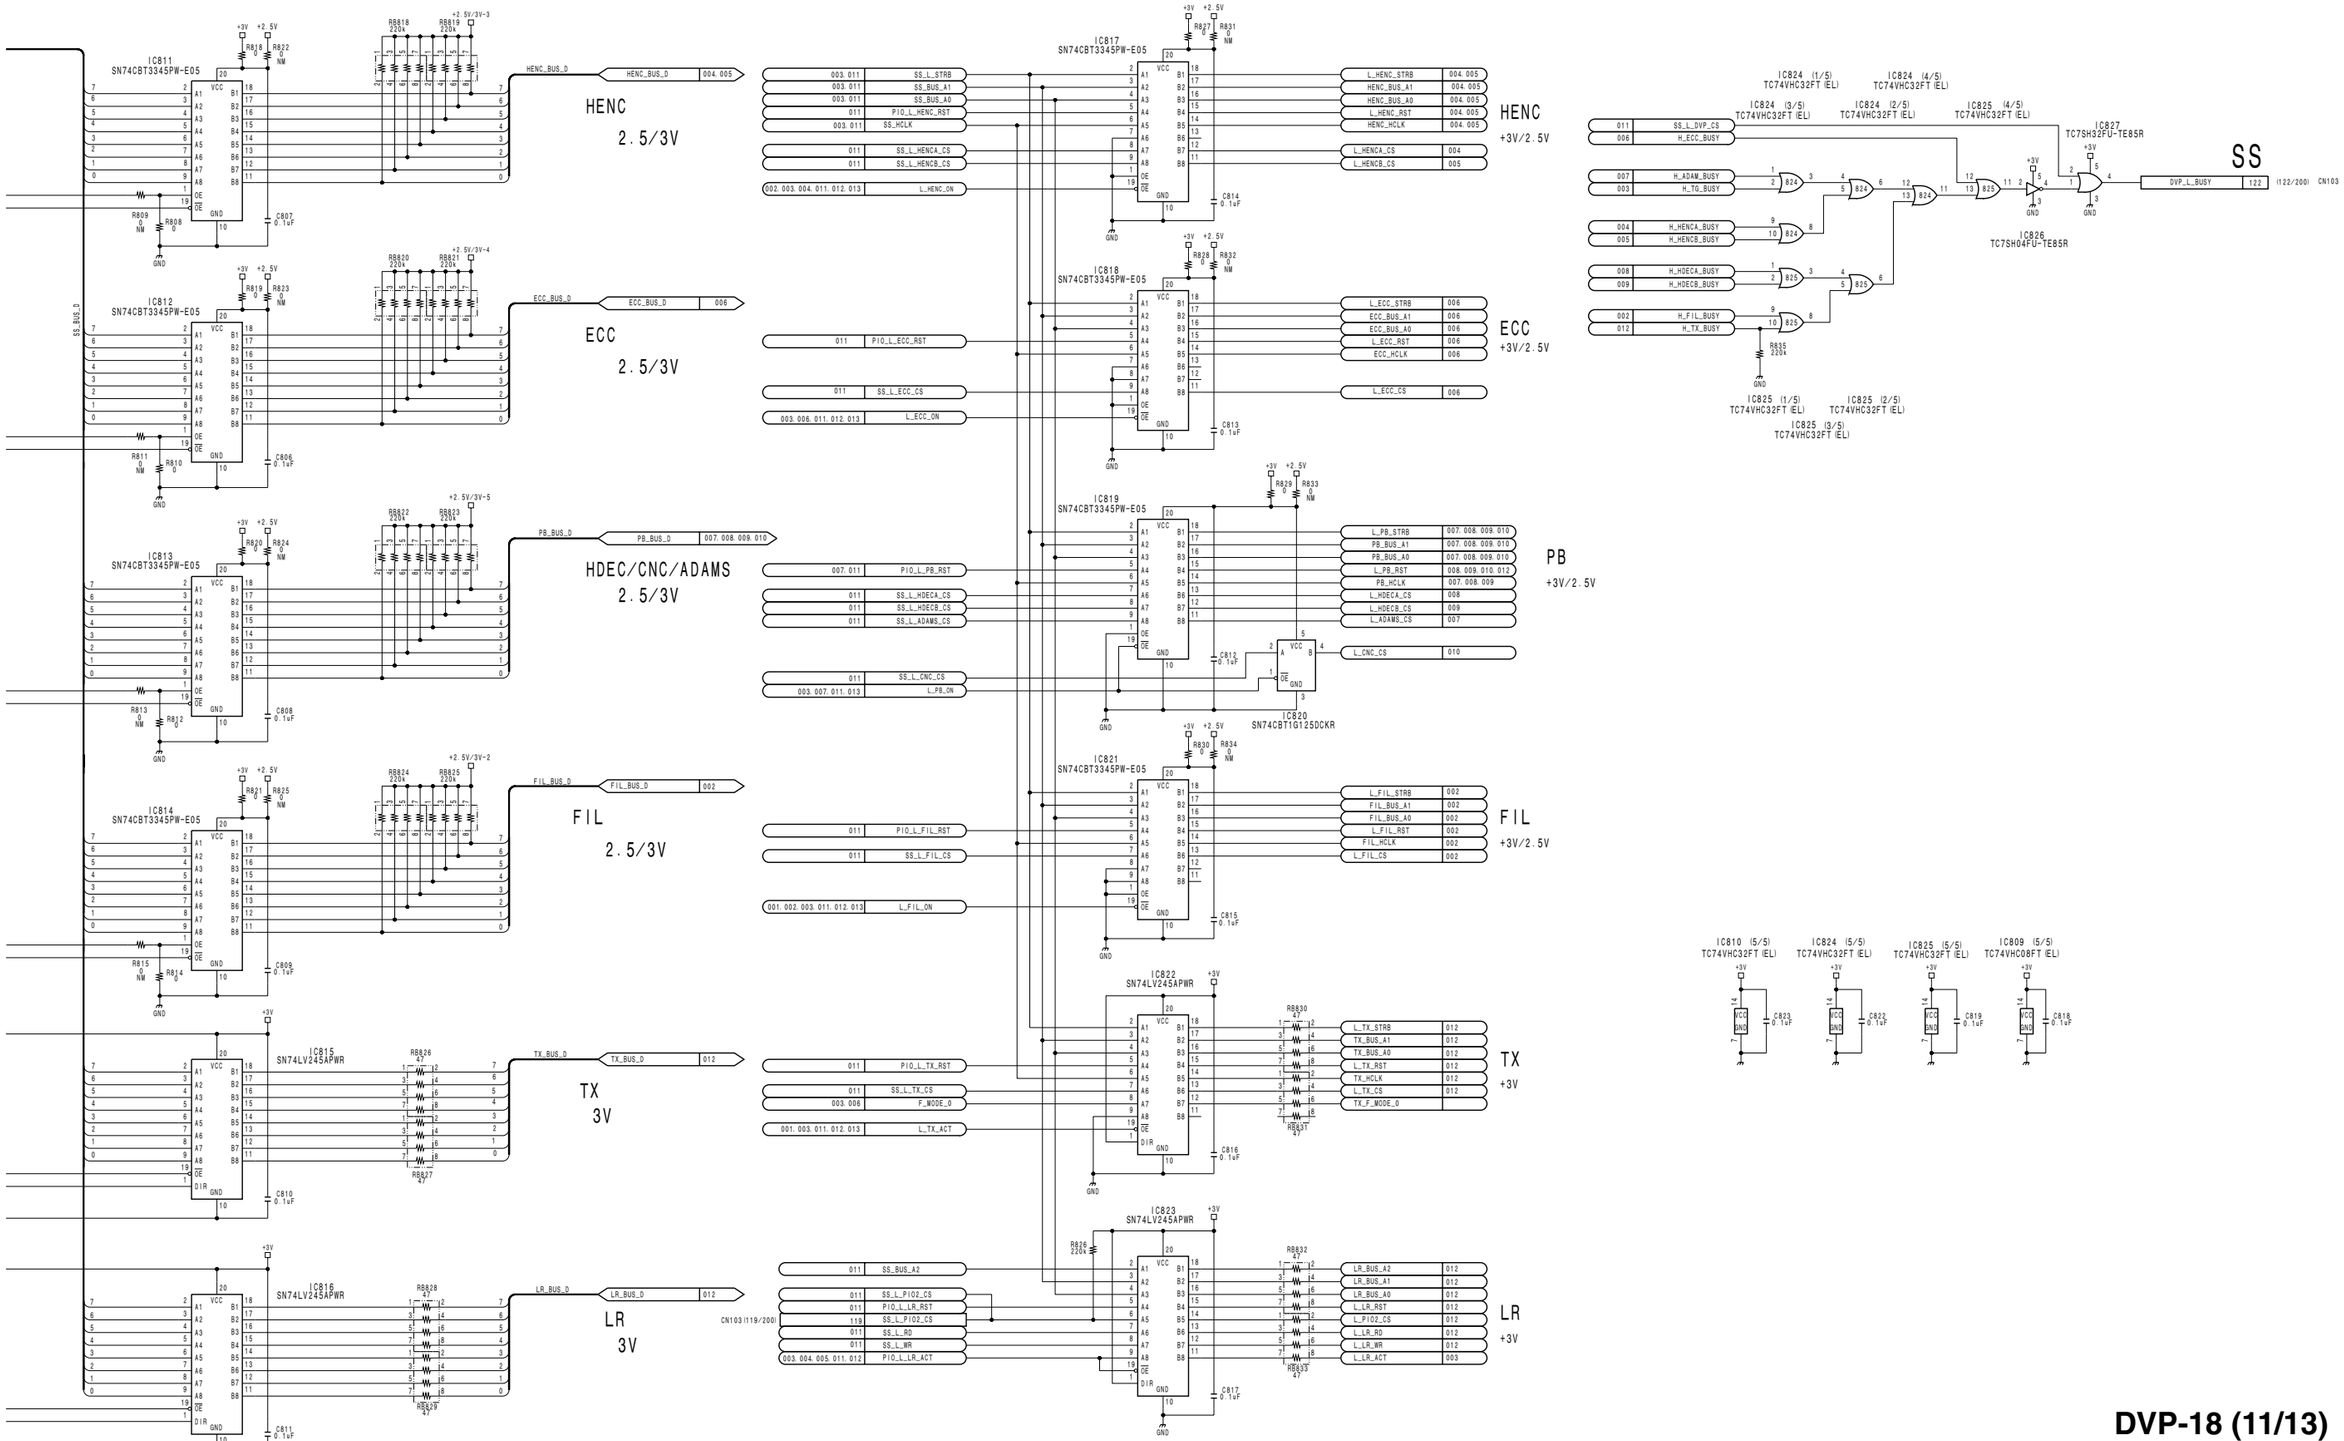

DVP-18 (11/13)

BOARD NO. 1-678-731-12, 13
LOT NO. 083-

HDW-750_DVP-18_015_11

DVP-18 (12/13)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

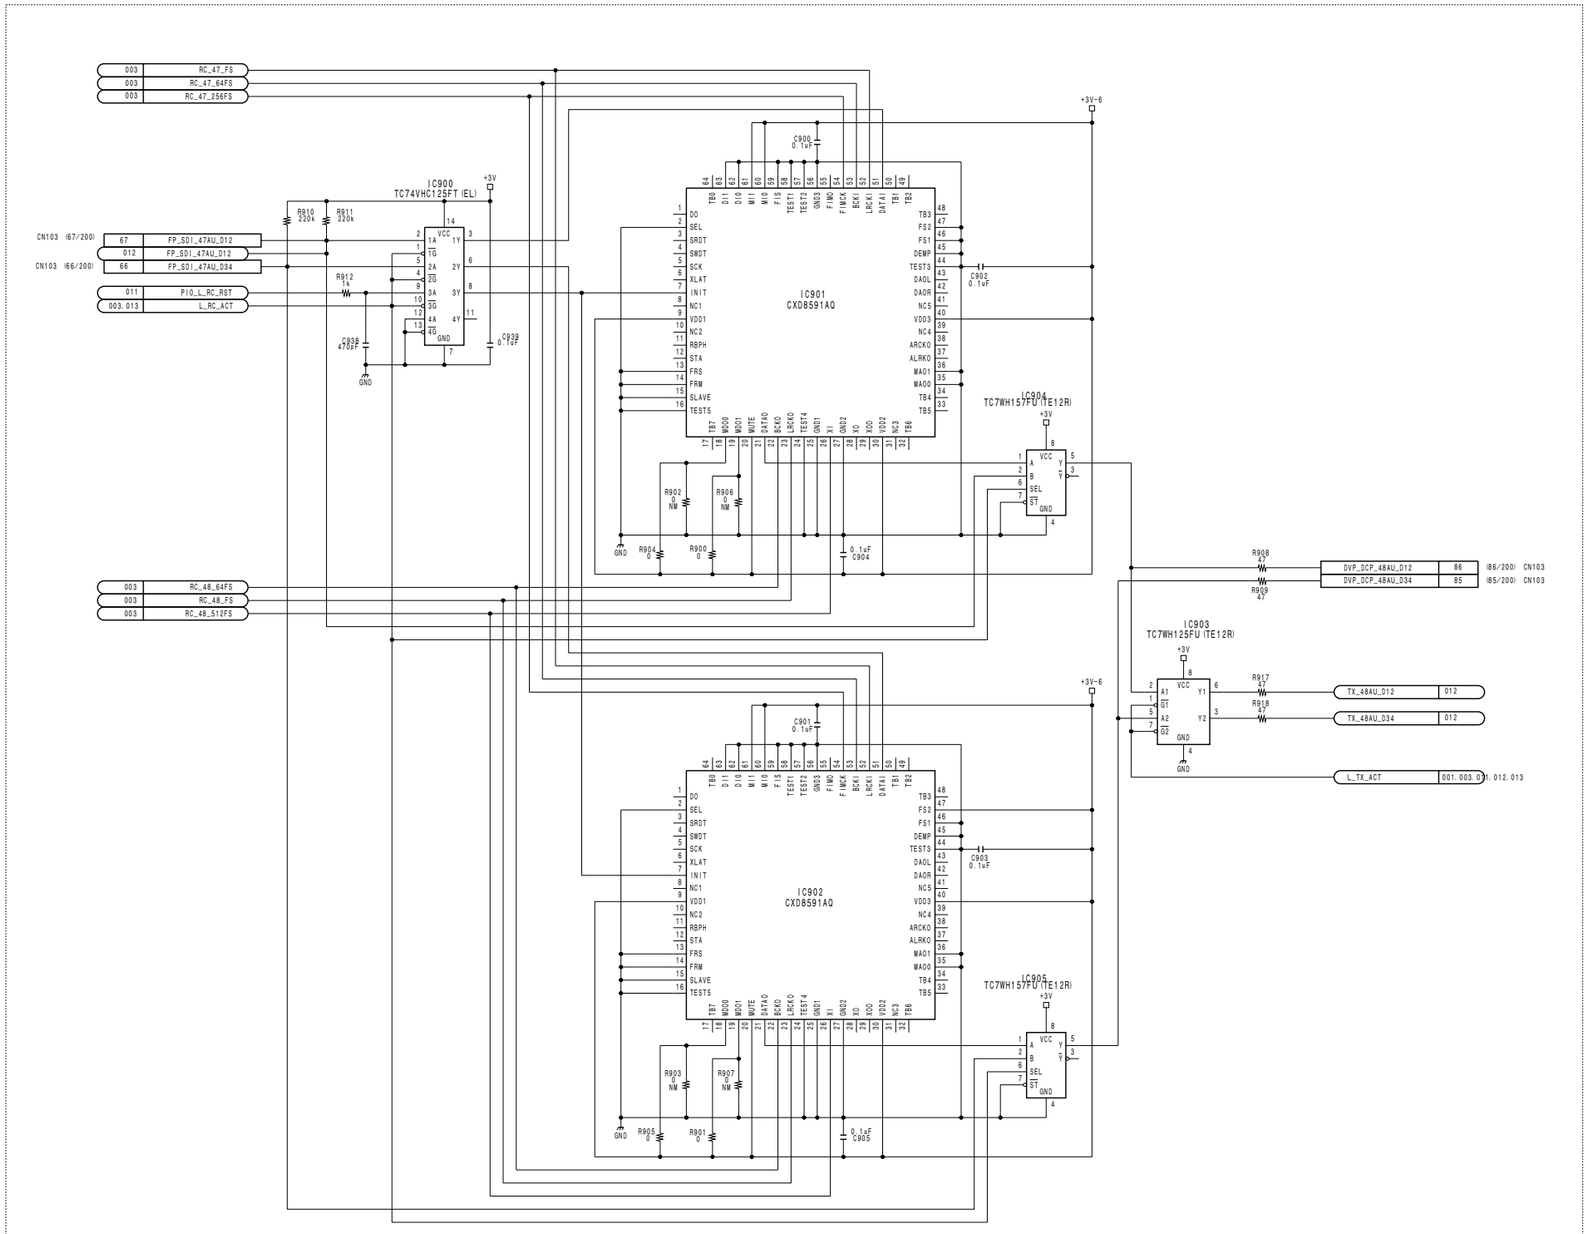

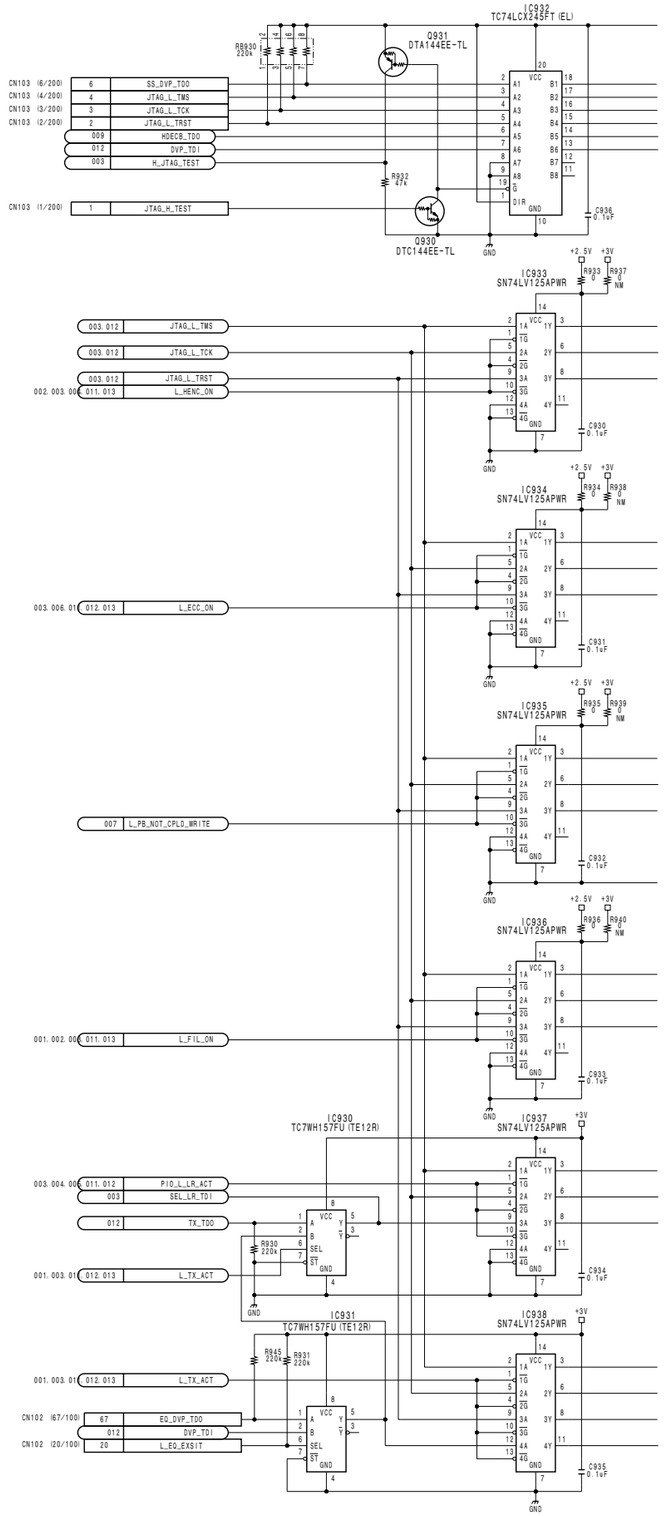

4-68

HDW-750 V2

DVP-18 (12/13)

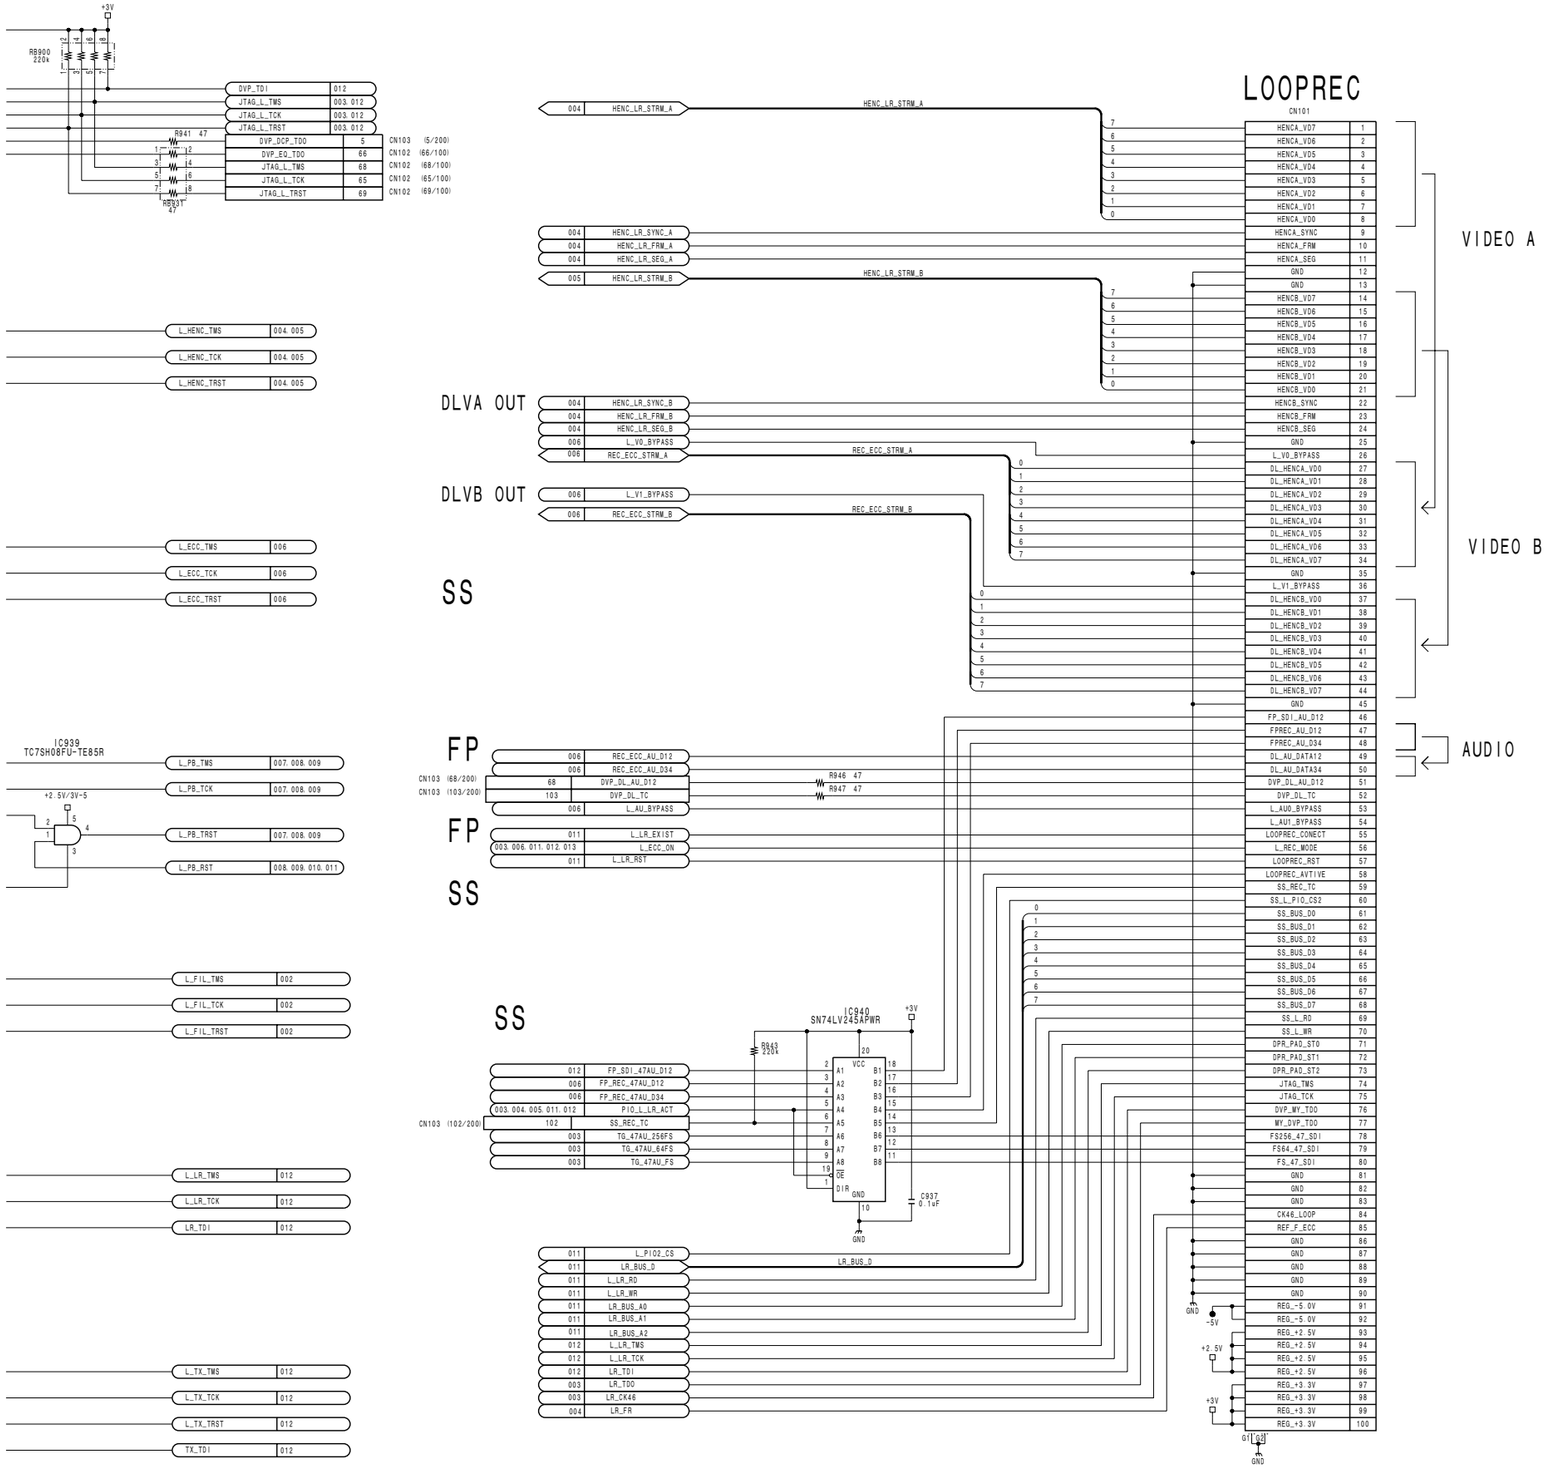

DVP-18 (12/13)

BOARD NO. 1-678-731-12, 13
LOT NO. 083-

HDW-750_DVP-18_015_12

DVP-18 (13/13)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

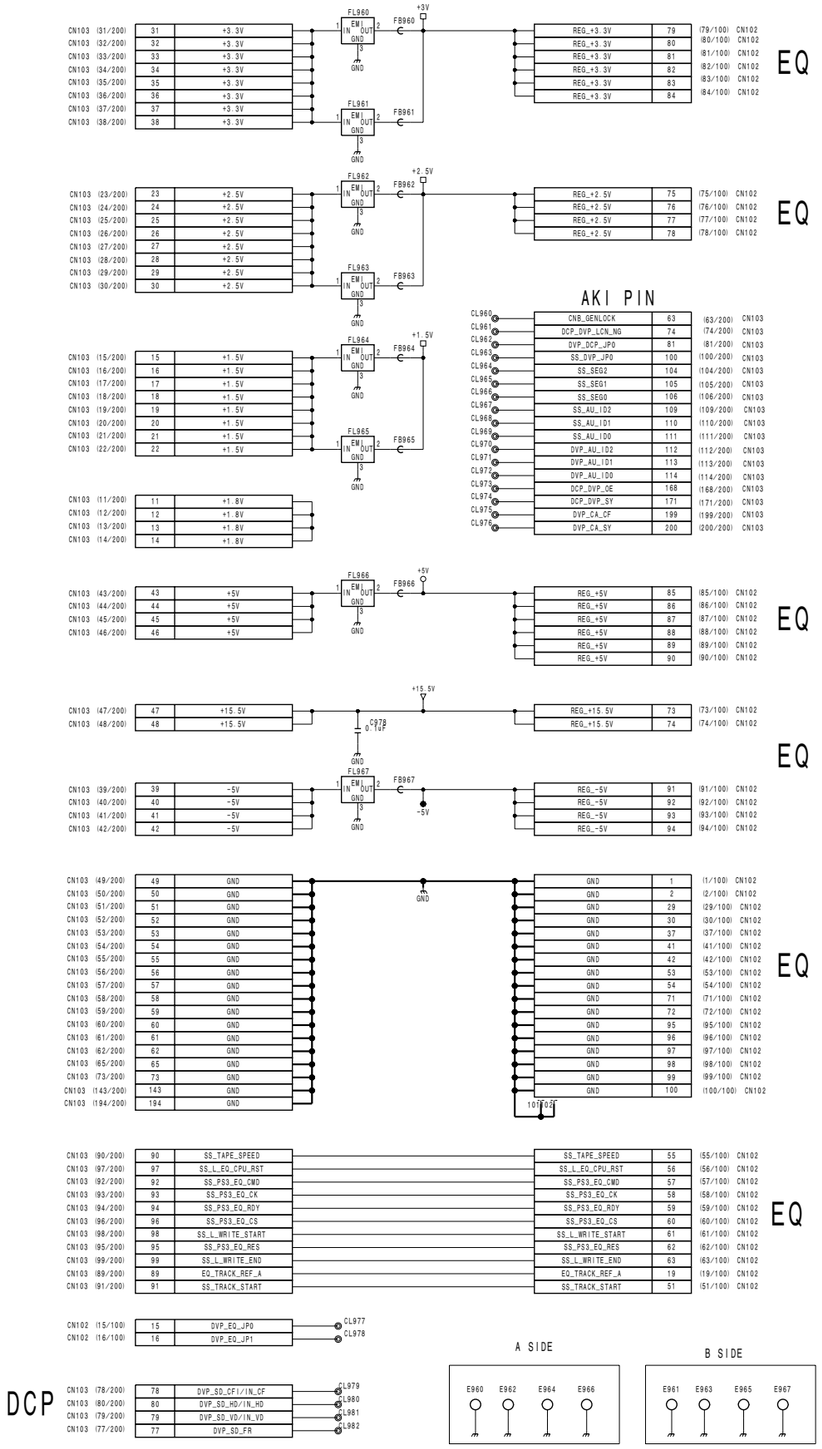

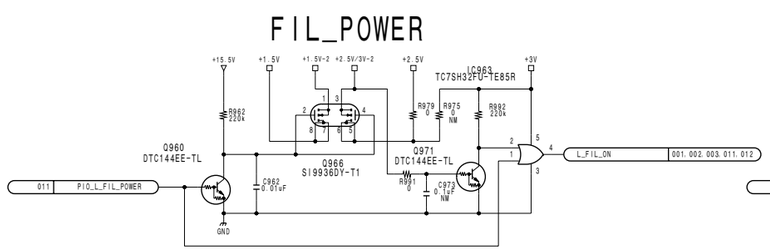

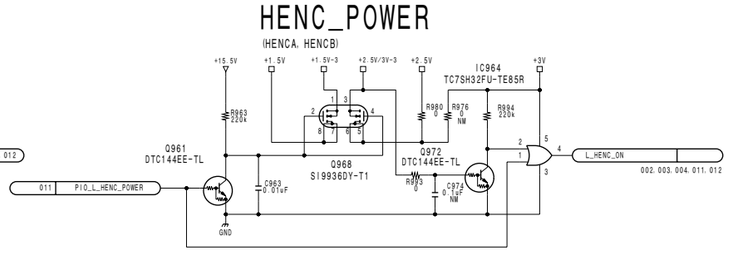

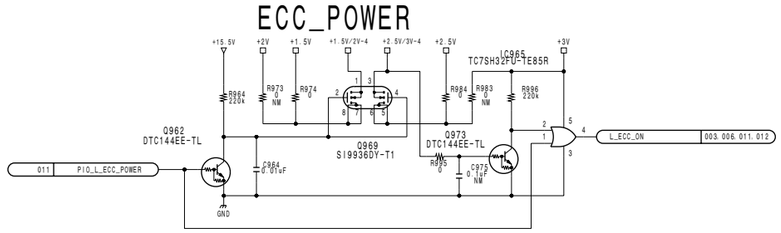

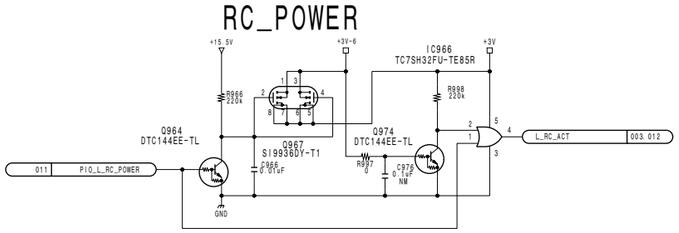

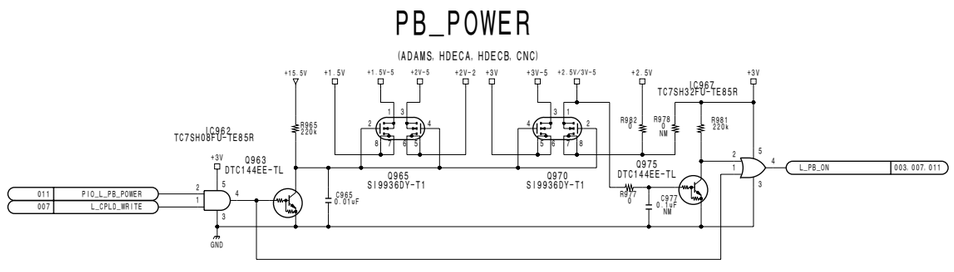



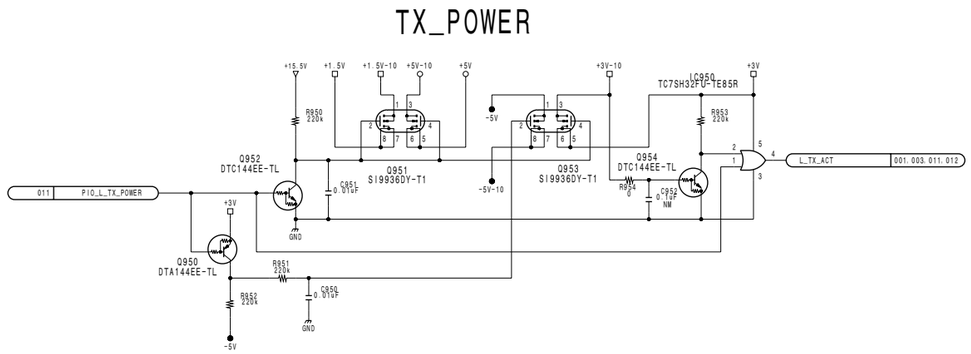



DVP-18 (13/13)

BOARD NO. 1-678-731-12, 13
LOT NO. 083-
HDW-750_DVP-18_015_13

http://getMANUAL.com

HDW-750 (J) : S/N 70001 and Higher
HKDW-703 (UCJ)

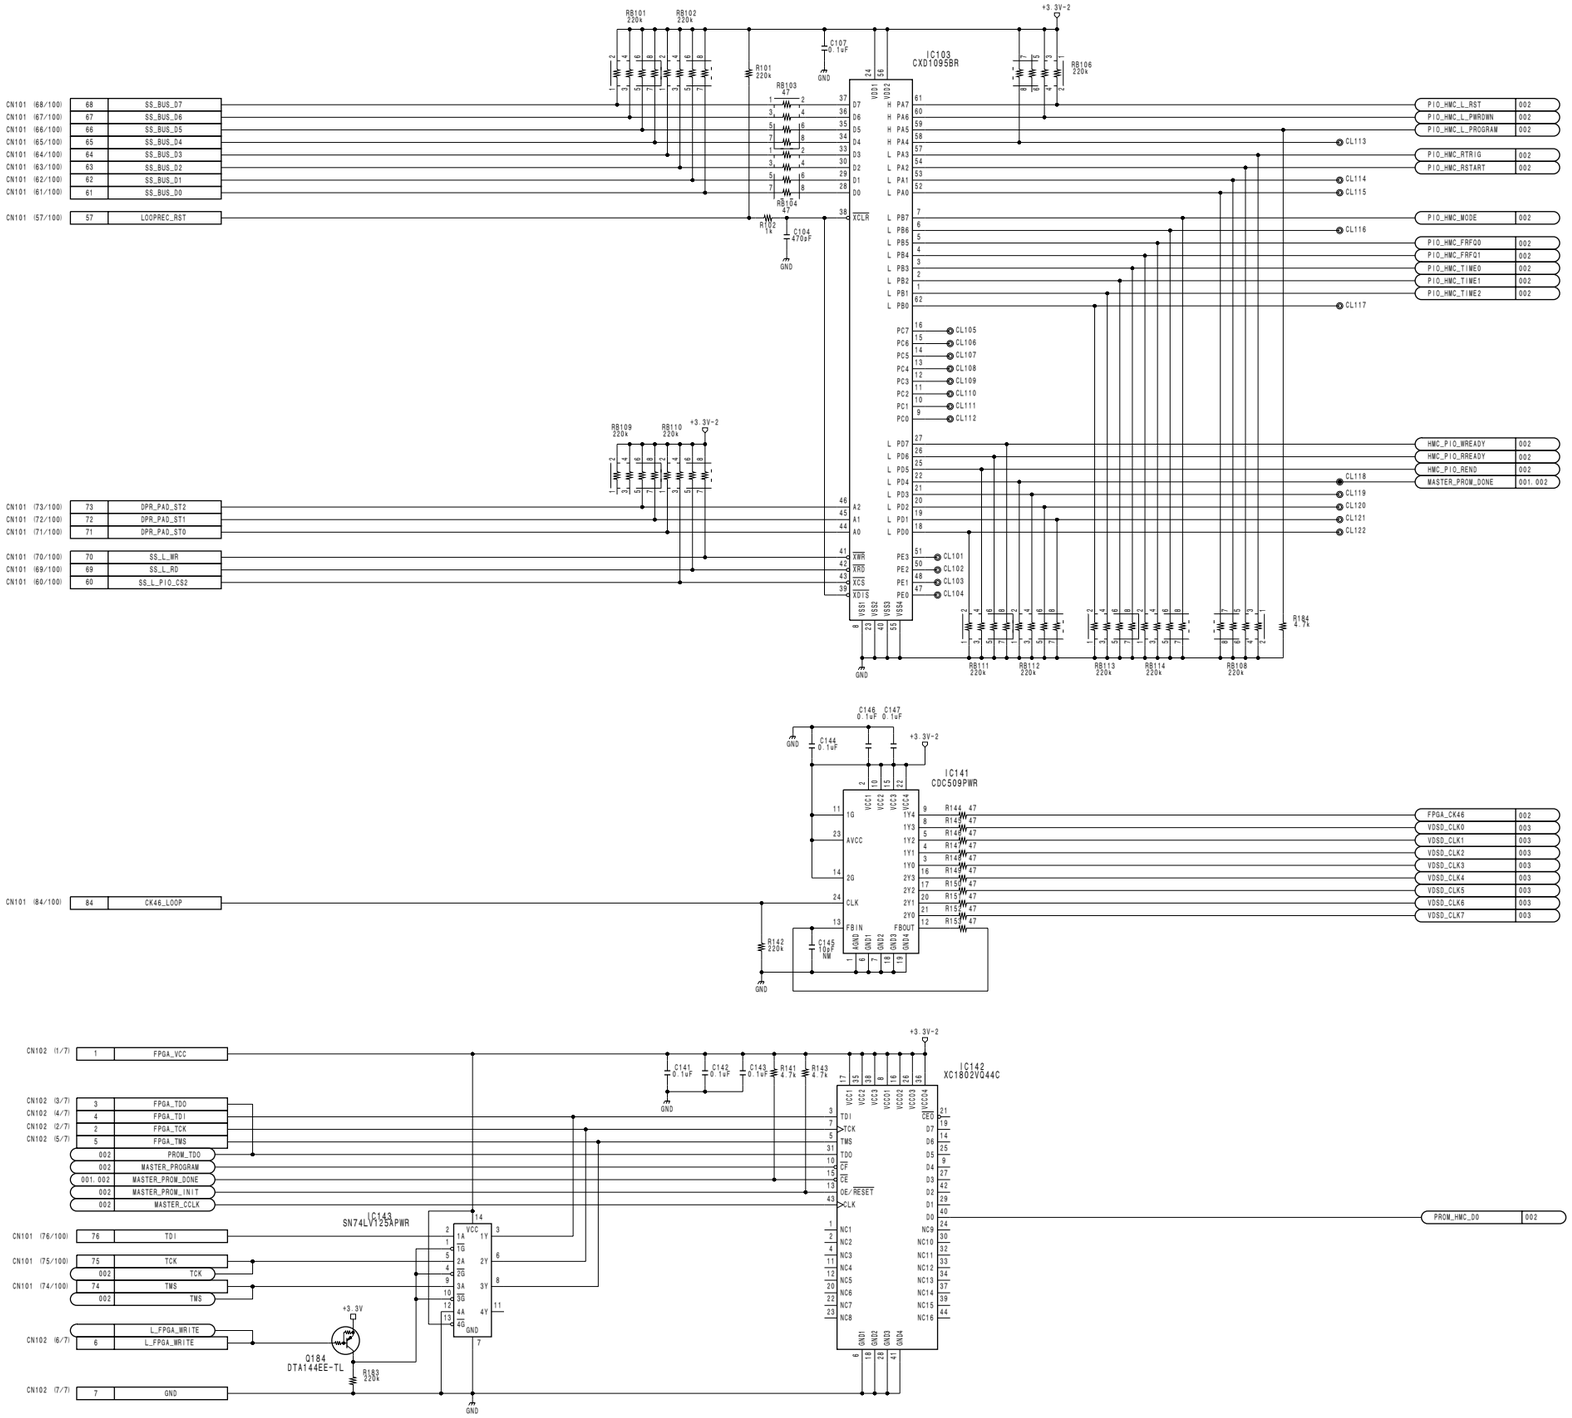

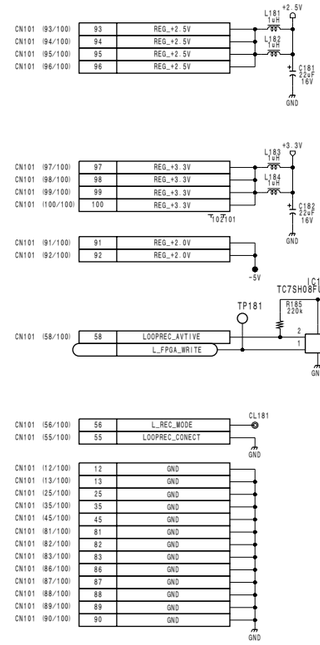

MY-99 (1/3)
BOARD NO. 1-678-759-12
LOT NO. 083-
HDW-750_MY-99_013_1

HDW-750 (J) : S/N 70001 and Higher
HKDW-703 (UCJ)

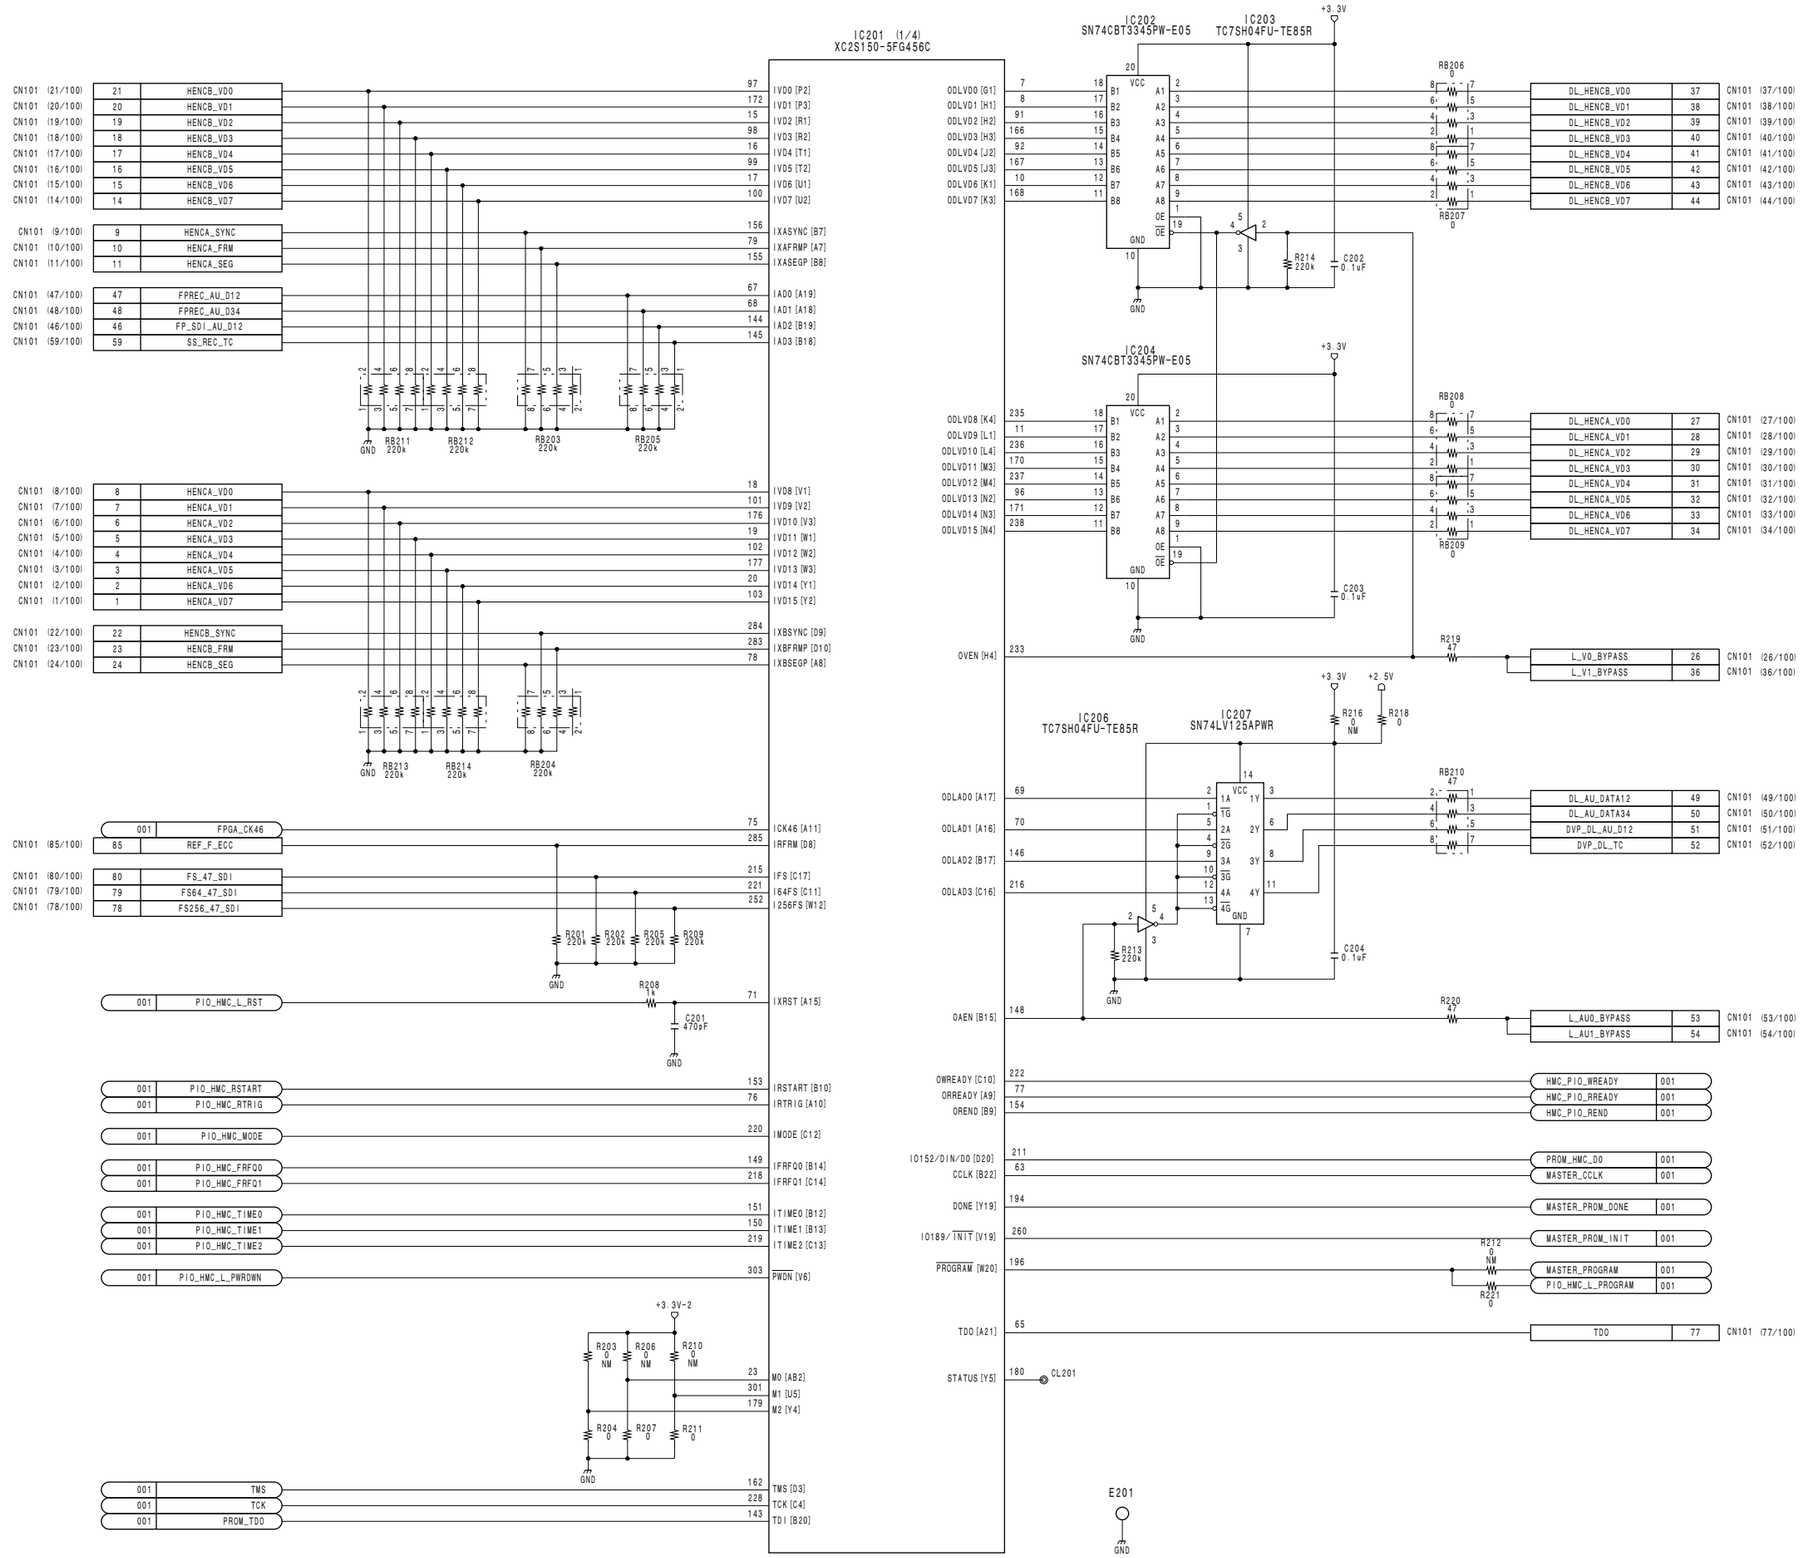

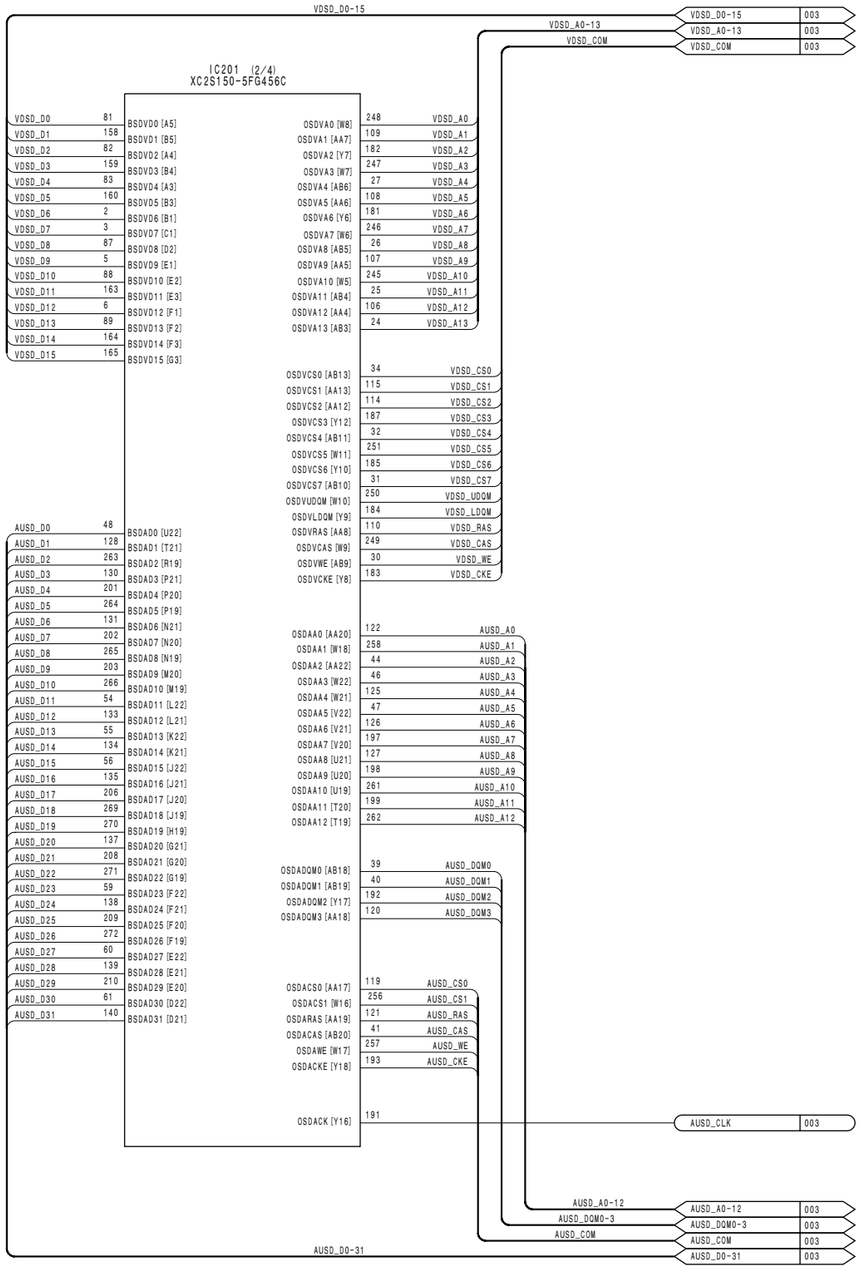

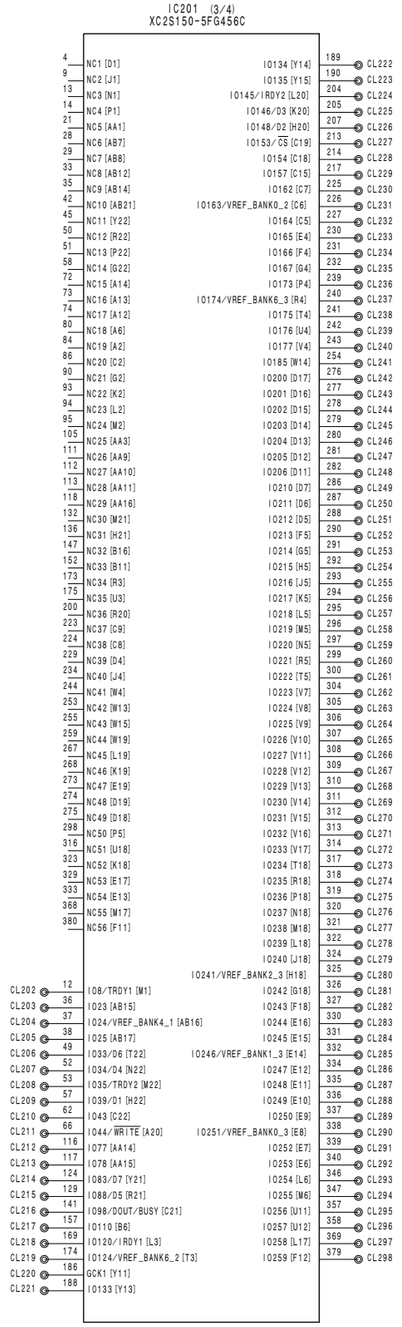

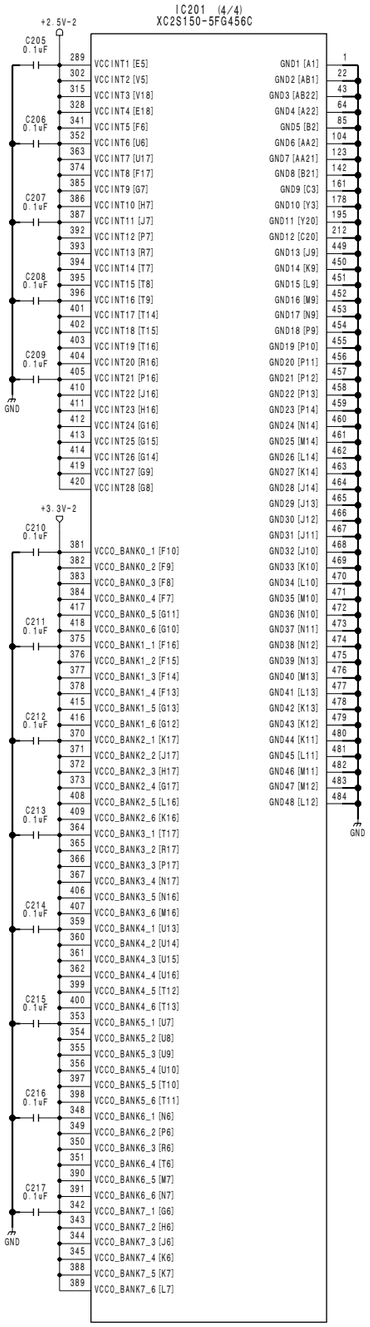

MY-99 (2/3)

BOARD NO. 1-678-759-12
LOT NO. 083-
HDW-750_MY-99_013_2

HDW-750 (J) : S/N 70001 and Higher
HKDW-703 (UCJ)

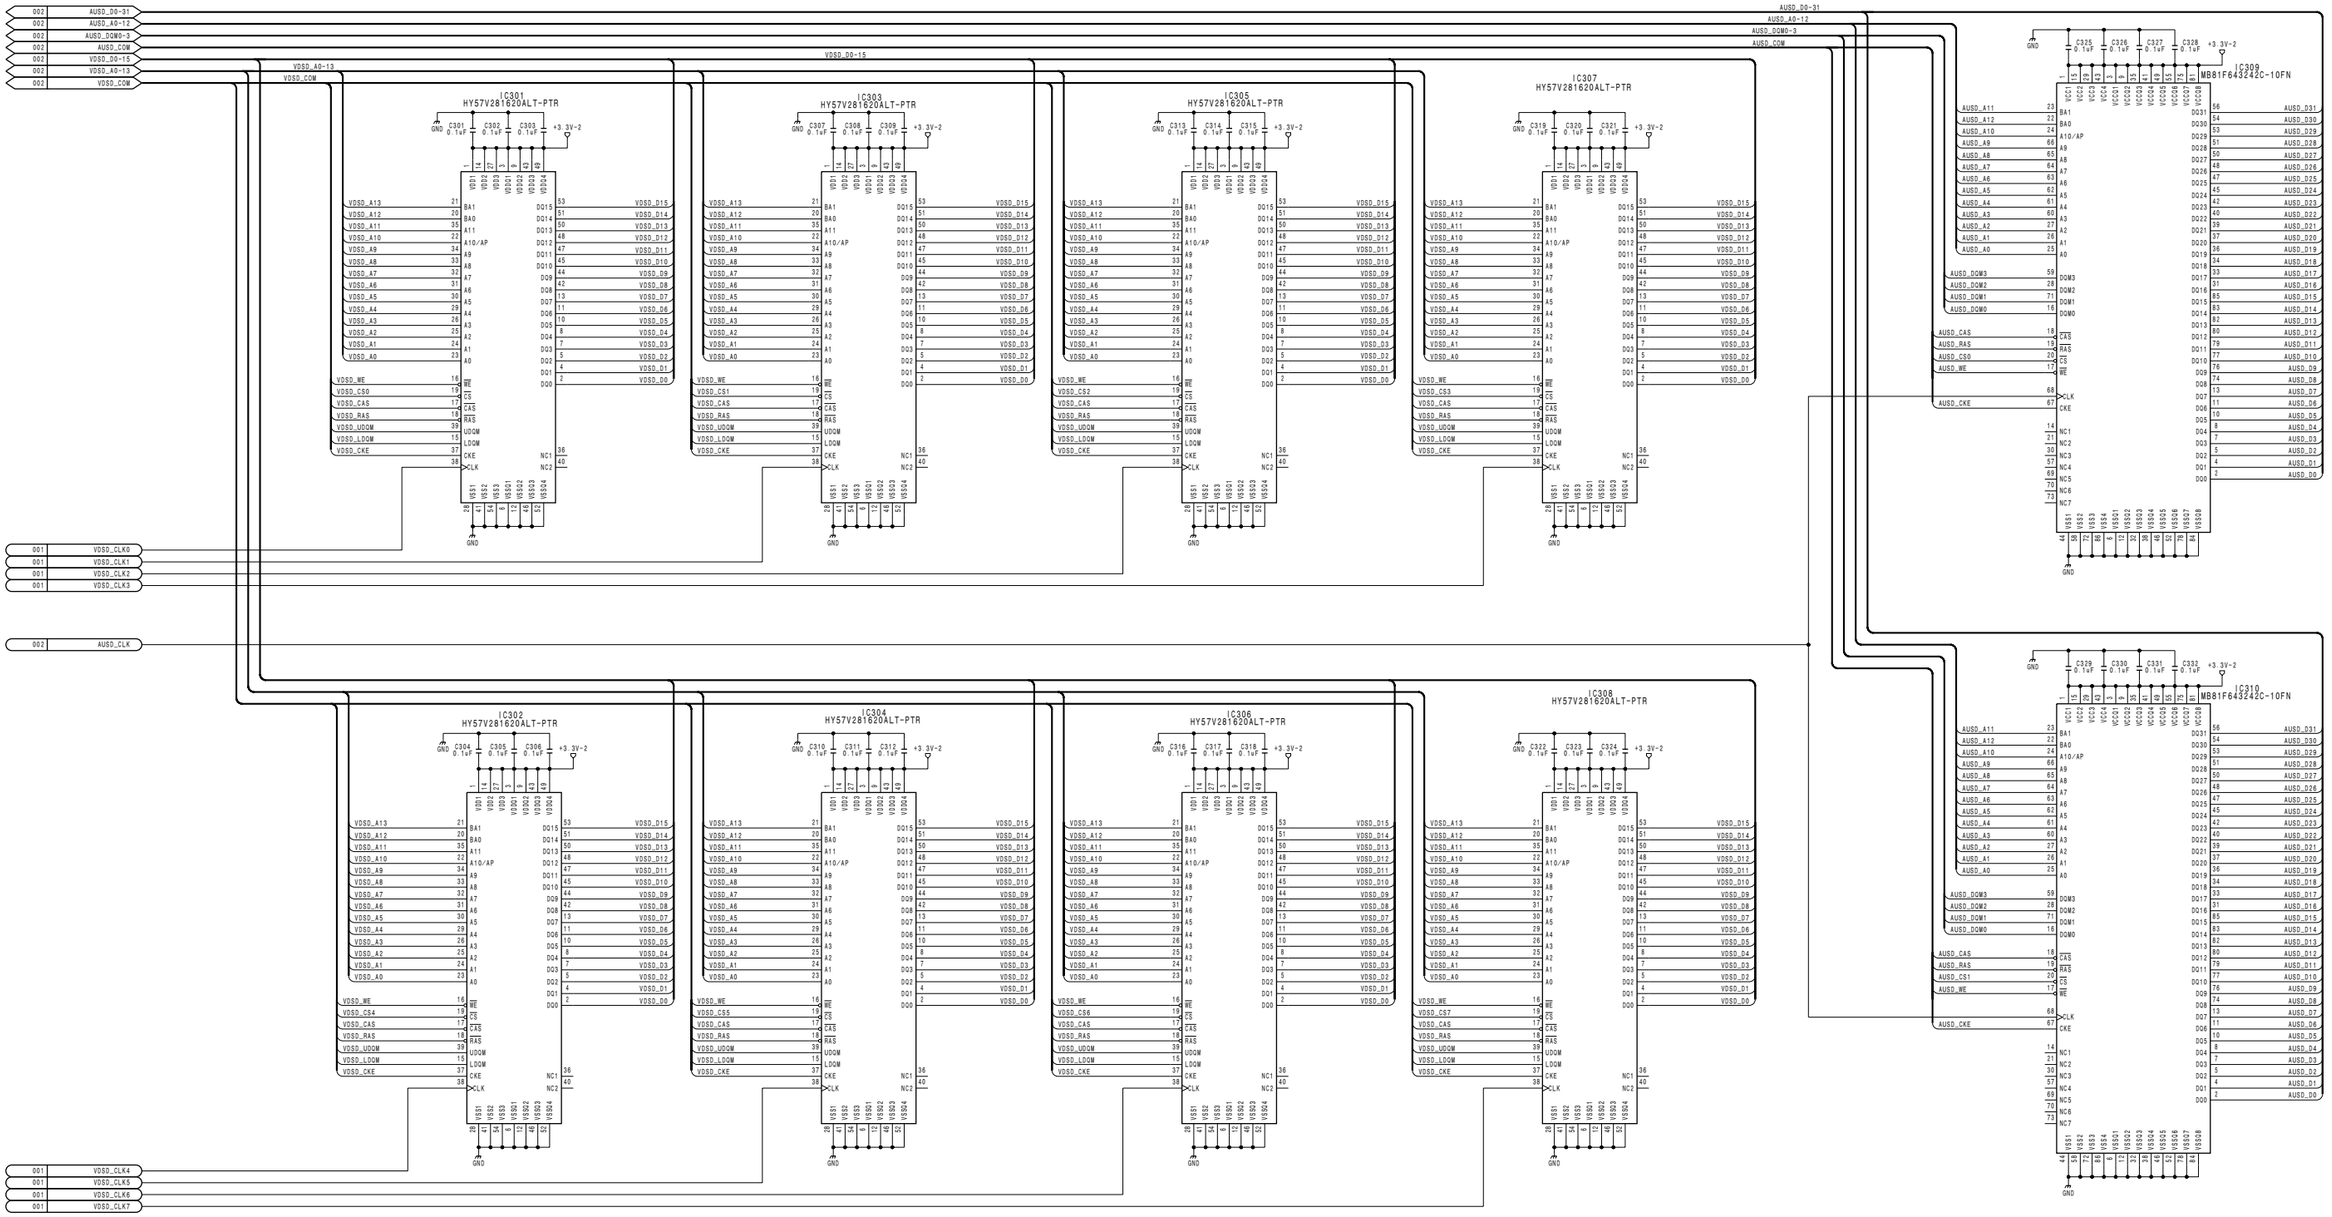

MY-99 (3/3)
BOARD NO. 1-678-759-12
LOT NO. 083-
HDW-750_MY-99_013_3

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

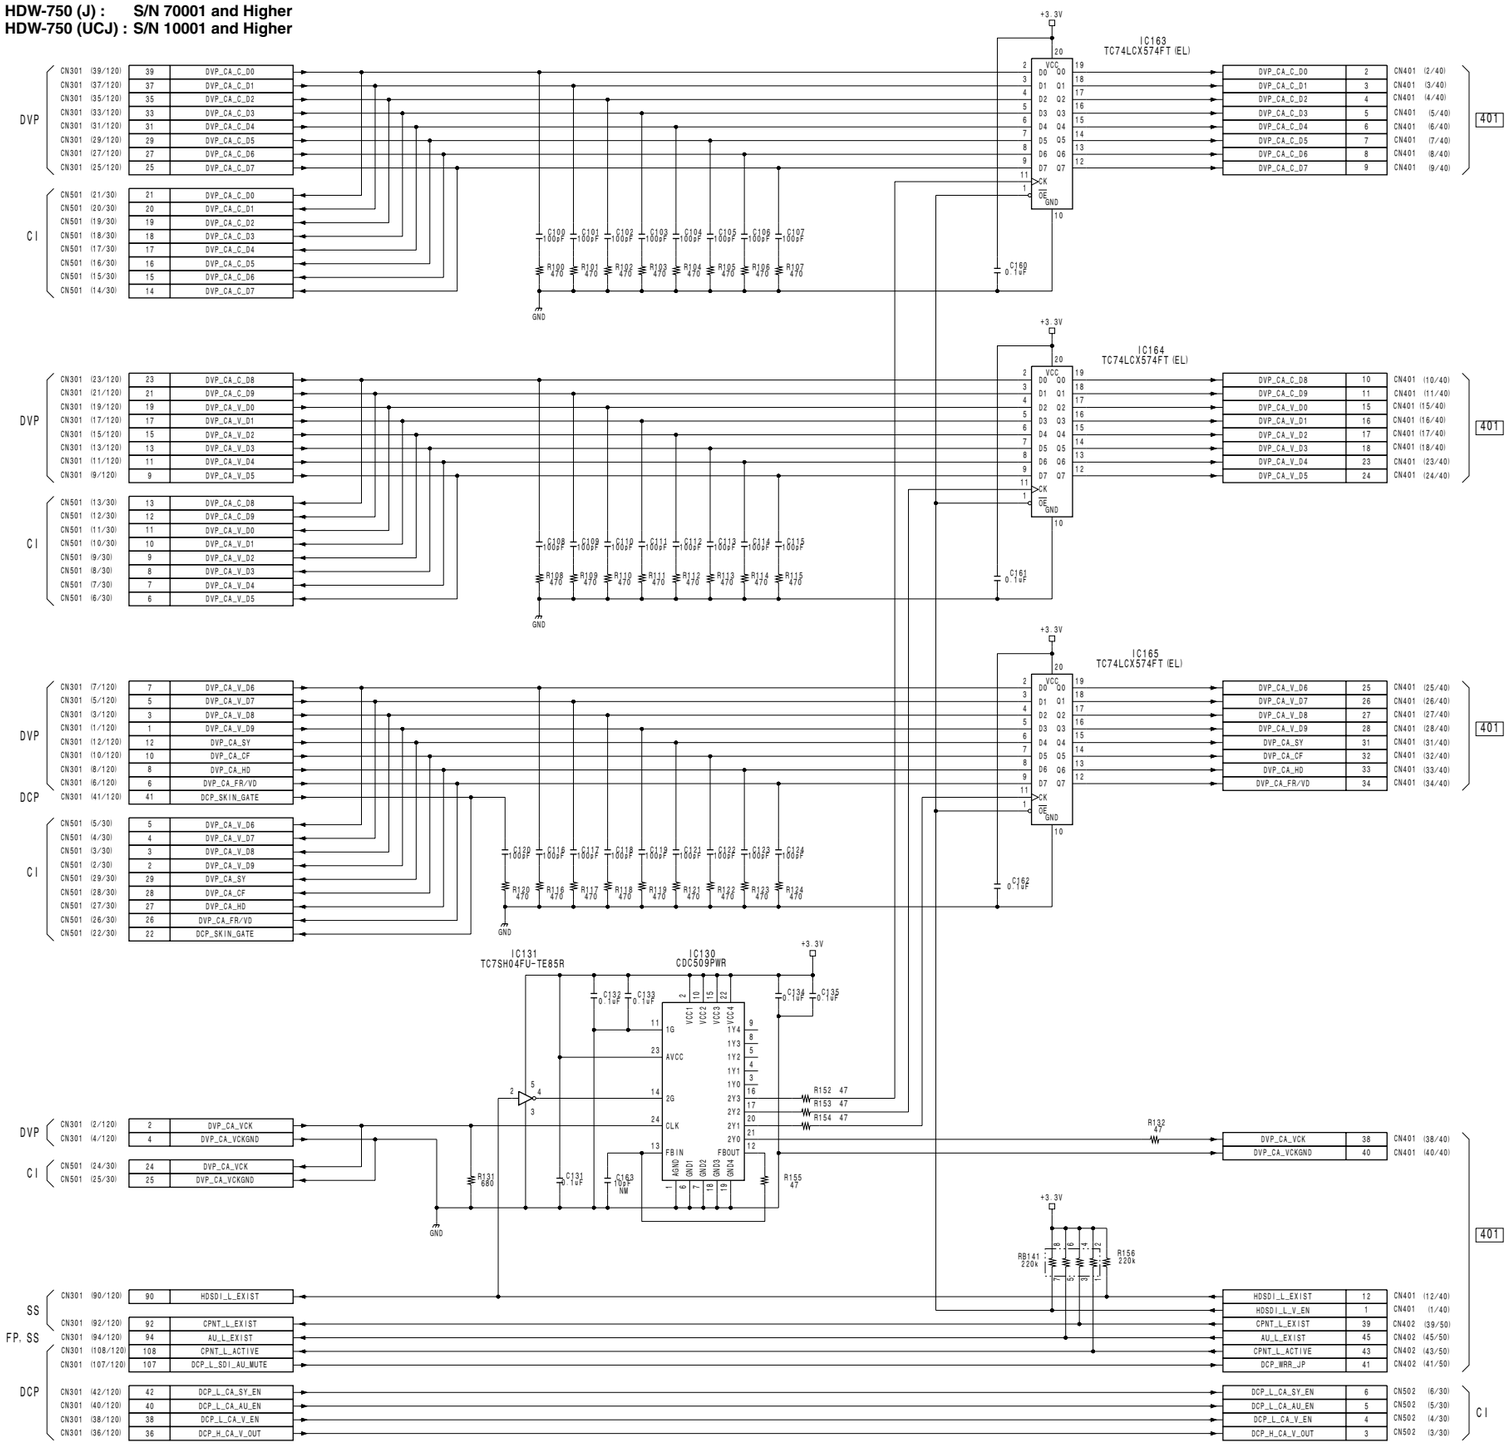

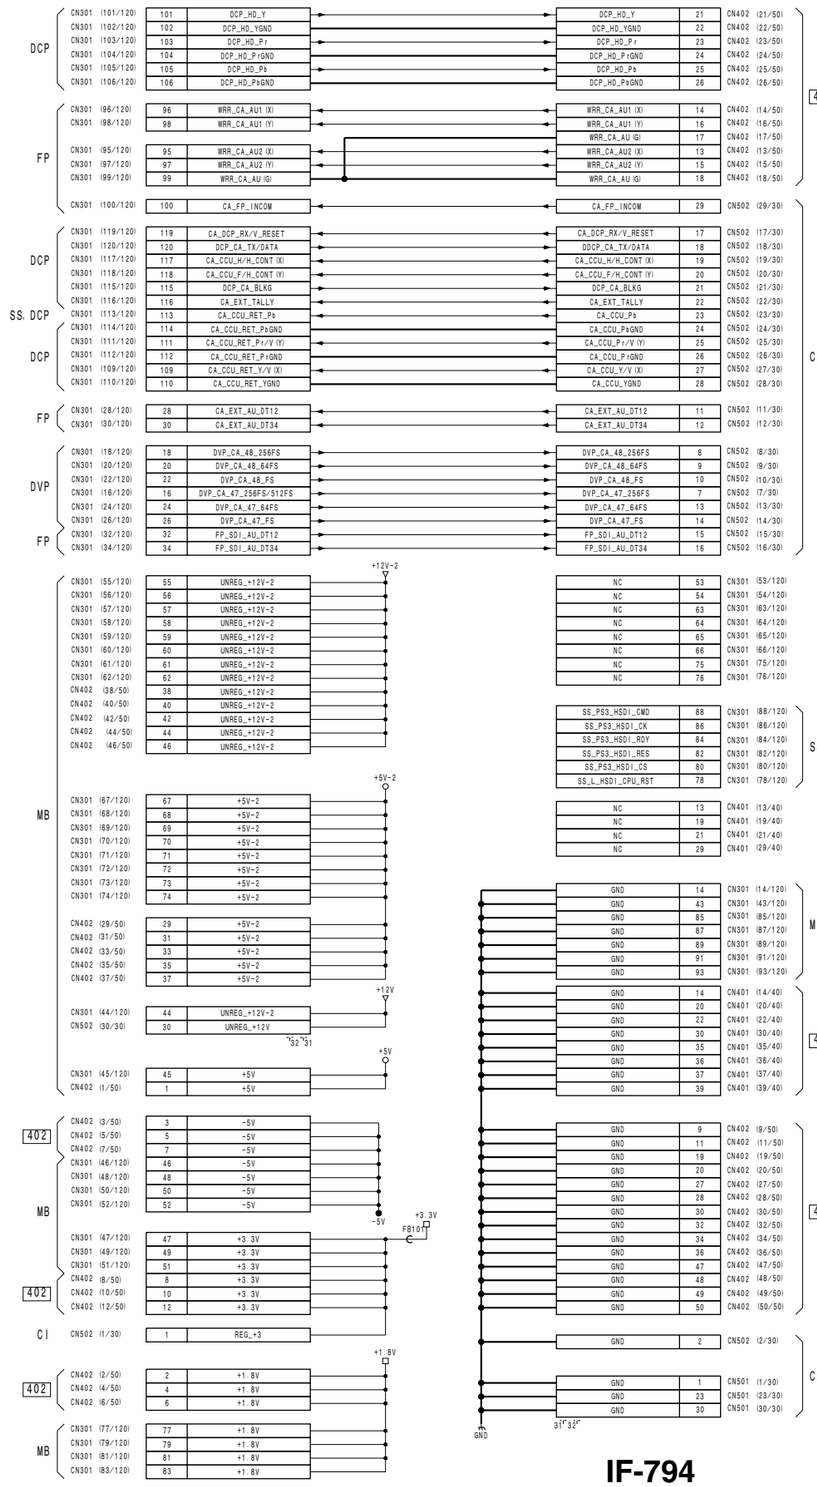

IF-794
BOARD NO. 1-678-756-12
LOT NO. 083-
HDW-750_IF-794_014_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

DVP	CN112 (1/121)	1	DVP_CA_V_D9	DVP_CA_V_D9	1	CN201 (1/120)	IF, CI
	CN112 (3/121)	3	DVP_CA_V_D8	DVP_CA_V_D8	3	CN201 (3/120)	
	CN112 (5/121)	5	DVP_CA_V_D7	DVP_CA_V_D7	5	CN201 (5/120)	
	CN112 (7/121)	7	DVP_CA_V_D6	DVP_CA_V_D6	7	CN201 (7/120)	
	CN112 (9/121)	9	DVP_CA_V_D5	DVP_CA_V_D5	9	CN201 (9/120)	
	CN112 (11/121)	11	DVP_CA_V_D4	DVP_CA_V_D4	11	CN201 (11/120)	
	CN112 (13/121)	13	DVP_CA_V_D3	DVP_CA_V_D3	13	CN201 (13/120)	
	CN112 (15/121)	15	DVP_CA_V_D2	DVP_CA_V_D2	15	CN201 (15/120)	
	CN112 (17/121)	17	DVP_CA_V_D1	DVP_CA_V_D1	17	CN201 (17/120)	
	CN112 (19/121)	19	DVP_CA_V_D0	DVP_CA_V_D0	19	CN201 (19/120)	
	CN112 (21/121)	21	DVP_CA_C_D9	DVP_CA_C_D9	21	CN201 (21/120)	
	CN112 (23/121)	23	DVP_CA_C_D8	DVP_CA_C_D8	23	CN201 (23/120)	
	CN112 (25/121)	25	DVP_CA_C_D7	DVP_CA_C_D7	25	CN201 (25/120)	
	CN112 (27/121)	27	DVP_CA_C_D6	DVP_CA_C_D6	27	CN201 (27/120)	
	CN112 (29/121)	29	DVP_CA_C_D5	DVP_CA_C_D5	29	CN201 (29/120)	
	CN112 (31/121)	31	DVP_CA_C_D4	DVP_CA_C_D4	31	CN201 (31/120)	
	CN112 (33/121)	33	DVP_CA_C_D3	DVP_CA_C_D3	33	CN201 (33/120)	
	CN112 (35/121)	35	DVP_CA_C_D2	DVP_CA_C_D2	35	CN201 (35/120)	
	CN112 (37/121)	37	DVP_CA_C_D1	DVP_CA_C_D1	37	CN201 (37/120)	
	CN112 (39/121)	39	DVP_CA_C_D0	DVP_CA_C_D0	39	CN201 (39/120)	
DCP	CN112 (41/121)	41	DCP_SKIN_GATE	DCP_SKIN_GATE	41	CN201 (41/120)	(IF), CI
DVP	CN112 (12/121)	12	DVP_CA_SY	DVP_CA_SY	12	CN201 (12/120)	IF, CI
	CN112 (10/121)	10	DVP_CA_CF	DVP_CA_CF	10	CN201 (10/120)	
	CN112 (8/121)	8	DVP_CA_HD	DVP_CA_HD	8	CN201 (8/120)	
	CN112 (6/121)	6	DVP_CA_FR/VD	DVP_CA_FR/VD	6	CN201 (6/120)	
	CN112 (4/121)	4	DVP_CA_VCKGND	DVP_CA_VCKGND	4	CN201 (4/120)	
	CN112 (2/121)	2	DVP_CA_VCK	DVP_CA_VCK	2	CN201 (2/120)	
FP	CN112 (18/121)	18	DVP_CA_48_256FS	DVP_CA_48_256FS	18	CN201 (18/120)	(IF), CI
	CN112 (20/121)	20	DVP_CA_48_64FS	DVP_CA_48_64FS	20	CN201 (20/120)	
	CN112 (22/121)	22	DVP_CA_48_FS	DVP_CA_48_FS	22	CN201 (22/120)	
	CN112 (16/121)	16	DVP_CA_47_256/512FS	DVP_CA_47_256/512FS	16	CN201 (16/120)	
	CN112 (24/121)	24	DVP_CA_47_64FS	DVP_CA_47_64FS	24	CN201 (24/120)	
	CN112 (26/121)	26	DVP_CA_47_FS	DVP_CA_47_FS	26	CN201 (26/120)	
	CN112 (28/121)	28	CA_EXT_AU_DT12	CA_EXT_AU_DT12	28	CN201 (28/120)	
	CN112 (30/121)	30	CA_EXT_AU_DT34	CA_EXT_AU_DT34	30	CN201 (30/120)	
	CN112 (32/121)	32	FP_SDI_AU_DT12	FP_SDI_AU_DT12	32	CN201 (32/120)	
	CN112 (34/121)	34	FP_SDI_AU_DT34	FP_SDI_AU_DT34	34	CN201 (34/120)	
DCP	CN112 (36/121)	36	DCP_H_CA_V_OUT	DCP_H_CA_V_OUT	36	CN201 (36/120)	
	CN112 (38/121)	38	DCP_L_CA_V_EN	DCP_L_CA_V_EN	38	CN201 (38/120)	
	CN112 (40/121)	40	DCP_L_CA_AU_EN	DCP_L_CA_AU_EN	40	CN201 (40/120)	
	CN112 (42/121)	42	DCP_L_CA_SY_EN	DCP_L_CA_SY_EN	42	CN201 (42/120)	

+12V

	CN112 (44/121)	44	UNREG+12.0V	UNREG+12.0V	44	CN201 (44/120)	

+9.3V

	CN112 (52/121)	52	+9.3V	REG_+9.3V	8	CN203 (8/10)	

+5V

	CN112 (45/121)	45	+5.0V	+5.0V	45	CN201 (45/120)	

+3.3V

	CN112 (47/121)	47	+3.3V	+3.3V	47	CN201 (47/120)	
	CN112 (49/121)	49	+3.3V	+3.3V	49	CN201 (49/120)	
	CN112 (51/121)	51	+3.3V	+3.3V	51	CN201 (51/120)	
				REG_+3.3V	10	CN203 (10/10)	

+1.8V

	CN112 (79/121)	79	+1.8V	+1.8V	77	CN201 (77/120)	
	CN112 (81/121)	81	+1.8V	+1.8V	79	CN201 (79/120)	
	CN112 (83/121)	83	+1.8V	+1.8V	81	CN201 (81/120)	
				+1.8V	83	CN201 (83/120)	

-5V

	CN112 (46/121)	46	-5.0V	-5.0V	46	CN201 (46/120)	
	CN112 (48/121)	48	-5.0V	-5.0V	48	CN201 (48/120)	
	CN112 (50/121)	50	-5.0V	-5.0V	50	CN201 (50/120)	
				-5.0V	52	CN201 (52/120)	

	CN112 (53/121)	53	NC	NC	53	CN201 (53/120)	
	CN112 (54/121)	54	NC	NC	54	CN201 (54/120)	
	CN112 (61/121)	61	NC	NC	63	CN201 (63/120)	
	CN112 (62/121)	62	NC	NC	64	CN201 (64/120)	
	CN112 (69/121)	69	NC	NC	65	CN201 (65/120)	
	CN112 (70/121)	70	NC	NC	66	CN201 (66/120)	
				NC	75	CN201 (75/120)	
				NC	76	CN201 (76/120)	

FP	CN112 (96/121)	96	WRR_CA_AU1 (X)	WRR_CA_AU1 (X)	96	CN201 (96/120)	IF
	CN112 (98/121)	98	WRR_CA_AU1 (Y)	WRR_CA_AU1 (Y)	98	CN201 (98/120)	
	CN112 (95/121)	95	WRR_CA_AU2 (X)	WRR_CA_AU2 (X)	95	CN201 (95/120)	
	CN112 (97/121)	97	WRR_CA_AU2 (Y)	WRR_CA_AU2 (Y)	97	CN201 (97/120)	
	CN112 (99/121)	99	WRR_CA_AU (G)	WRR_CA_AU (G)	99	CN201 (99/120)	
DCP	CN112 (101/121)	101	DCP_HD_Y	DCP_HD_Y	101	CN201 (101/120)	
	CN112 (102/121)	102	DCP_HD_YGND	DCP_HD_YGND	102	CN201 (102/120)	
	CN112 (103/121)	103	DCP_HD_Pr	DCP_HD_Pr	103	CN201 (103/120)	
	CN112 (104/121)	104	DCP_HD_PrGND	DCP_HD_PrGND	104	CN201 (104/120)	
	CN112 (105/121)	105	DCP_HD_Pb	DCP_HD_Pb	105	CN201 (105/120)	
	CN112 (106/121)	106	DCP_HD_PbGND	DCP_HD_PbGND	106	CN201 (106/120)	
	CN112 (107/121)	107	DCP_L_SDI_AU_MUTE	DCP_L_SDI_AU_MUTE	107	CN201 (107/120)	
	CN112 (109/121)	109	CA_CCU_RET_Y/V (X)	CA_CCU_RET_Y/V (X)	109	CN201 (109/120)	(IF), CI
	CN112 (110/121)	110	CA_CCU_RET_YGND	CA_CCU_RET_YGND	110	CN201 (110/120)	
	CN112 (111/121)	111	CA_CCU_RET_Pr/V (Y)	CA_CCU_RET_Pr/V (Y)	111	CN201 (111/120)	
	CN112 (112/121)	112	CA_CCU_RET_PrGND	CA_CCU_RET_PrGND	112	CN201 (112/120)	
	CN112 (113/121)	113	CA_CCU_RET_Pb	CA_CCU_RET_Pb	113	CN201 (113/120)	
	CN112 (114/121)	114	CA_CCU_RET_PbGND	CA_CCU_RET_PbGND	114	CN201 (114/120)	
	CN112 (71/121)	71	SS_TF_CMD	SS_TF_CMD	4	CN203 (4/10)	CCM
	CN112 (73/121)	73	SS_TF_CK	SS_TF_CK	3	CN203 (3/10)	
	CN112 (75/121)	75	TF_S_REQ	TF_S_REQ	2	CN203 (2/10)	
	CN112 (77/121)	77	TF_SS_RES	TF_SS_RES	1	CN203 (1/10)	
SS	CN112 (72/121)	72	SS_L_TF_EN	SS_L_TF_EN	7	CN203 (7/10)	
	CN112 (74/121)	74	SS_L_TF_RST	SS_L_TF_RST	6	CN203 (6/10)	
	CN112 (76/121)	76	SS_TF_R_REQ	SS_TF_R_REQ	5	CN203 (5/10)	
	CN112 (78/121)	78	SS_L_HSDI_CPU_RST	SS_L_HSDI_CPU_RST	78	CN201 (78/120)	IF
	CN112 (80/121)	80	SS_PD3_HSDI_CS	SS_PD3_HSDI_CS	80	CN201 (80/120)	
	CN112 (82/121)	82	SS_PS3_HSDI_RES	SS_PS3_HSDI_RES	82	CN201 (82/120)	
	CN112 (84/121)	84	SS_PS3_HSDI_RDY	SS_PS3_HSDI_RDY	84	CN201 (84/120)	
	CN112 (86/121)	86	SS_PS3_HSDI_CK	SS_PS3_HSDI_CK	86	CN201 (86/120)	
	CN112 (88/121)	88	SS_PS3_HSDI_CMD	SS_PS3_HSDI_CMD	88	CN201 (88/120)	
	CN112 (90/121)	90	HDSDI_L_EXIST	HDSDI_L_EXIST	90	CN201 (90/120)	
	CN112 (92/121)	92	CPNT_L_EXIST	CPNT_L_EXIST	92	CN201 (92/120)	
	CN112 (94/121)	94	AU_L_EXIST	AU_L_EXIST	94	CN201 (94/120)	
FP	CN112 (100/121)	100	CA_FP_INCOM	CA_FP_INCOM	100	CN201 (100/120)	
SS	CN112 (108/121)	108	CPNT_L_ACTIVE	CPNT_L_ACTIVE	108	CN201 (108/120)	
DCP	CN112 (115/121)	115	DCP_CA_BLKG	DCP_CA_BLKG	115	CN201 (115/120)	
SS, DCP	CN112 (116/121)	116	CA_EXT_TALLY	CA_EXT_TALLY	116	CN201 (116/120)	
	CN112 (117/121)	117	CA_CCU_H/H_CONT (X)	CA_CCU_H/H_CONT (X)	117	CN201 (117/120)	(IF), CI
	CN112 (118/121)	118	CA_CCU_F/H_CONT (Y)	CA_CCU_F/H_CONT (Y)	118	CN201 (118/120)	
DCP	CN112 (119/121)	119	CA_DCP_RX/V_RESET	CA_DCP_RX/V_RESET	119	CN201 (119/120)	
	CN112 (120/121)	120	DCP_CA_TX/DATA	DCP_CA_TX/DATA	120	CN201 (120/120)	

CN112 (1/121) ... (121/121)

+12V-2

	CN112 (55/121)	55	UNREG+12.0V-2	UNREG+12.0V-2	55	CN201 (55/120)	
	CN112 (56/121)	56	UNREG+12.0V-2	UNREG+12.0V-2	56	CN201 (56/120)	
	CN112 (57/121)	57	UNREG+12.0V-2	UNREG+12.0V-2	57	CN201 (57/120)	
	CN112 (58/121)	58	UNREG+12.0V-2	UNREG+12.0V-2	58	CN201 (58/120)	
	CN112 (59/121)	59	UNREG+12.0V-2	UNREG+12.0V-2	59	CN201 (59/120)	
	CN112 (60/121)	60	UNREG+12.0V-2	UNREG+12.0V-2	60	CN201 (60/120)	
				UNREG+12.0V-2	61	CN201 (61/120)	
				UNREG+12.0V-2	62	CN201 (62/120)	

+5V-2

	CN112 (63/121)	63	+5.0V-2	+5.0V-2	67	CN201 (67/120)	
	CN112 (64/121)	64	+5.0V-2	+5.0V-2	68	CN201 (68/120)	
	CN112 (65/121)	65	+5.0V-2	+5.0V-2	69	CN201 (69/120)	
	CN112 (66/121)	66	+5.0V-2	+5.0V-2	70	CN201 (70/120)	
	CN112 (67/121)	67	+5.0V-2	+5.0V-2	71	CN201 (71/120)	
	CN112 (68/121)	68	+5.0V-2	+5.0V-2	72	CN201 (72/120)	
				+5.0V-2	73	CN201 (73/120)	
				+5.0V-2	74	CN201 (74/120)	

	CN112 (14/121)	14	GND	GND	14	CN201 (14/120)	
	CN112 (43/121)	43	GND	GND	43	CN201 (43/120)	
	CN112 (85/121)	85	GND	GND	85	CN201 (85/120)	
	CN112 (87/121)	87	GND	GND	87	CN201 (87/120)	
	CN112 (89/121)	89	GND	GND	89	CN201 (89/120)	
	CN112 (91/121)	91	GND	GND	91	CN201 (91/120)	
	CN112 (93/121)	93	GND	GND	93	CN201 (93/120)	
				GND	9	CN203 (9/10)	

HN-277
BOARD NO. 1-678-757-11
LOT NO. 083-
HDW-750_HN-277_014_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

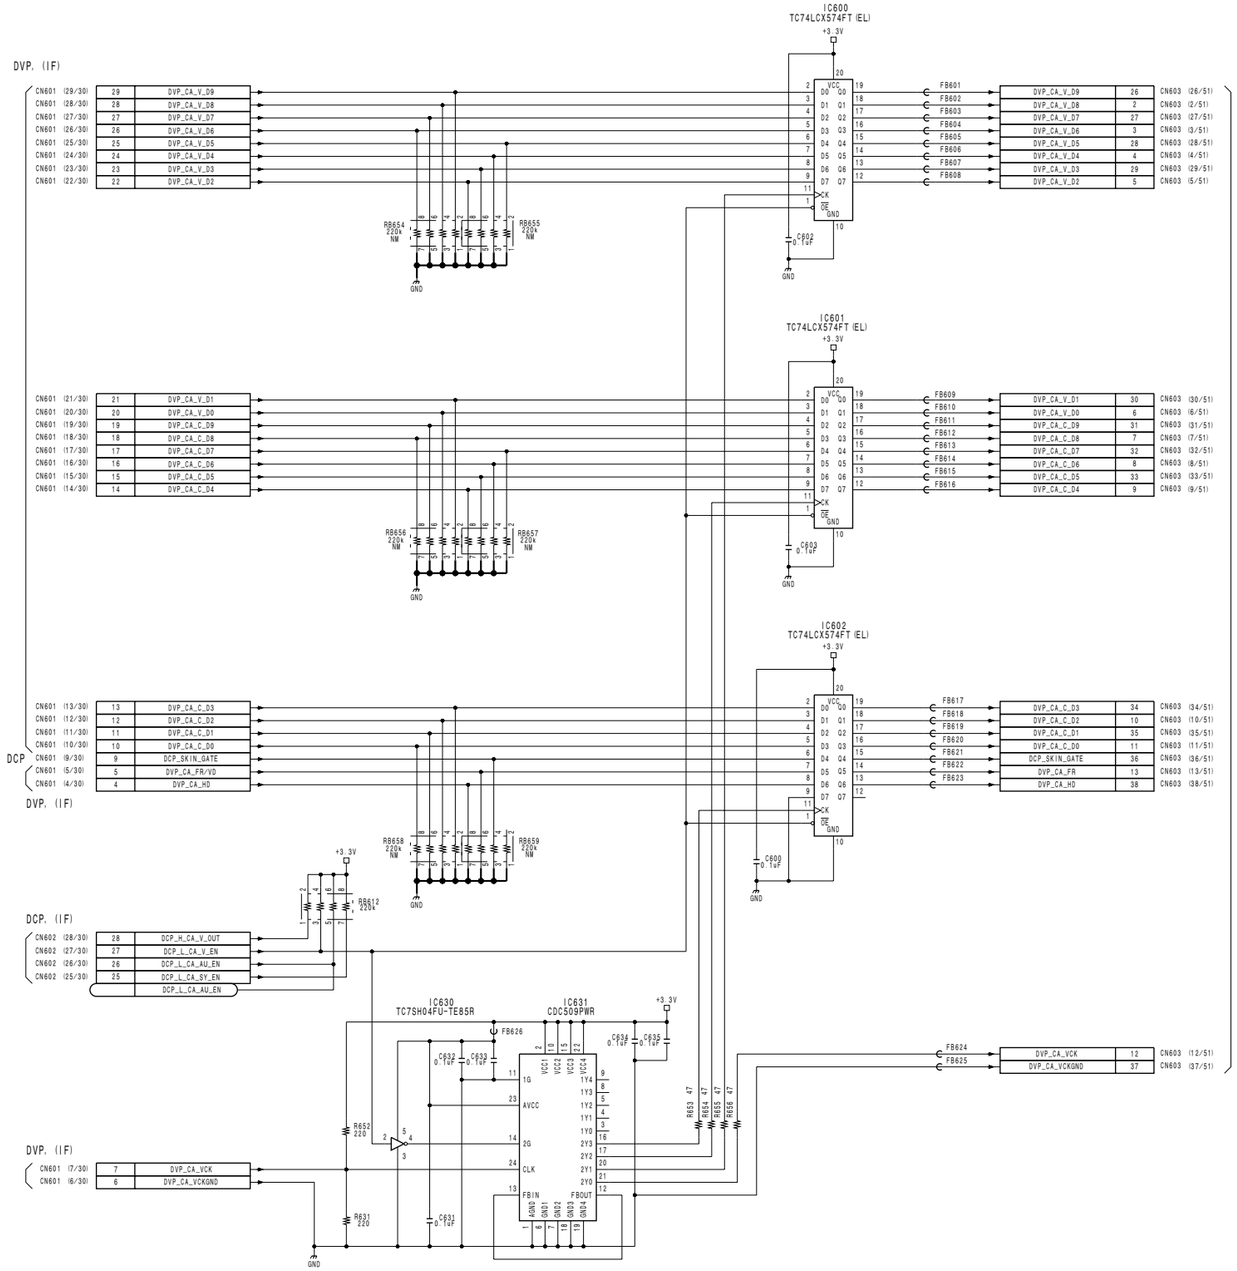

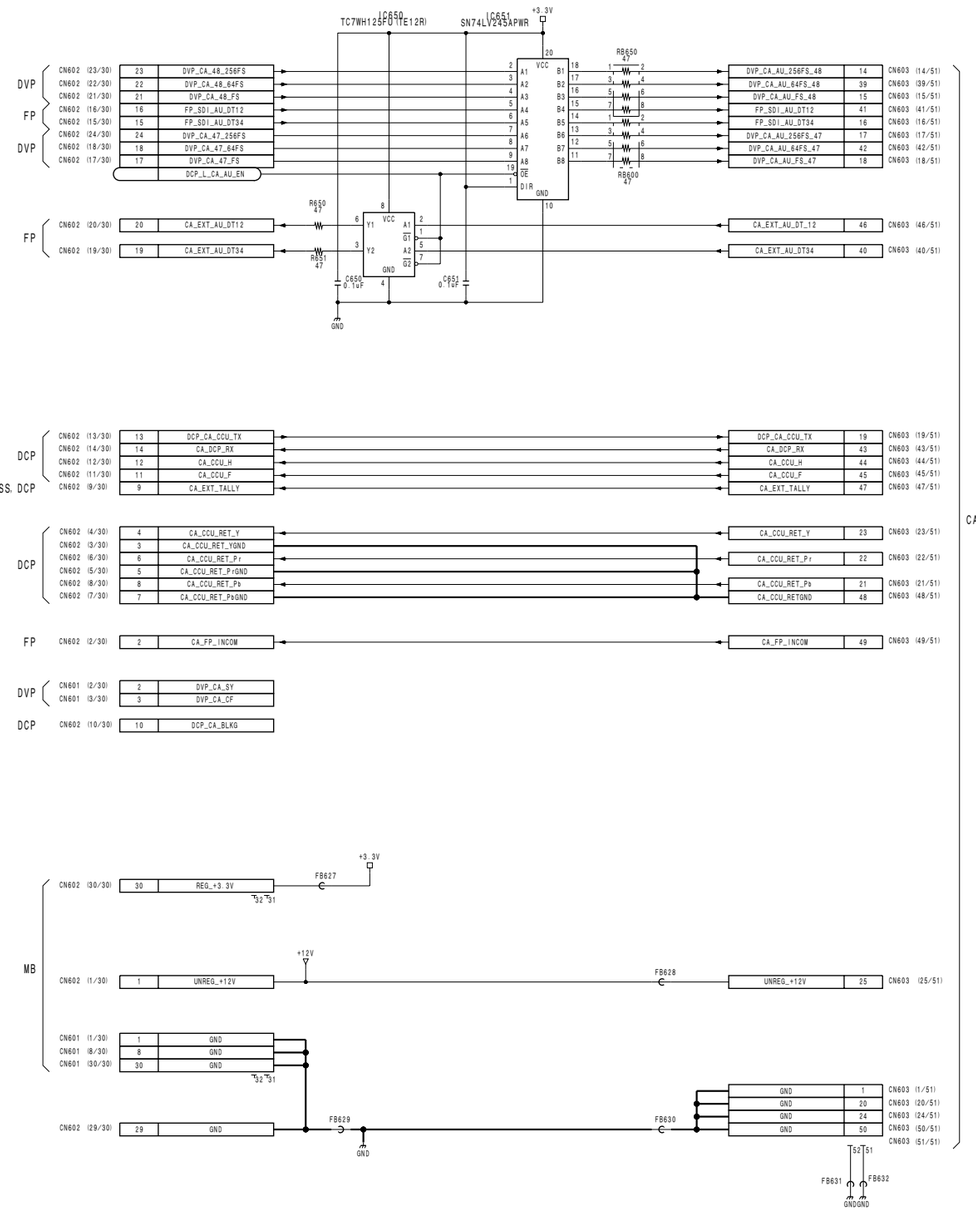

CI-27
BOARD NO. 1-678-755-12, 13
LOT NO. 083-
HDW-750_CI-27_015_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

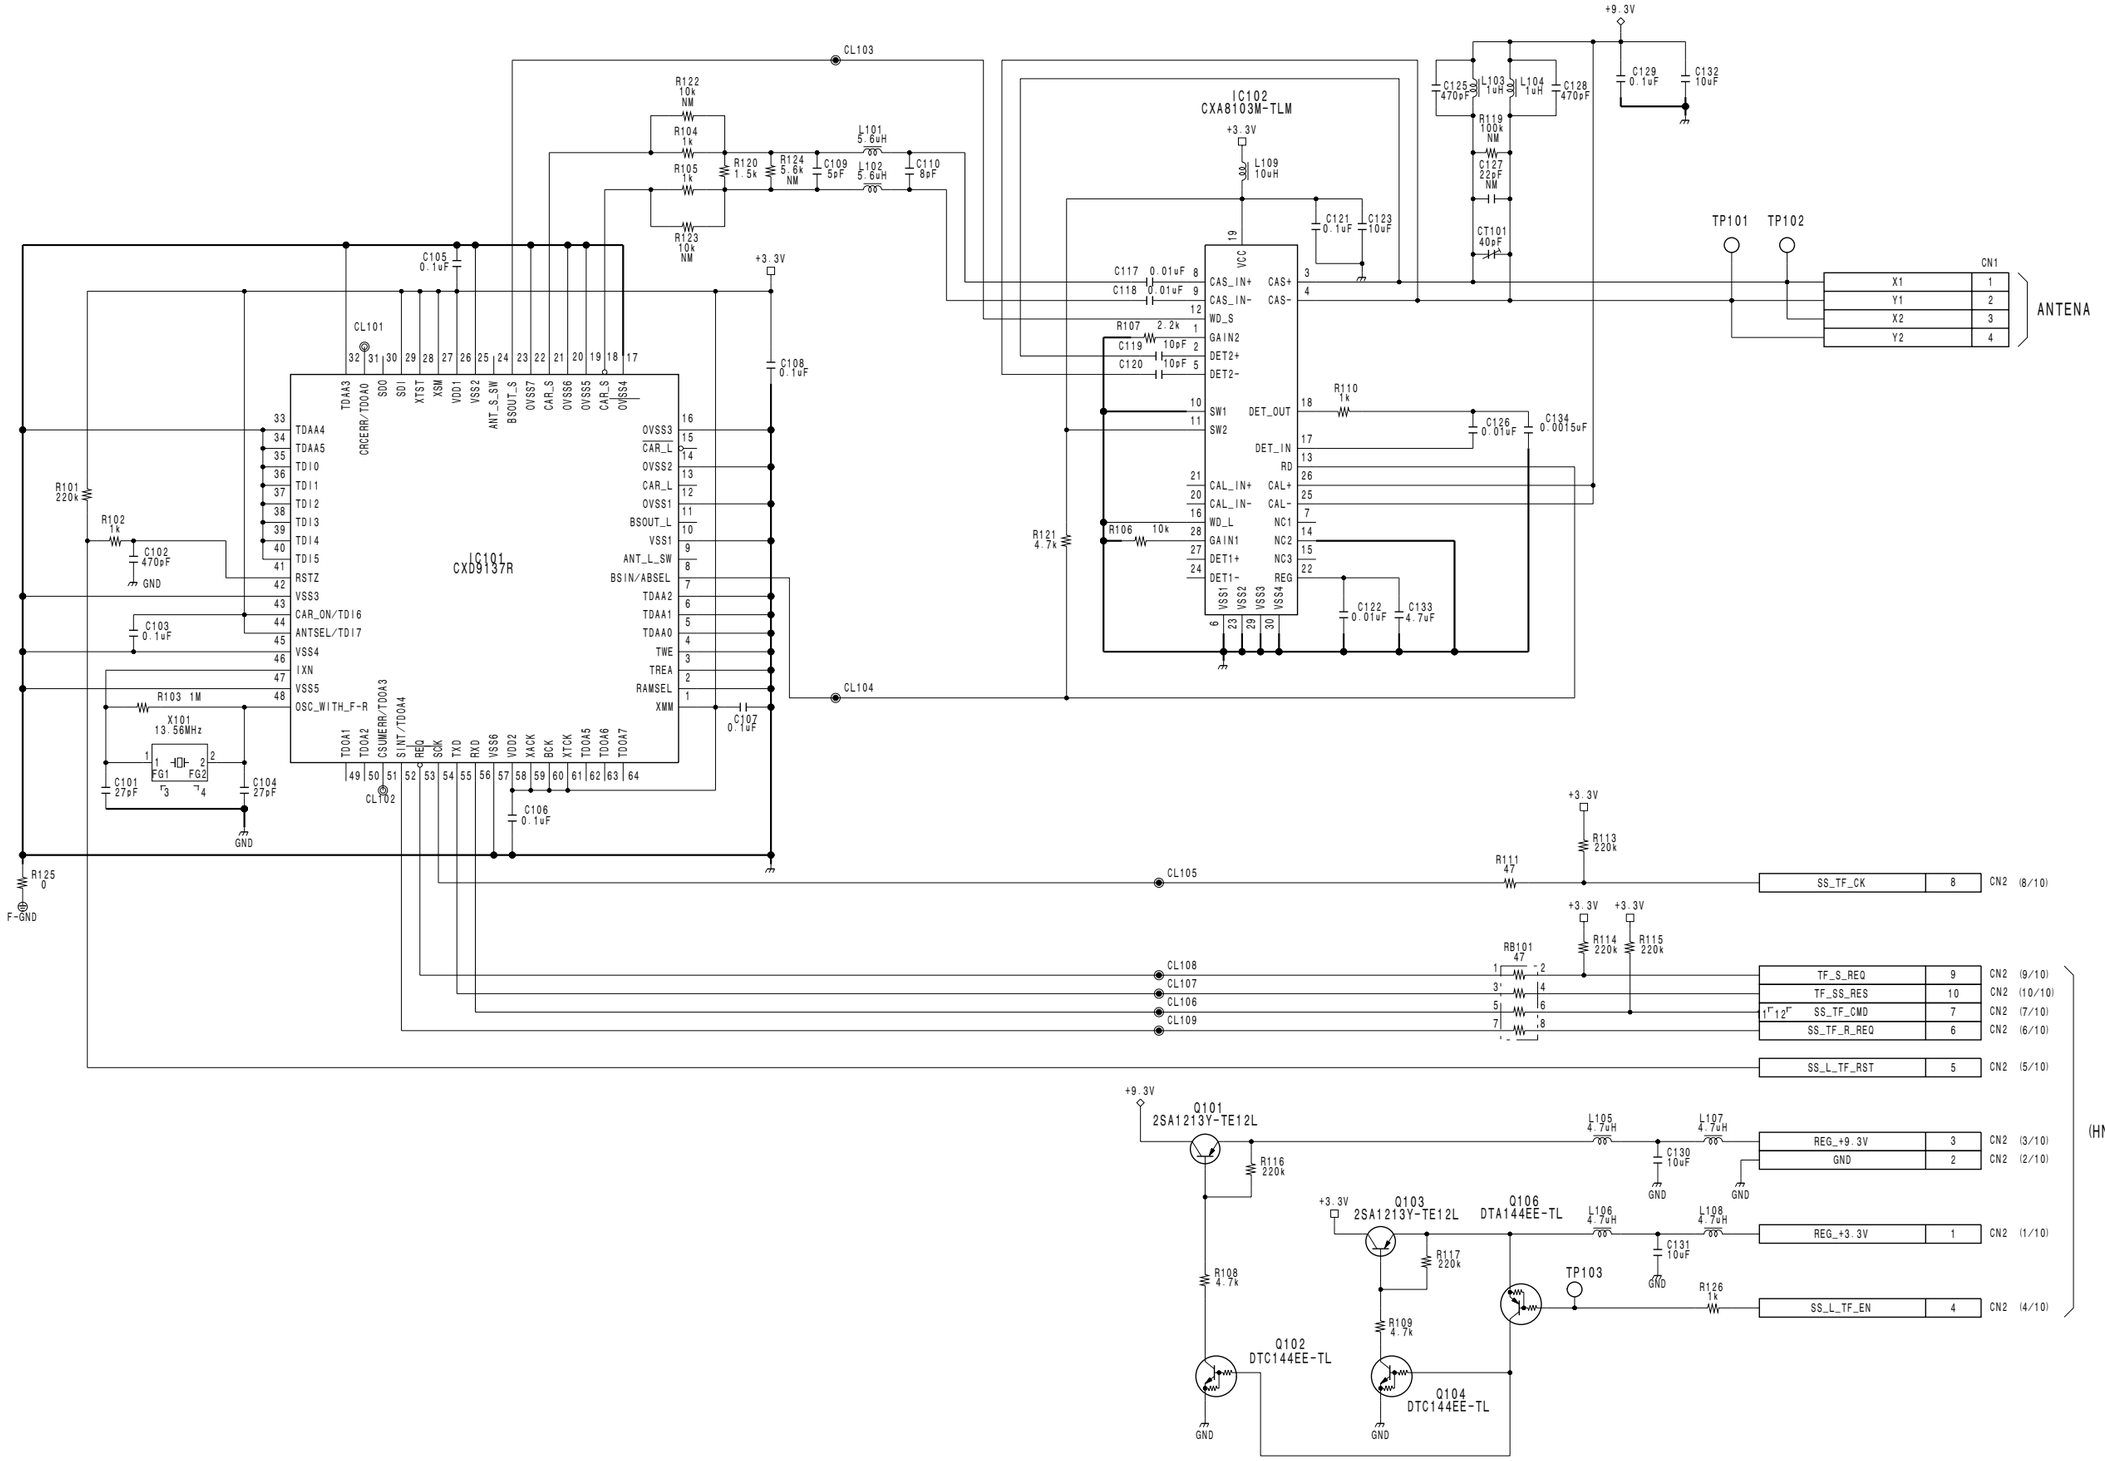

CCM-45
BOARD NO. 1-678-743-13
LOT NO. 083-
HDW-750_CCM-45_015_1

SS-92 (1/3)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

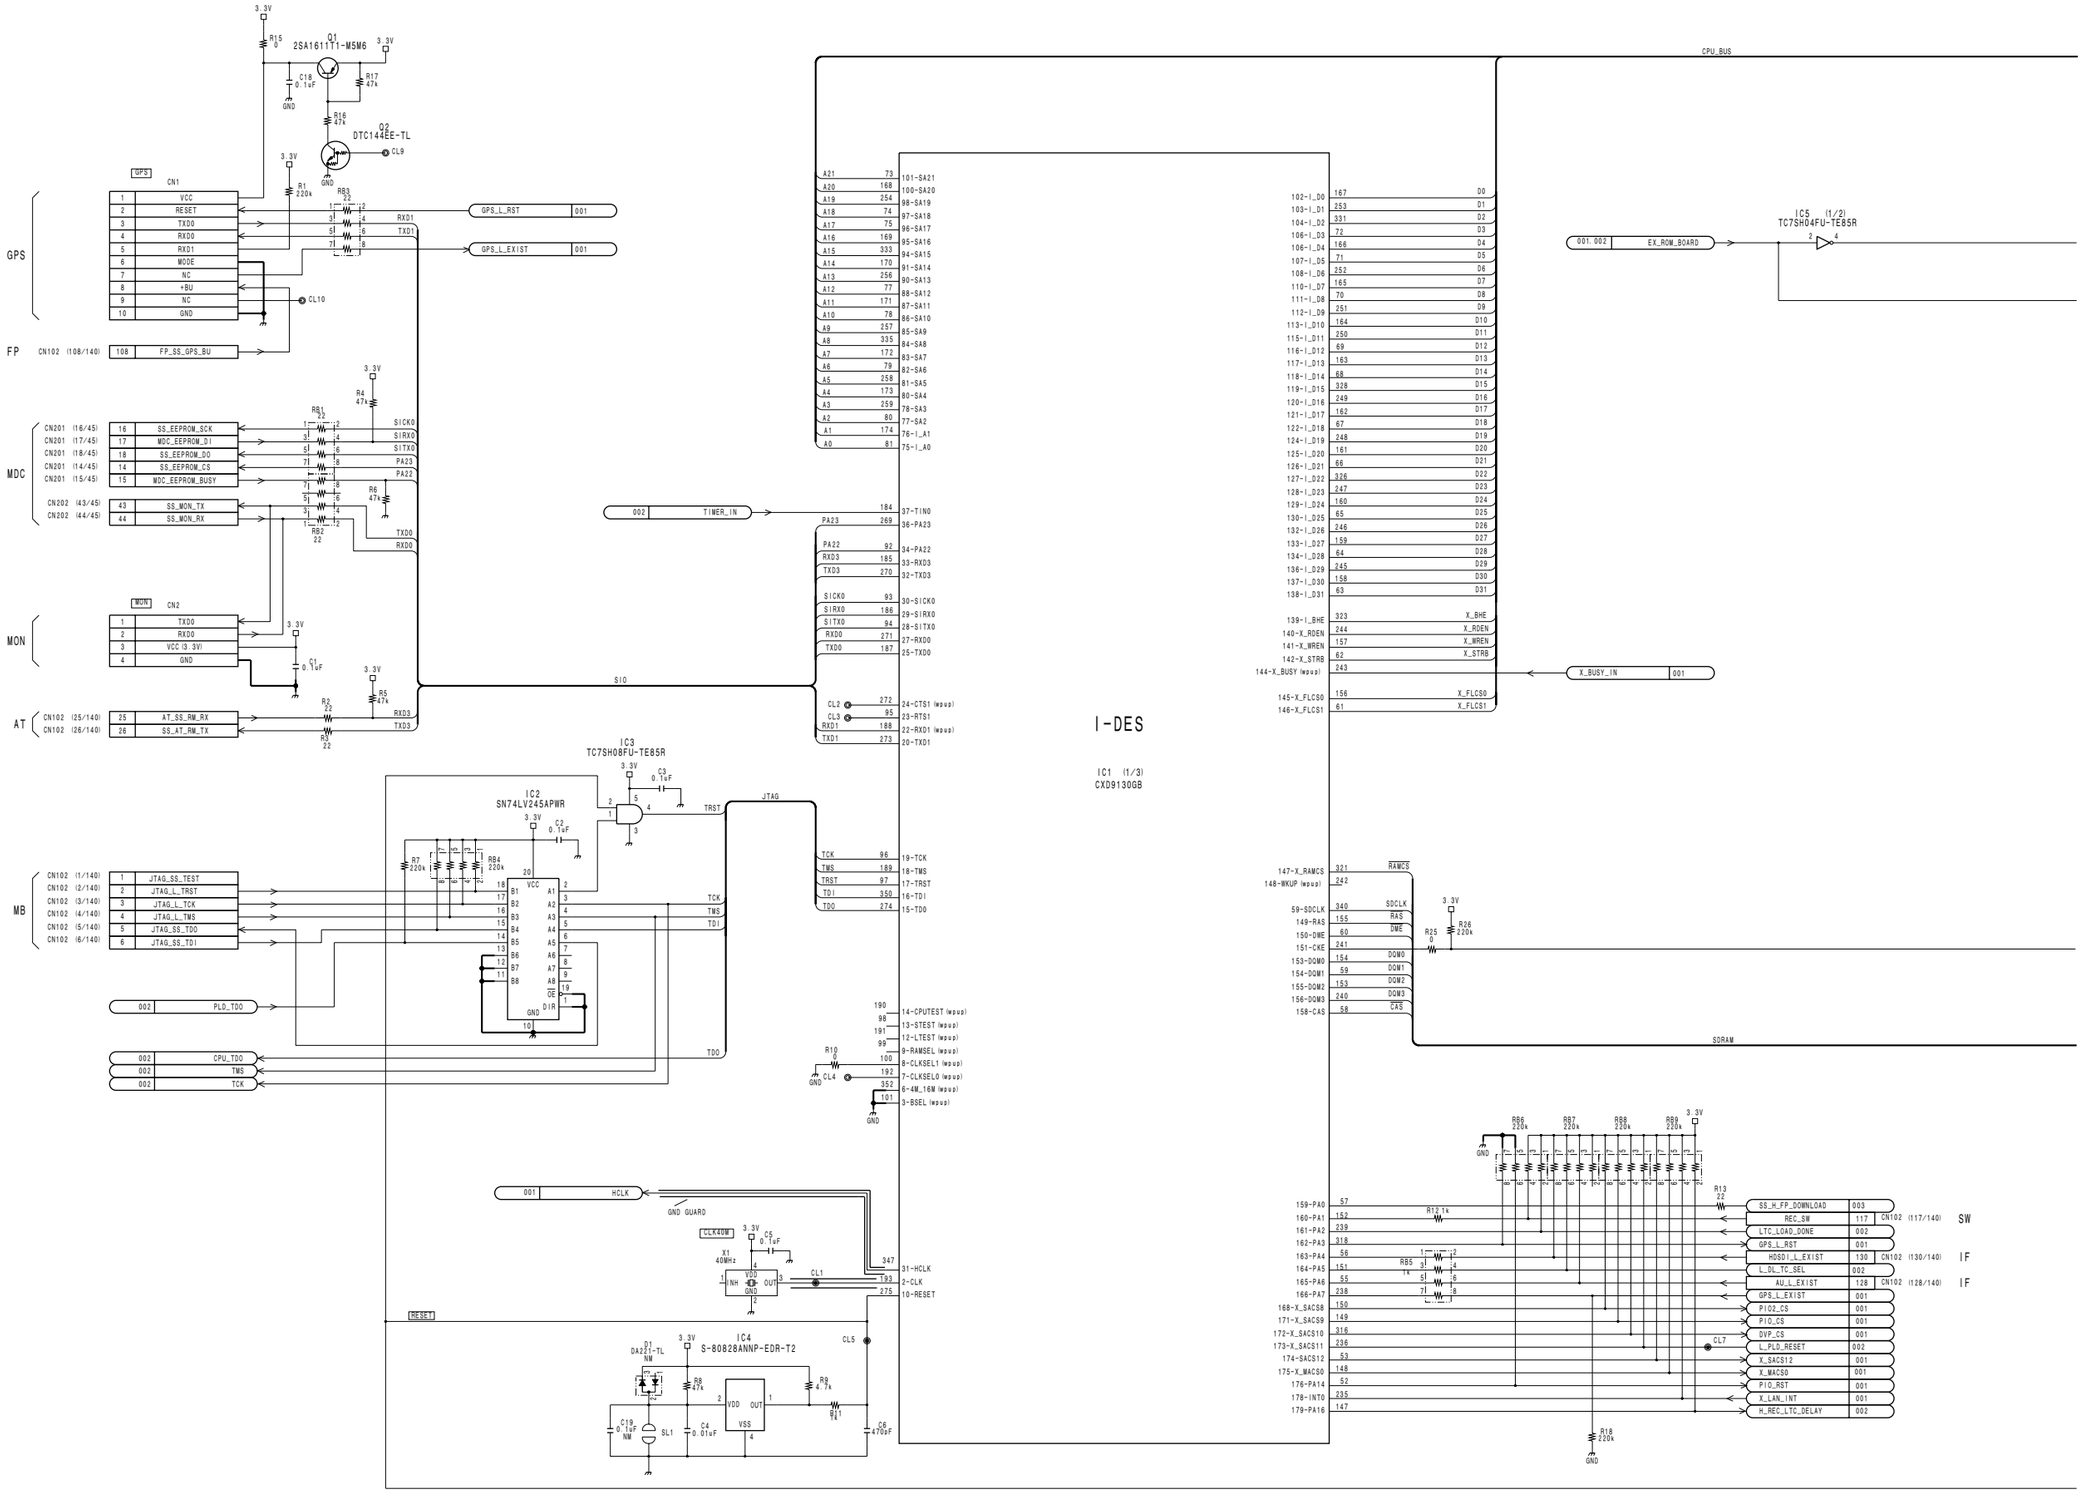

4-80

http://getMANUAL.com

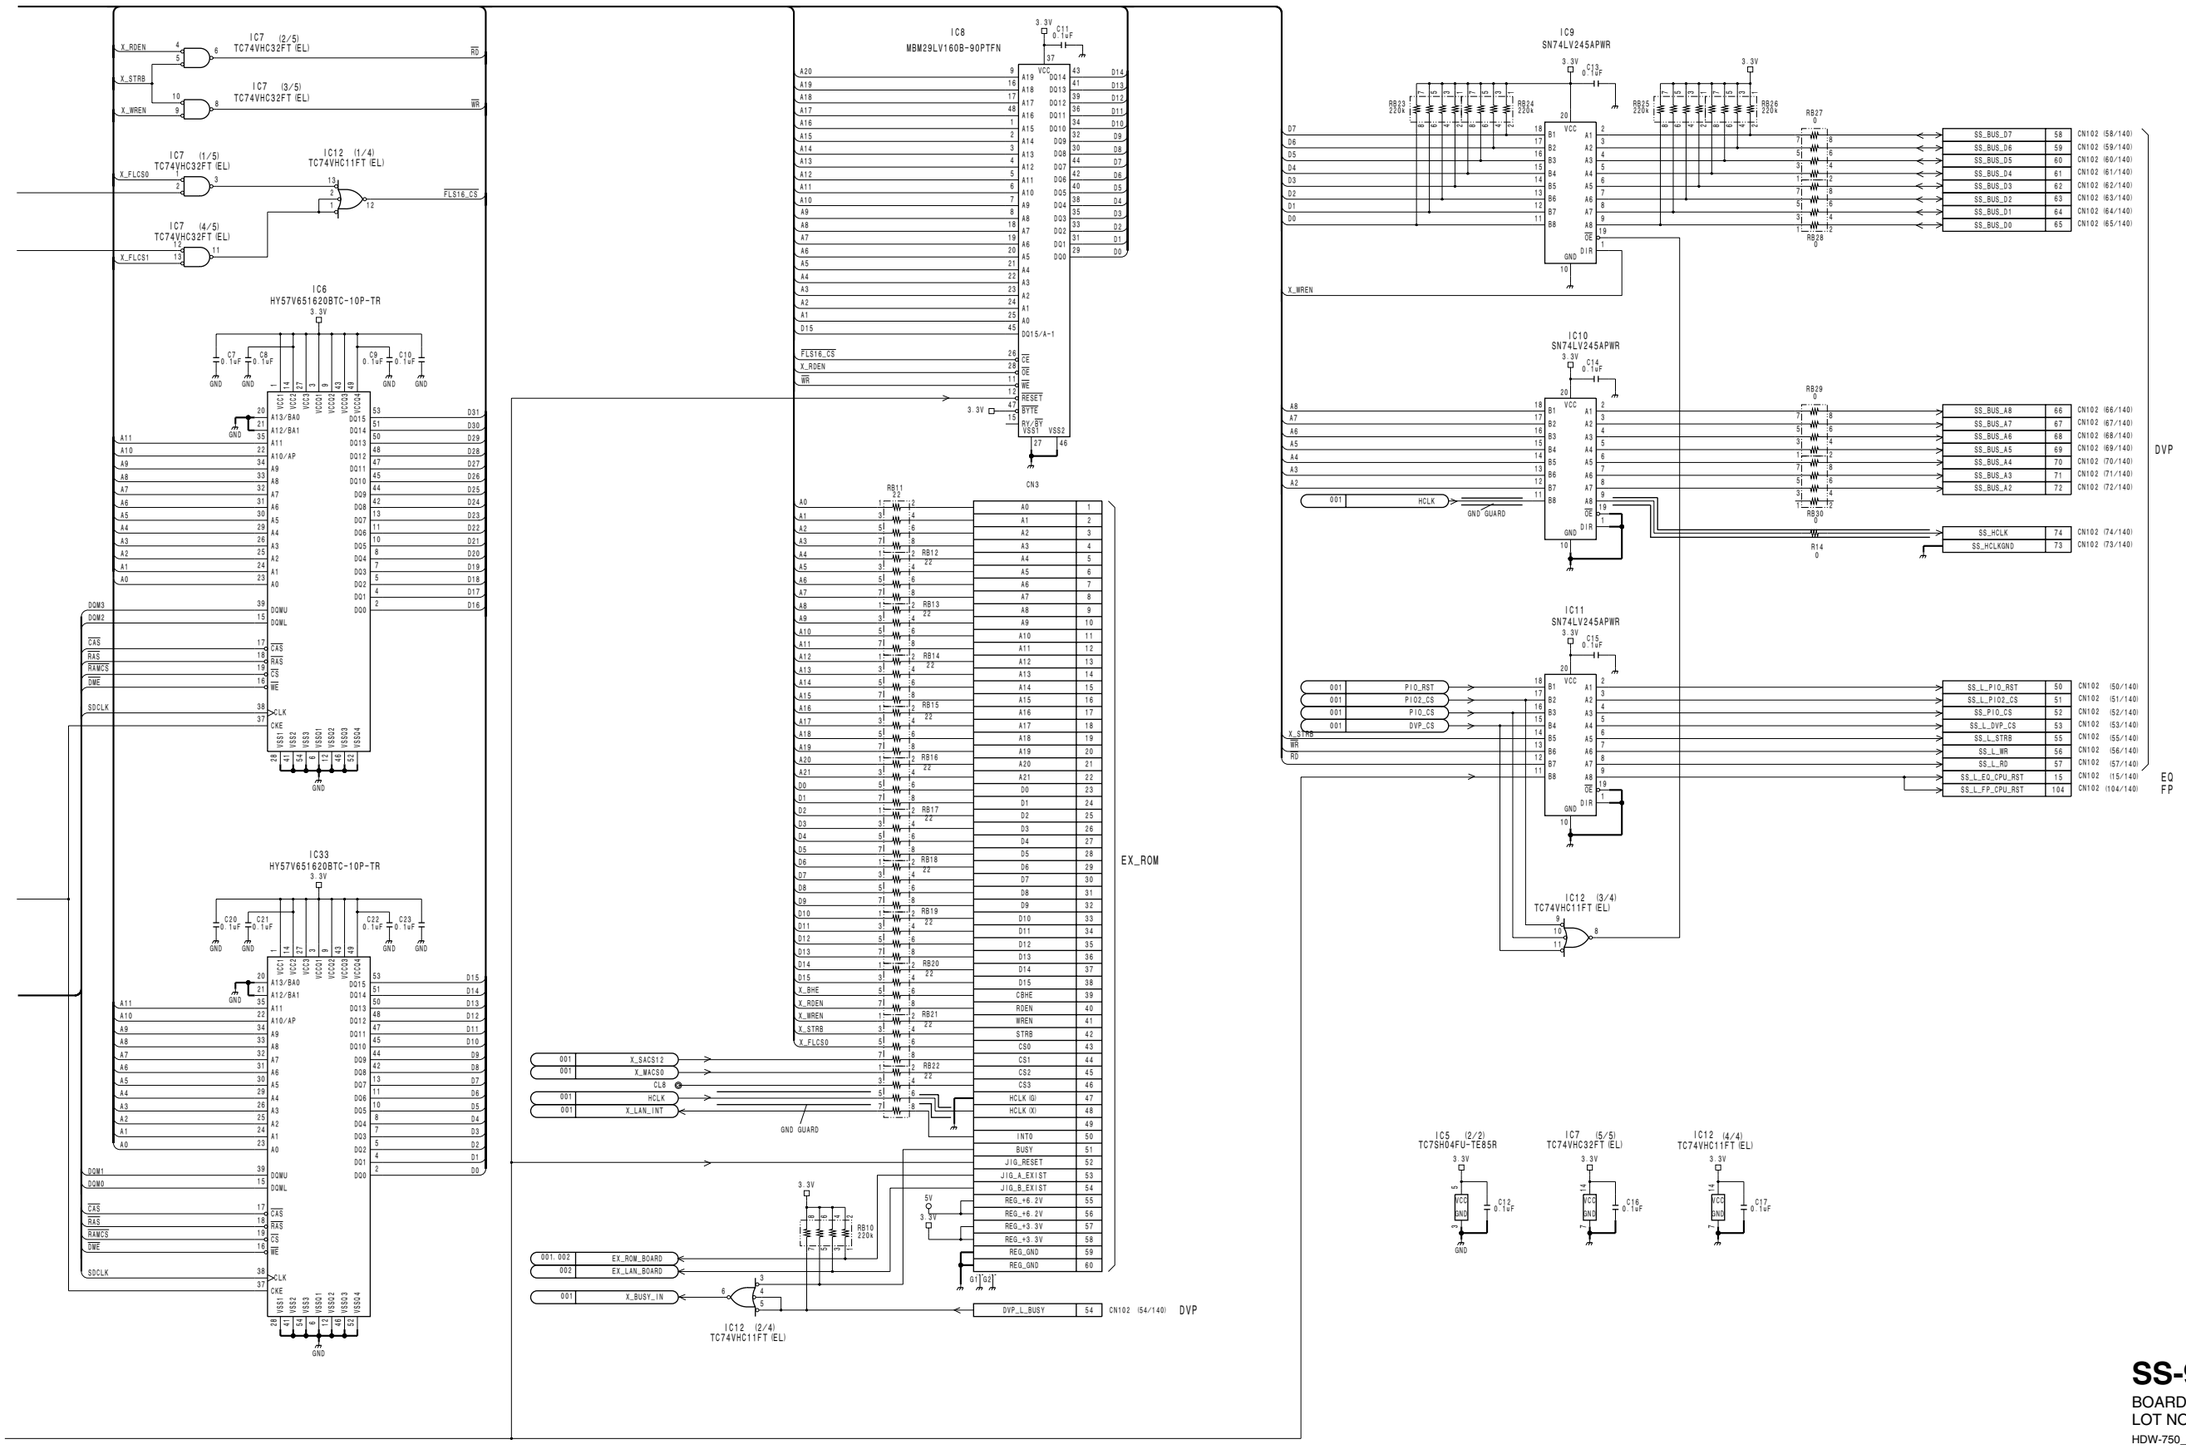

SS-92 (1/3)
BOARD NO. 1-678-740-12
LOT NO. 083-
HDW-750_SS-92_014_1

SS-92 (2/3)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

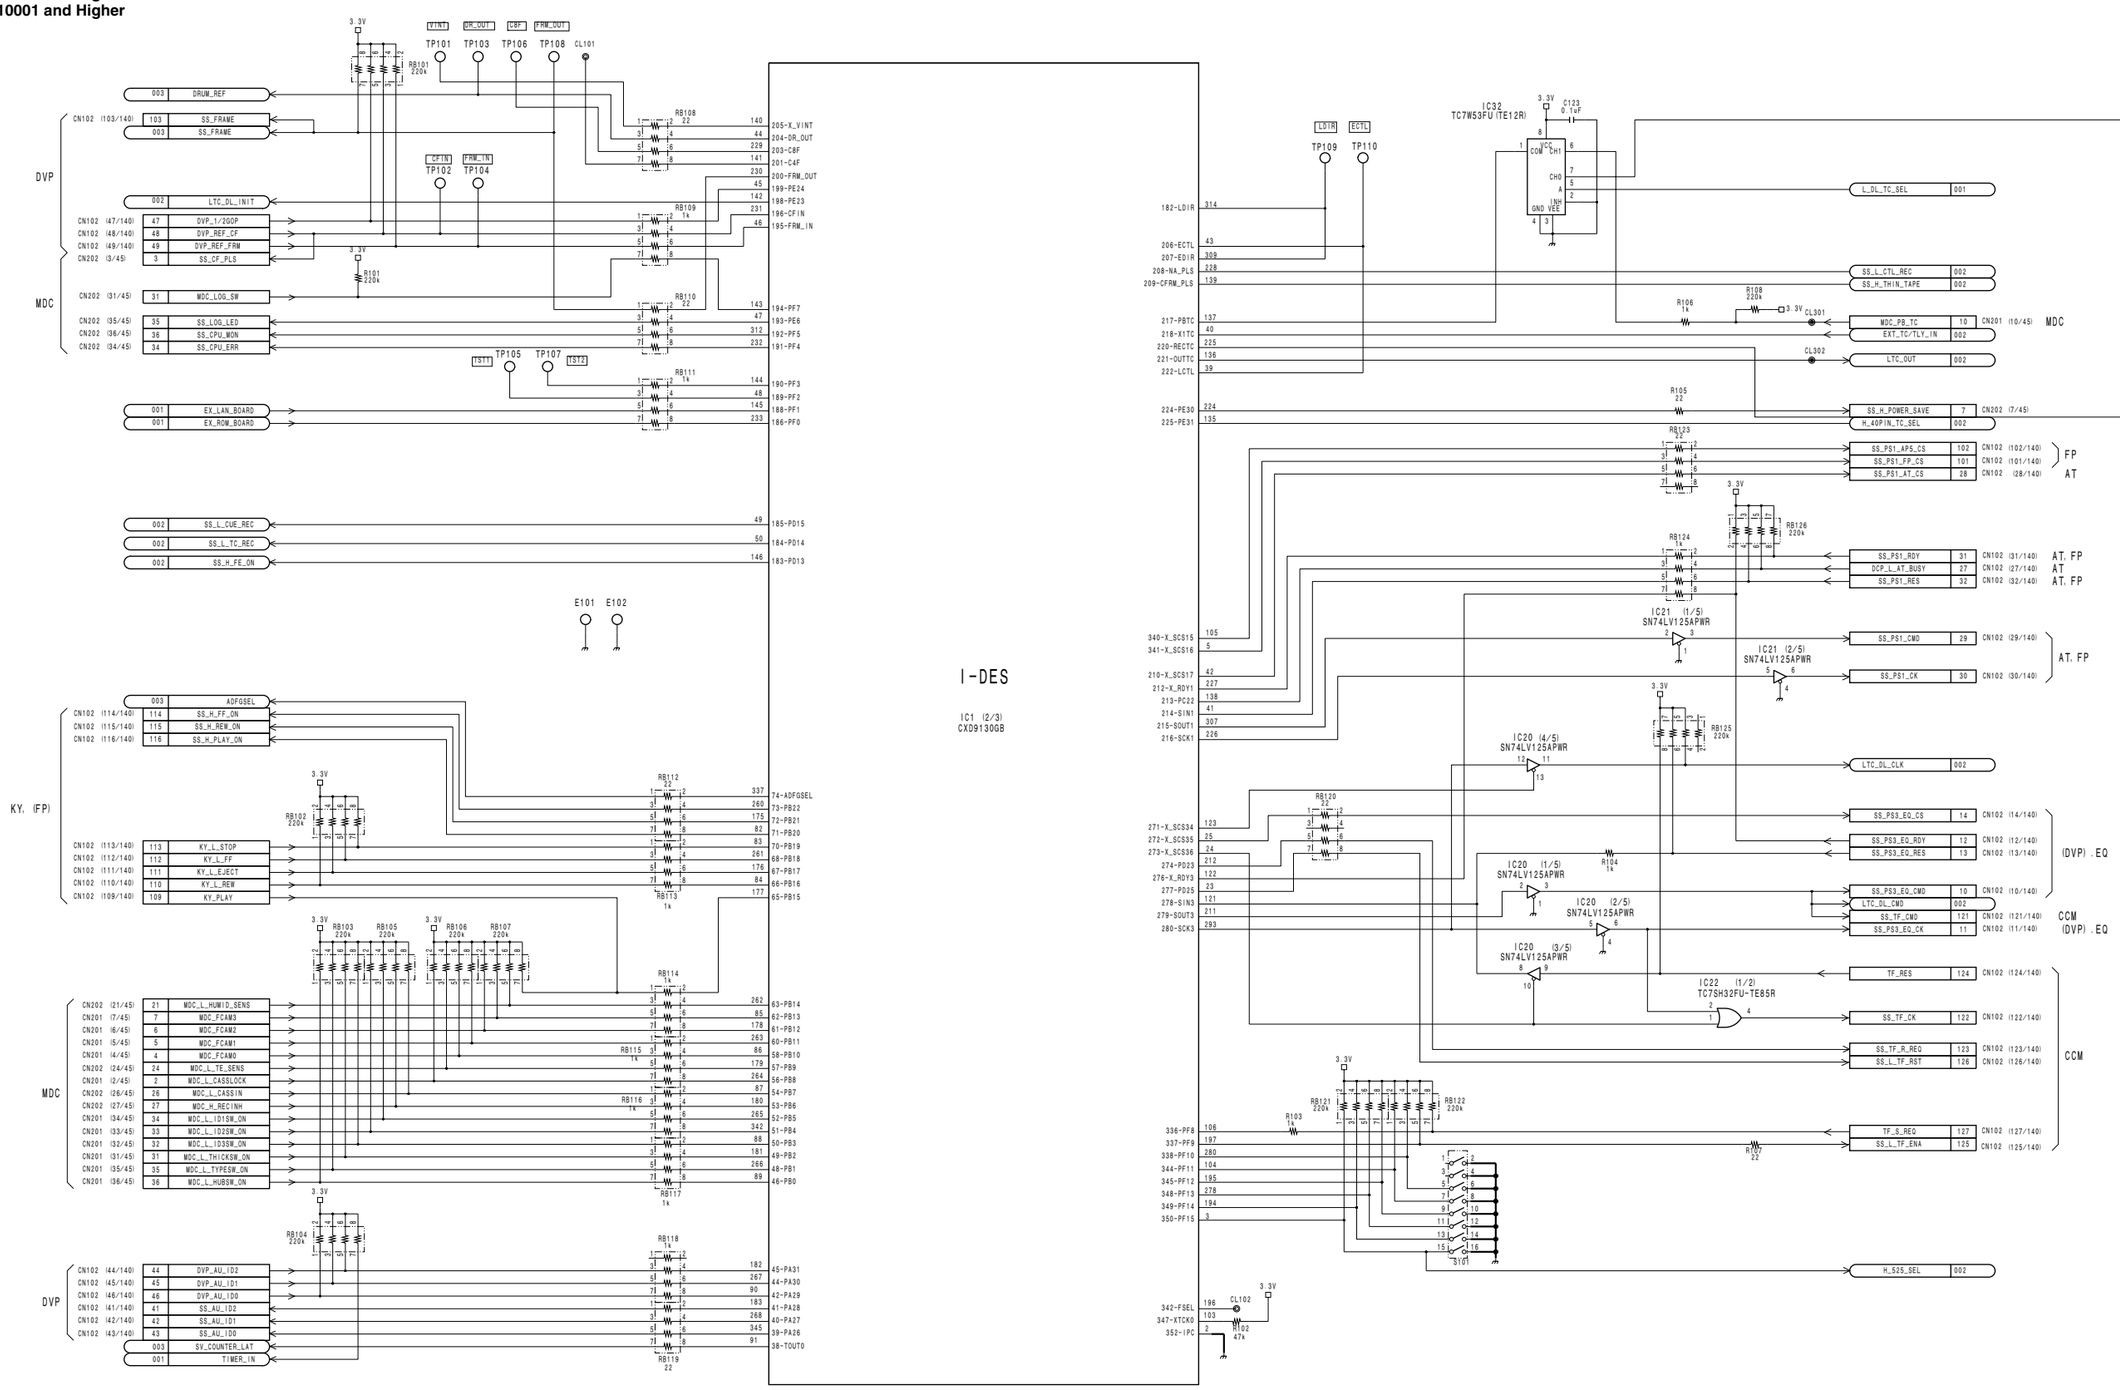

4-82

SS-92 (2/3)

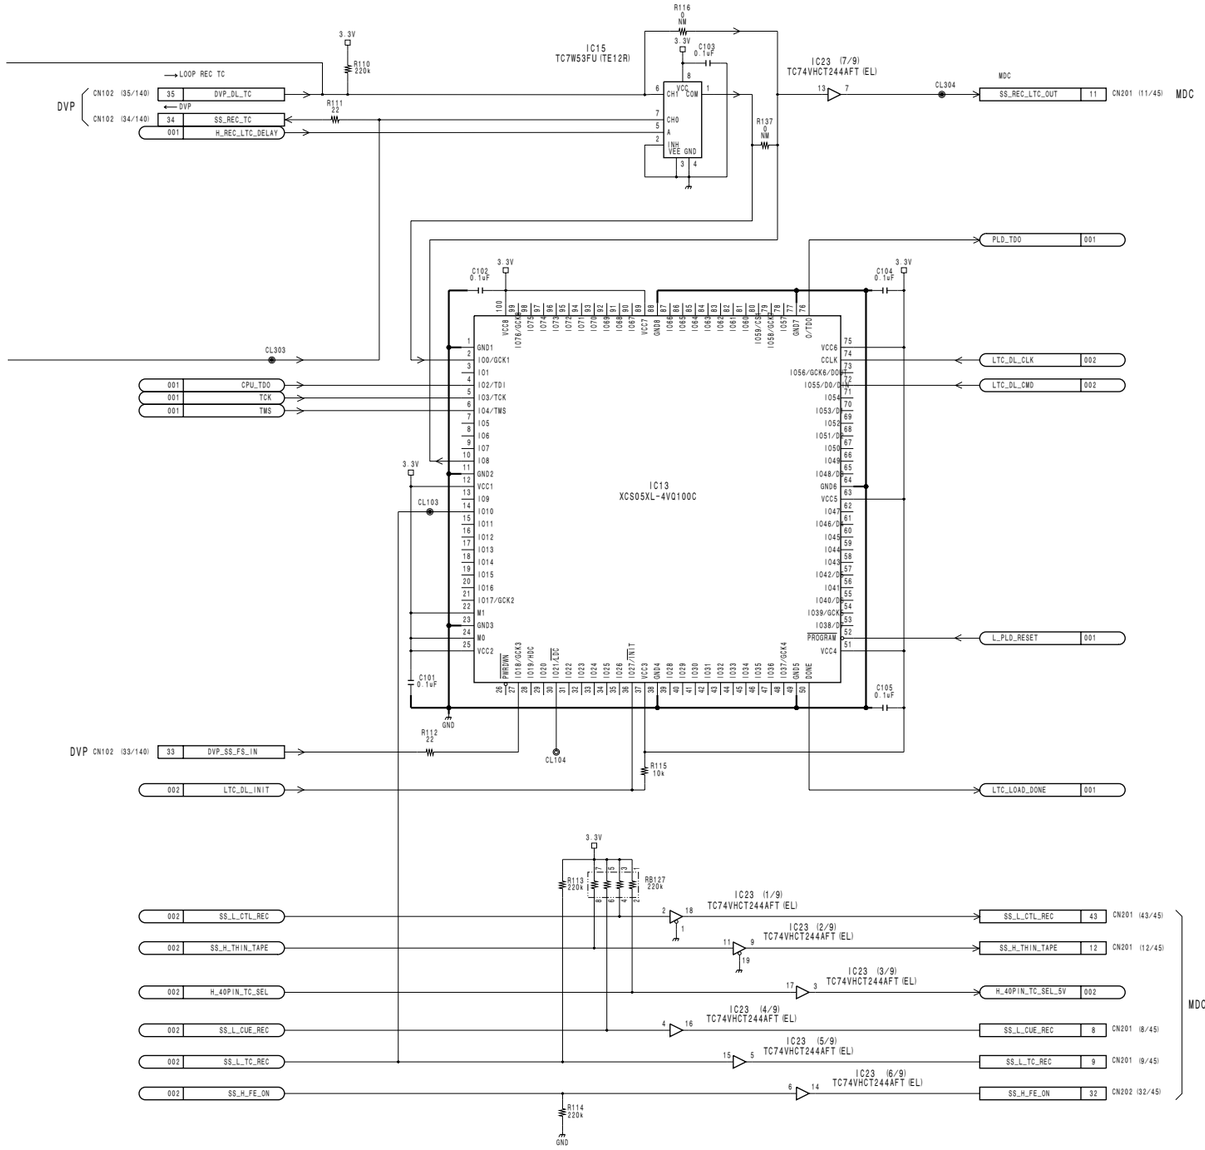

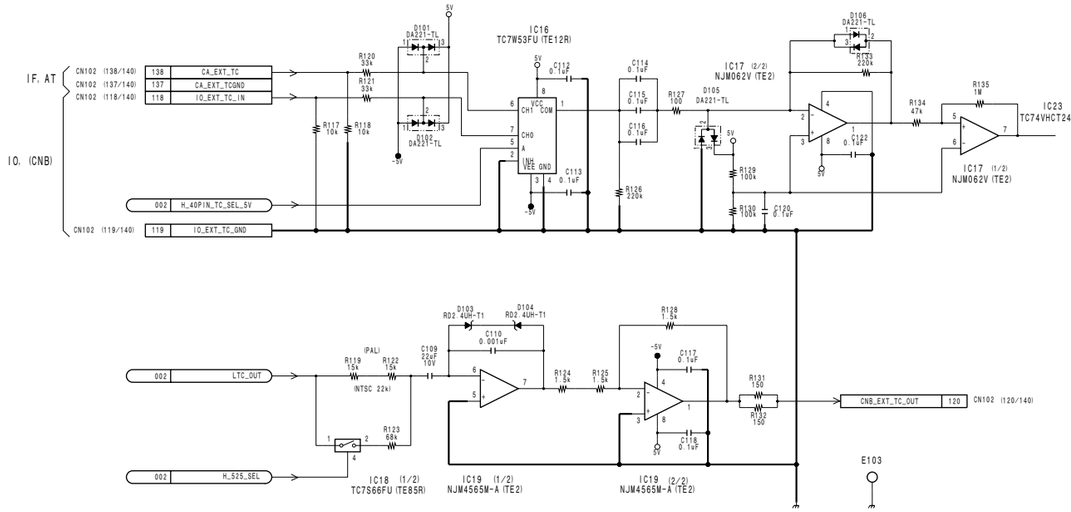

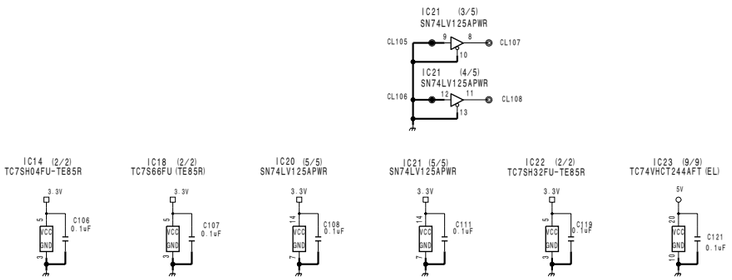

SS-92 (2/3)
BOARD NO. 1-678-740-12
LOT NO. 083-
HDW-750_SS-92_014_2

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

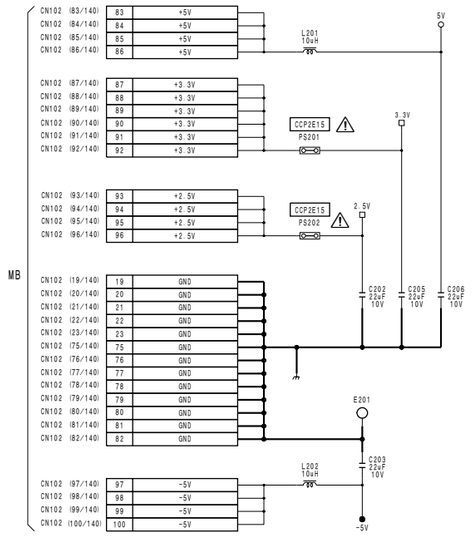

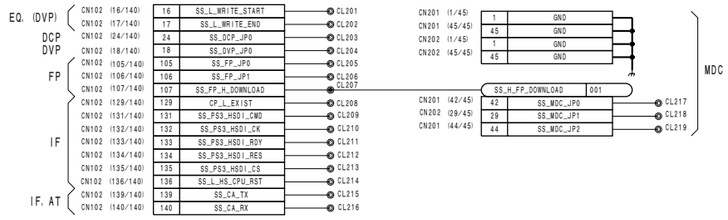

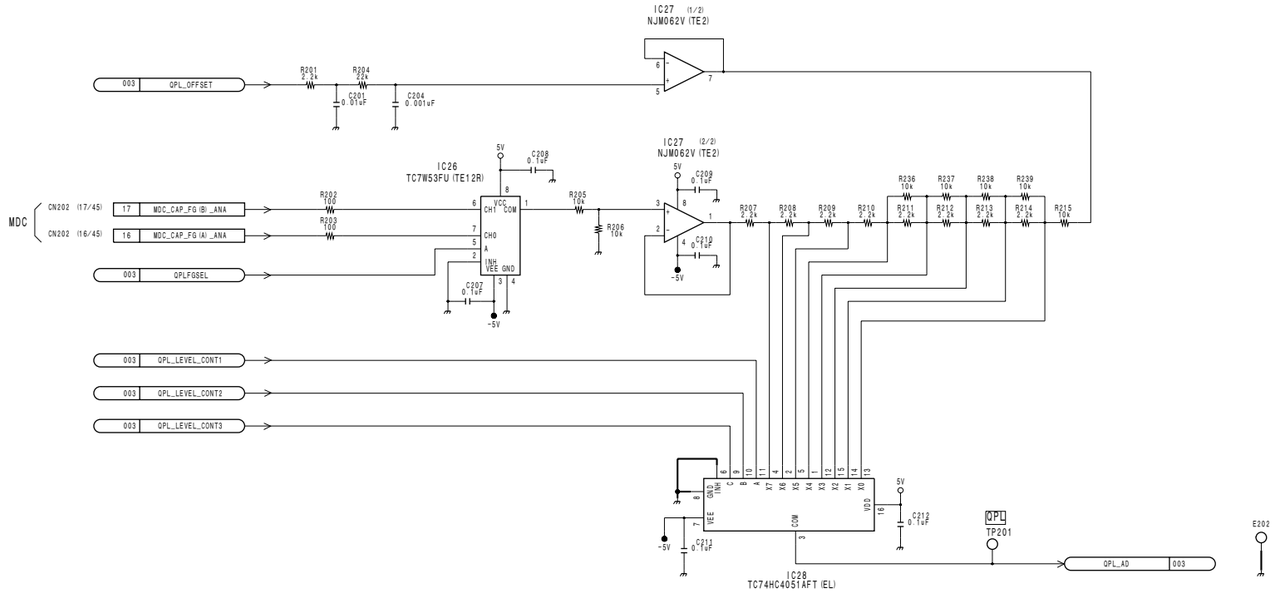

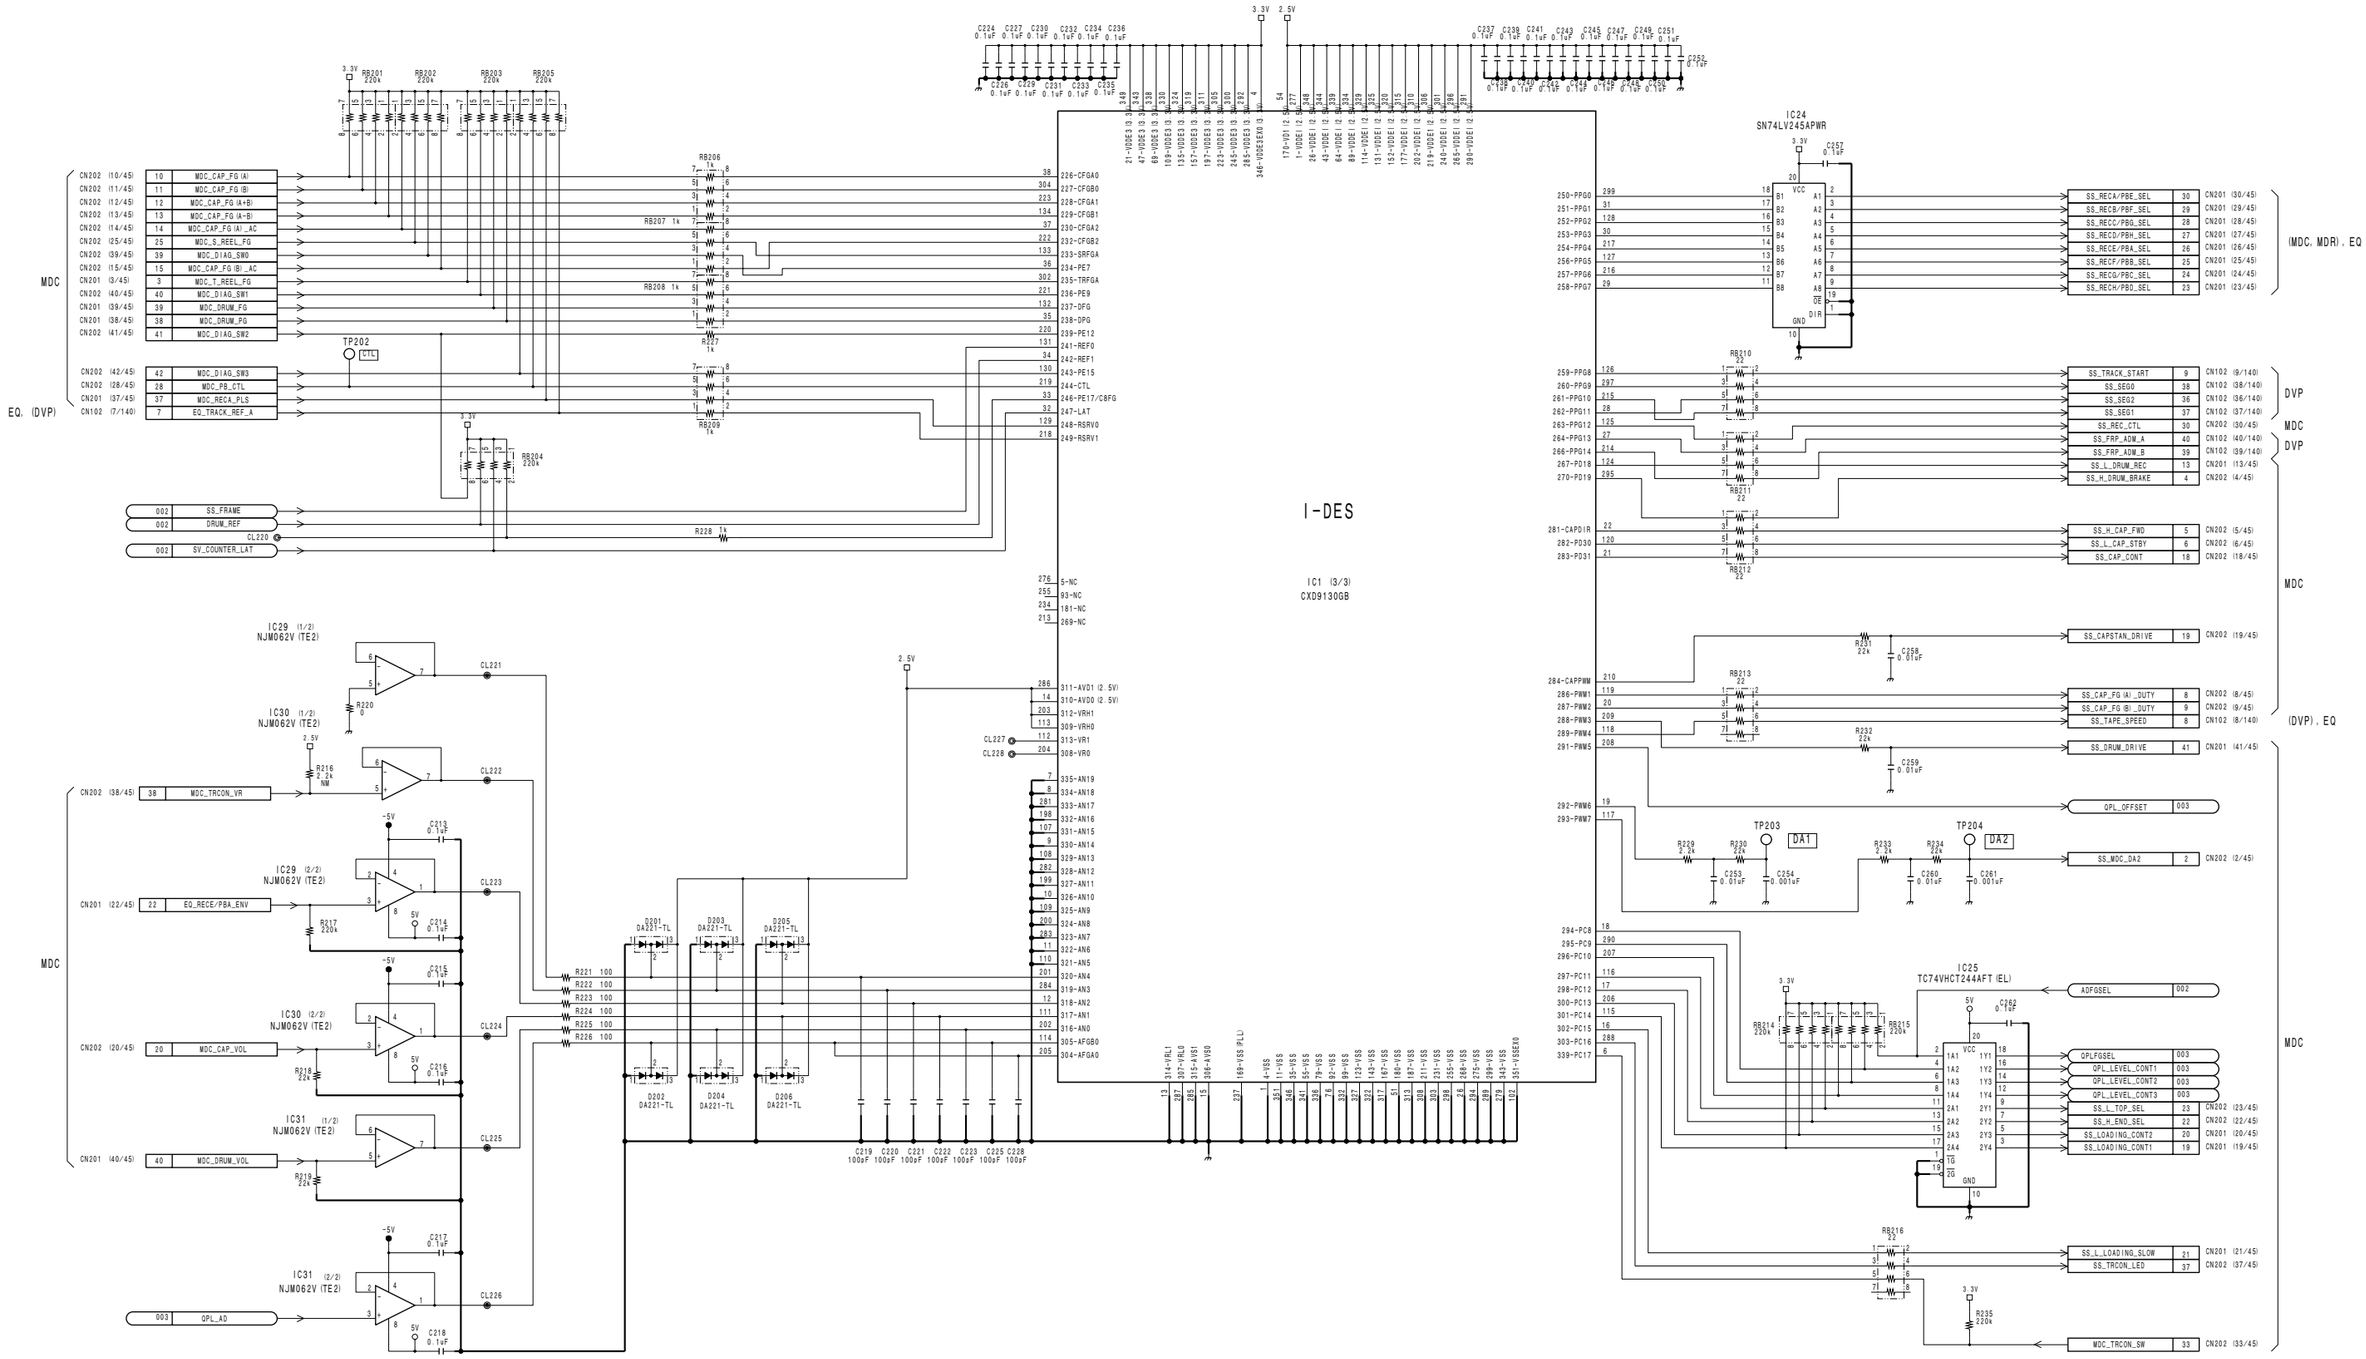

SS-92 (3/3)

BOARD NO. 1-678-740-12
LOT NO. 083-
HDW-750_SS-92_014_3

MDC-13 (1/6)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

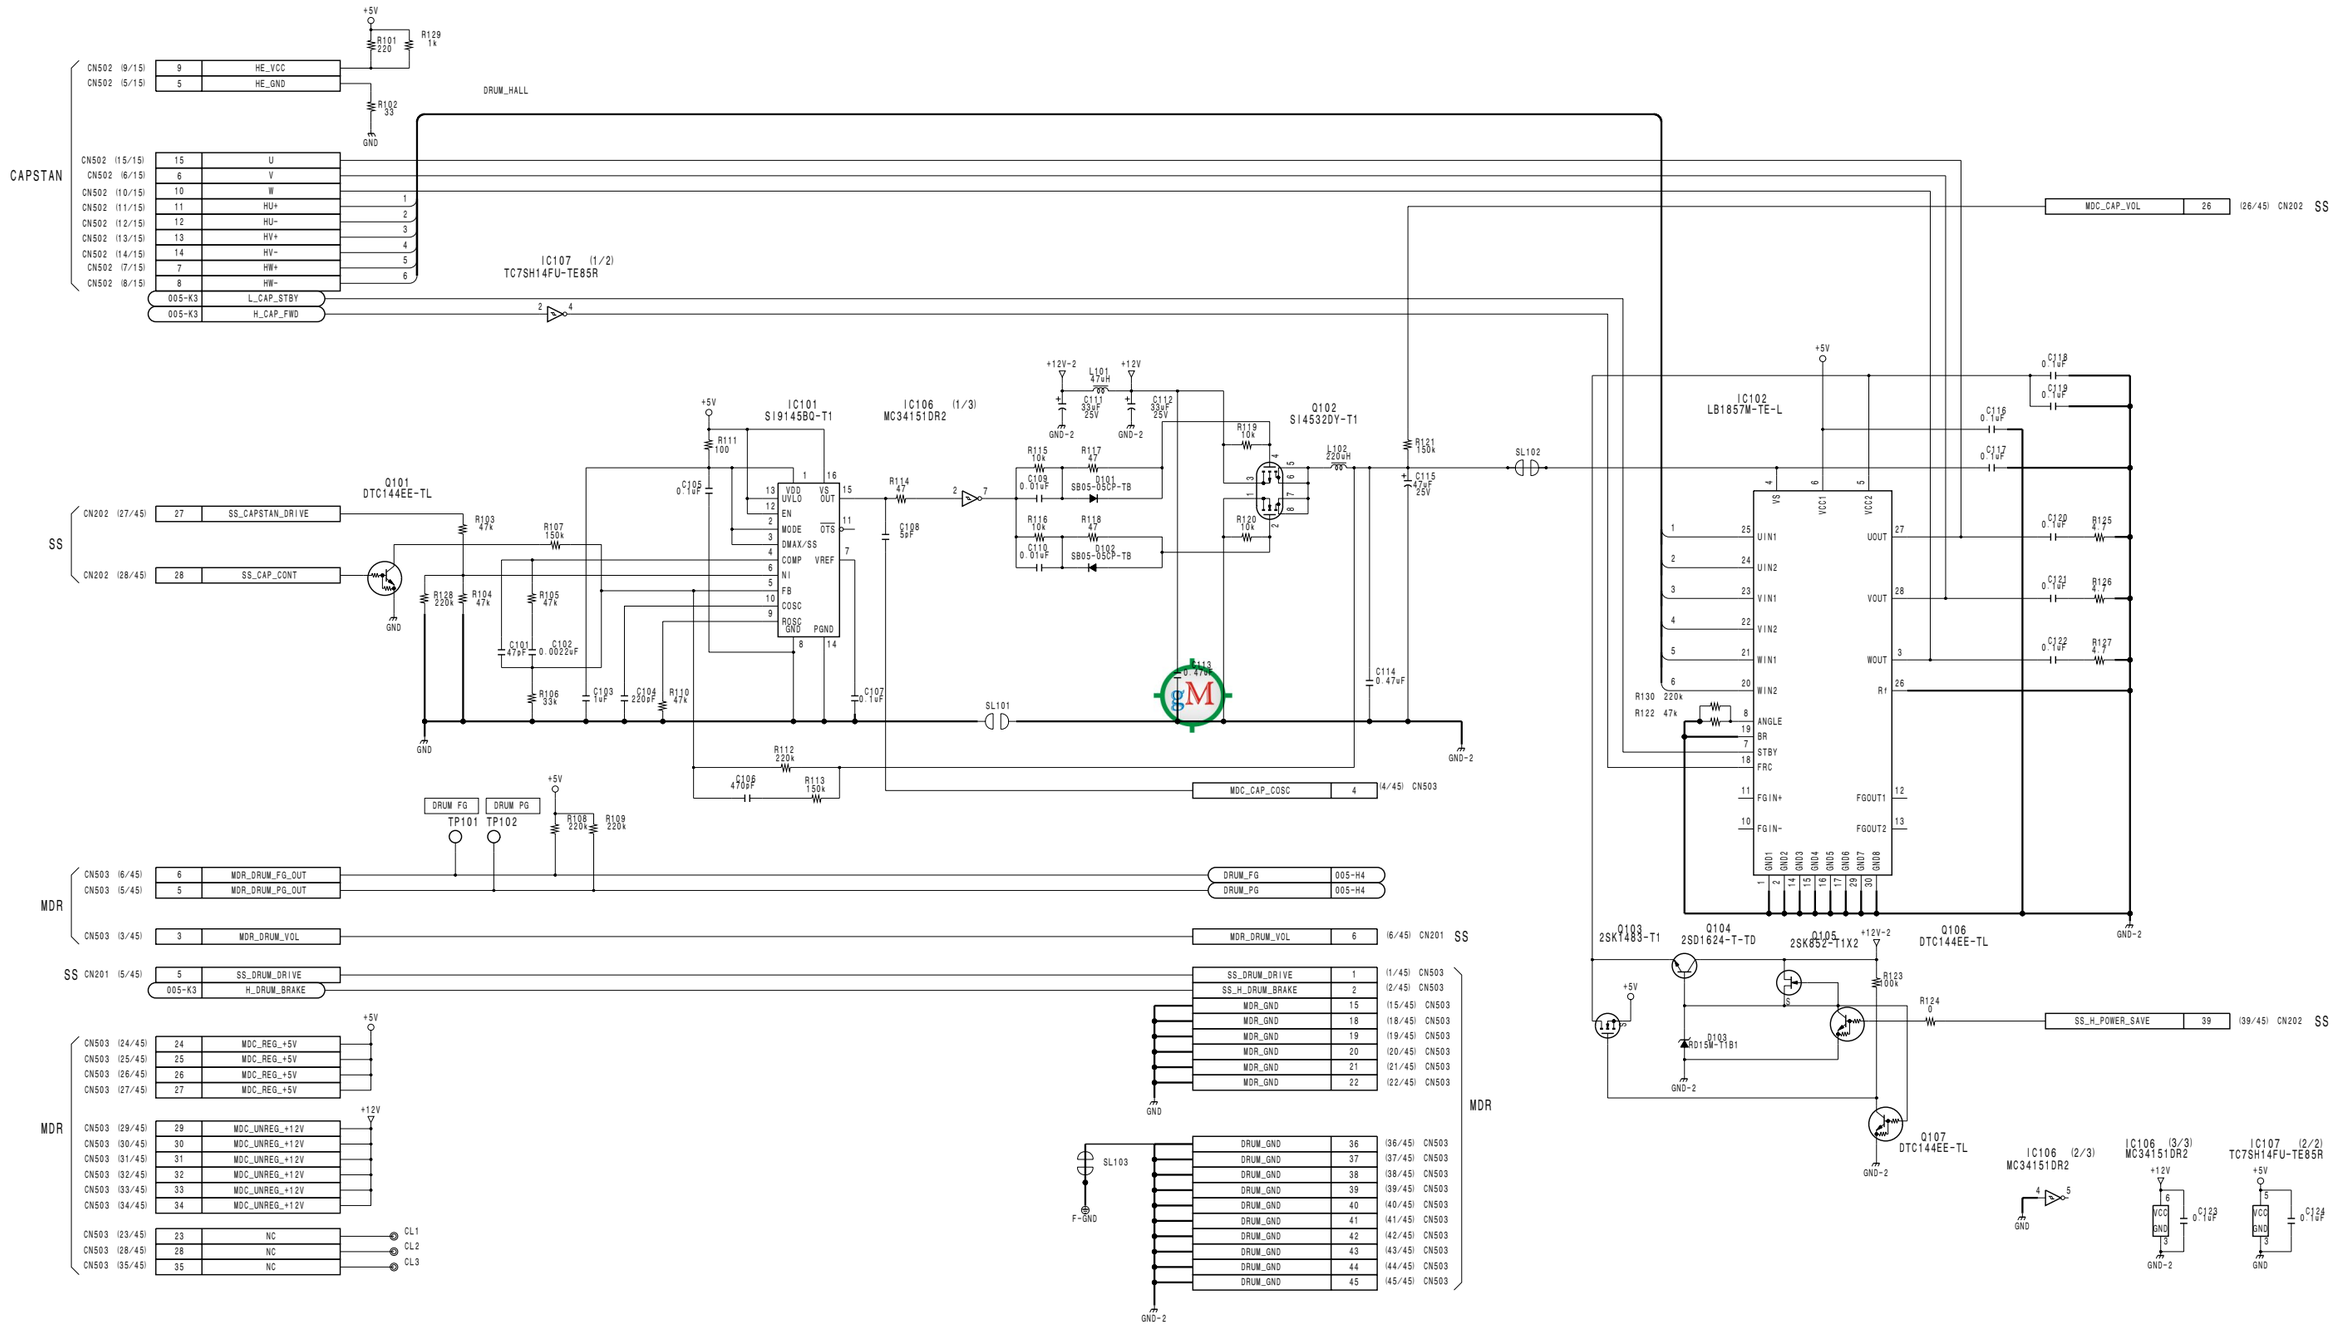

MDC-13 (1/6)

BOARD NO. 1-678-737-12, 13
LOT NO. 083-
HDW-750_MDC-13_015_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

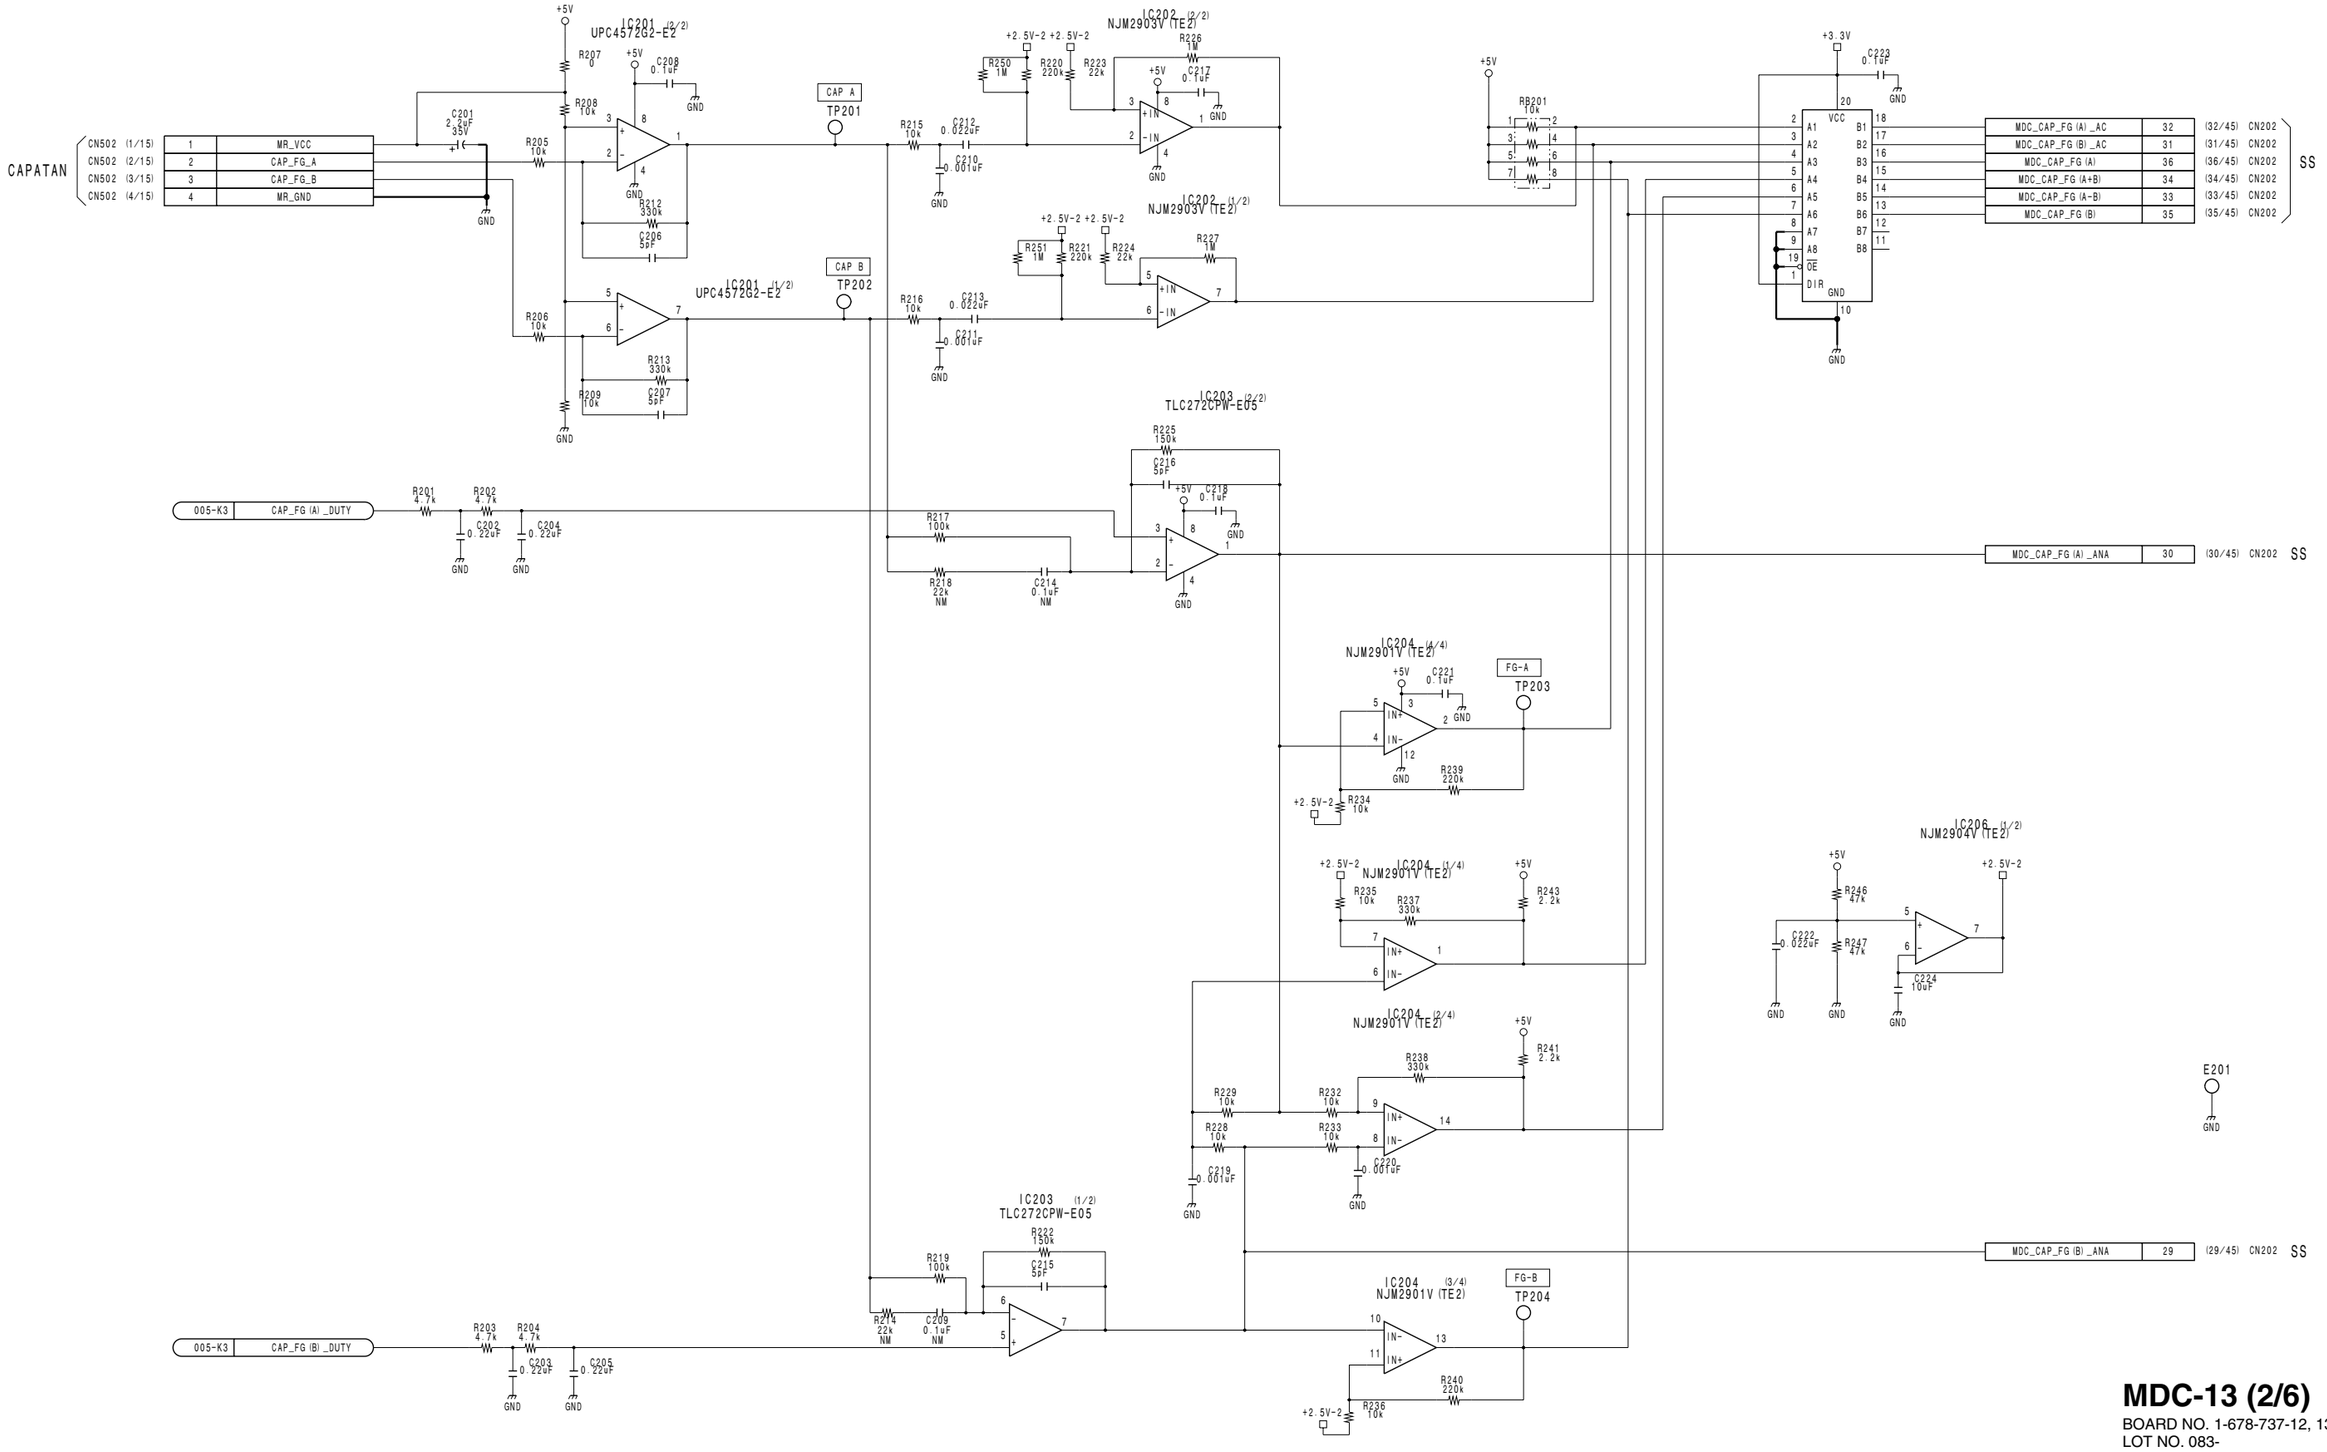

MDC-13 (2/6)

BOARD NO. 1-678-737-12, 13
LOT NO. 083-
HDW-750_MDC-13_015_2

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

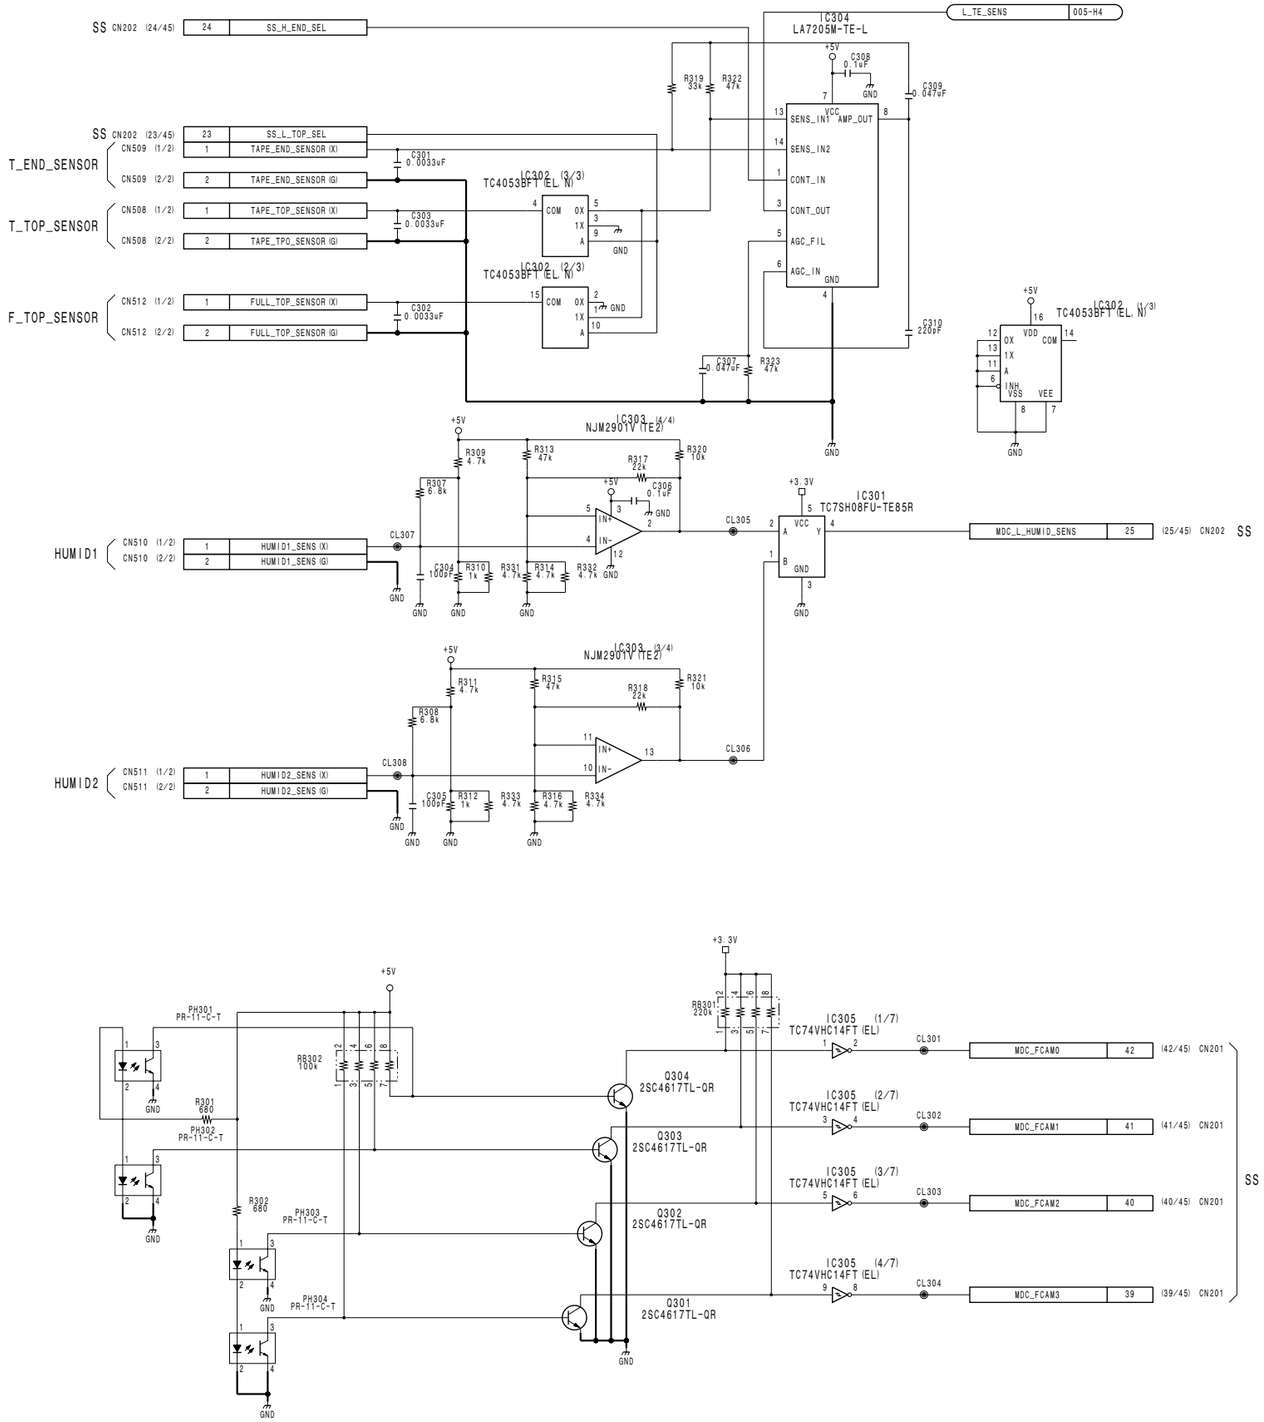

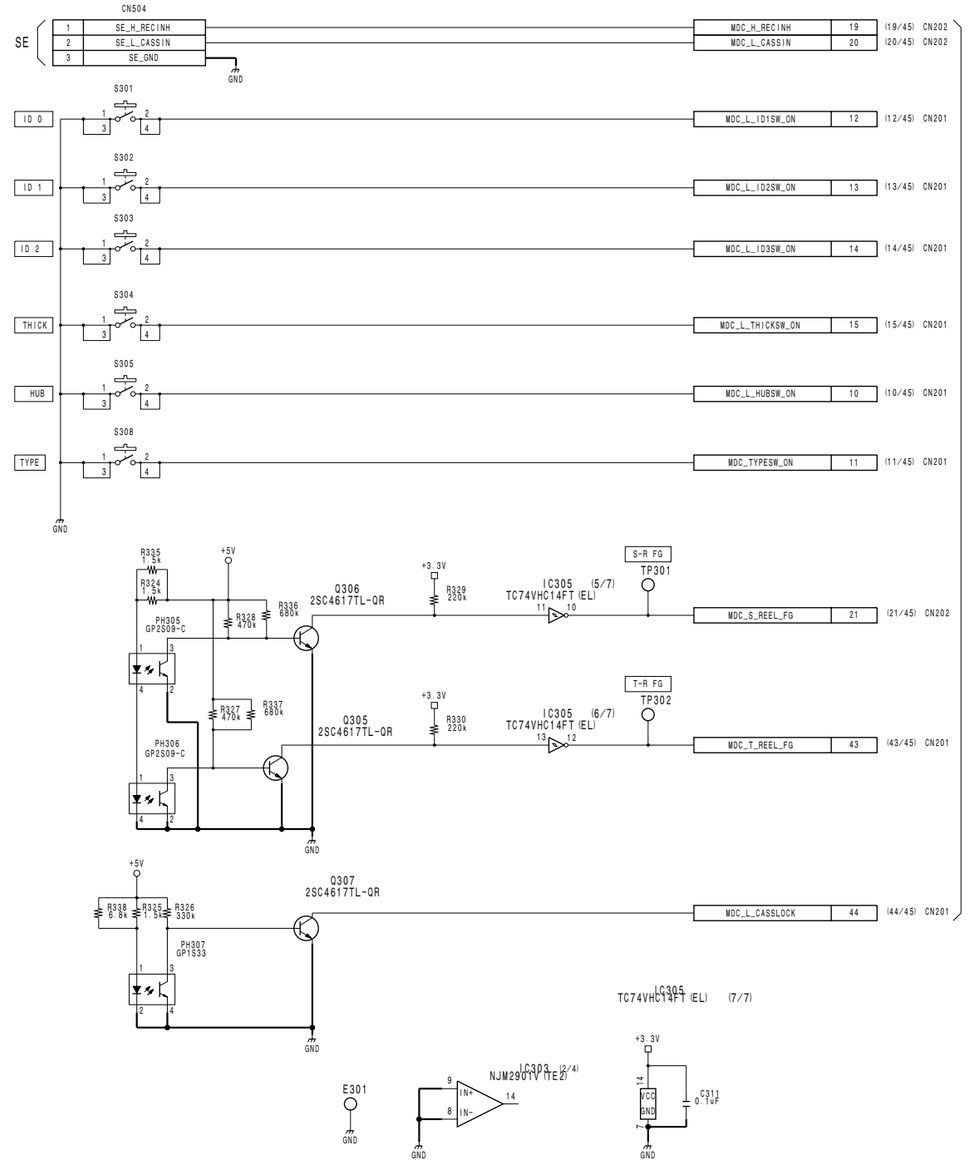

MDC-13 (3/6)

BOARD NO. 1-678-737-12, 13
LOT NO. 083-
HDW-750_MDC-13_015_3

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

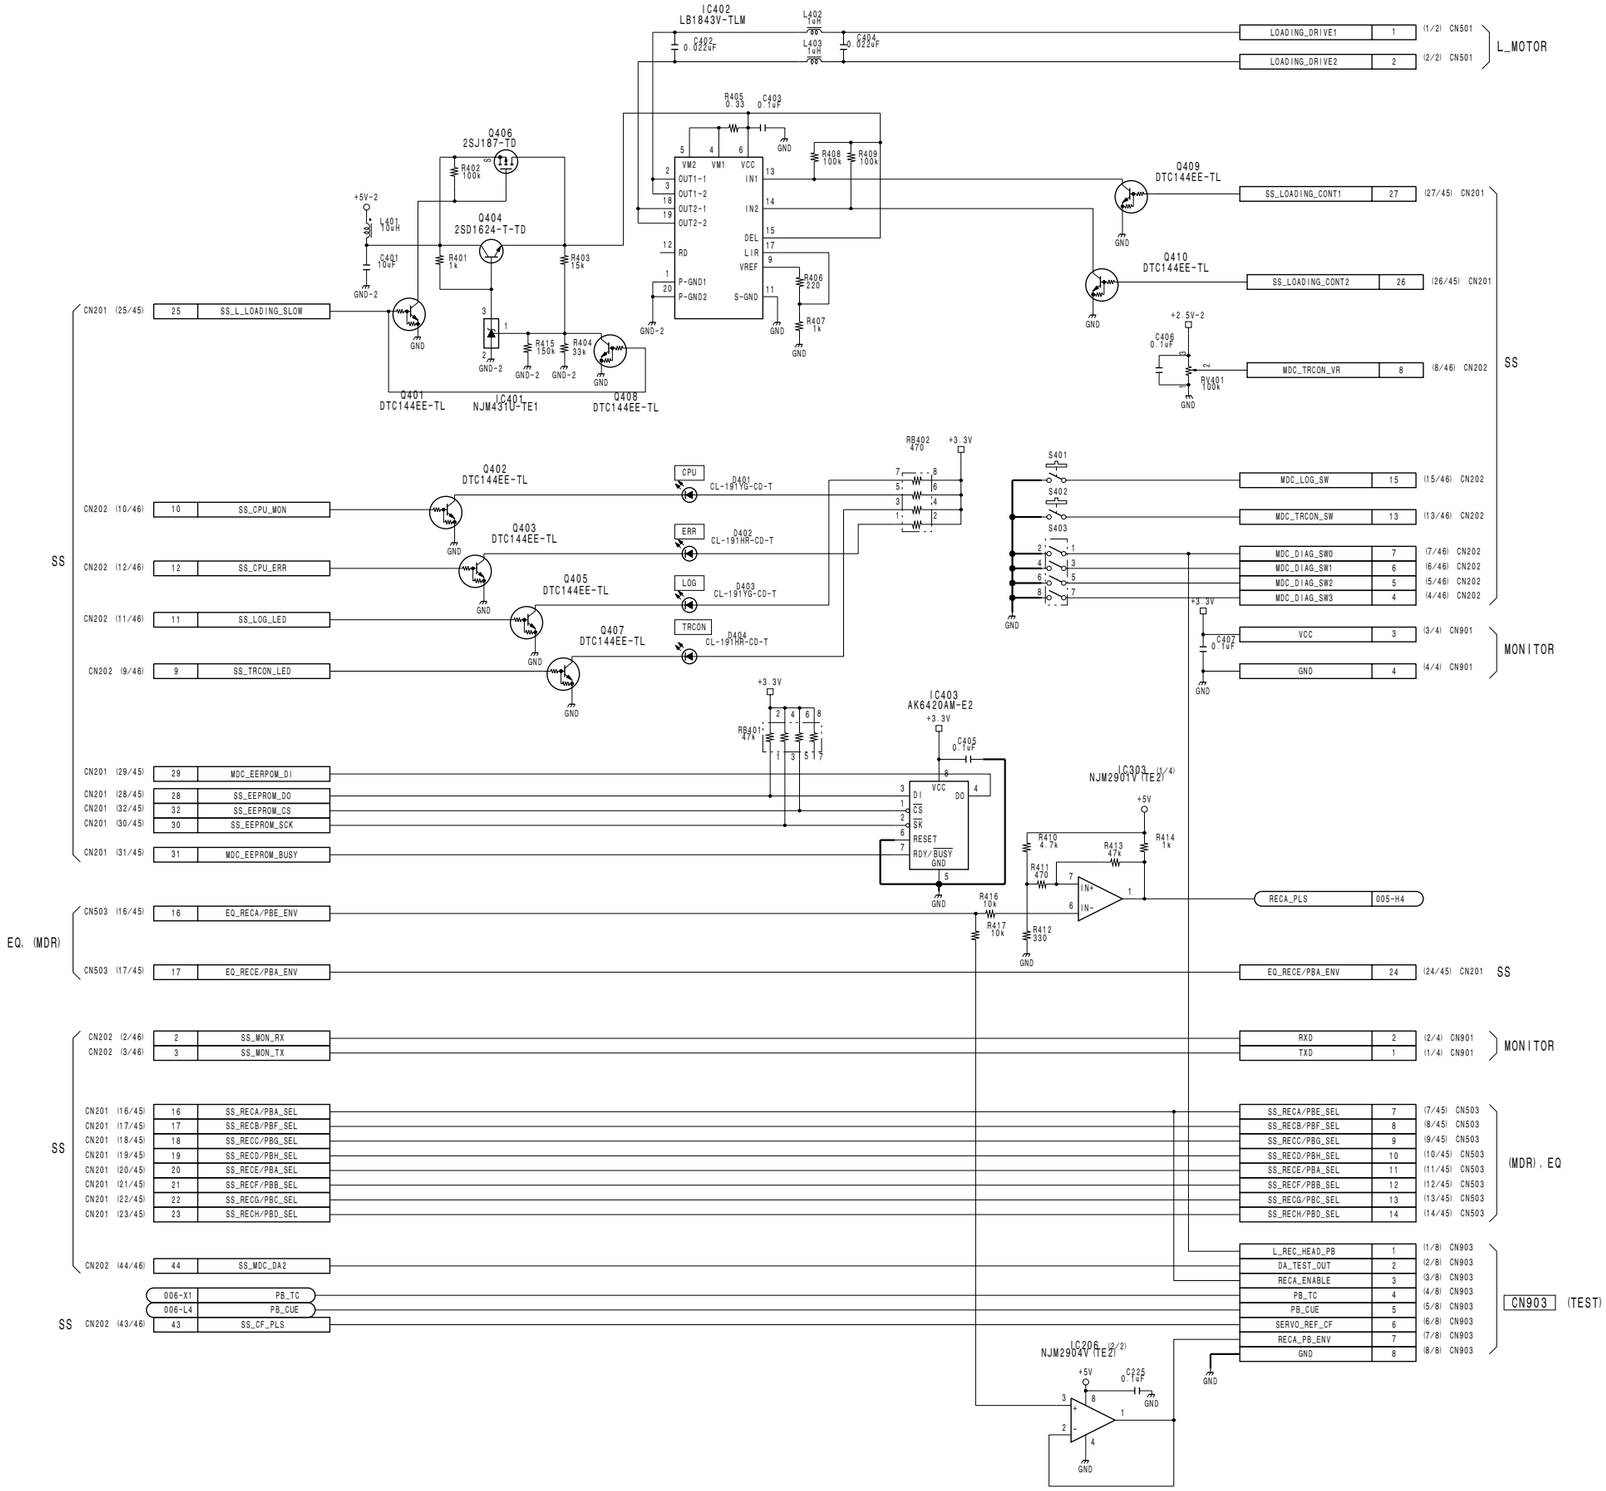

MDC-13 (4/6)

BOARD NO. 1-678-737-12, 13
LOT NO. 083-

HDW-750_MDC-13_015_4

http://getMANUAL.com

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

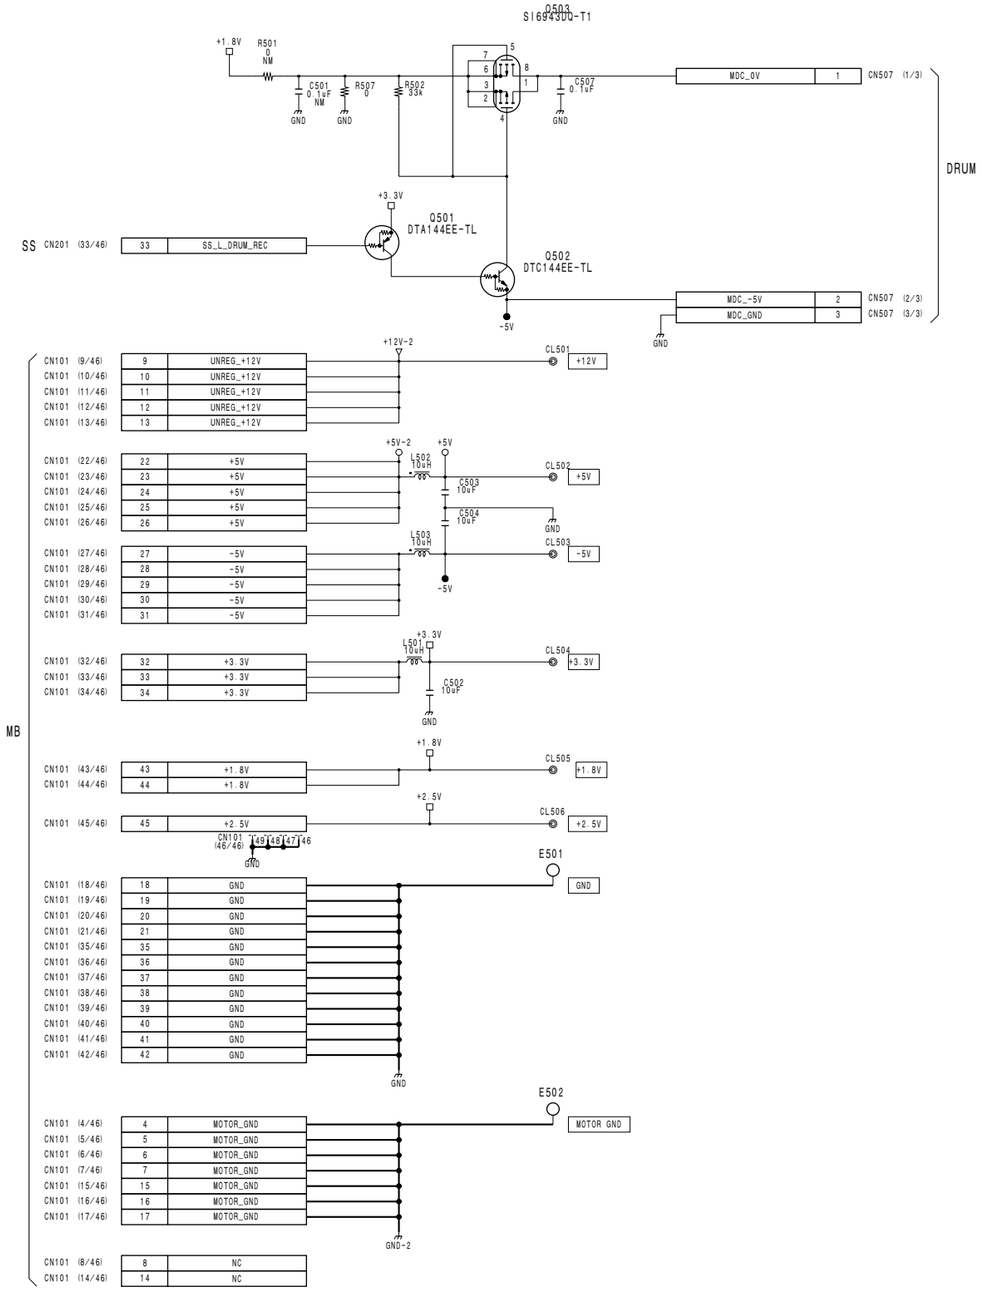

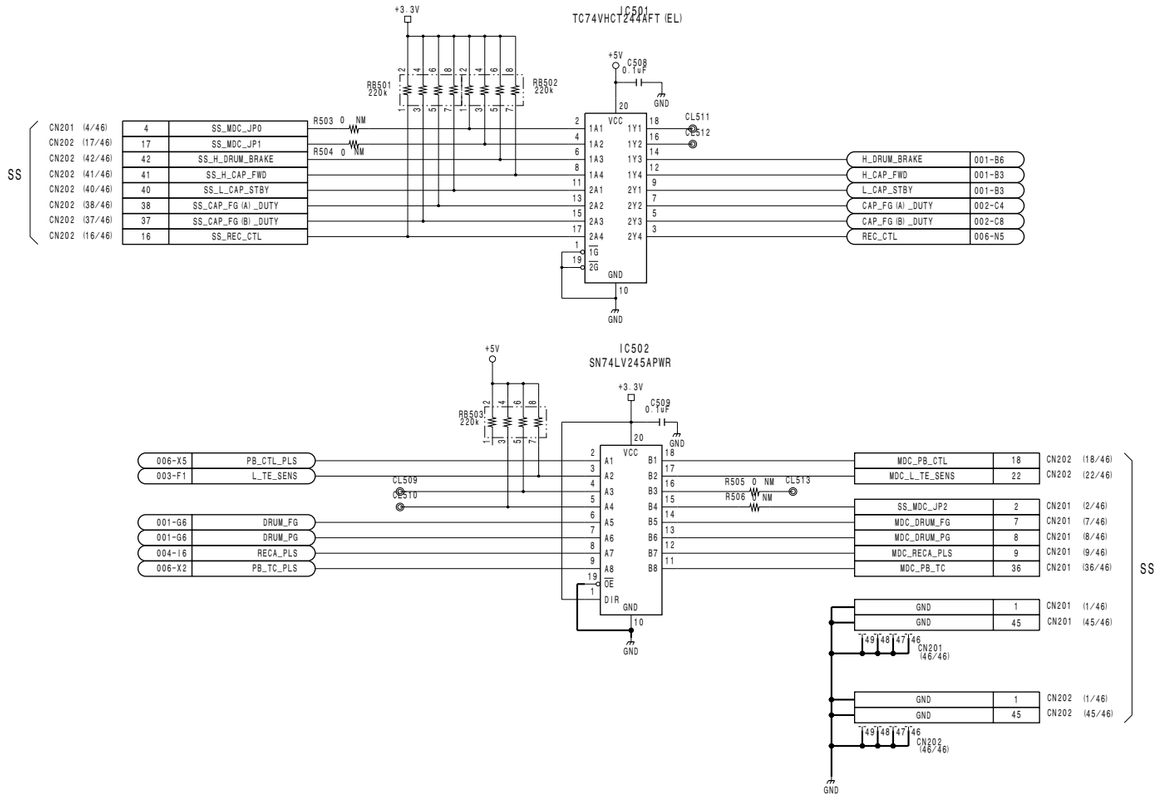

MDC-13 (5/6)
BOARD NO. 1-678-737-12, 13
LOT NO. 083-
HDW-750_MDC-13_015_5

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

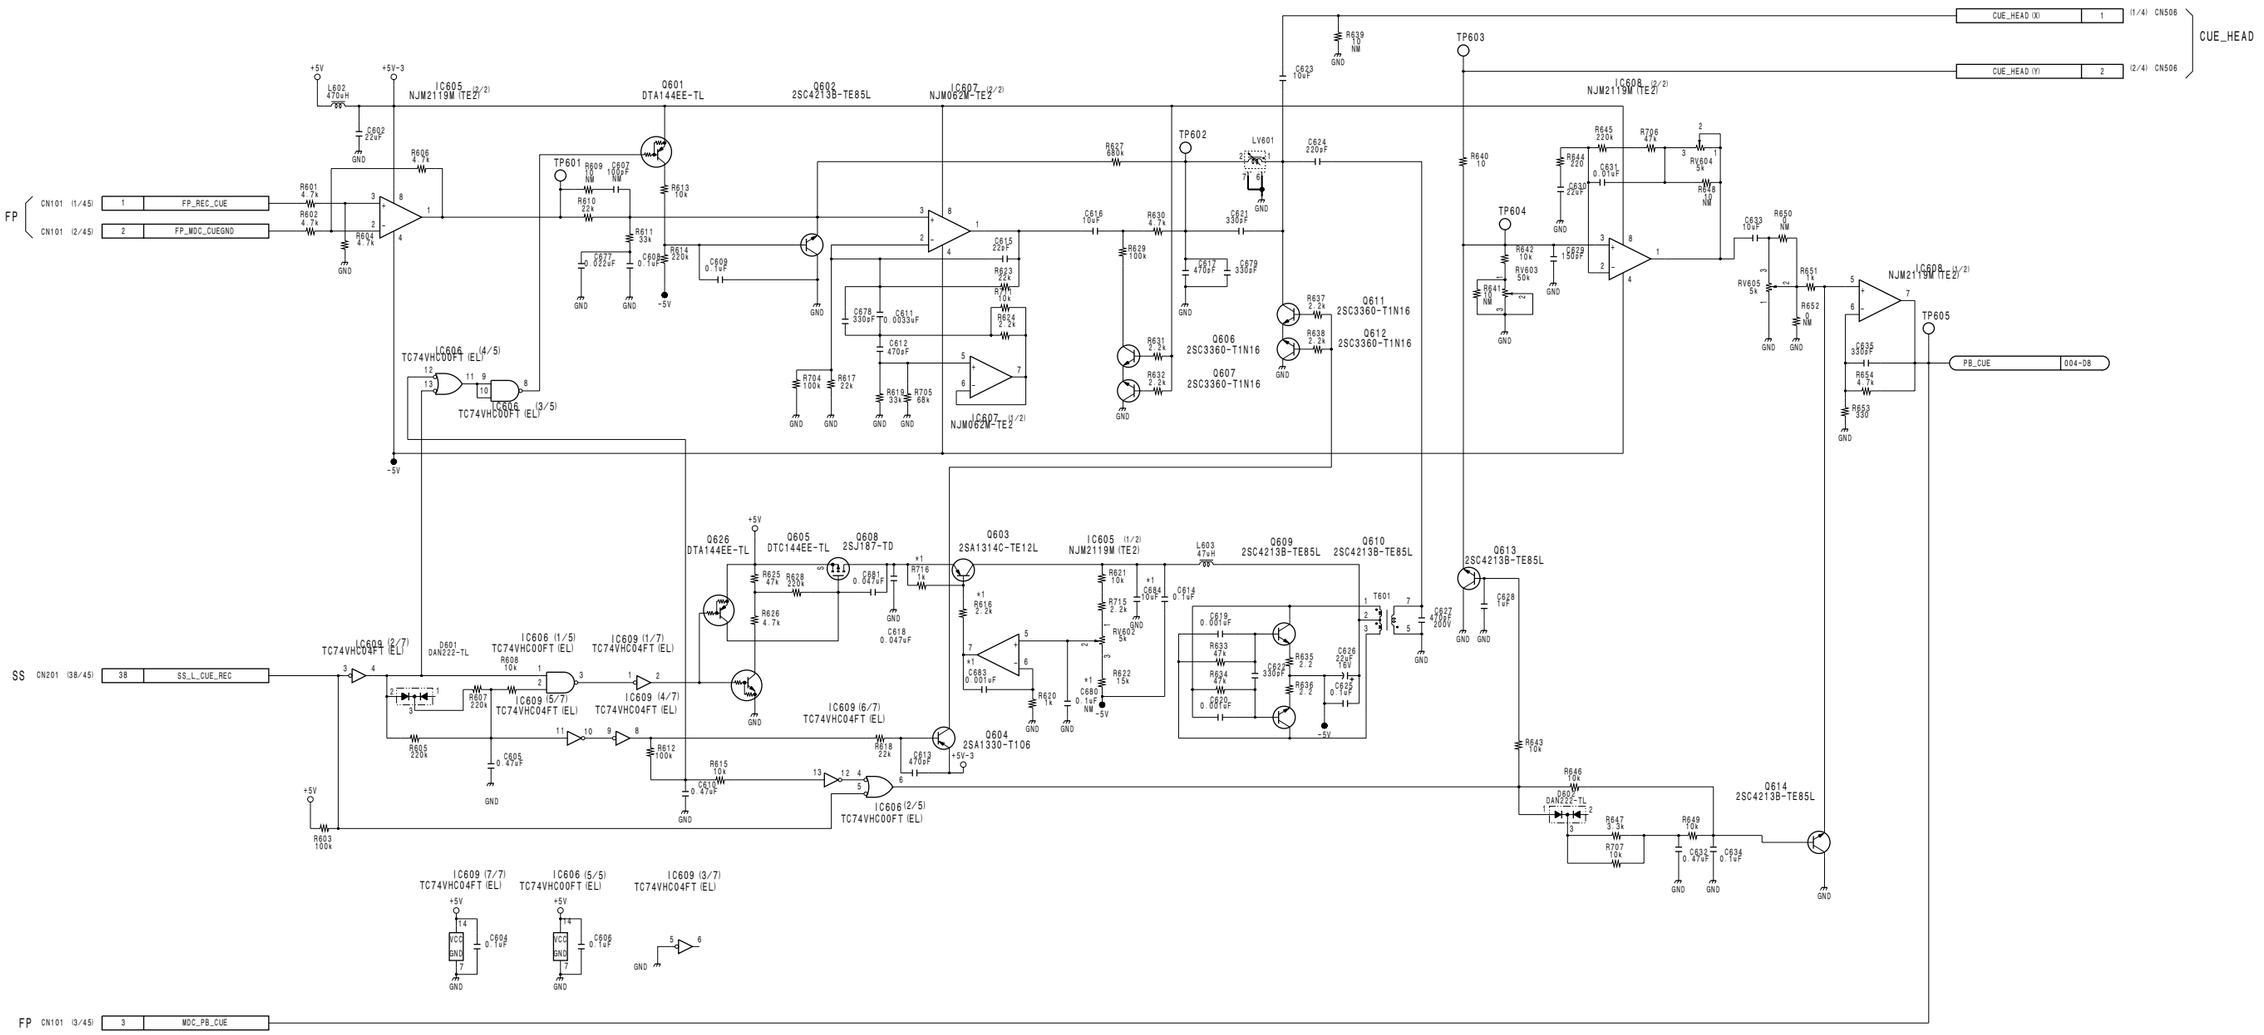

MARK	CHANGE INFORMATION	LOT NO.
*1	ADDED C684, C683, R716 DELETED C860 R616 1.0k → 2.2k	112-

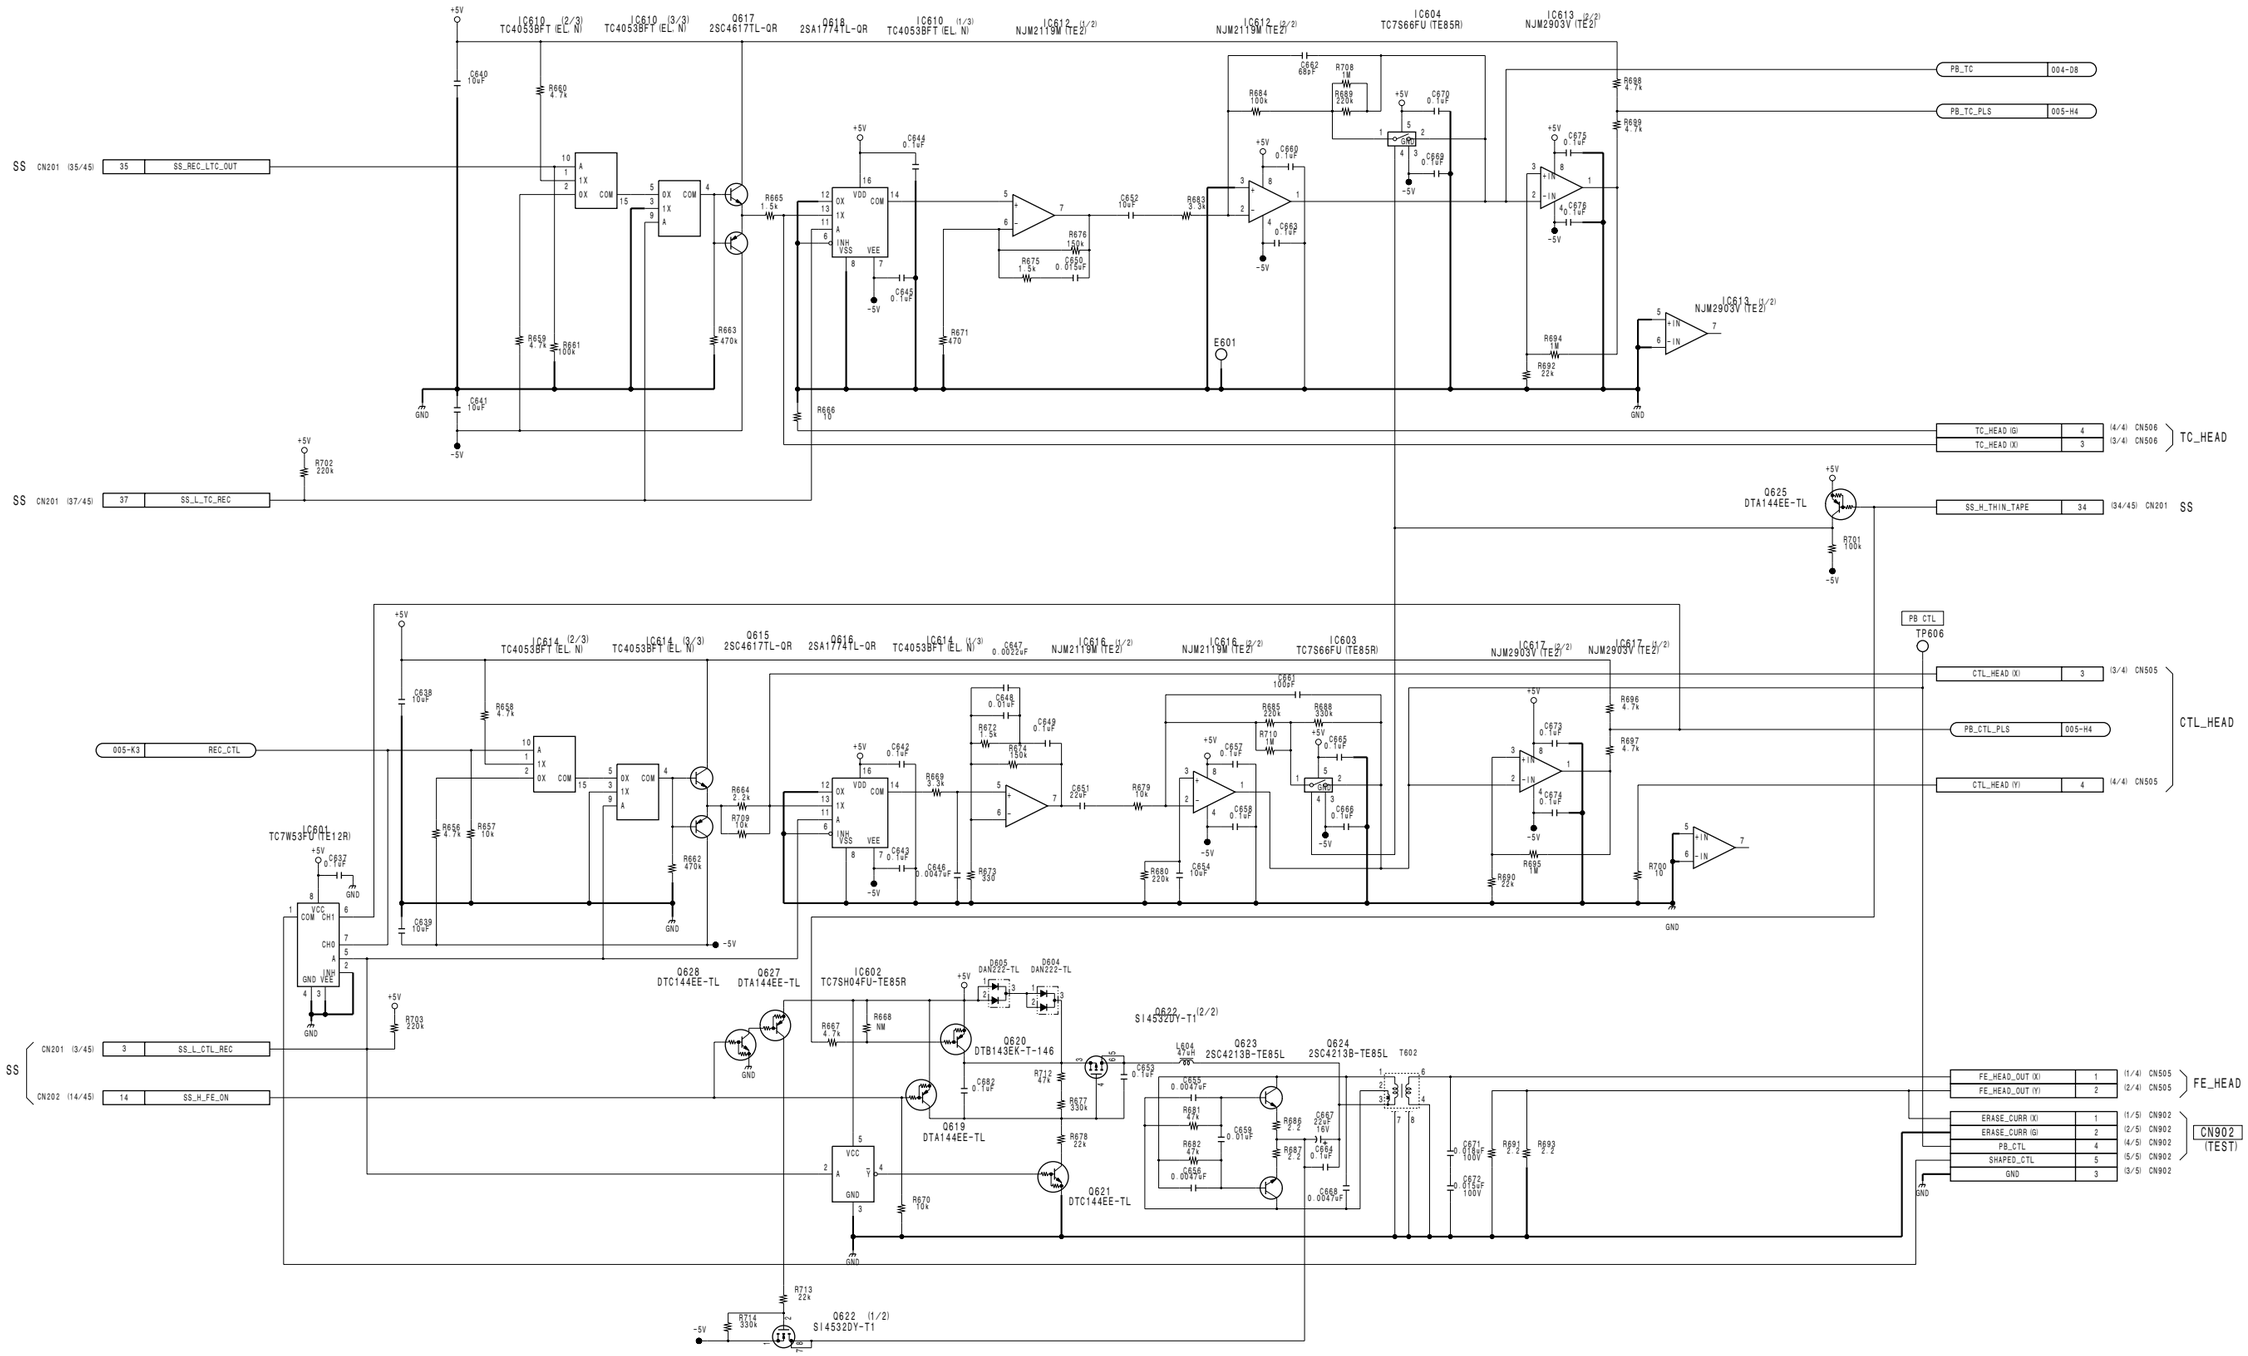

MDC-13 (6/6)

BOARD NO. 1-678-737-12, 13
LOT NO. 083-

HDW-750_MDC-13_015_6

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

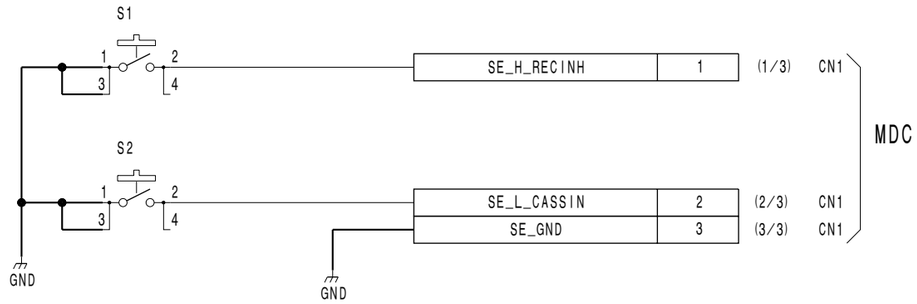

SE-613

BOARD NO. 1-678-769-11
LOT NO. 083-

HDW-750_SE-613_013_1

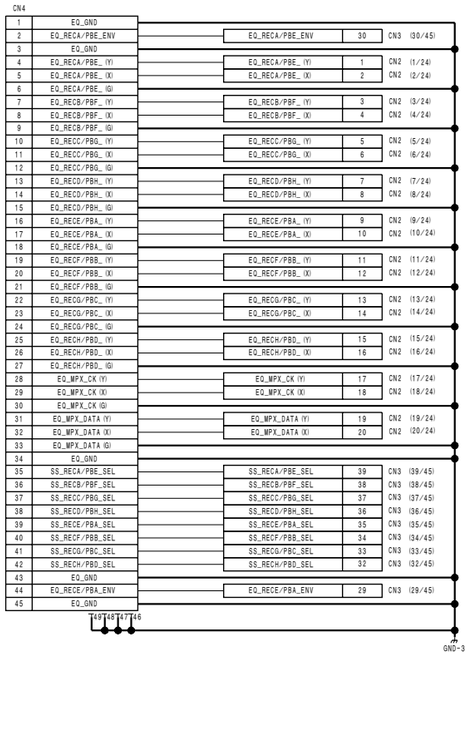

MDR-14

BOARD NO. 1-678-741-12, 13
LOT NO. 083-

HDW-750_MDR-14_015_1

EQ-88 (1/12)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

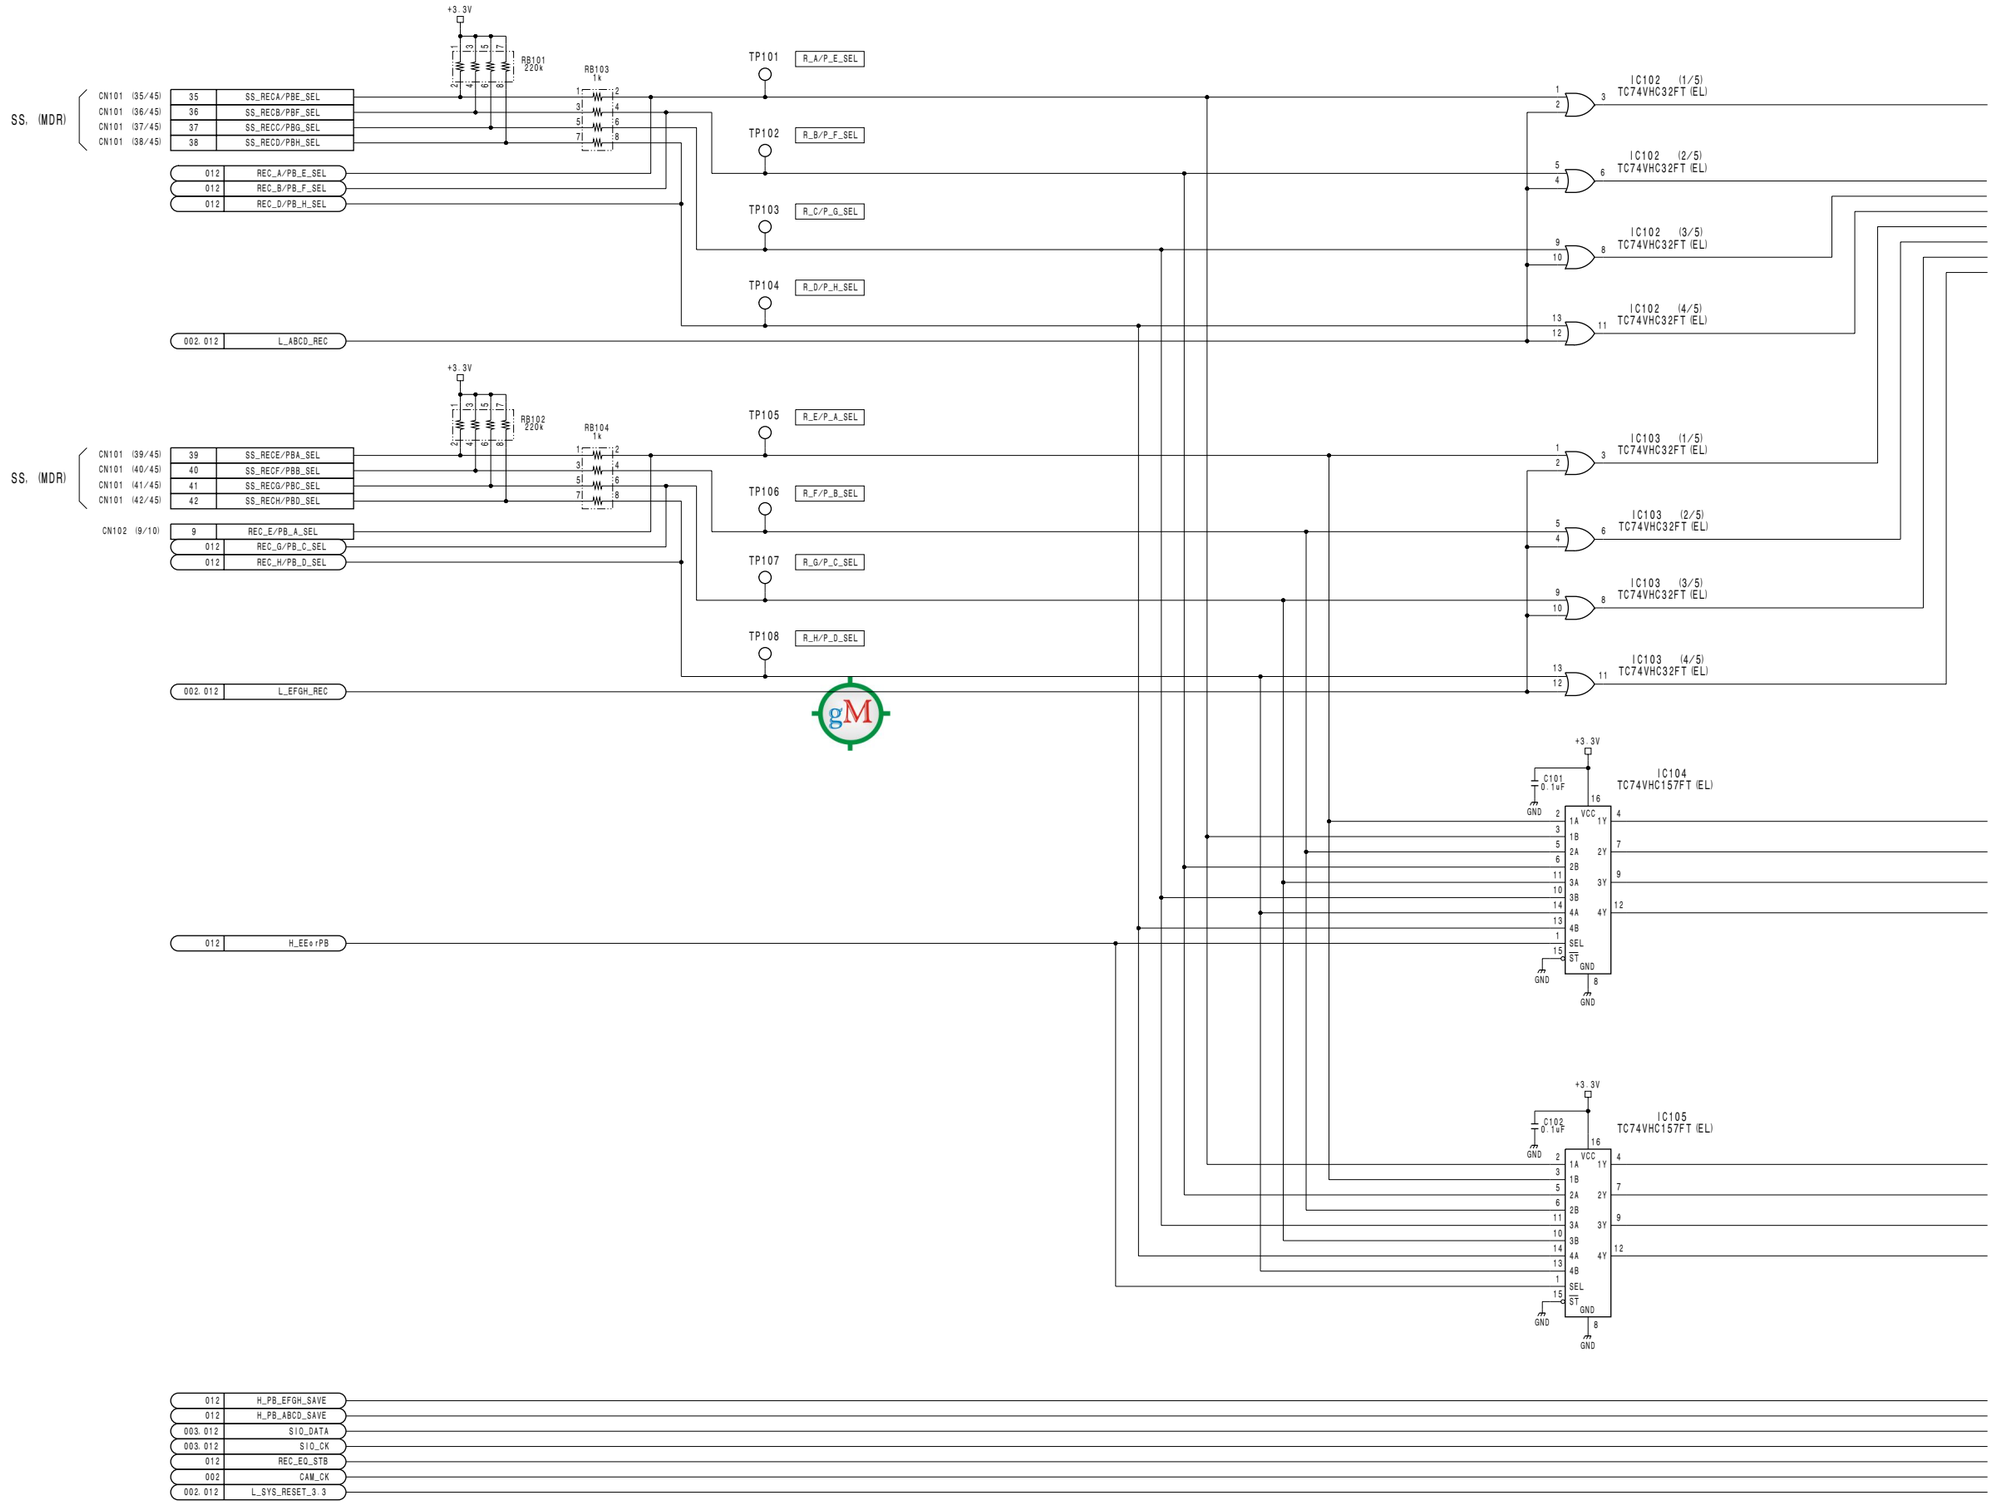

4-96

EQ-88 (1/12)

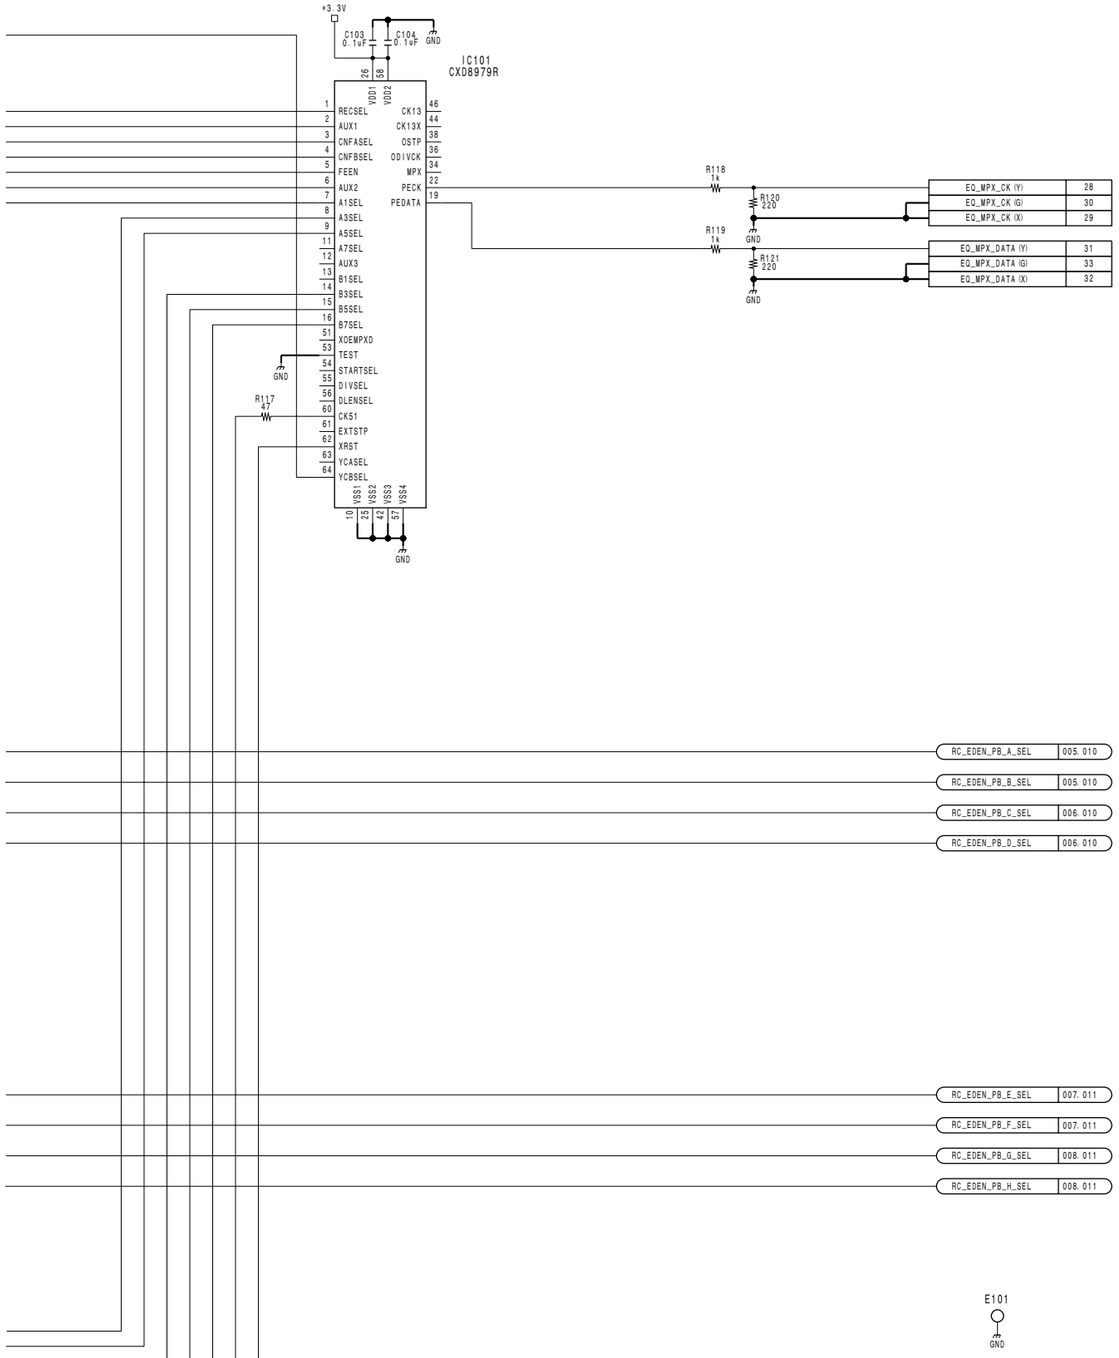



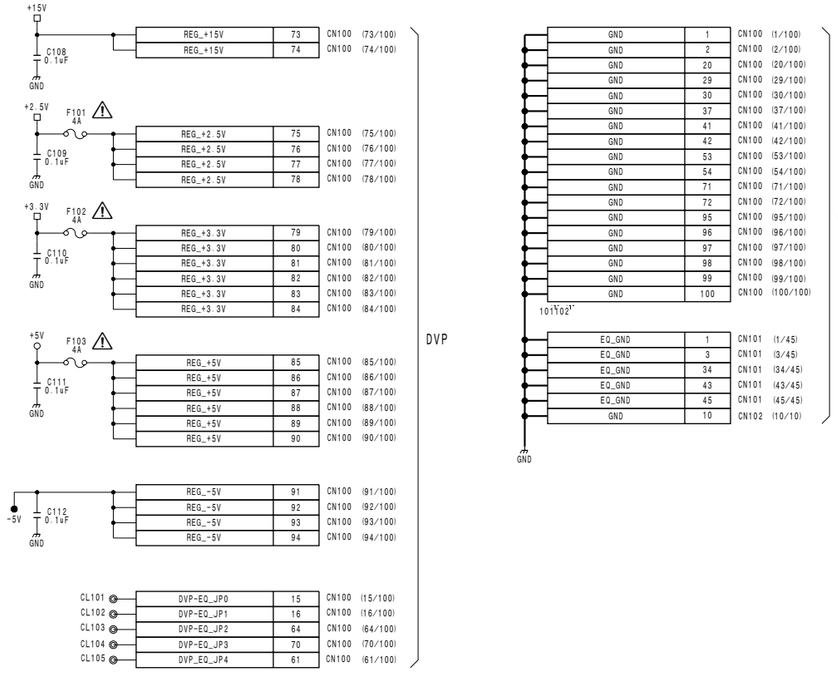

EQ-88 (1/12)

BOARD NO. 1-678-738-11, 12
LOT NO. 083-

HDW-750_EQ-88_014_1

EQ-88 (2/12)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

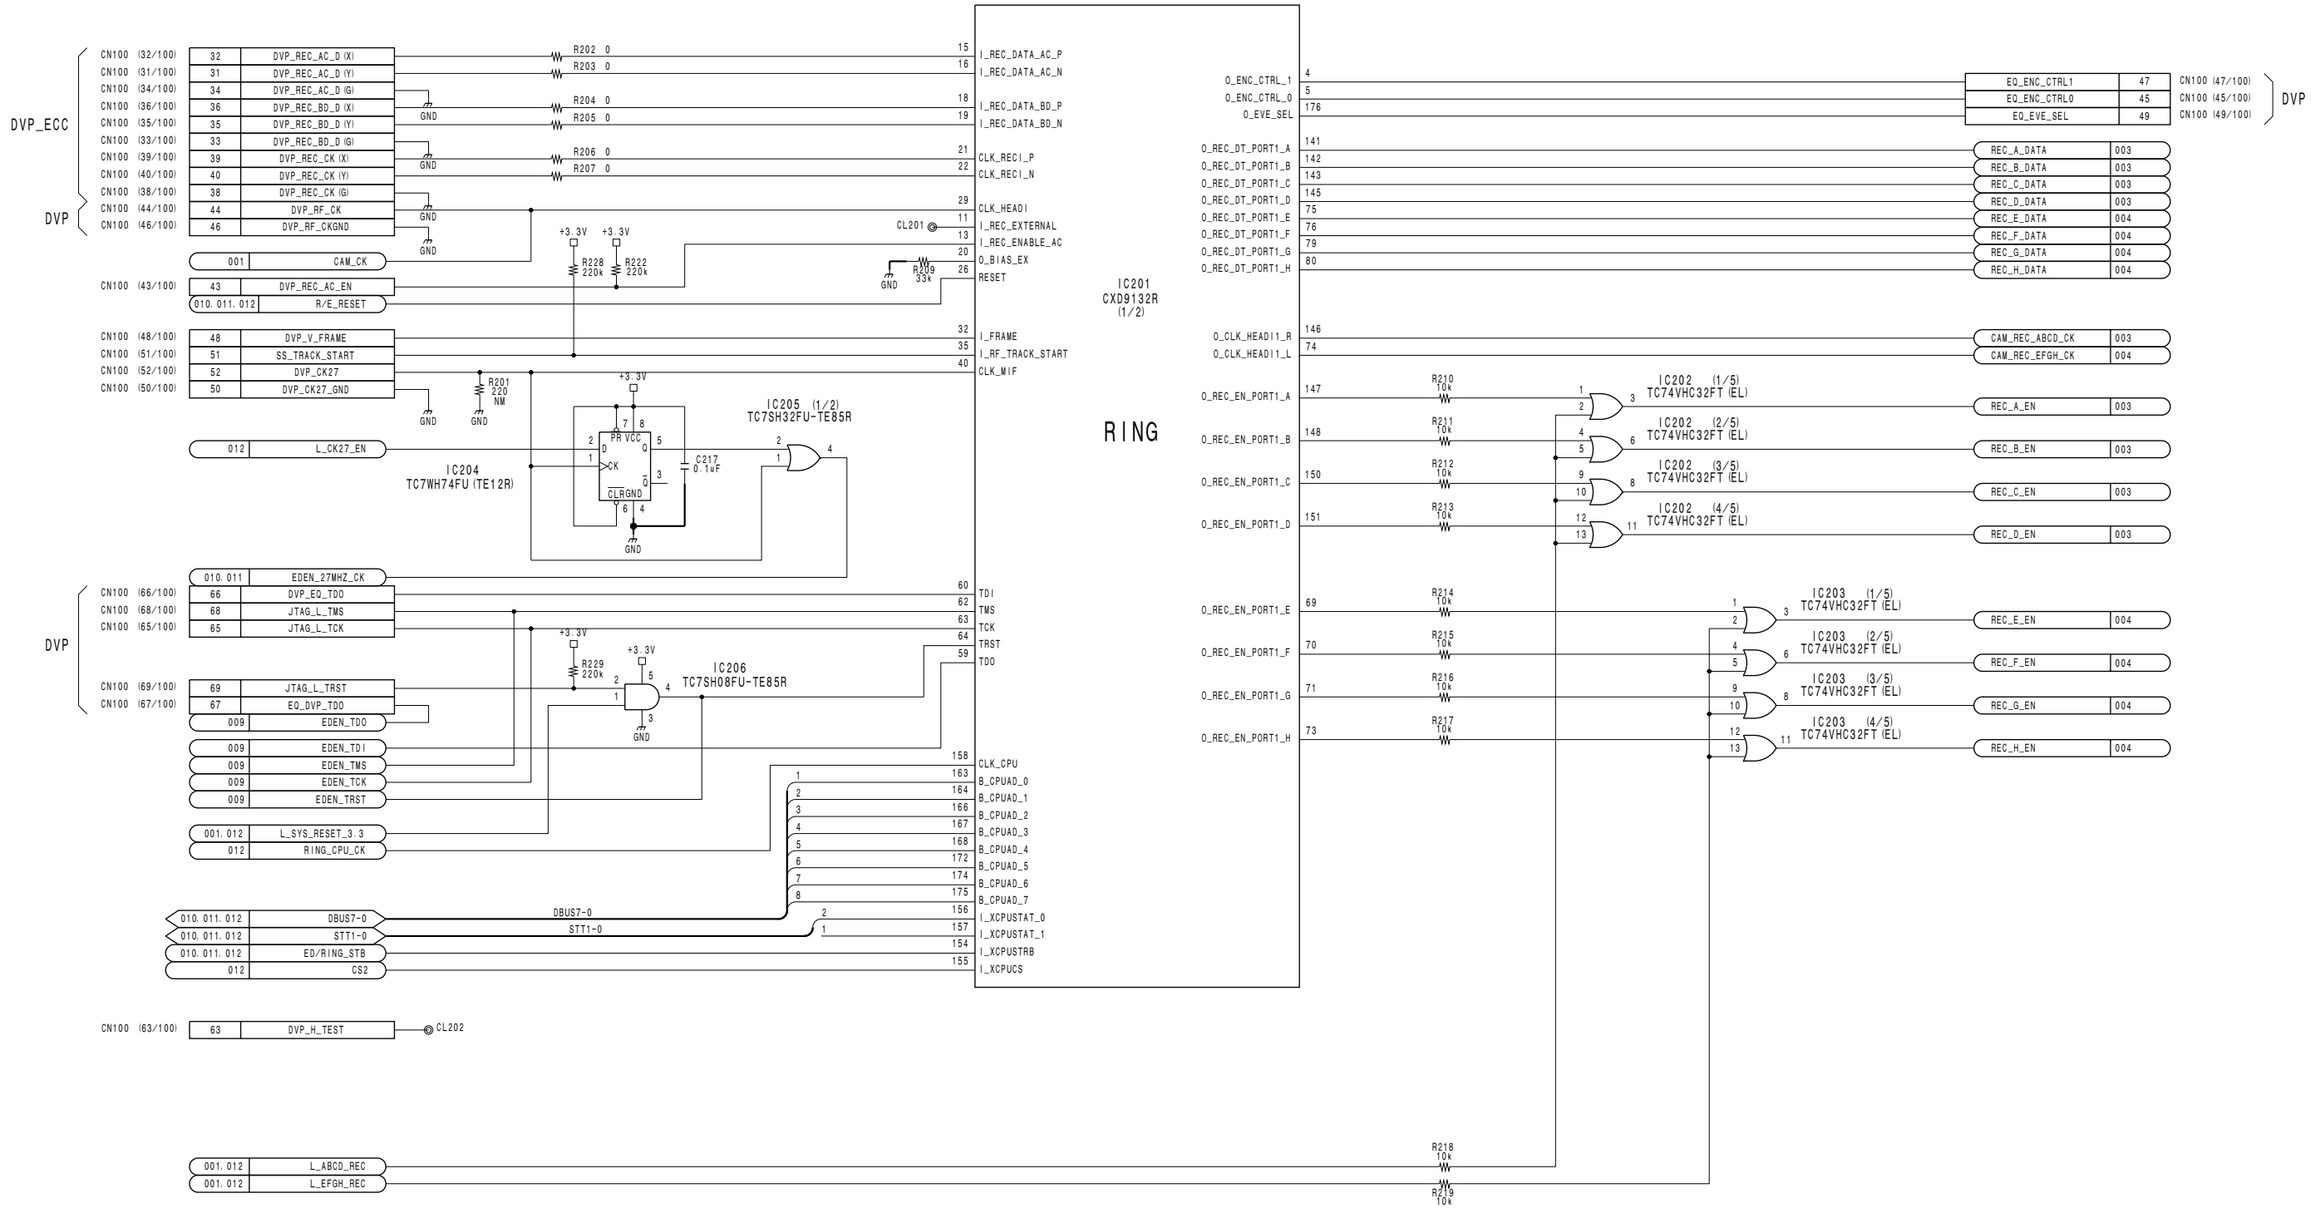

4-98

EQ-88 (2/12)

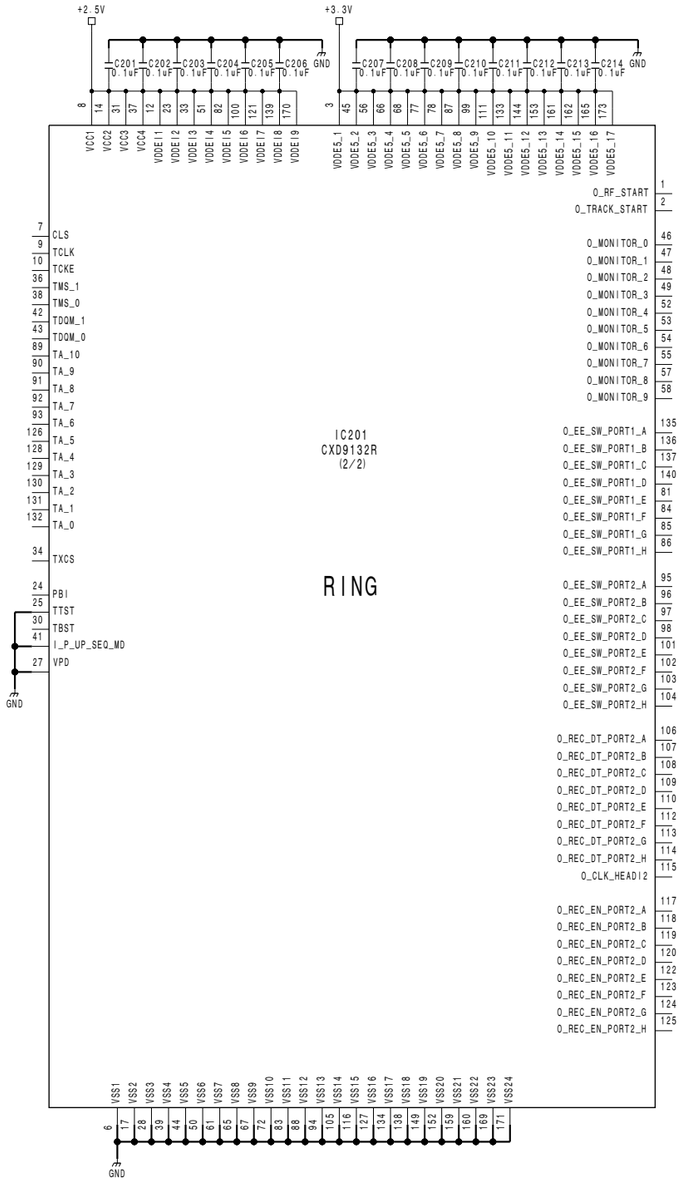

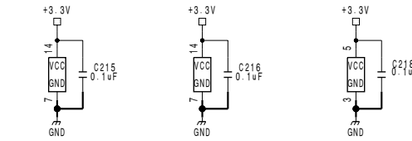

EQ-88 (2/12)

BOARD NO. 1-678-738-11, 12
LOT NO. 083-
HDW-750_EQ-88_014_2

EQ-88 (3/12)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

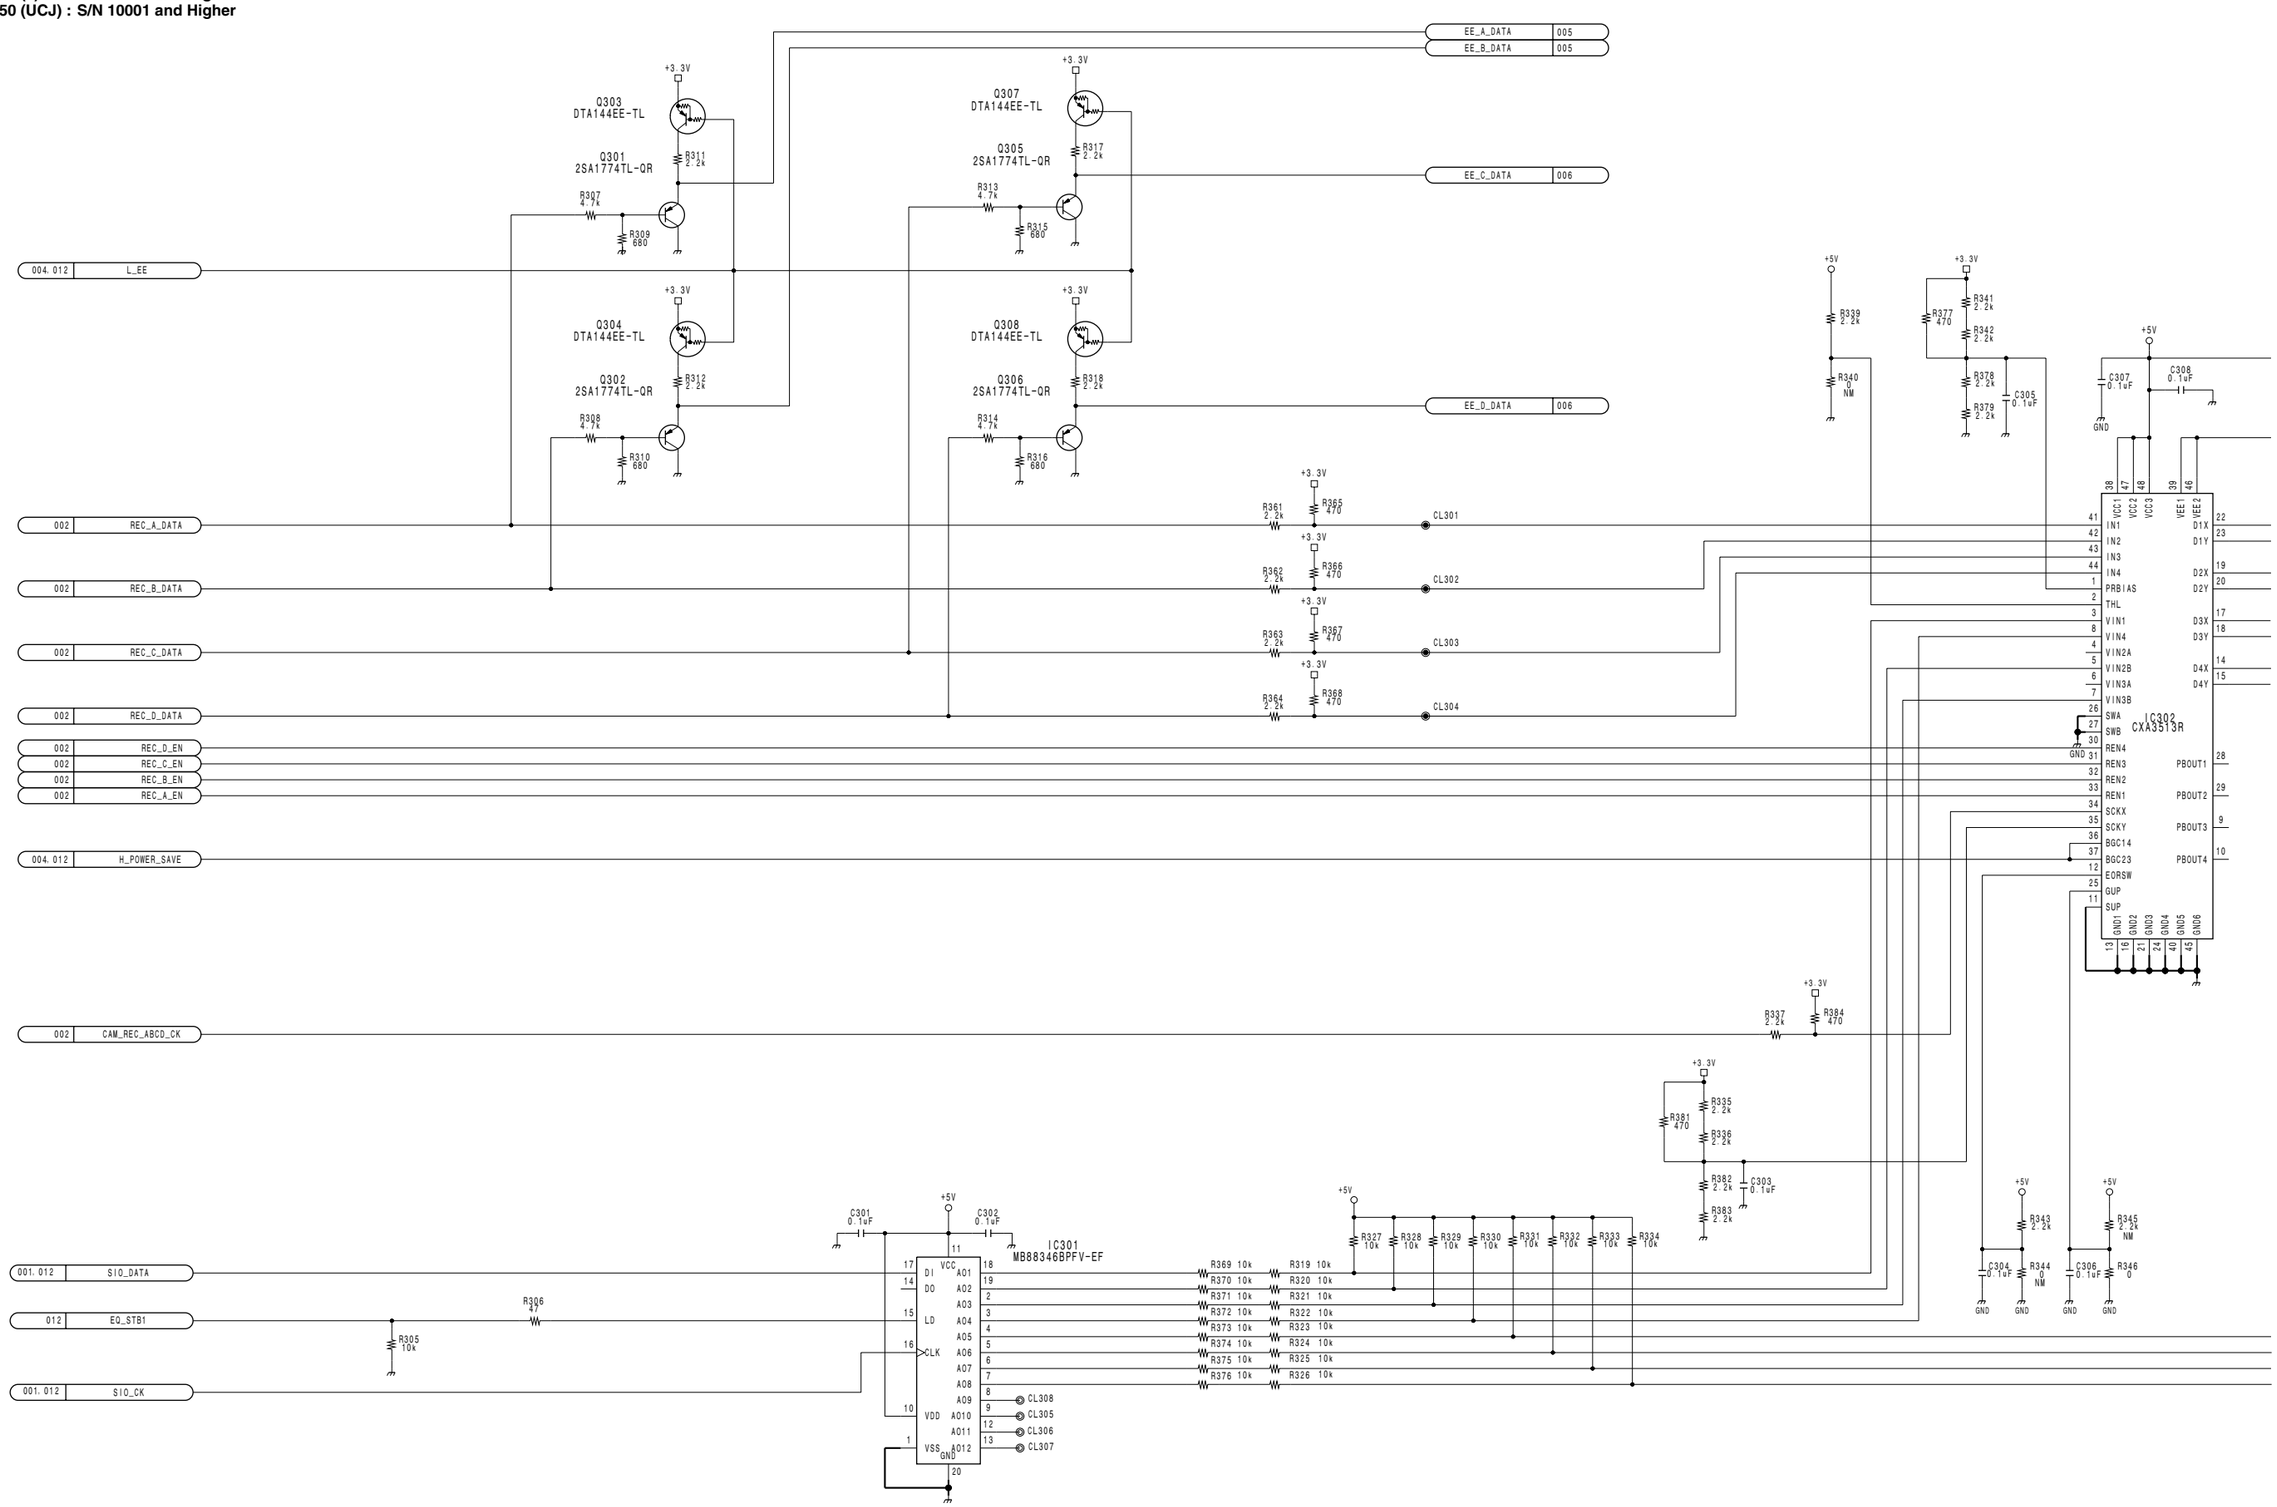

4-100

http://getMANUAL.com

EQ-88 (3/12)

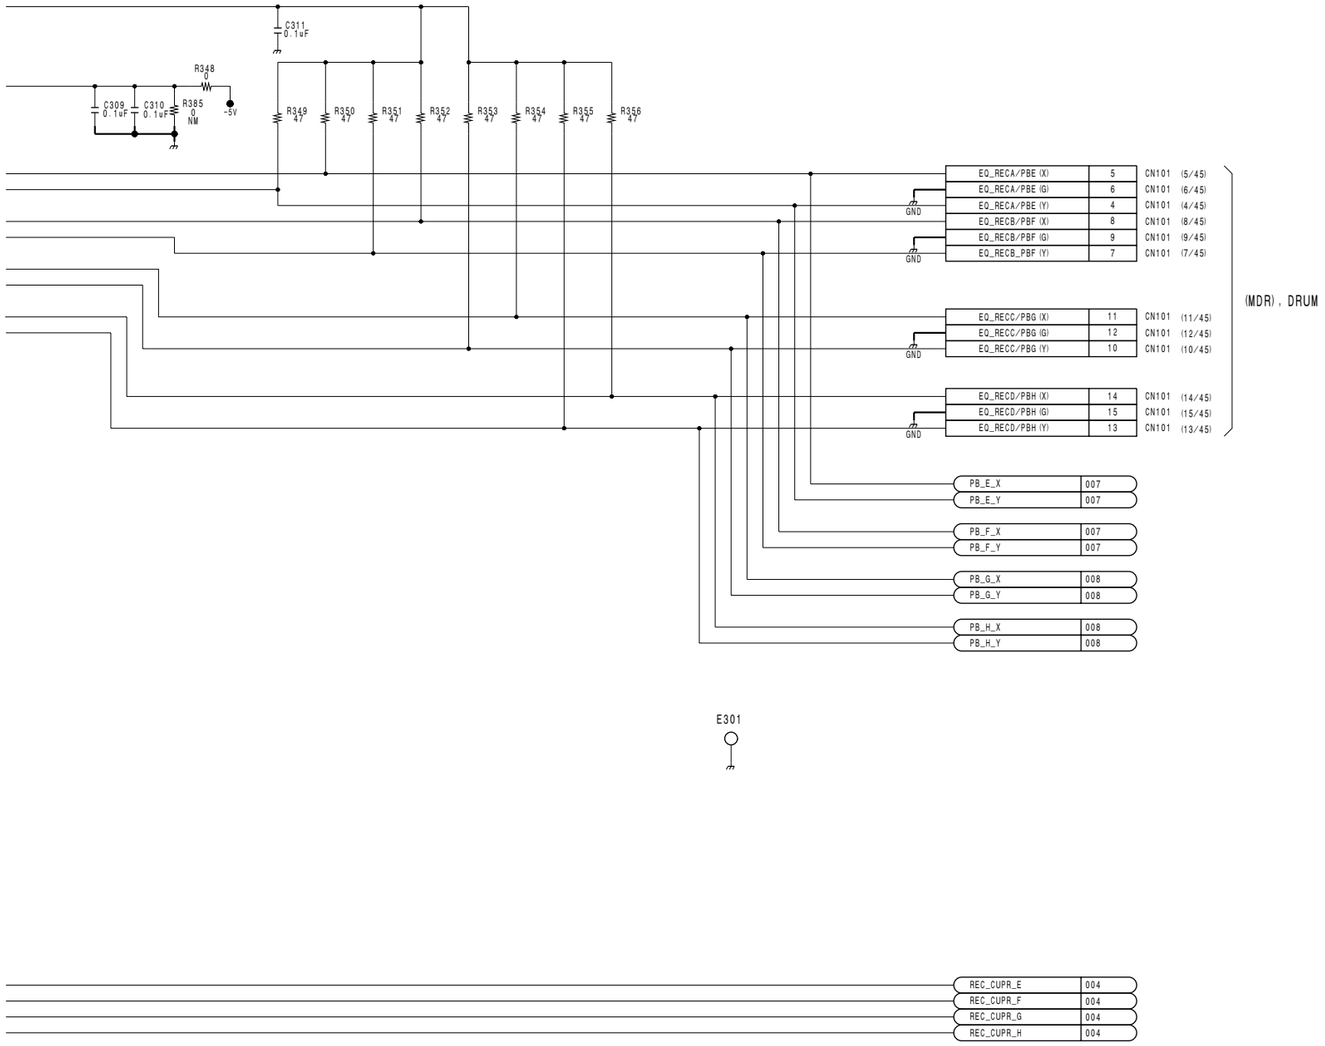

EQ-88 (3/12)

BOARD NO. 1-678-738-11, 12
LOT NO. 083-

HDW-750_EQ-88_014_3

EQ-88 (4/12)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

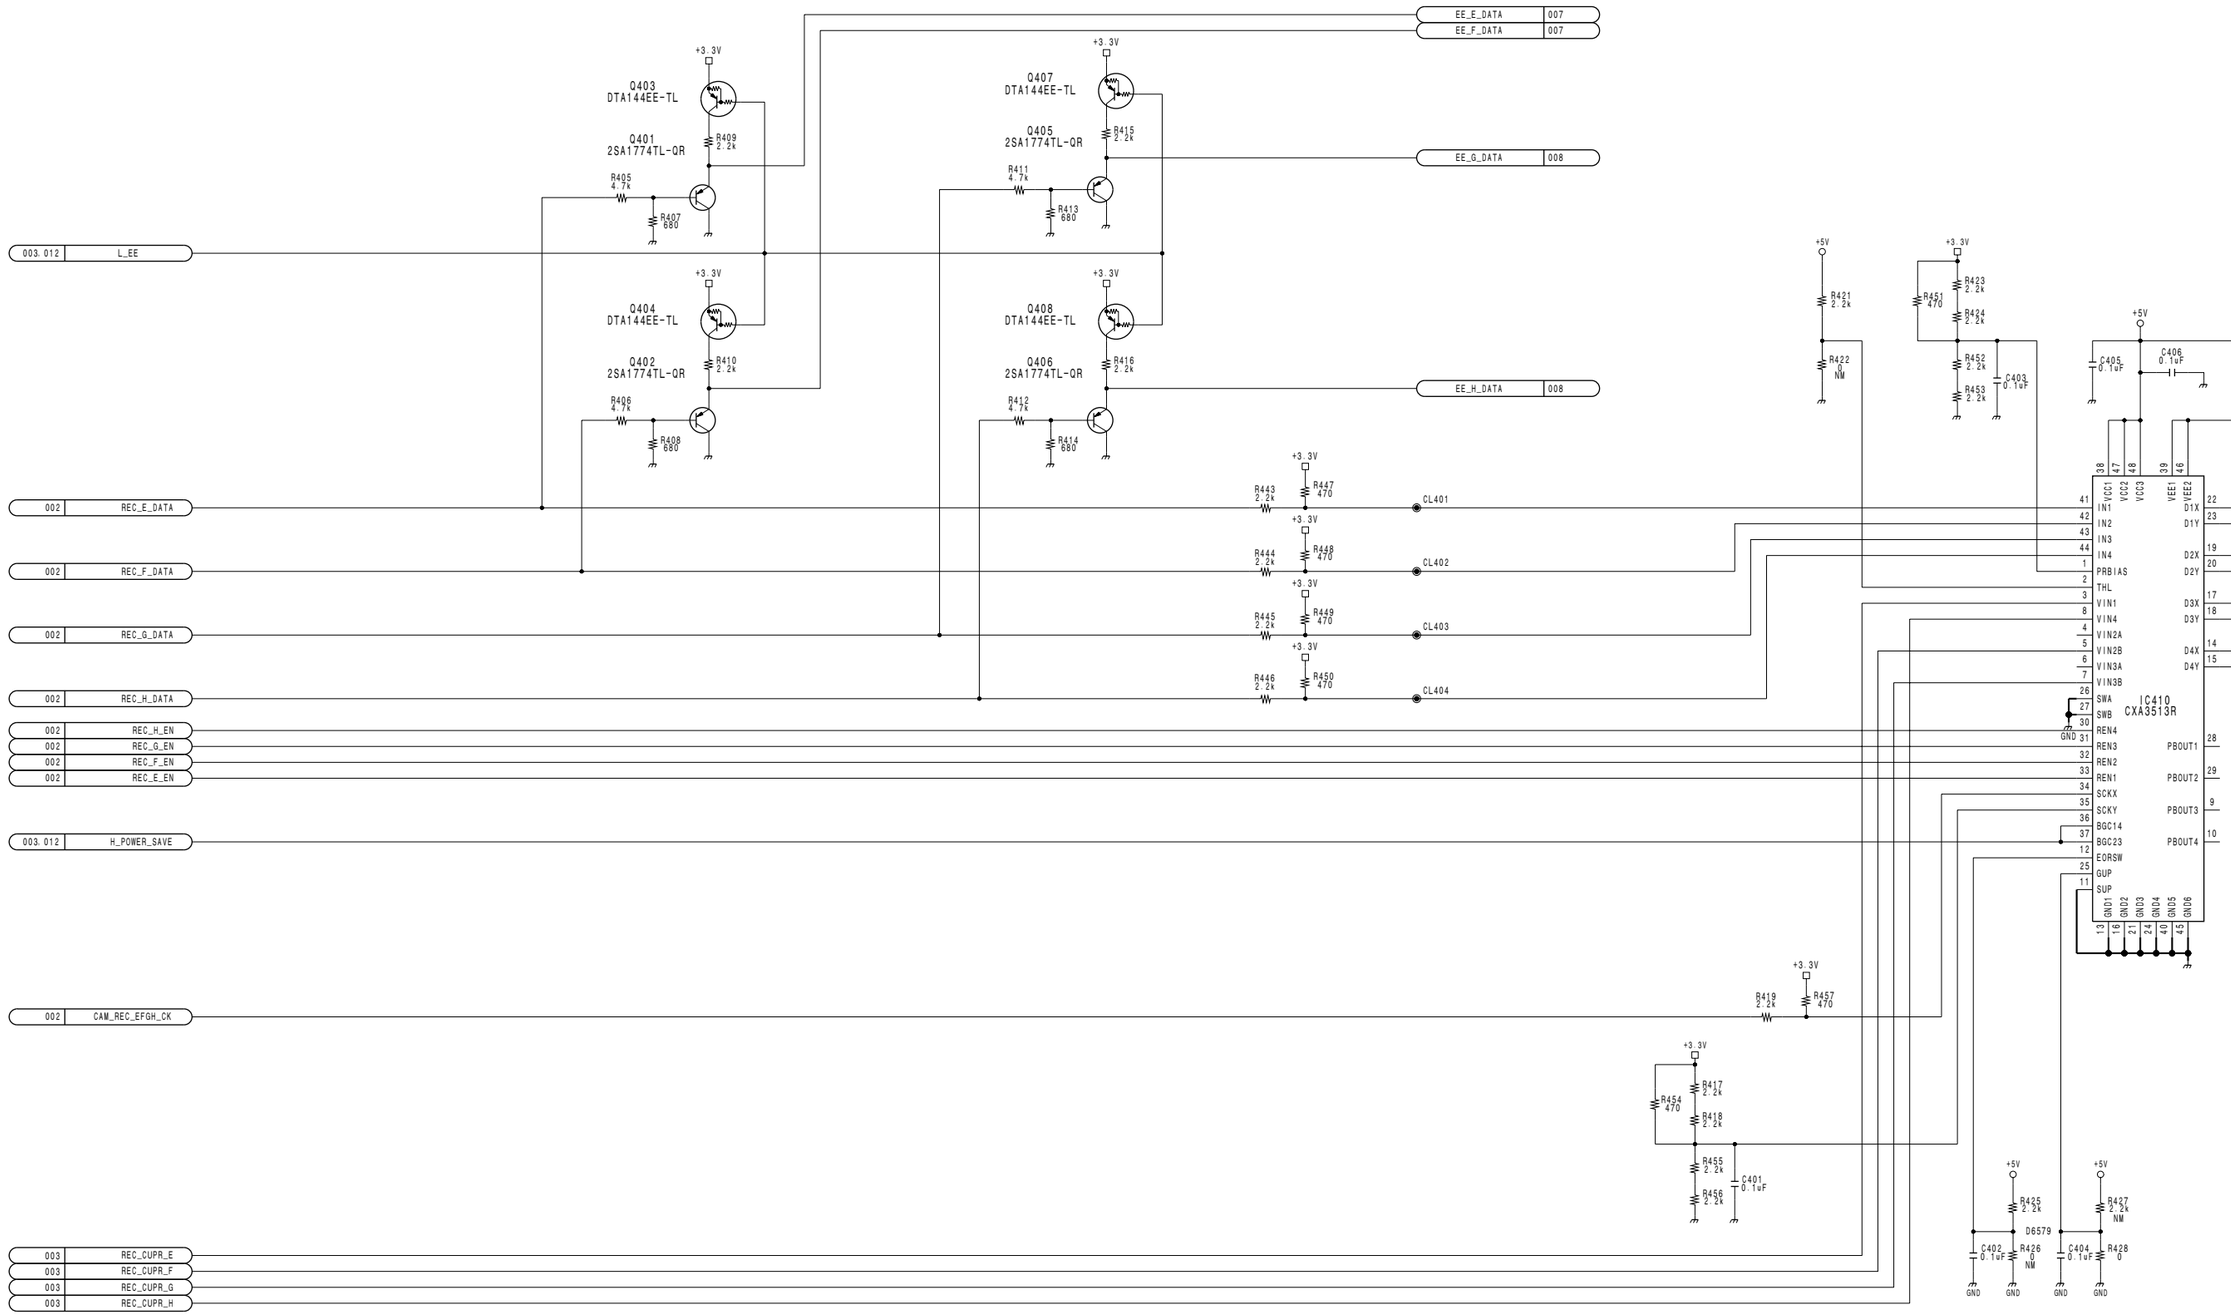

4-102

EQ-88 (4/12)

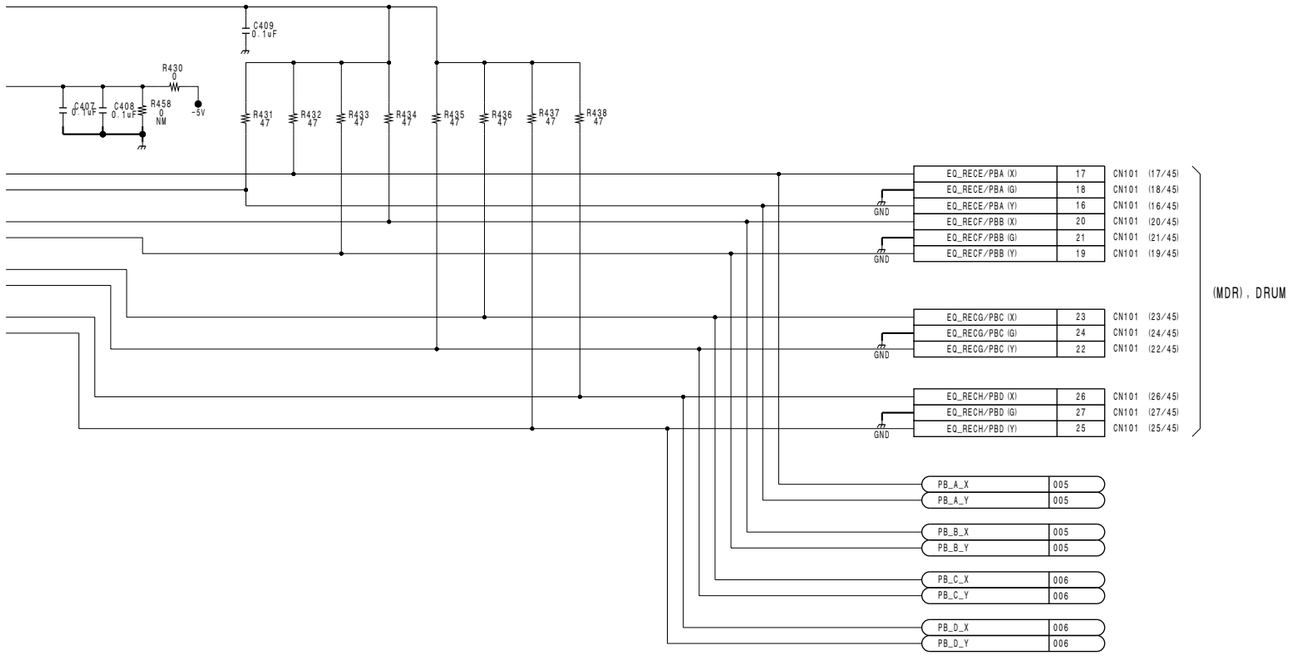

EQ-88 (4/12)

BOARD NO. 1-678-738-11, 12
LOT NO. 083-
HDW-750_EQ-88_014_4

EQ-88 (5/12)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

500

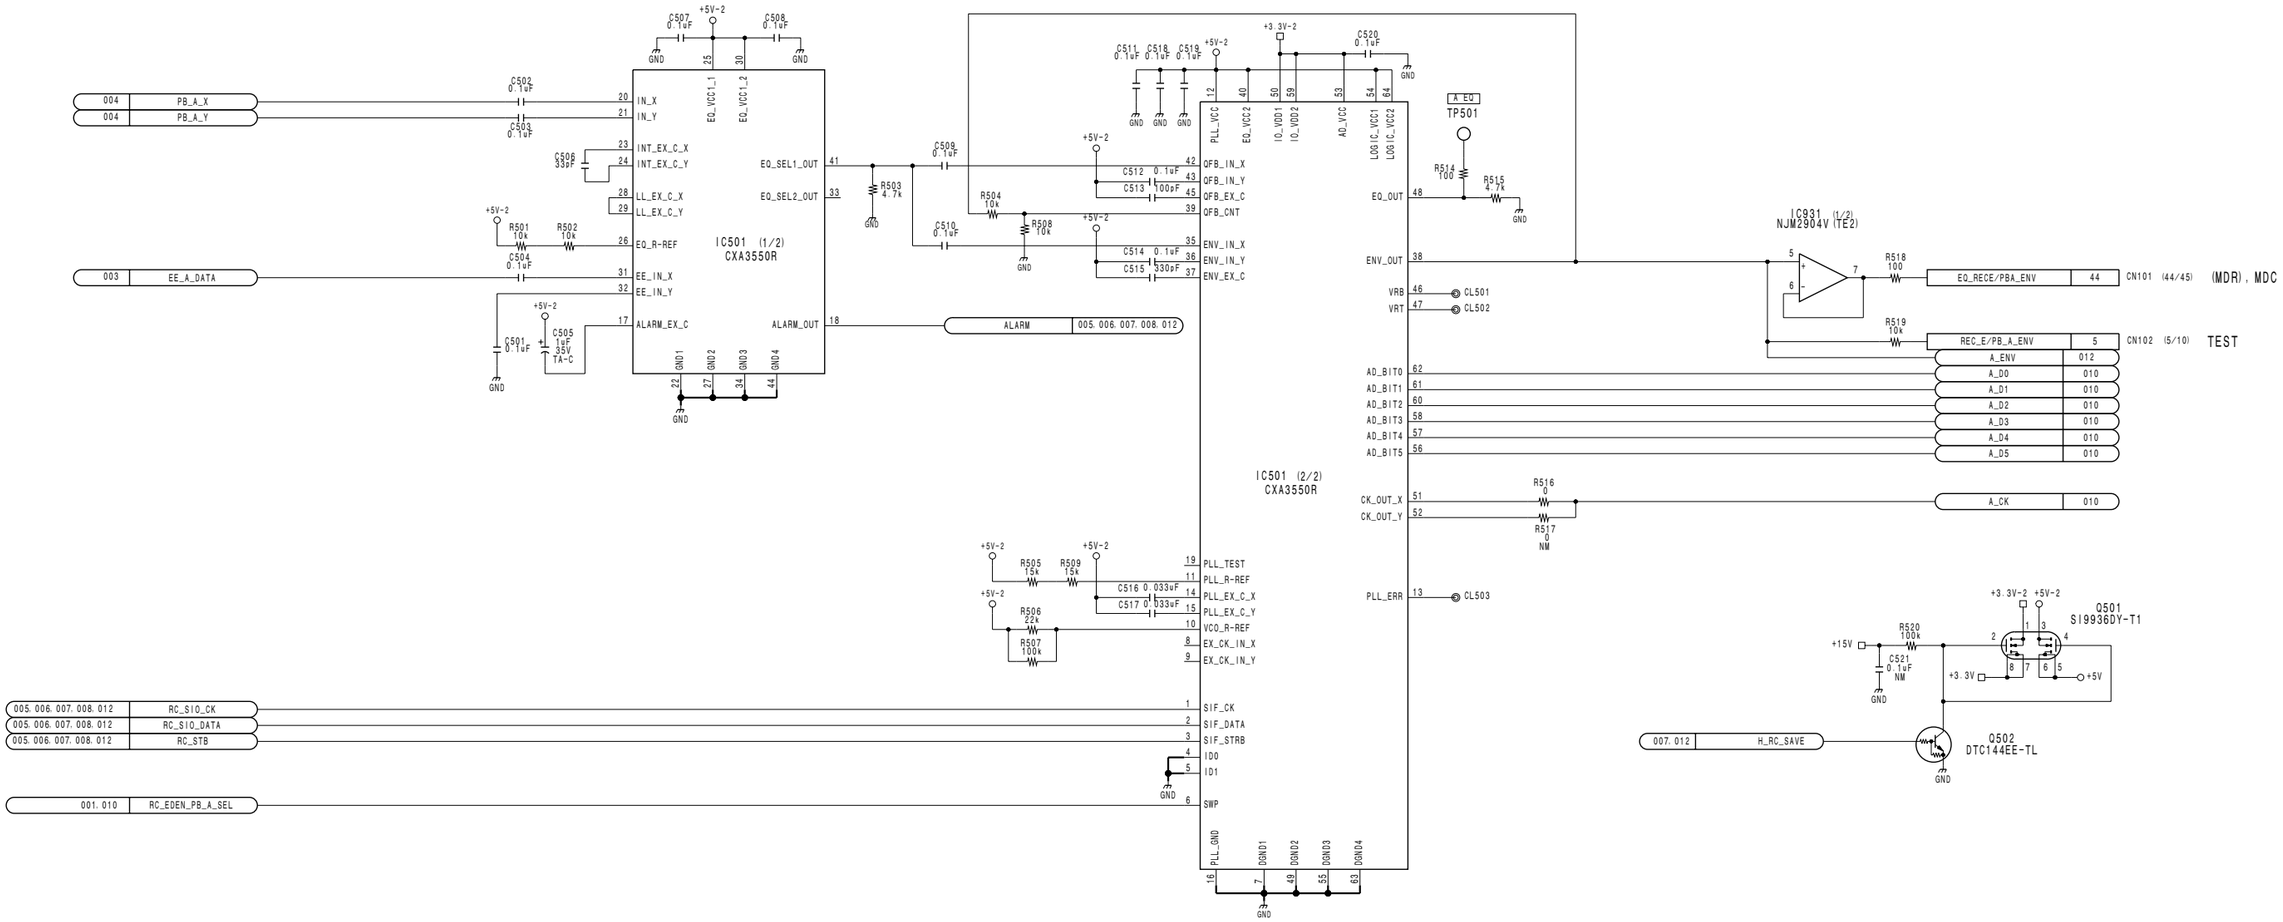

4-104

EQ-88 (5/12)

1500

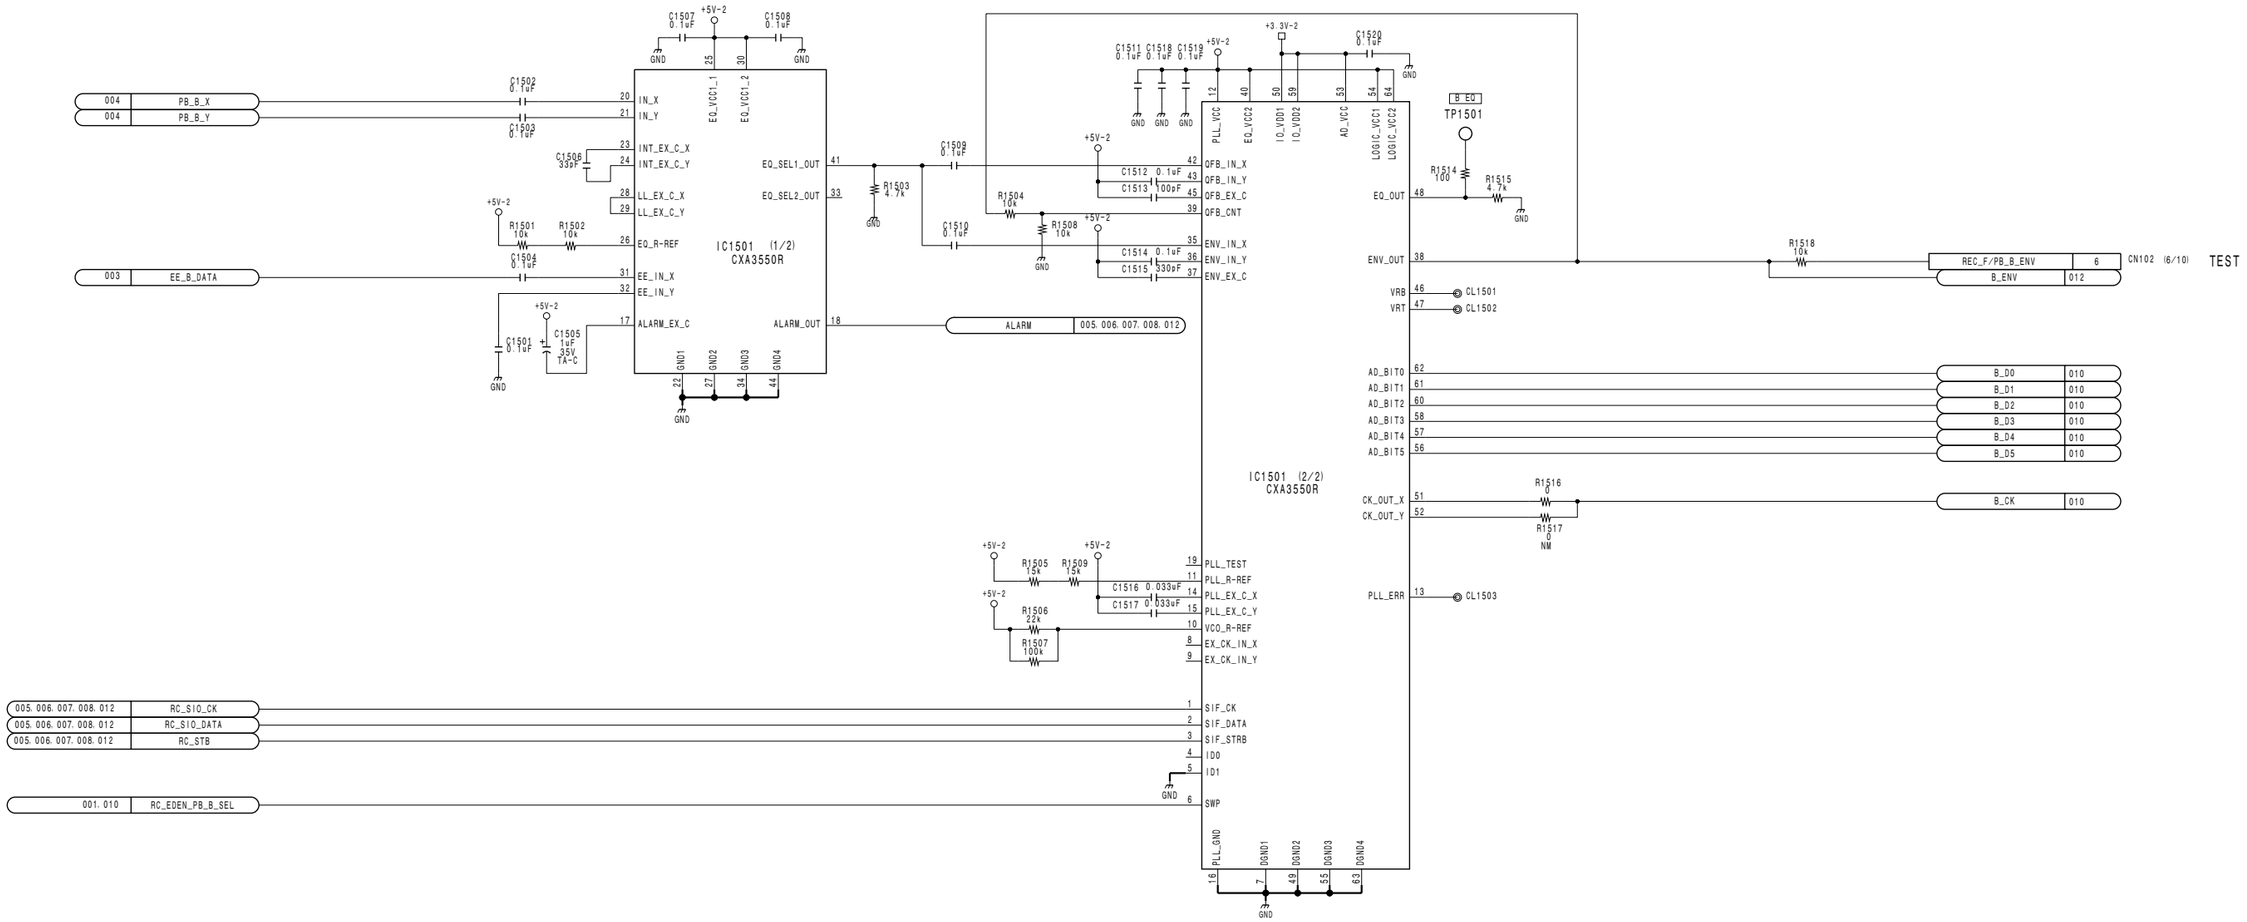

EQ-88 (5/12)
BOARD NO. 1-678-738-11, 12
LOT NO. 083-
HDW-750_EQ-88_014_5

EQ-88 (6/12)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

600

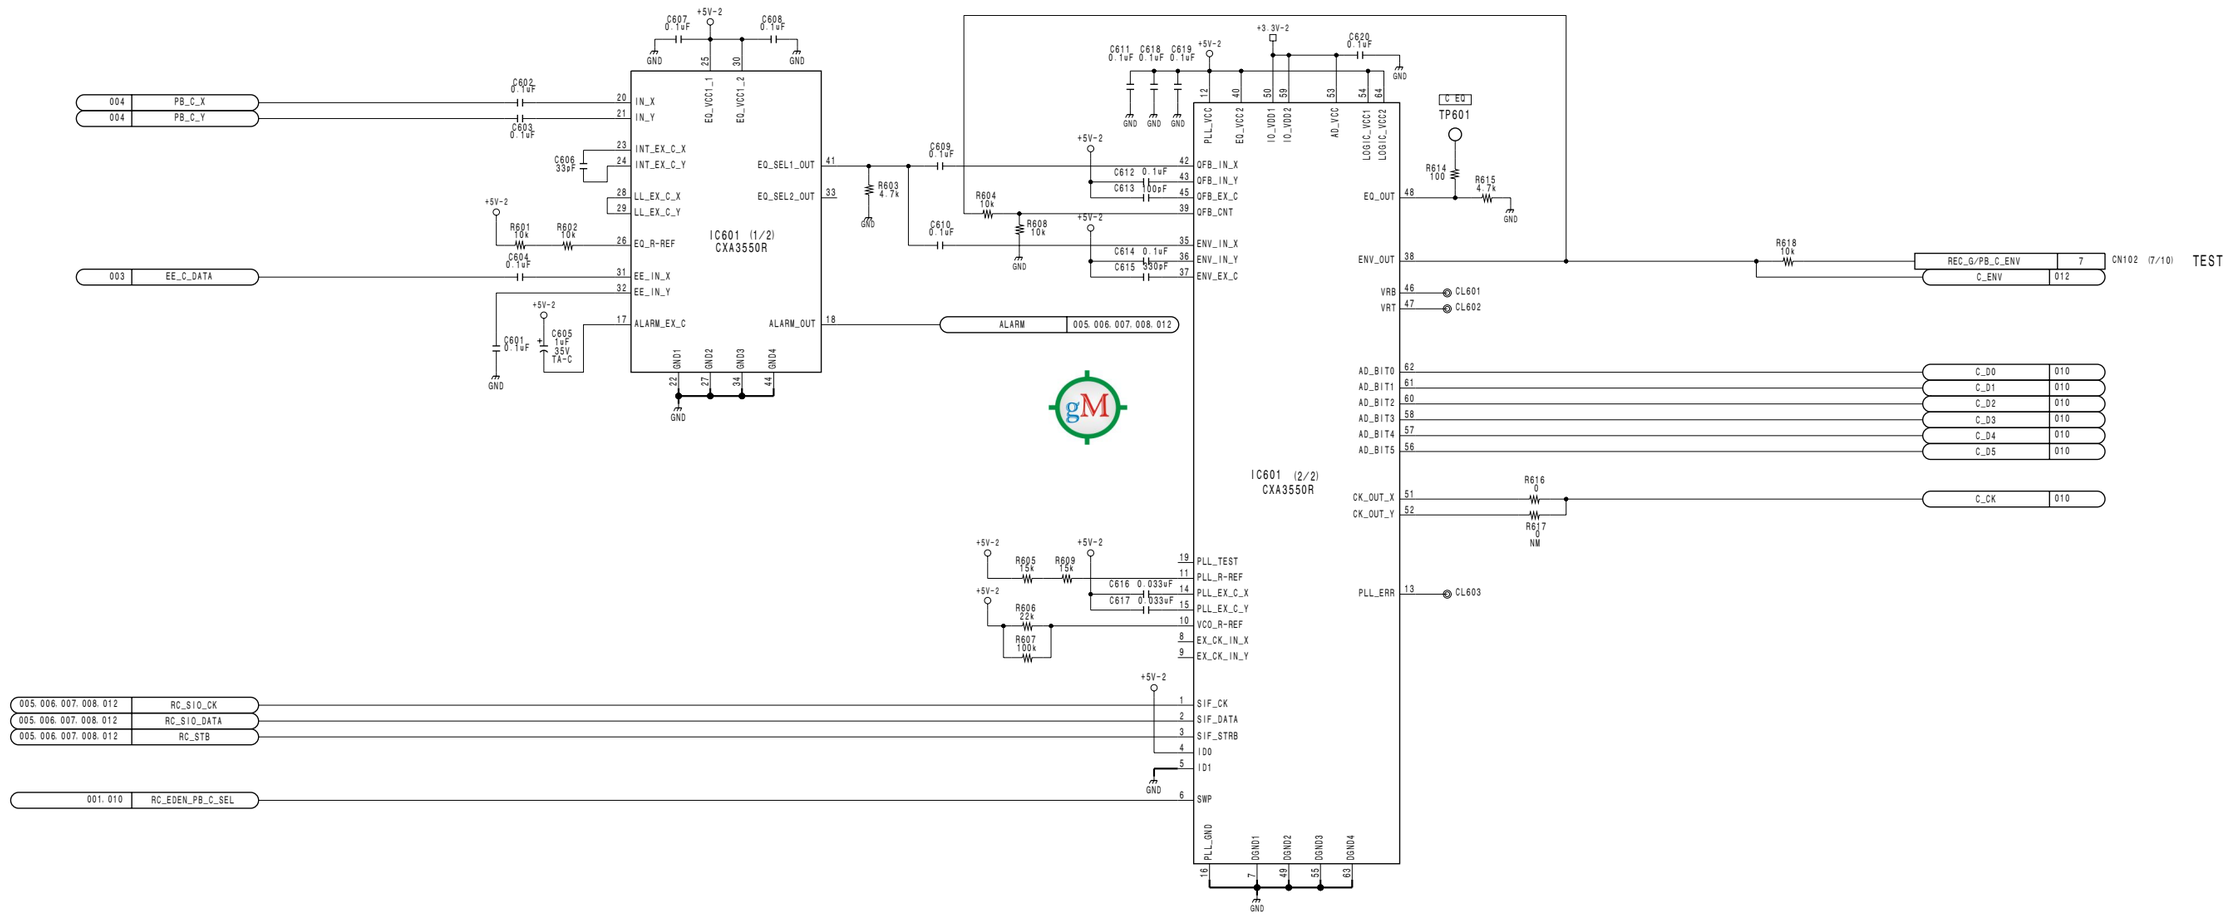

4-106

EQ-88 (6/12)

1600

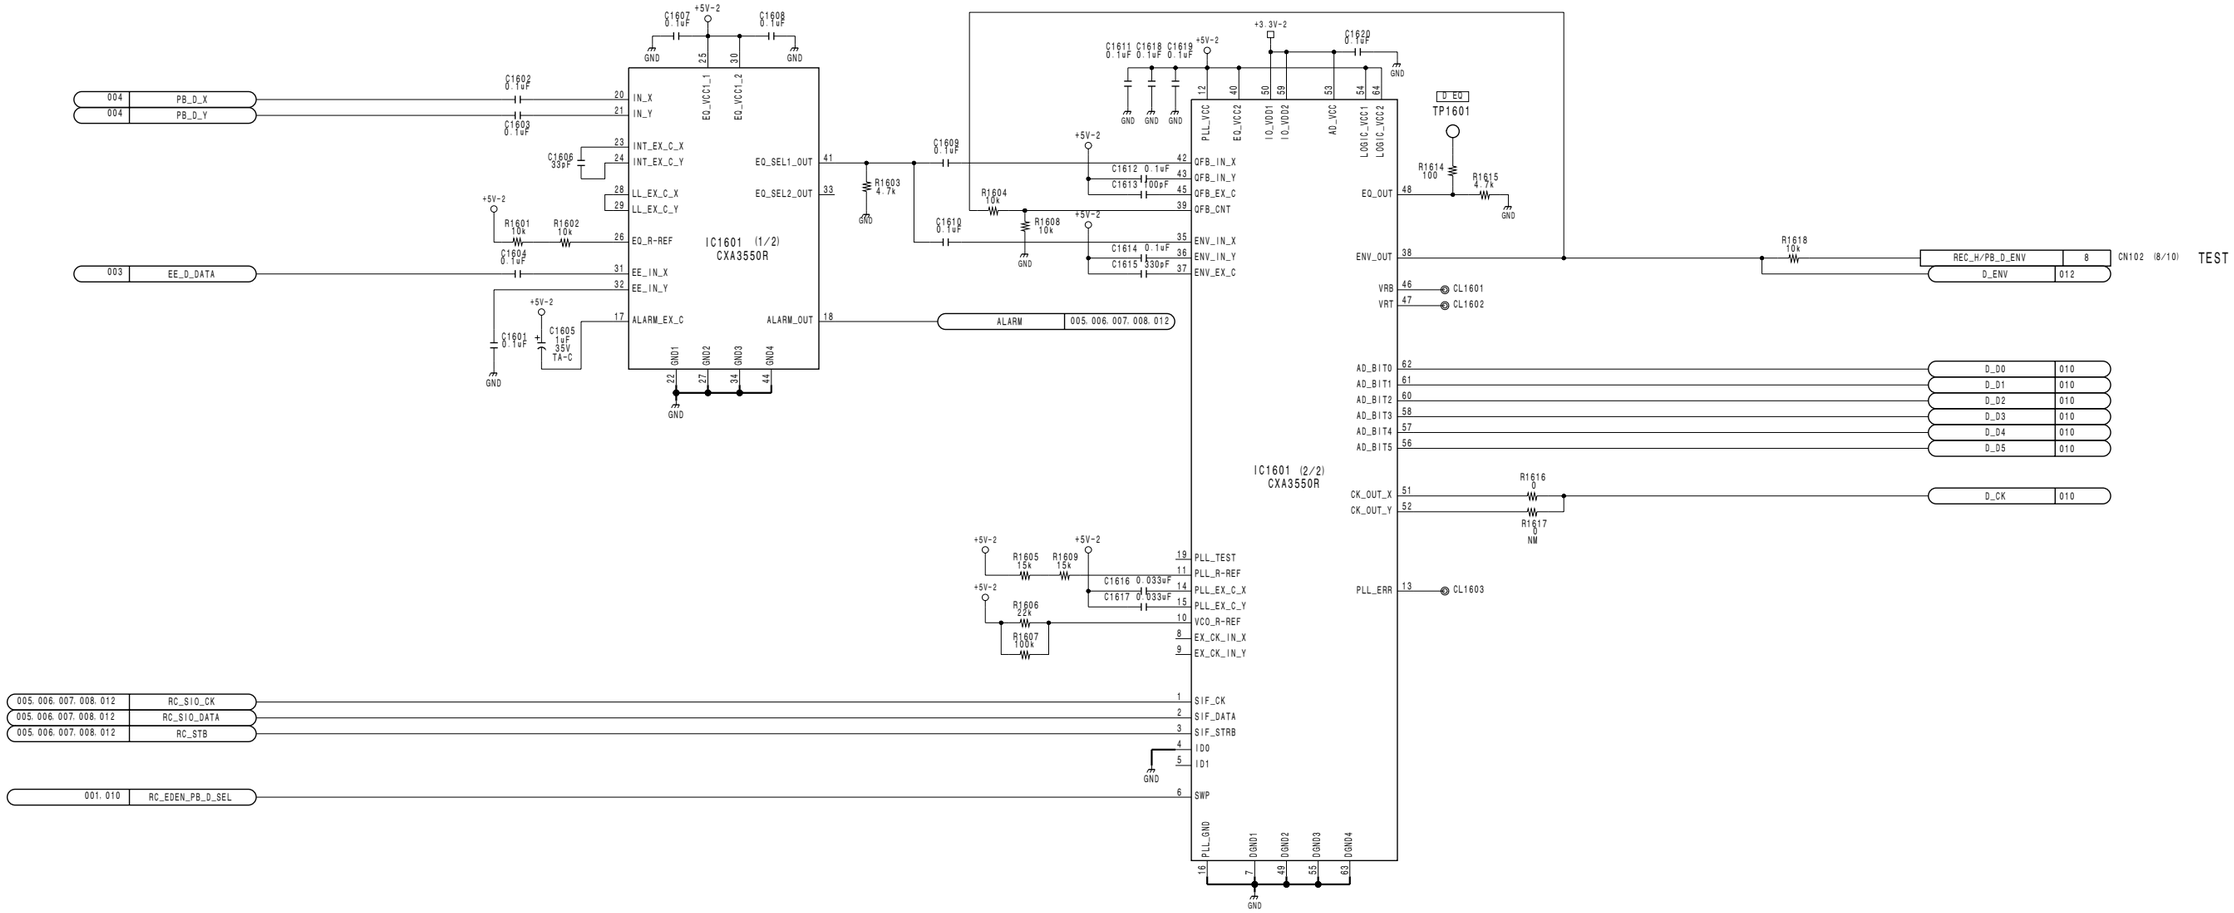

EQ-88 (6/12)
BOARD NO. 1-678-738-11, 12
LOT NO. 083-
HDW-750_EQ-88_014_6

EQ-88 (7/12)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

700

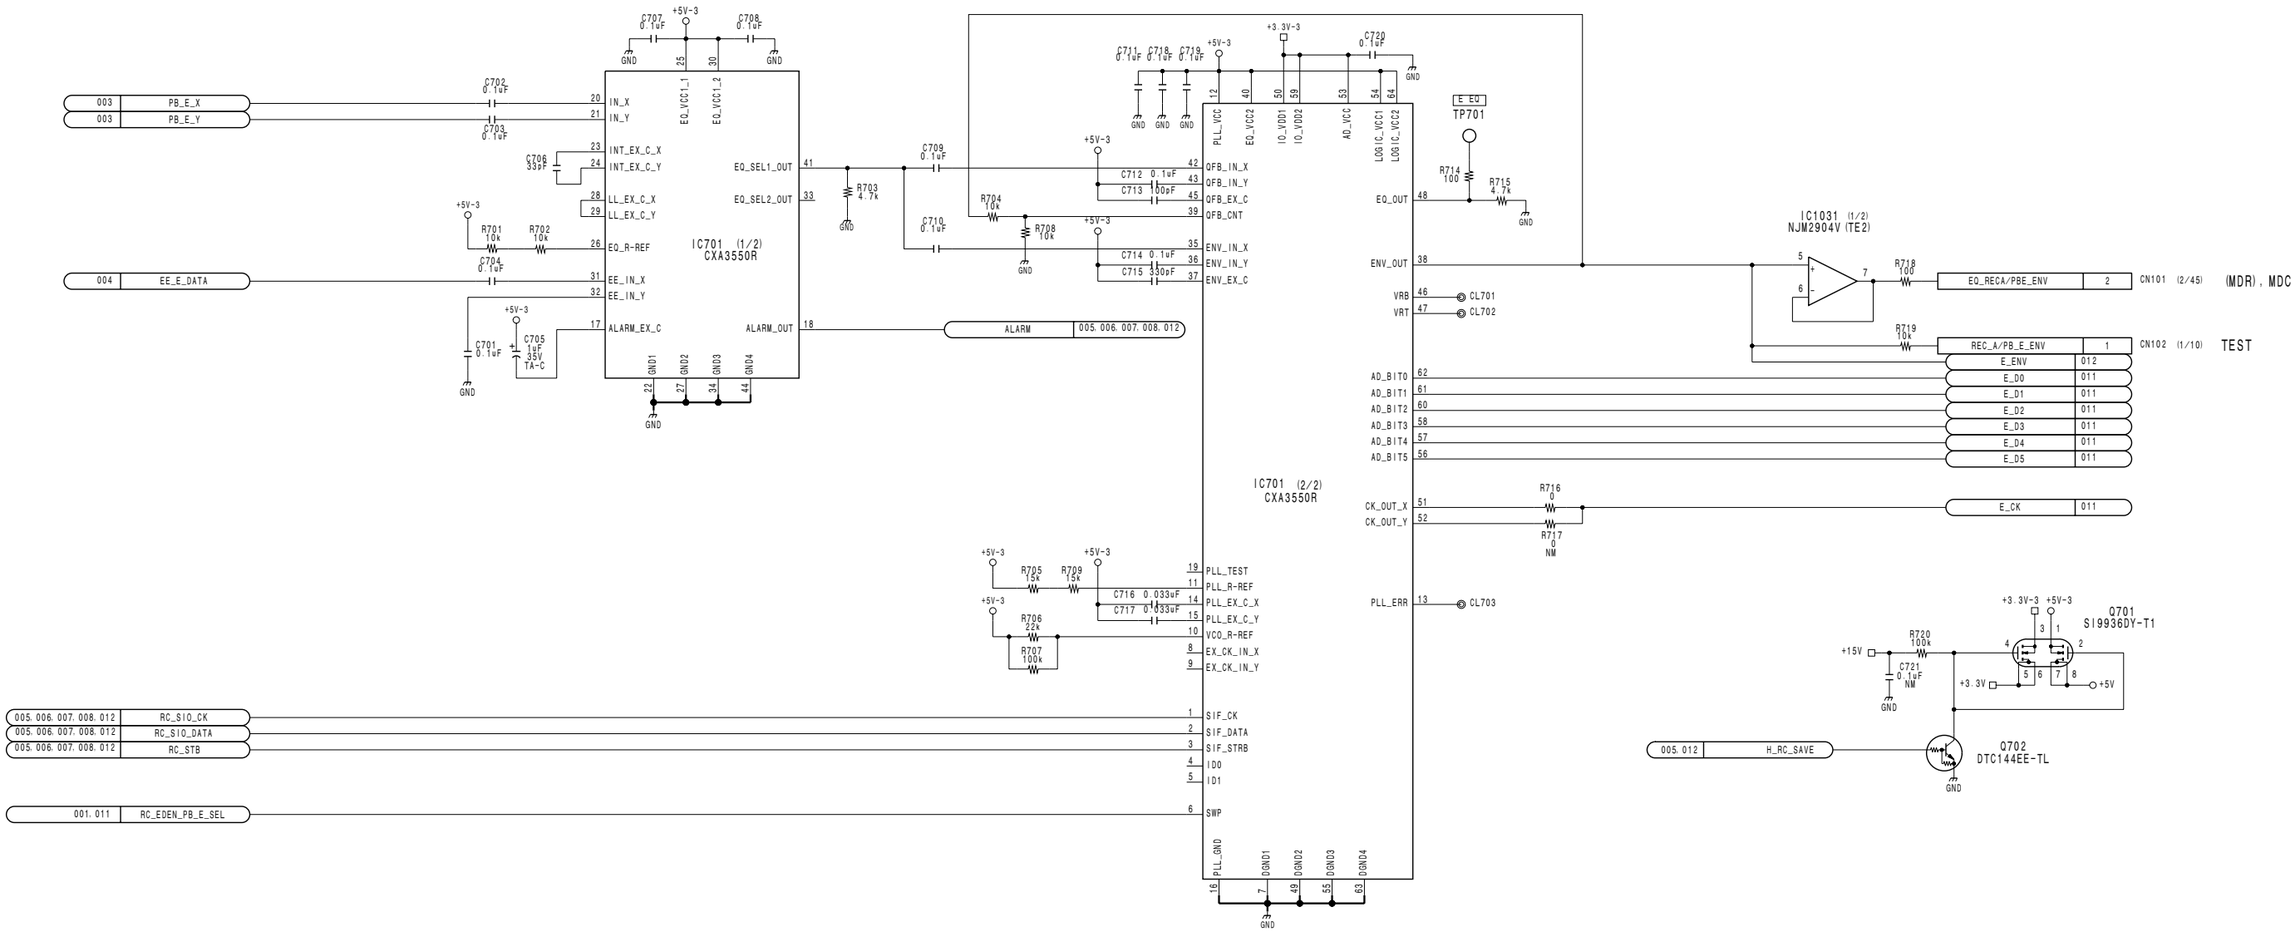

4-108

A B C D E F G H

EQ-88 (7/12)

1700

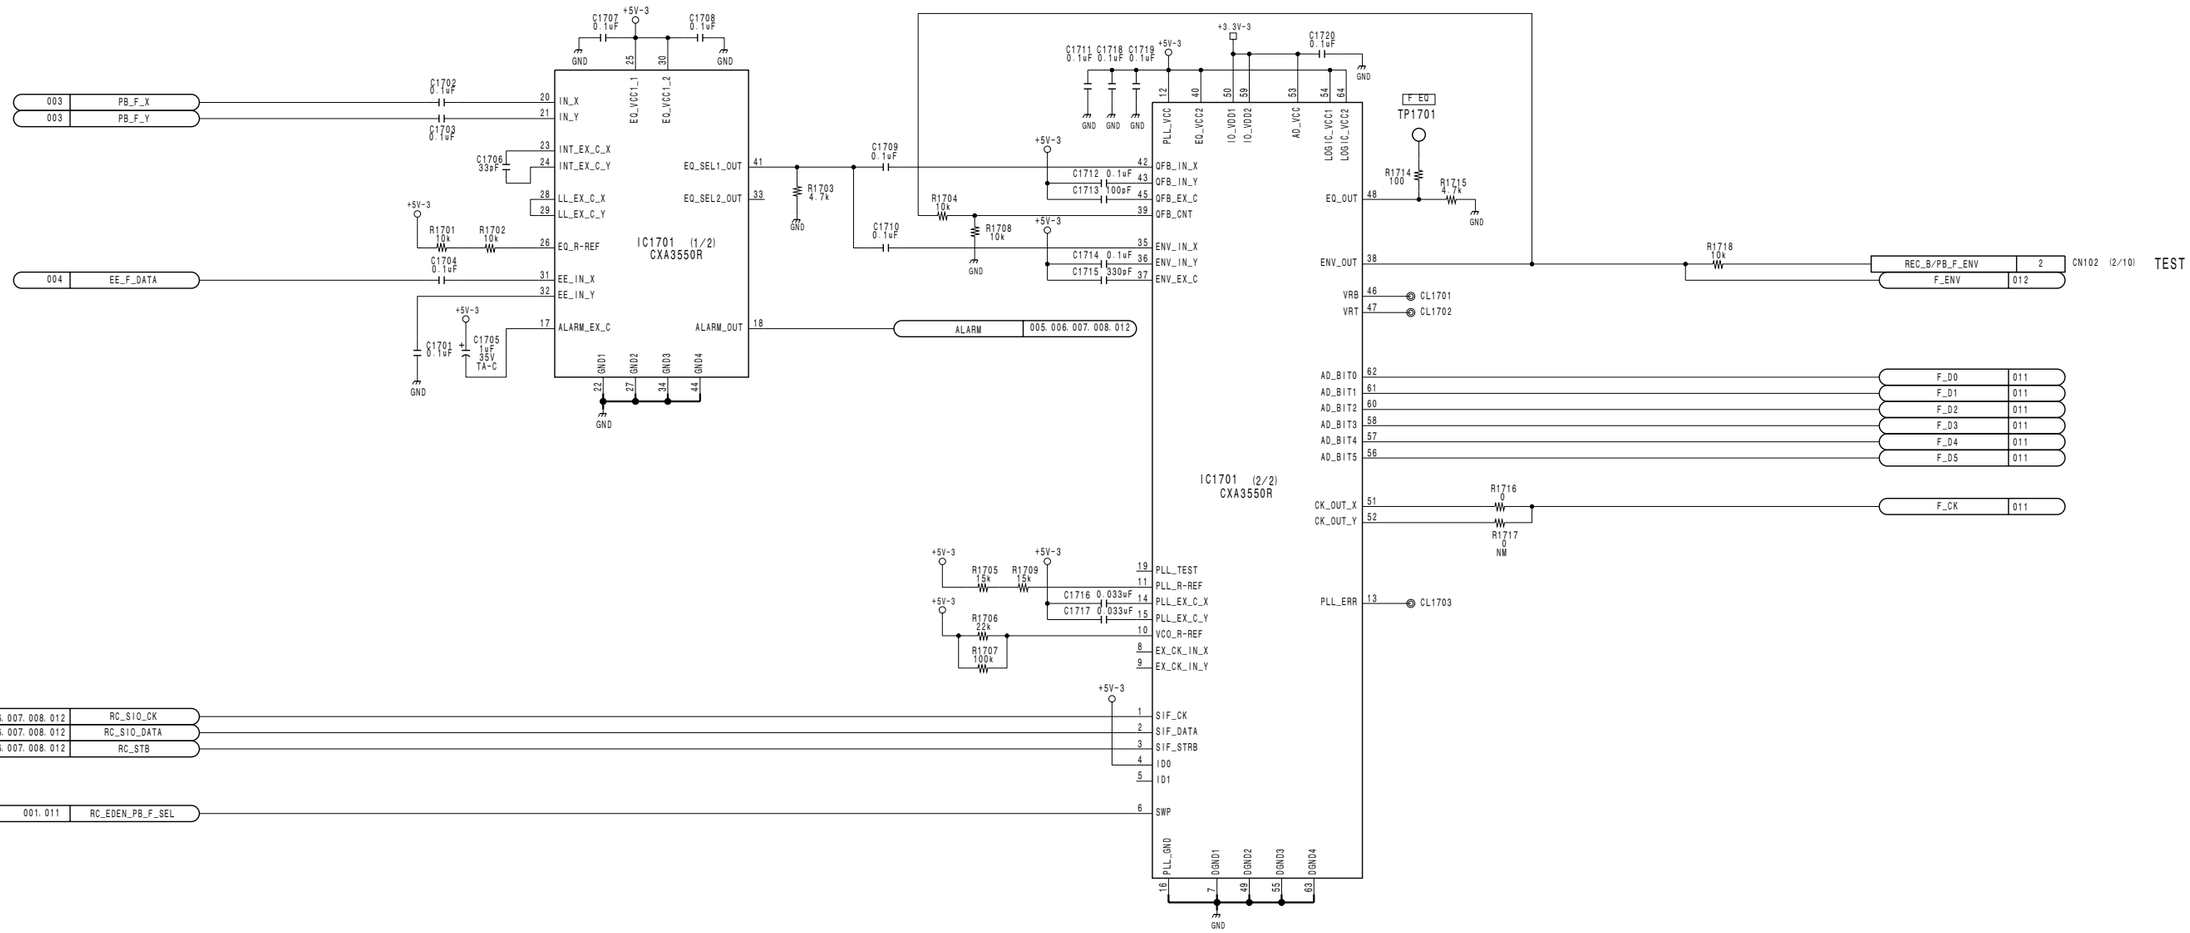

EQ-88 (7/12)

BOARD NO. 1-678-738-11, 12
LOT NO. 083-

HDW-750_EQ-88_014_7

EQ-88 (8/12)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

800

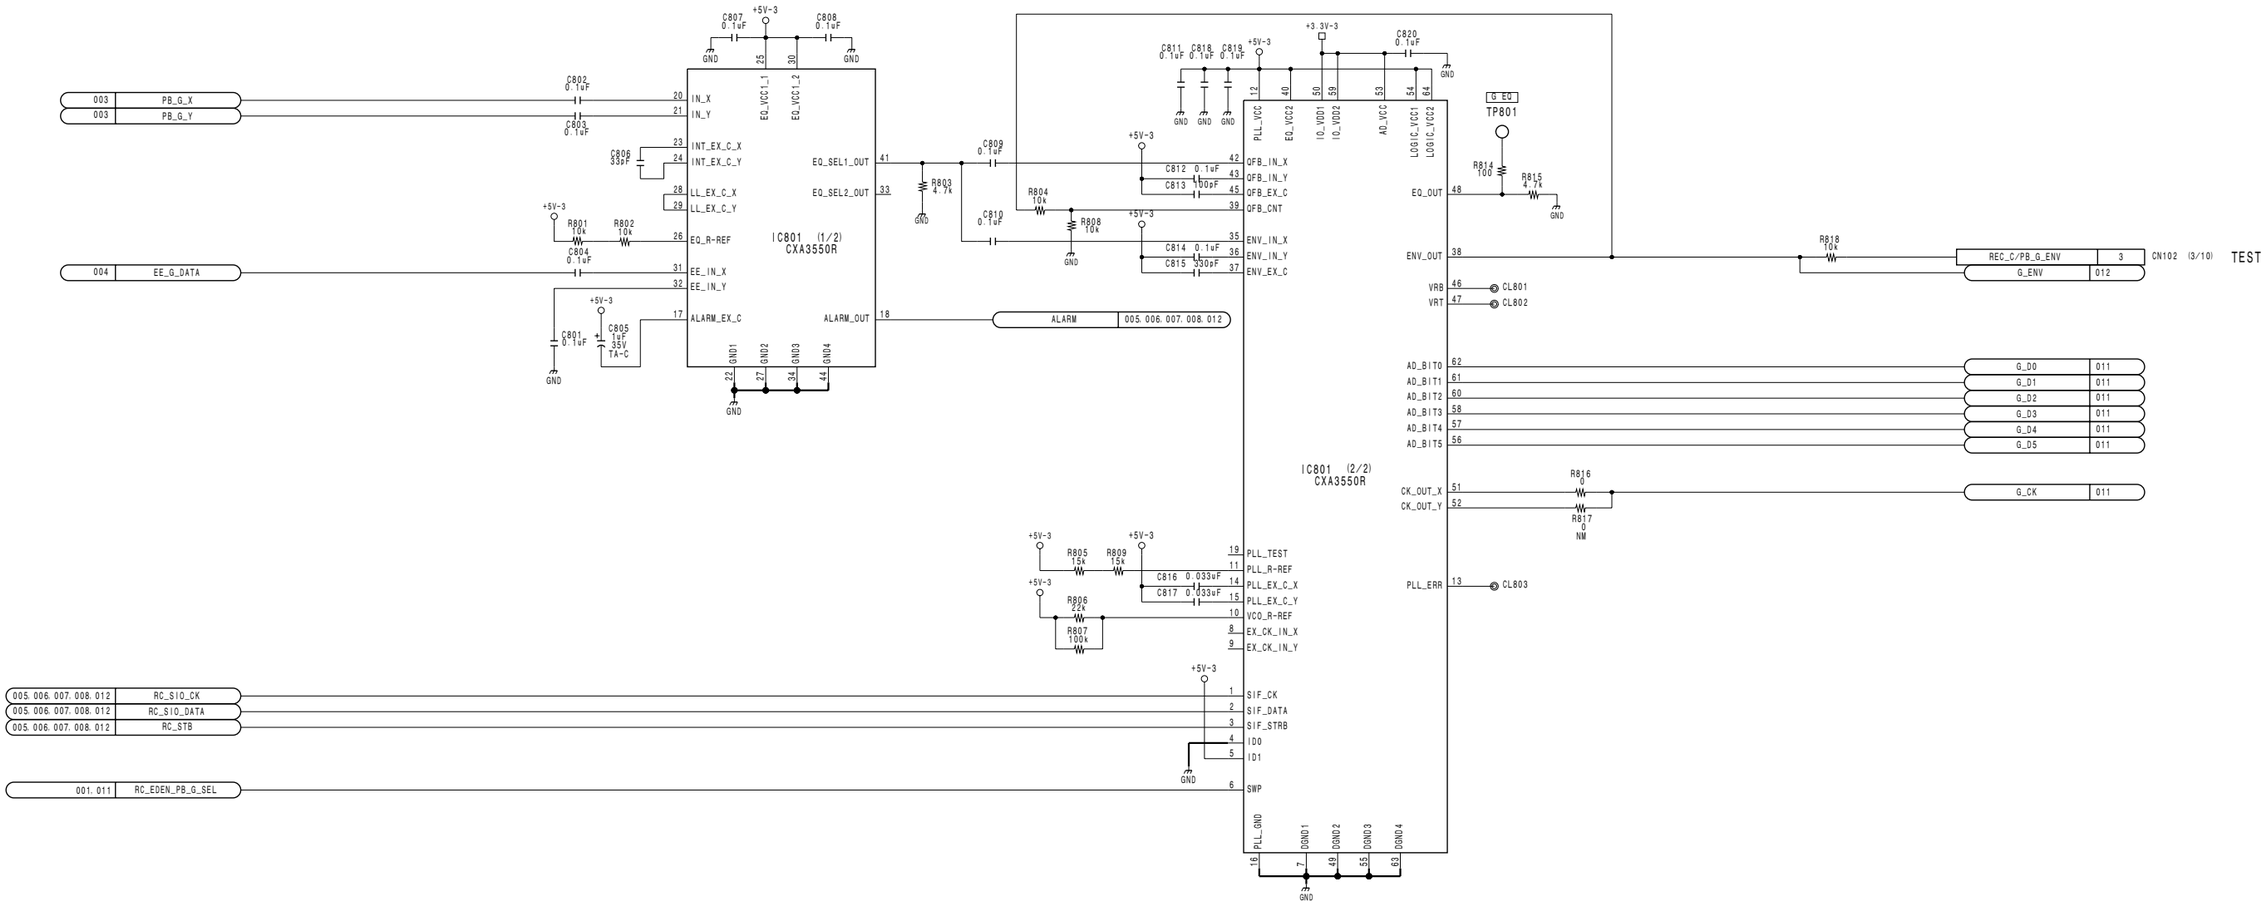

4-110

http://getMANUAL.com
 EQ-88 (8/12)

1800

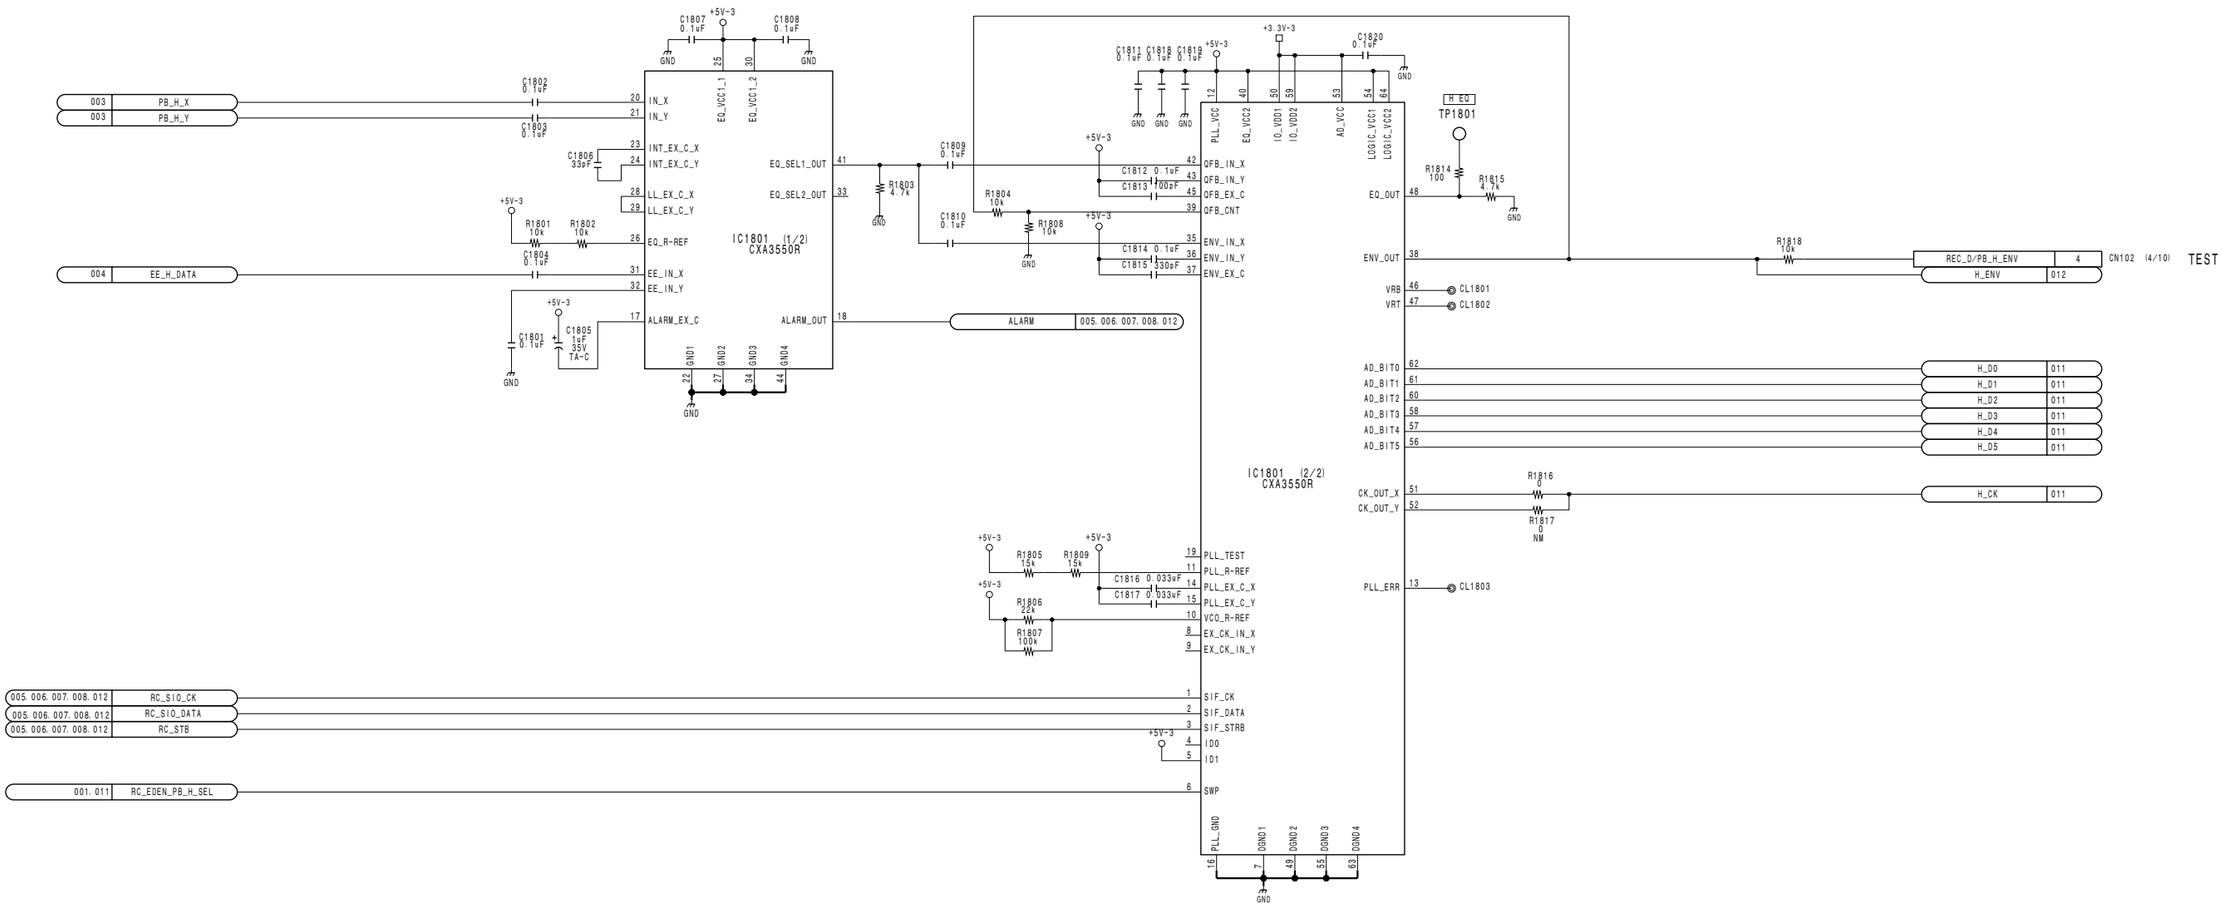

EQ-88 (8/12)
BOARD NO. 1-678-738-11, 12
LOT NO. 083-
HDW-750_EQ-88_014_8

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

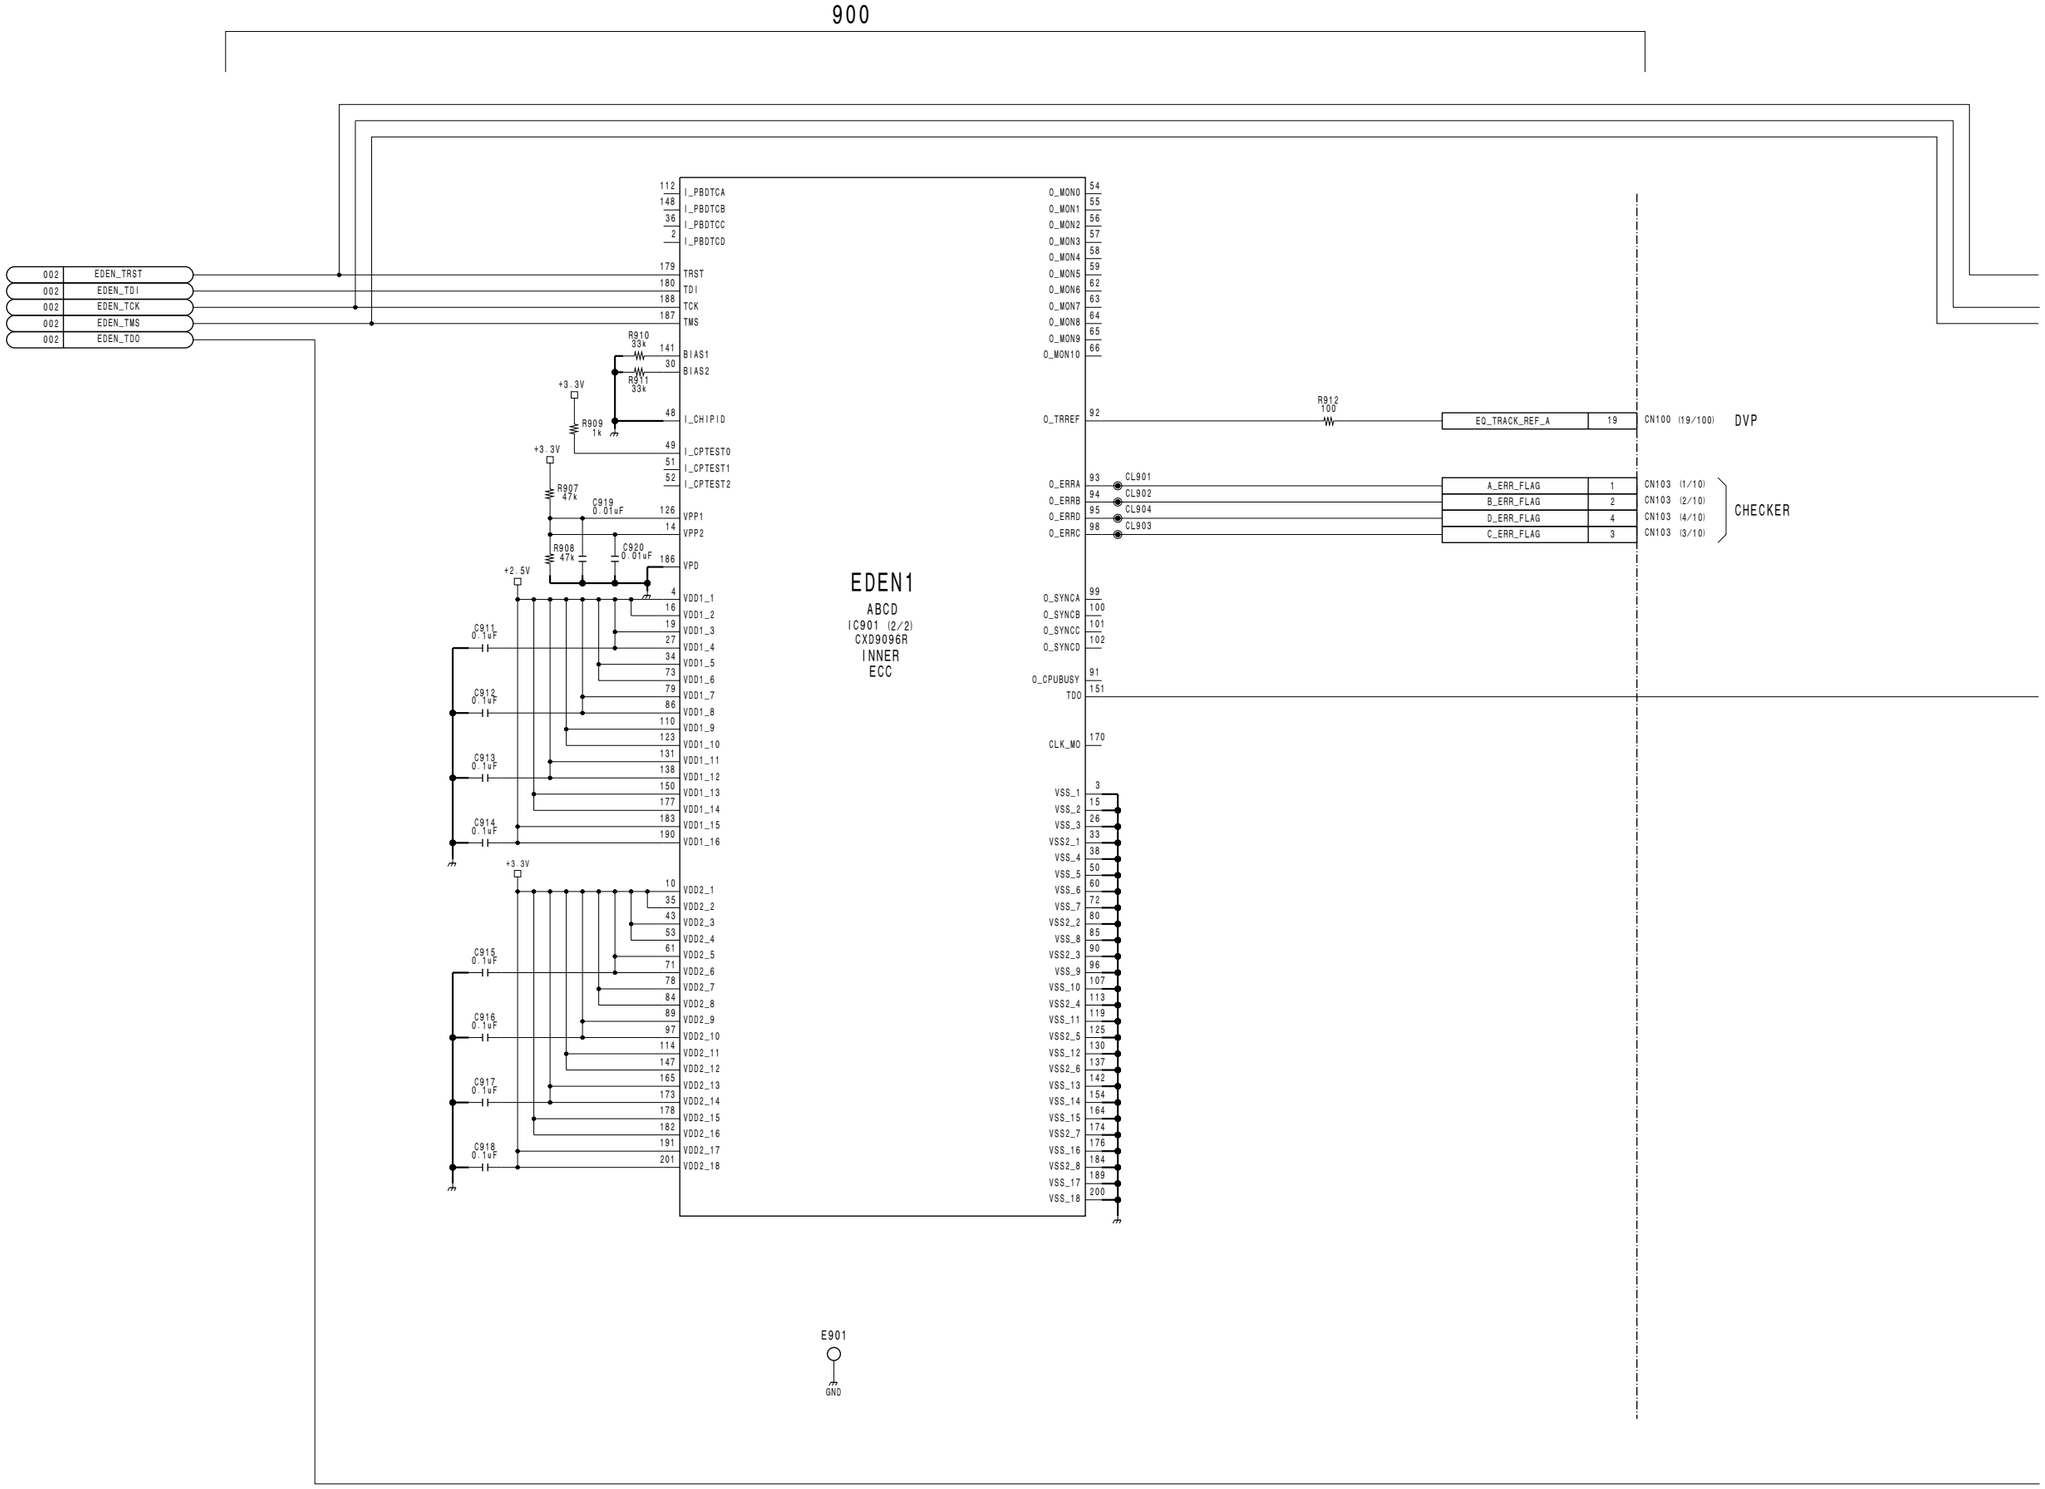

EQ-88 (9/12)

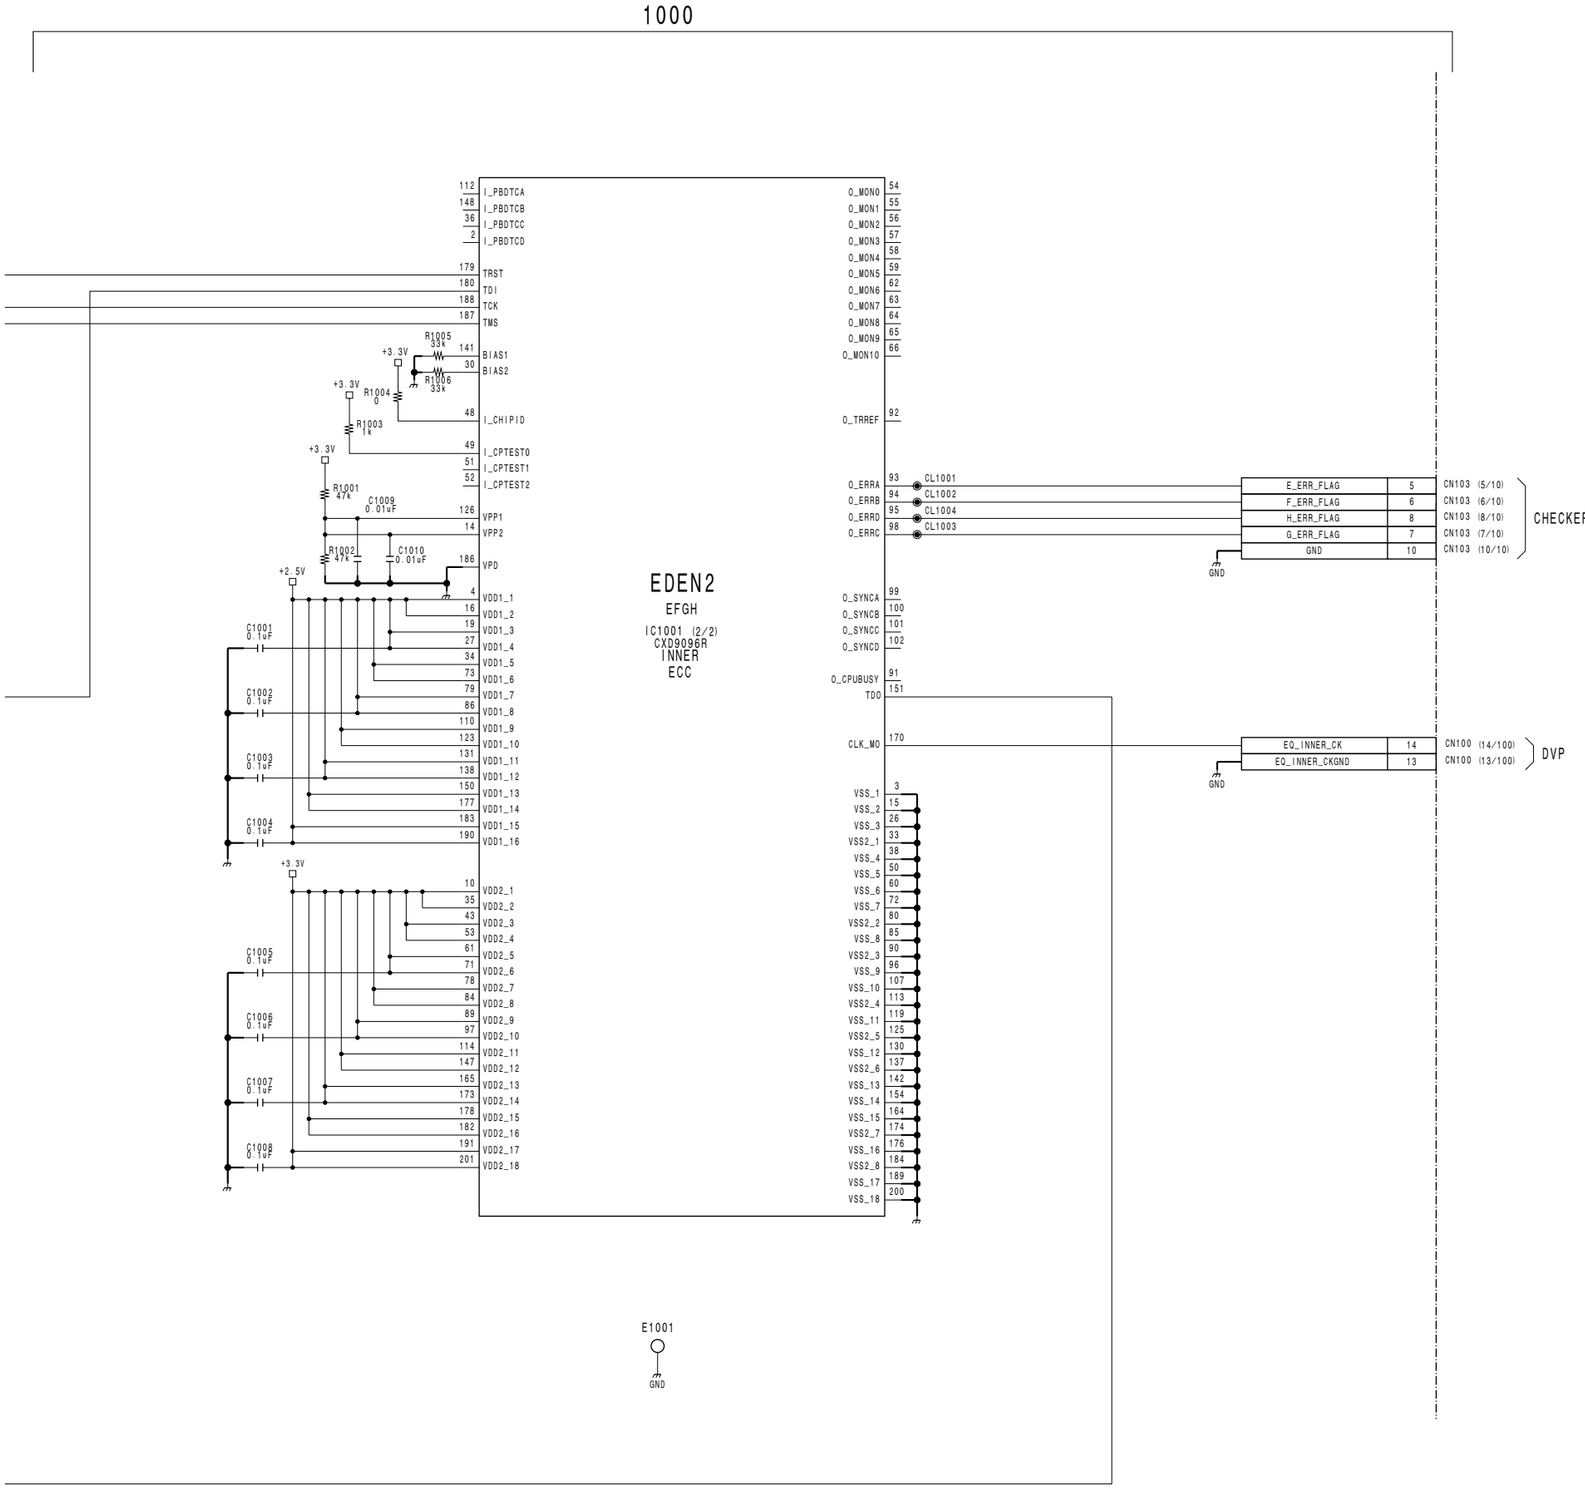

EQ-88 (9/12)

BOARD NO. 1-678-738-11, 12
LOT NO. 083-

HDW-750_EQ-88_014_9

EQ-88 (10/12)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

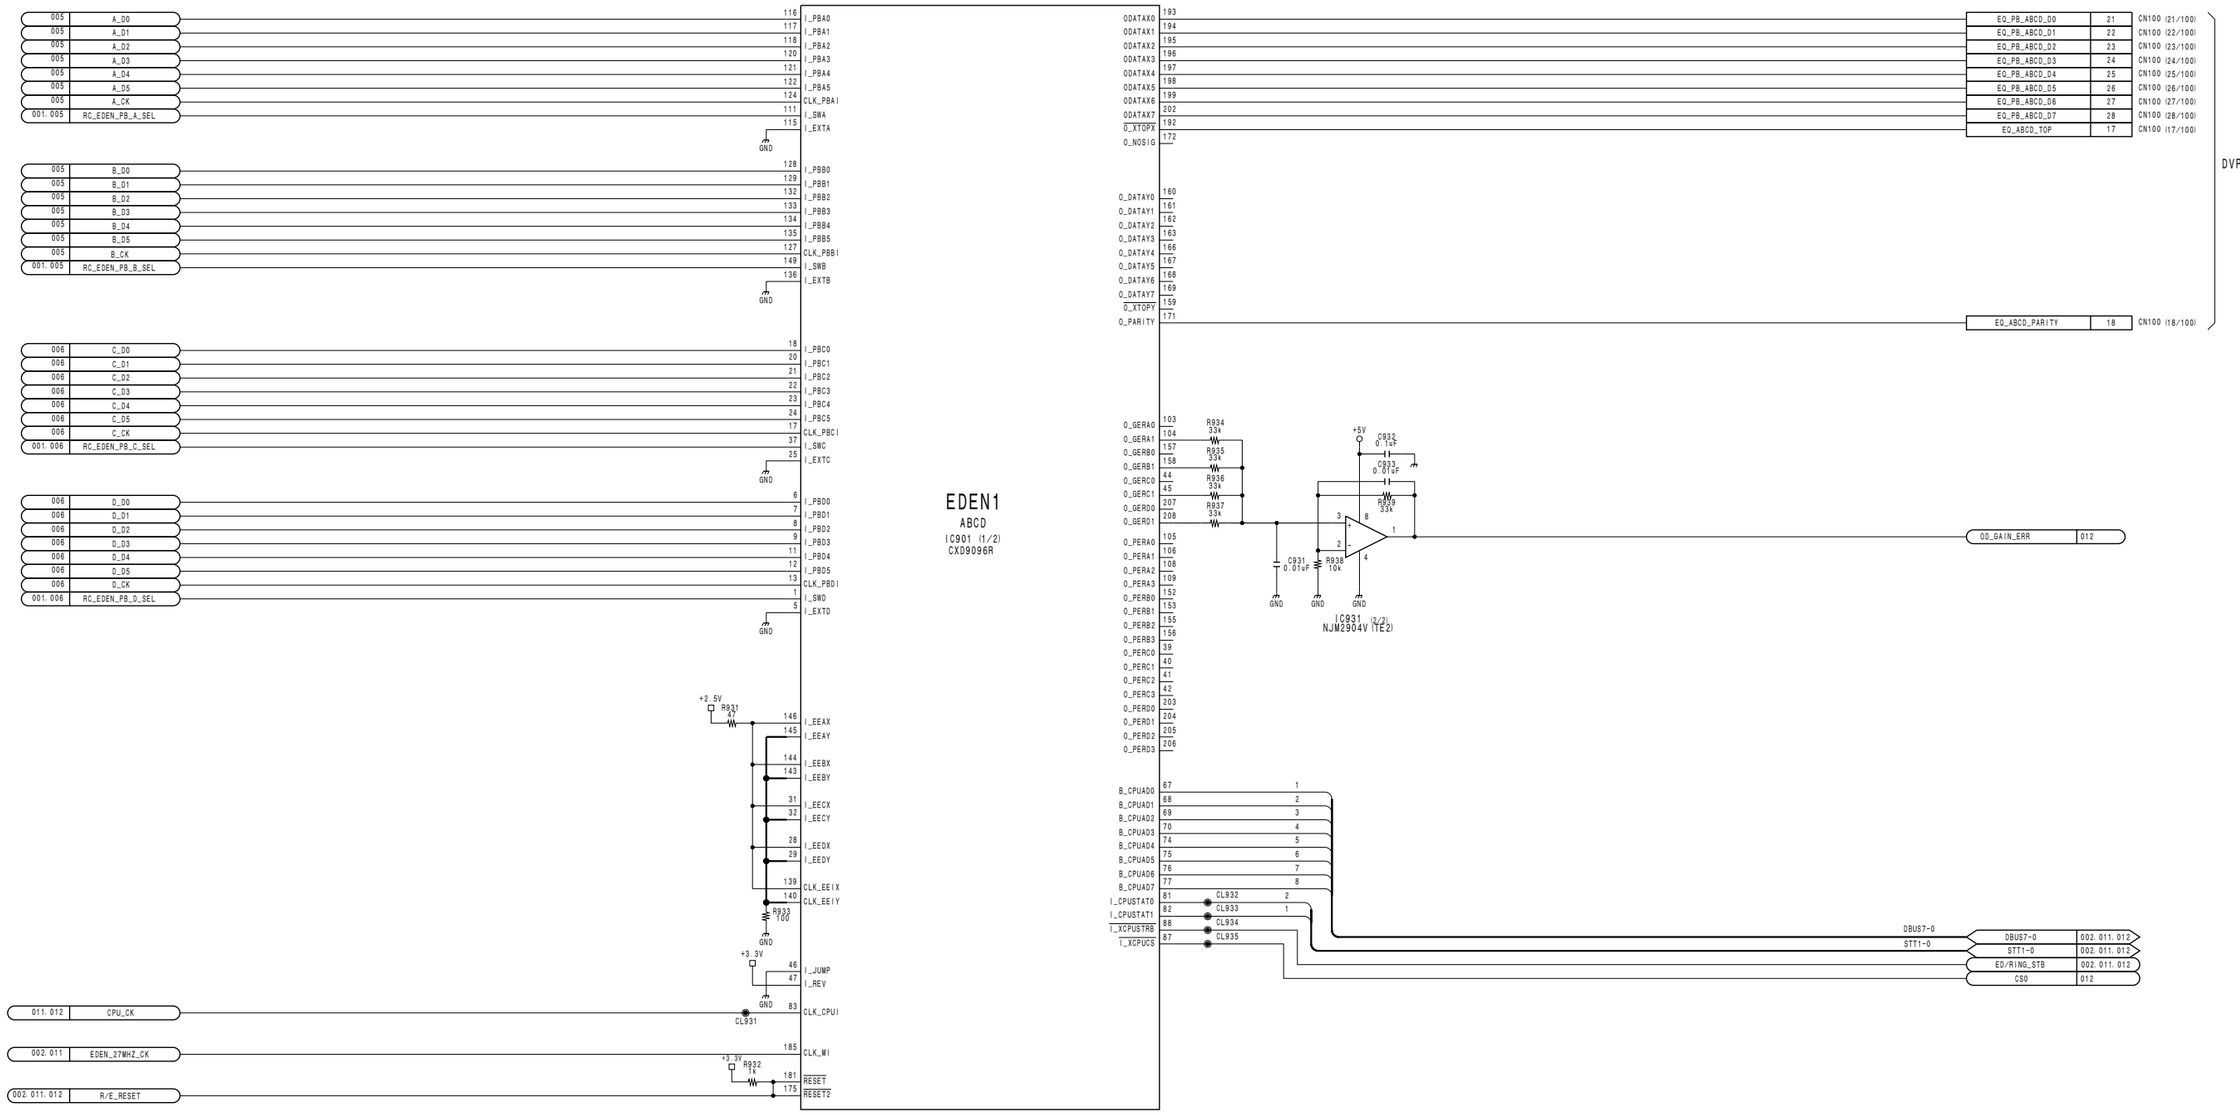

EQ-88 (10/12)

BOARD NO. 1-678-738-11, 12
LOT NO. 083-
HDW-750_EQ-88_014_10

4-114

EQ-88 (11/12)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

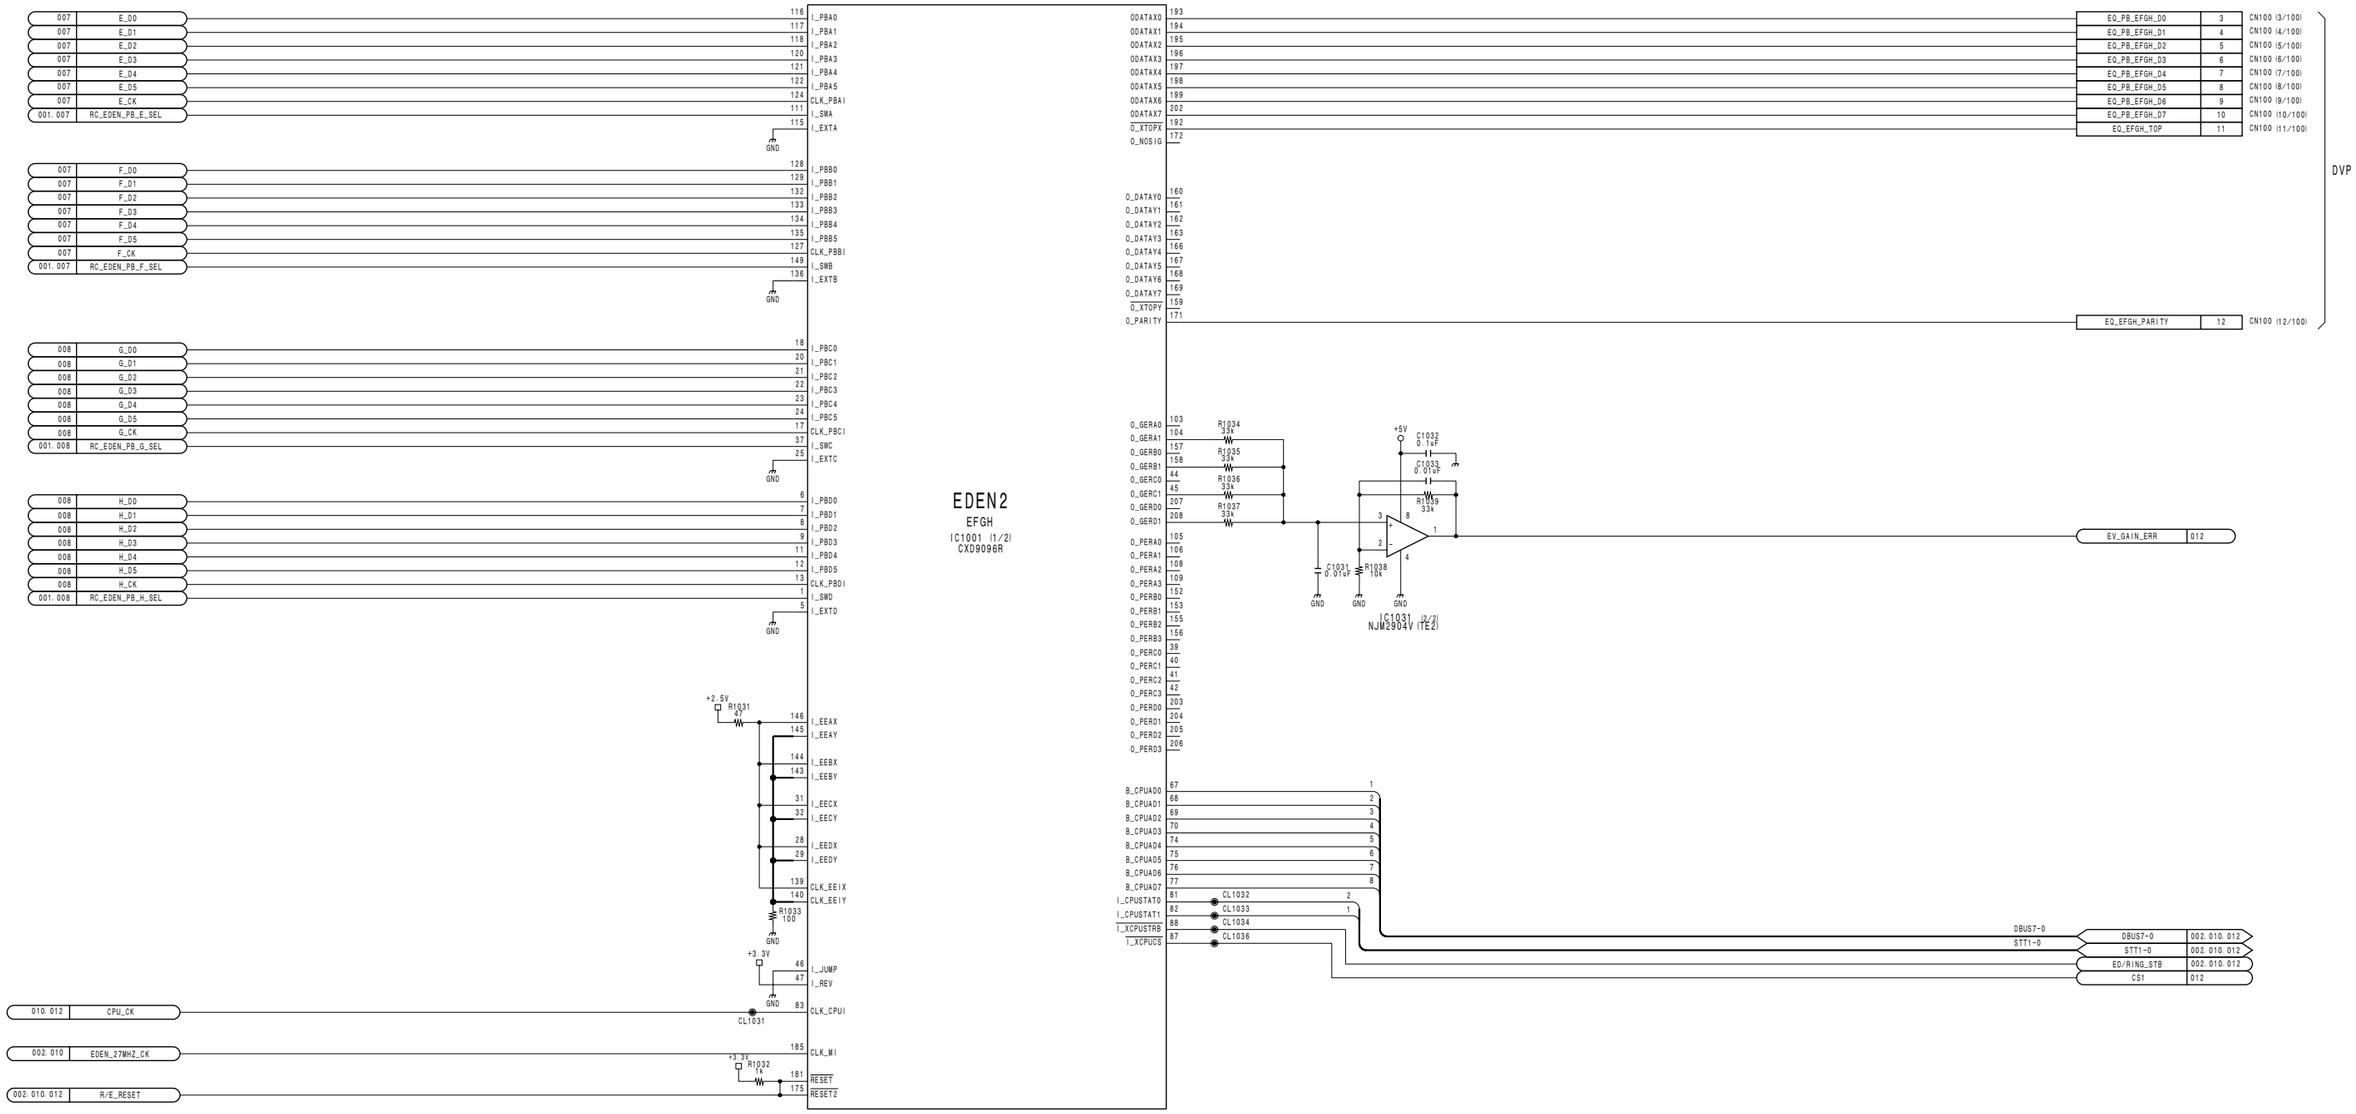

EQ-88 (11/12)
BOARD NO. 1-678-738-11, 12
LOT NO. 083-
HDW-750_EQ-88_014_11

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

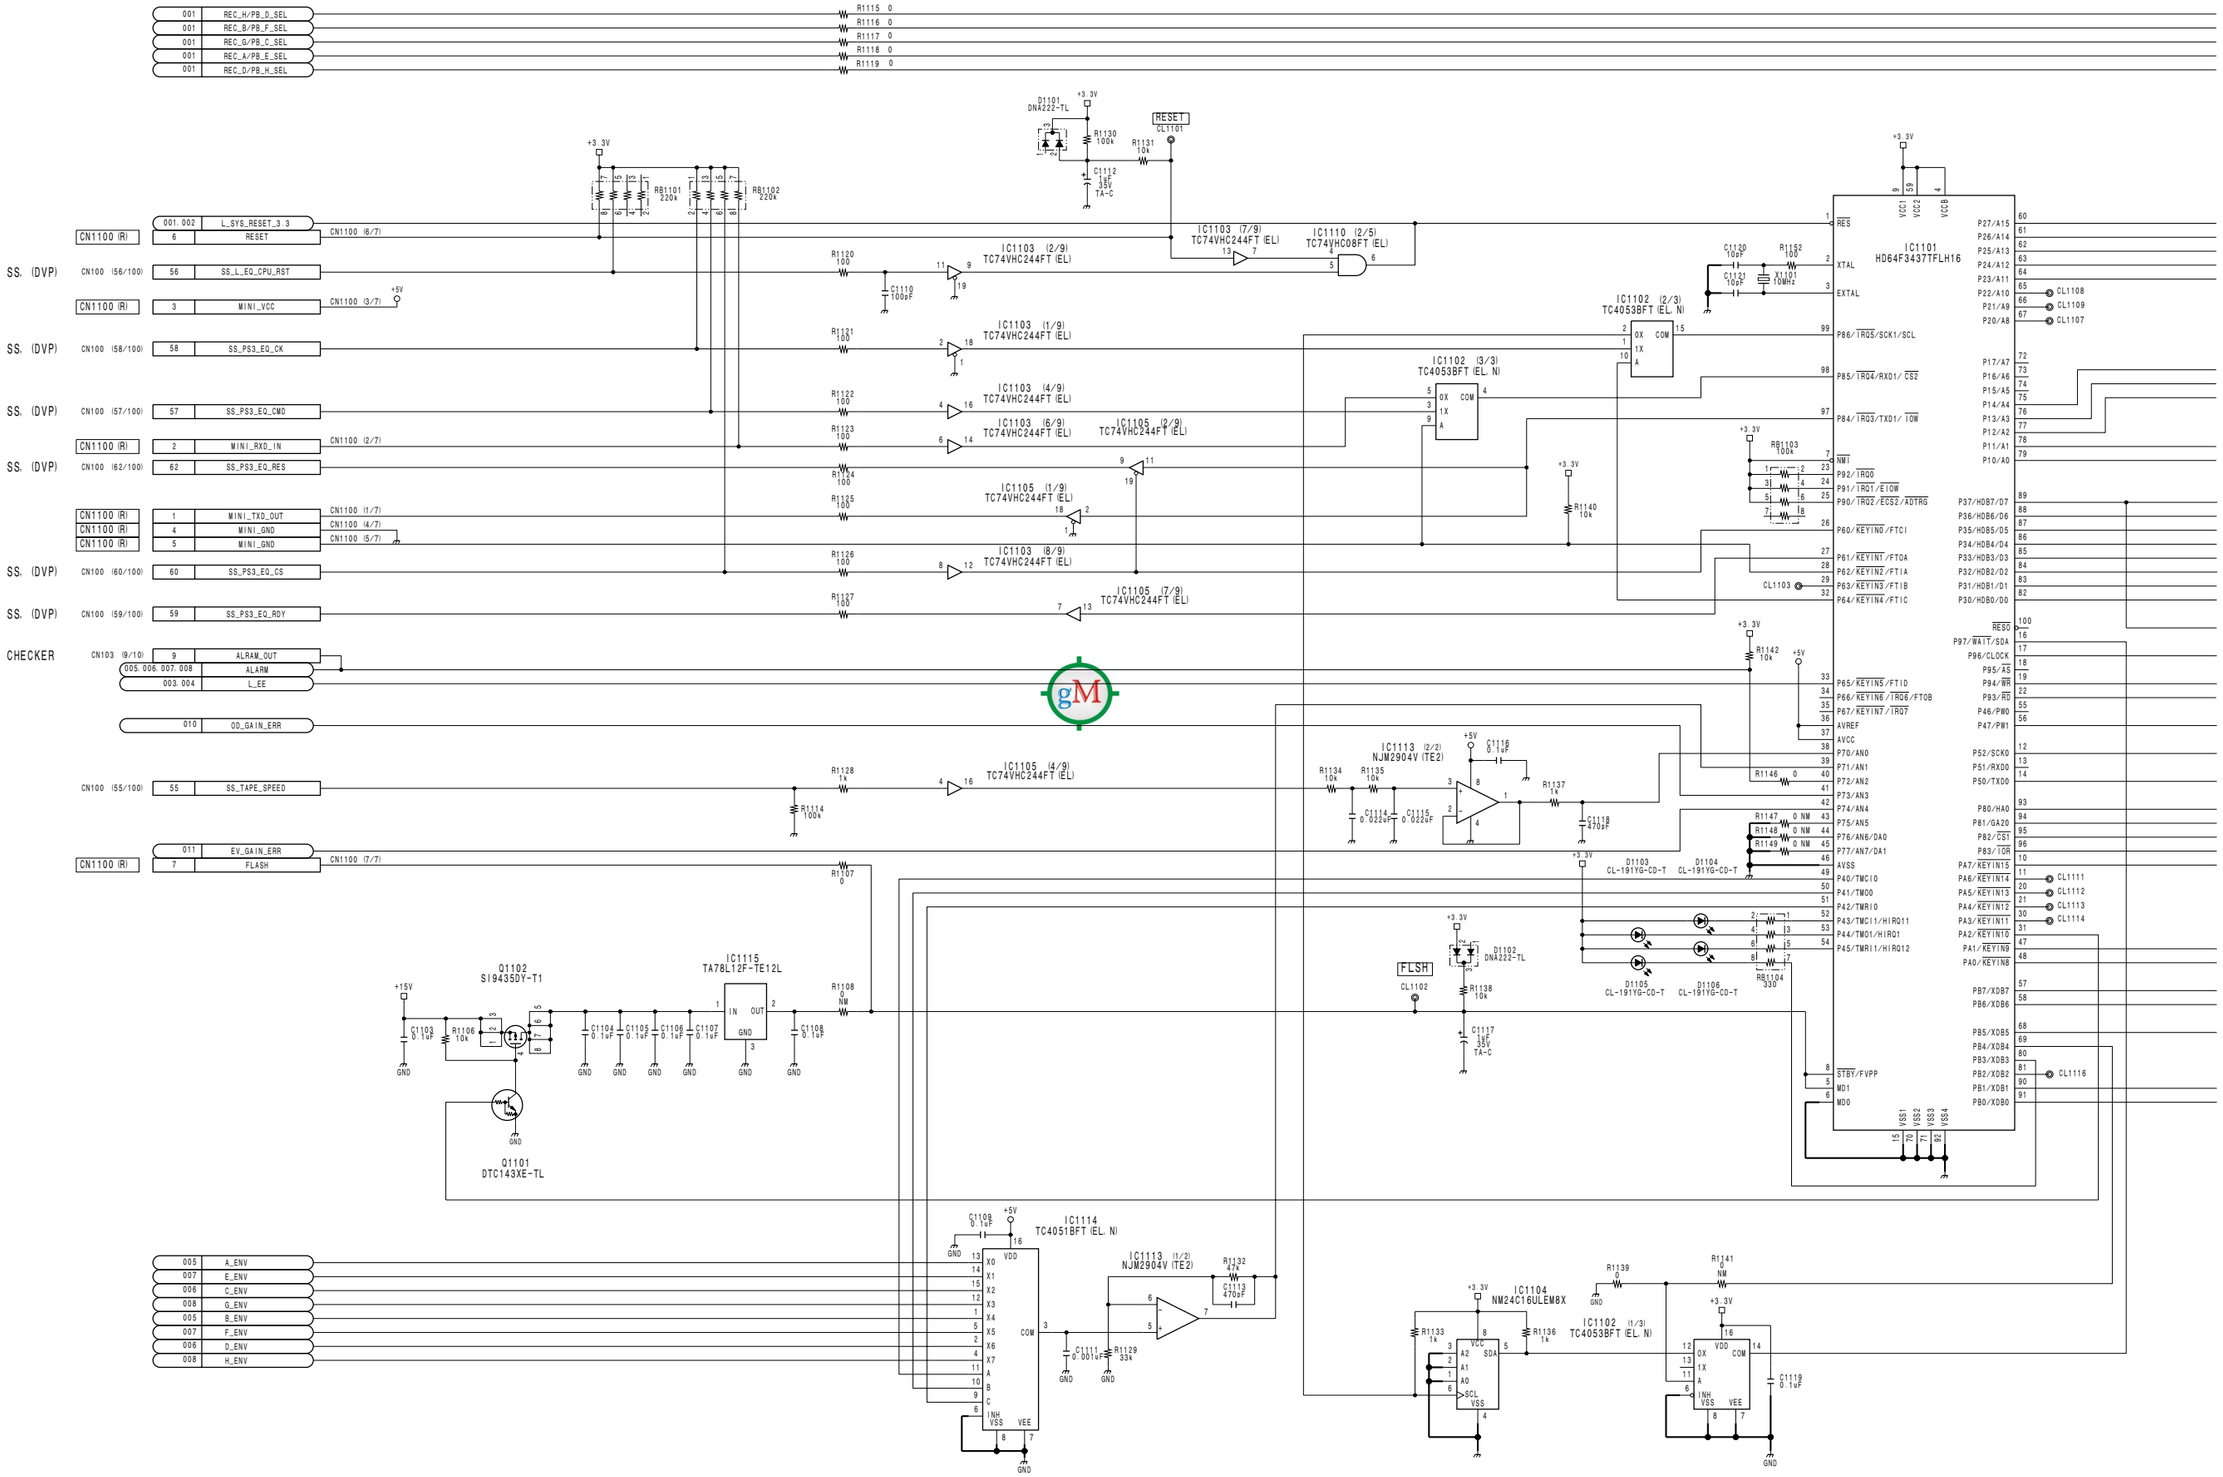

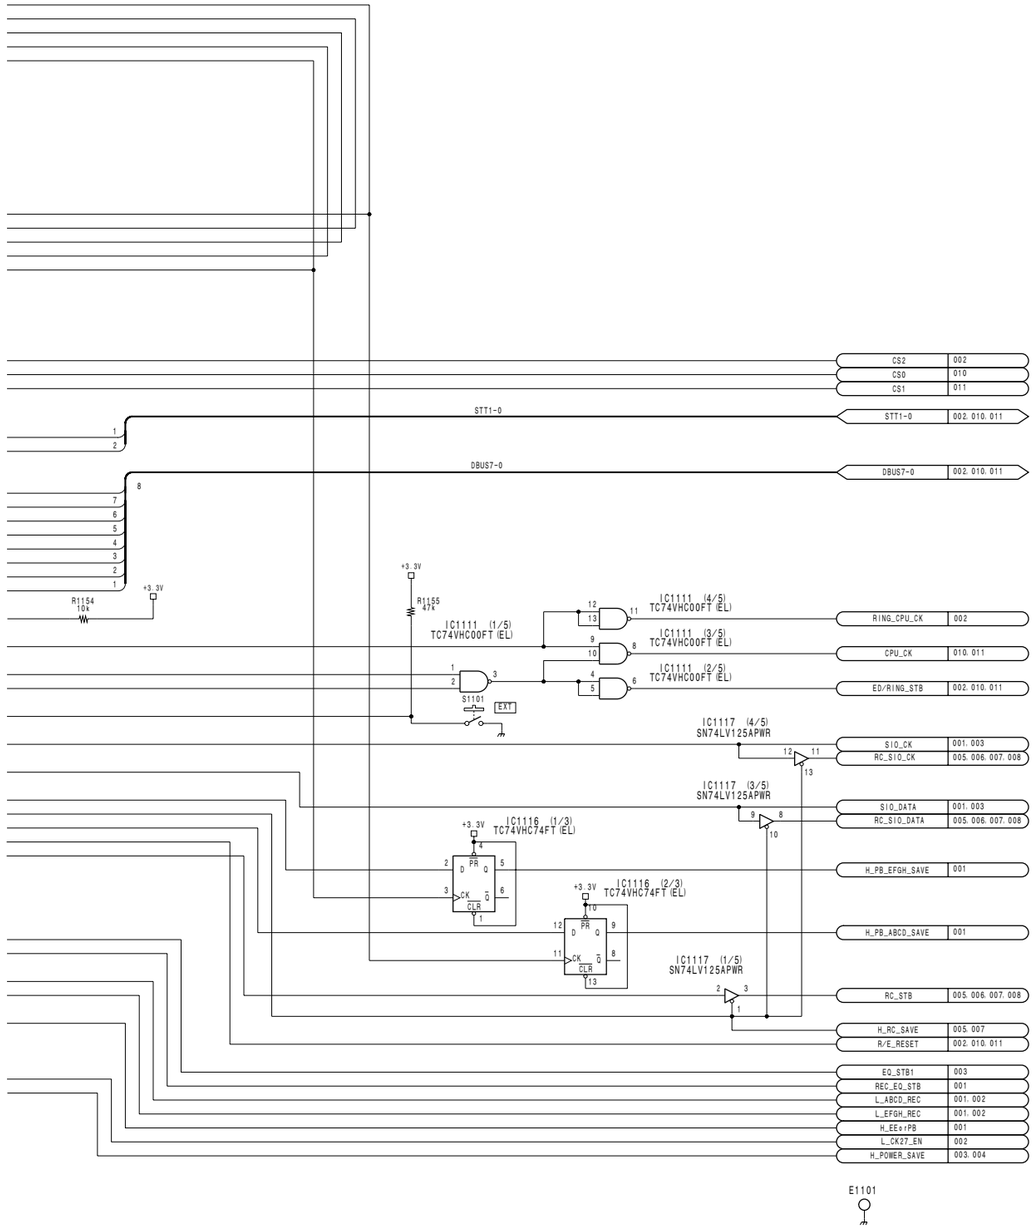

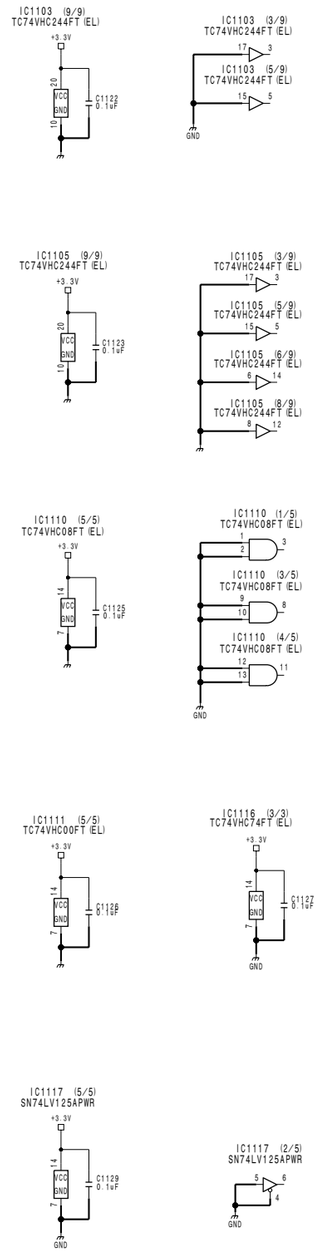

EQ-88 (12/12)

BOARD NO. 1-678-738-11, 12
LOT NO. 083-
HDW-750_EQ-88_014_12

FP-121 (1/6)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

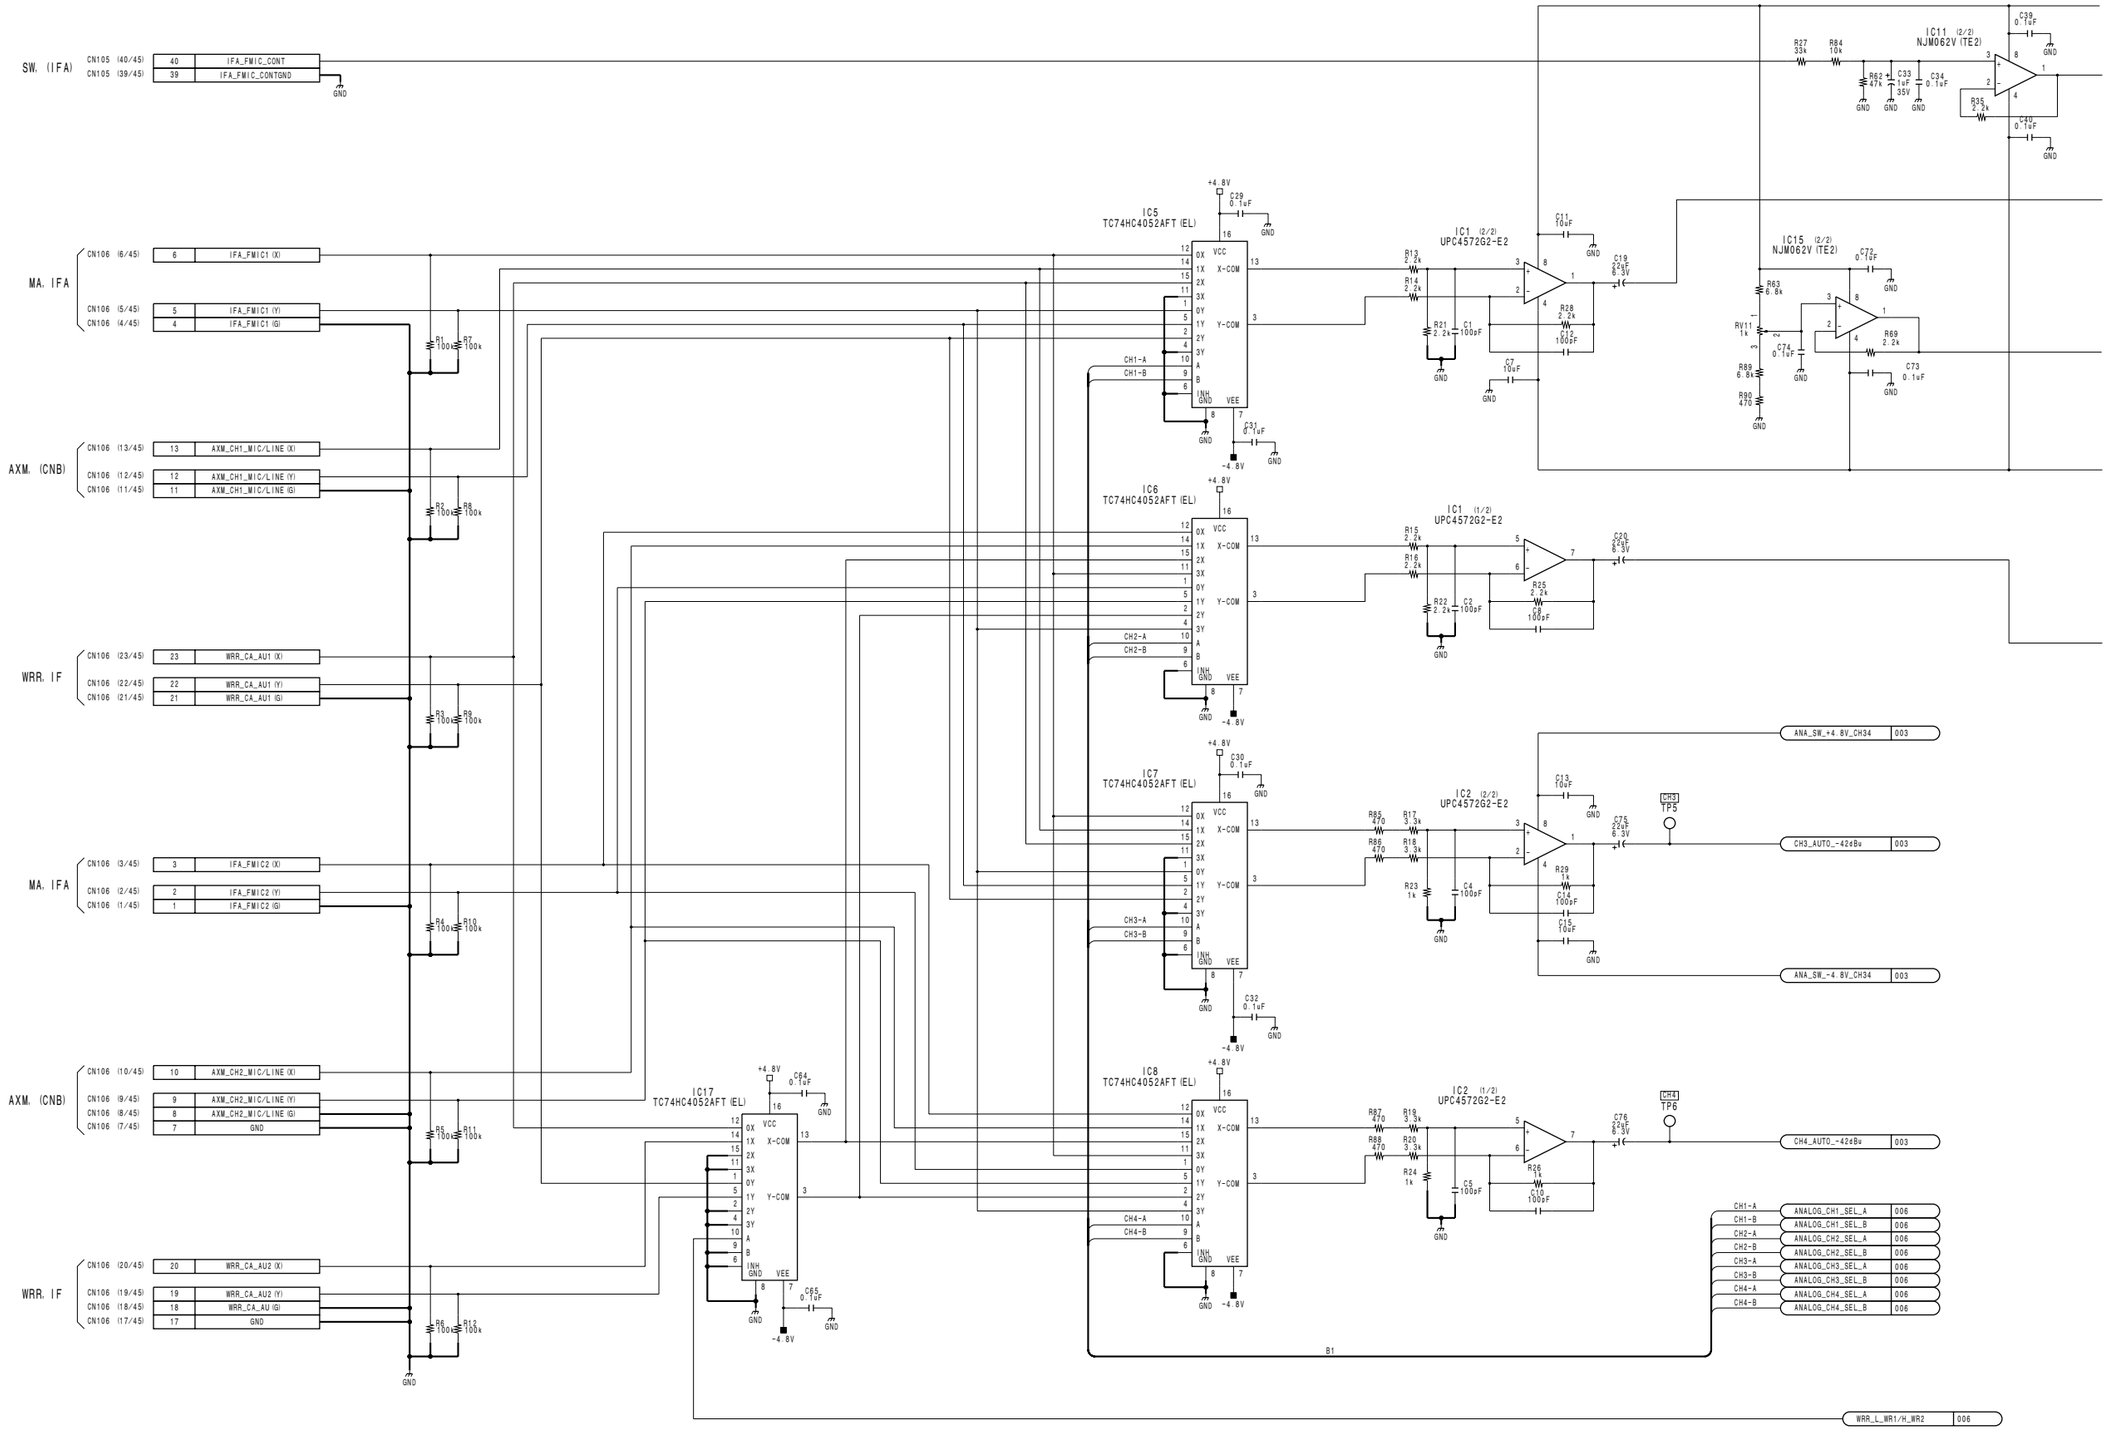

4-118

FP-121 (1/6)

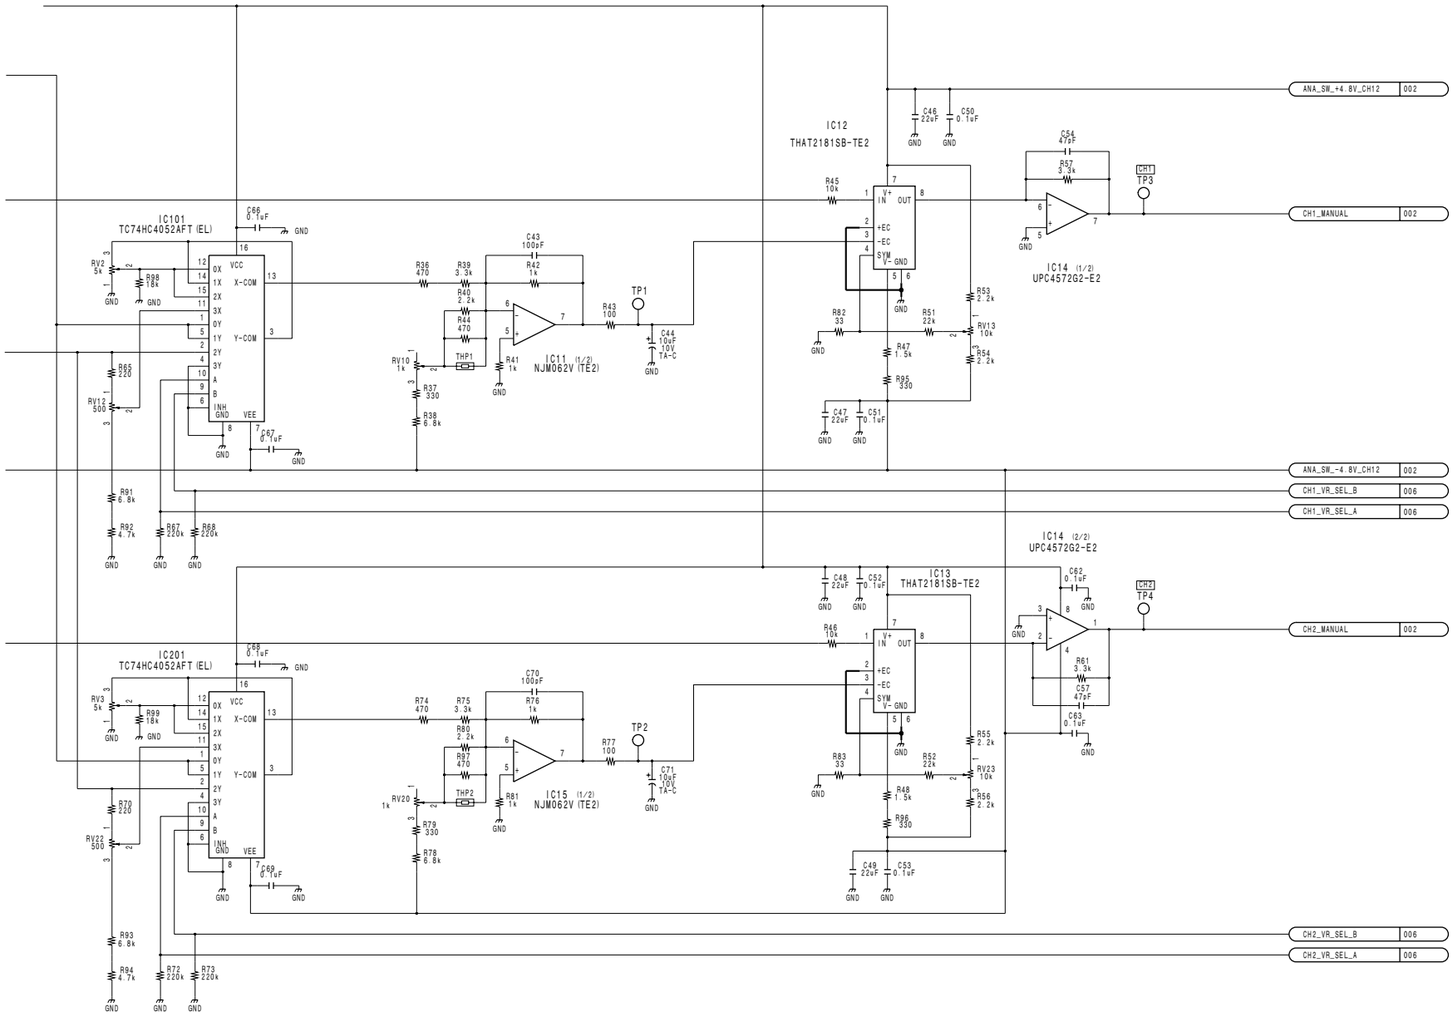

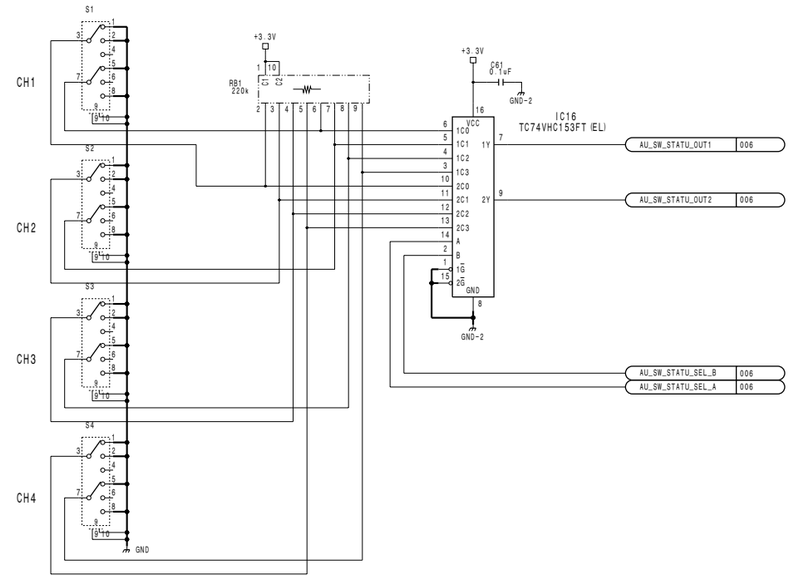

FP-121 (1/6)

BOARD NO. 1-678-732-12, 13
LOT NO. 083-

HDW-750_FP-121_015_1

4-119

FP-121 (2/6)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

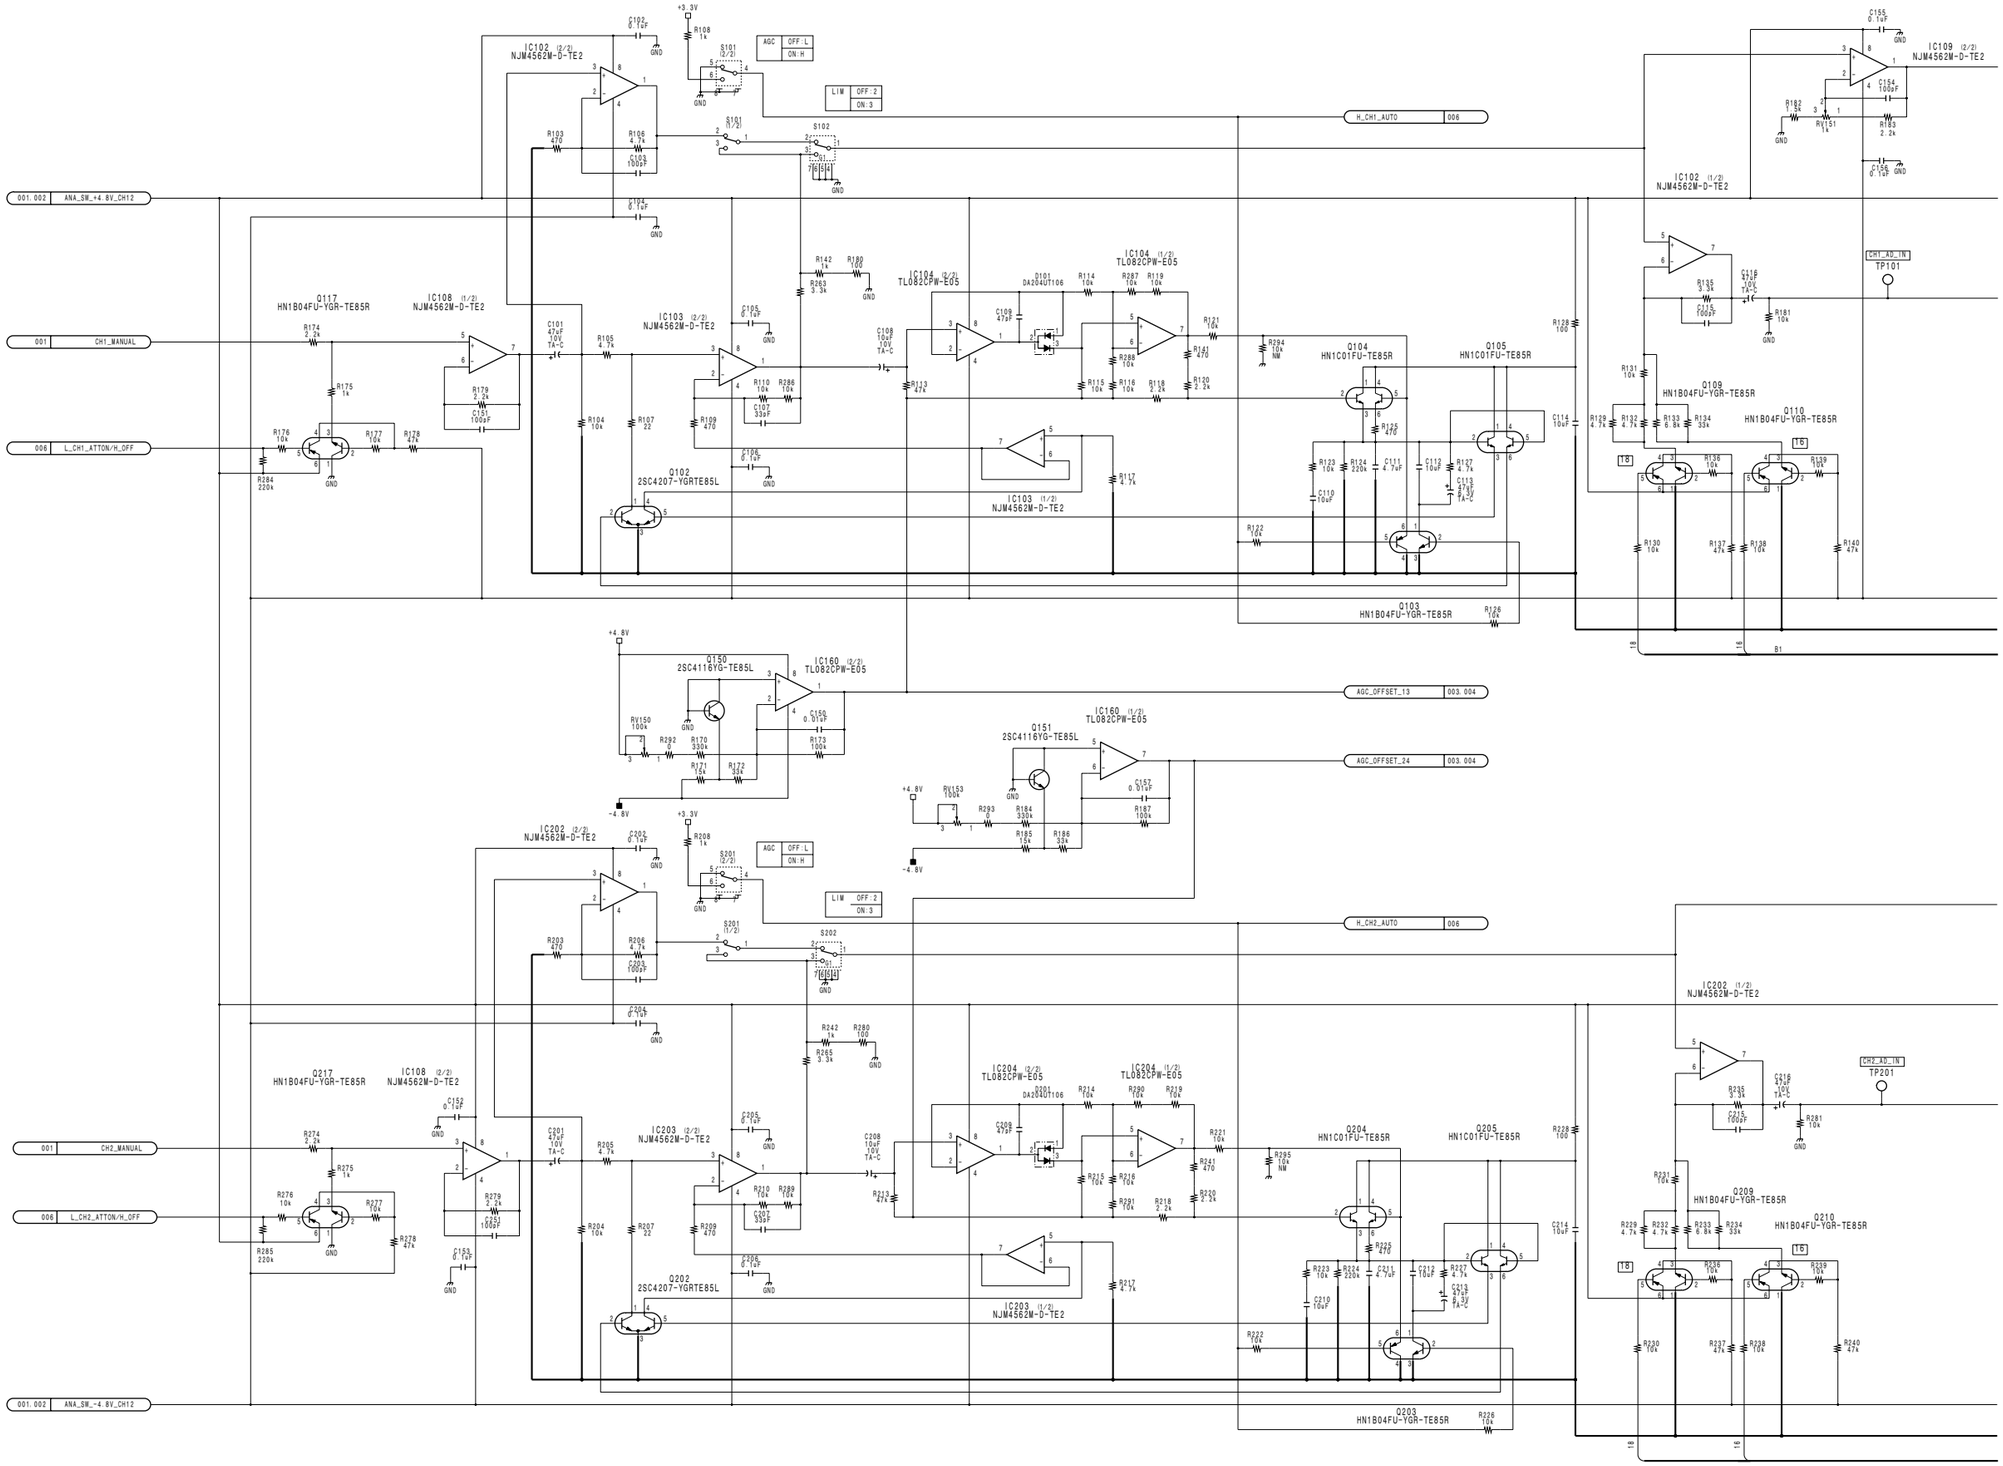

4-120

http://getMANUAL.com

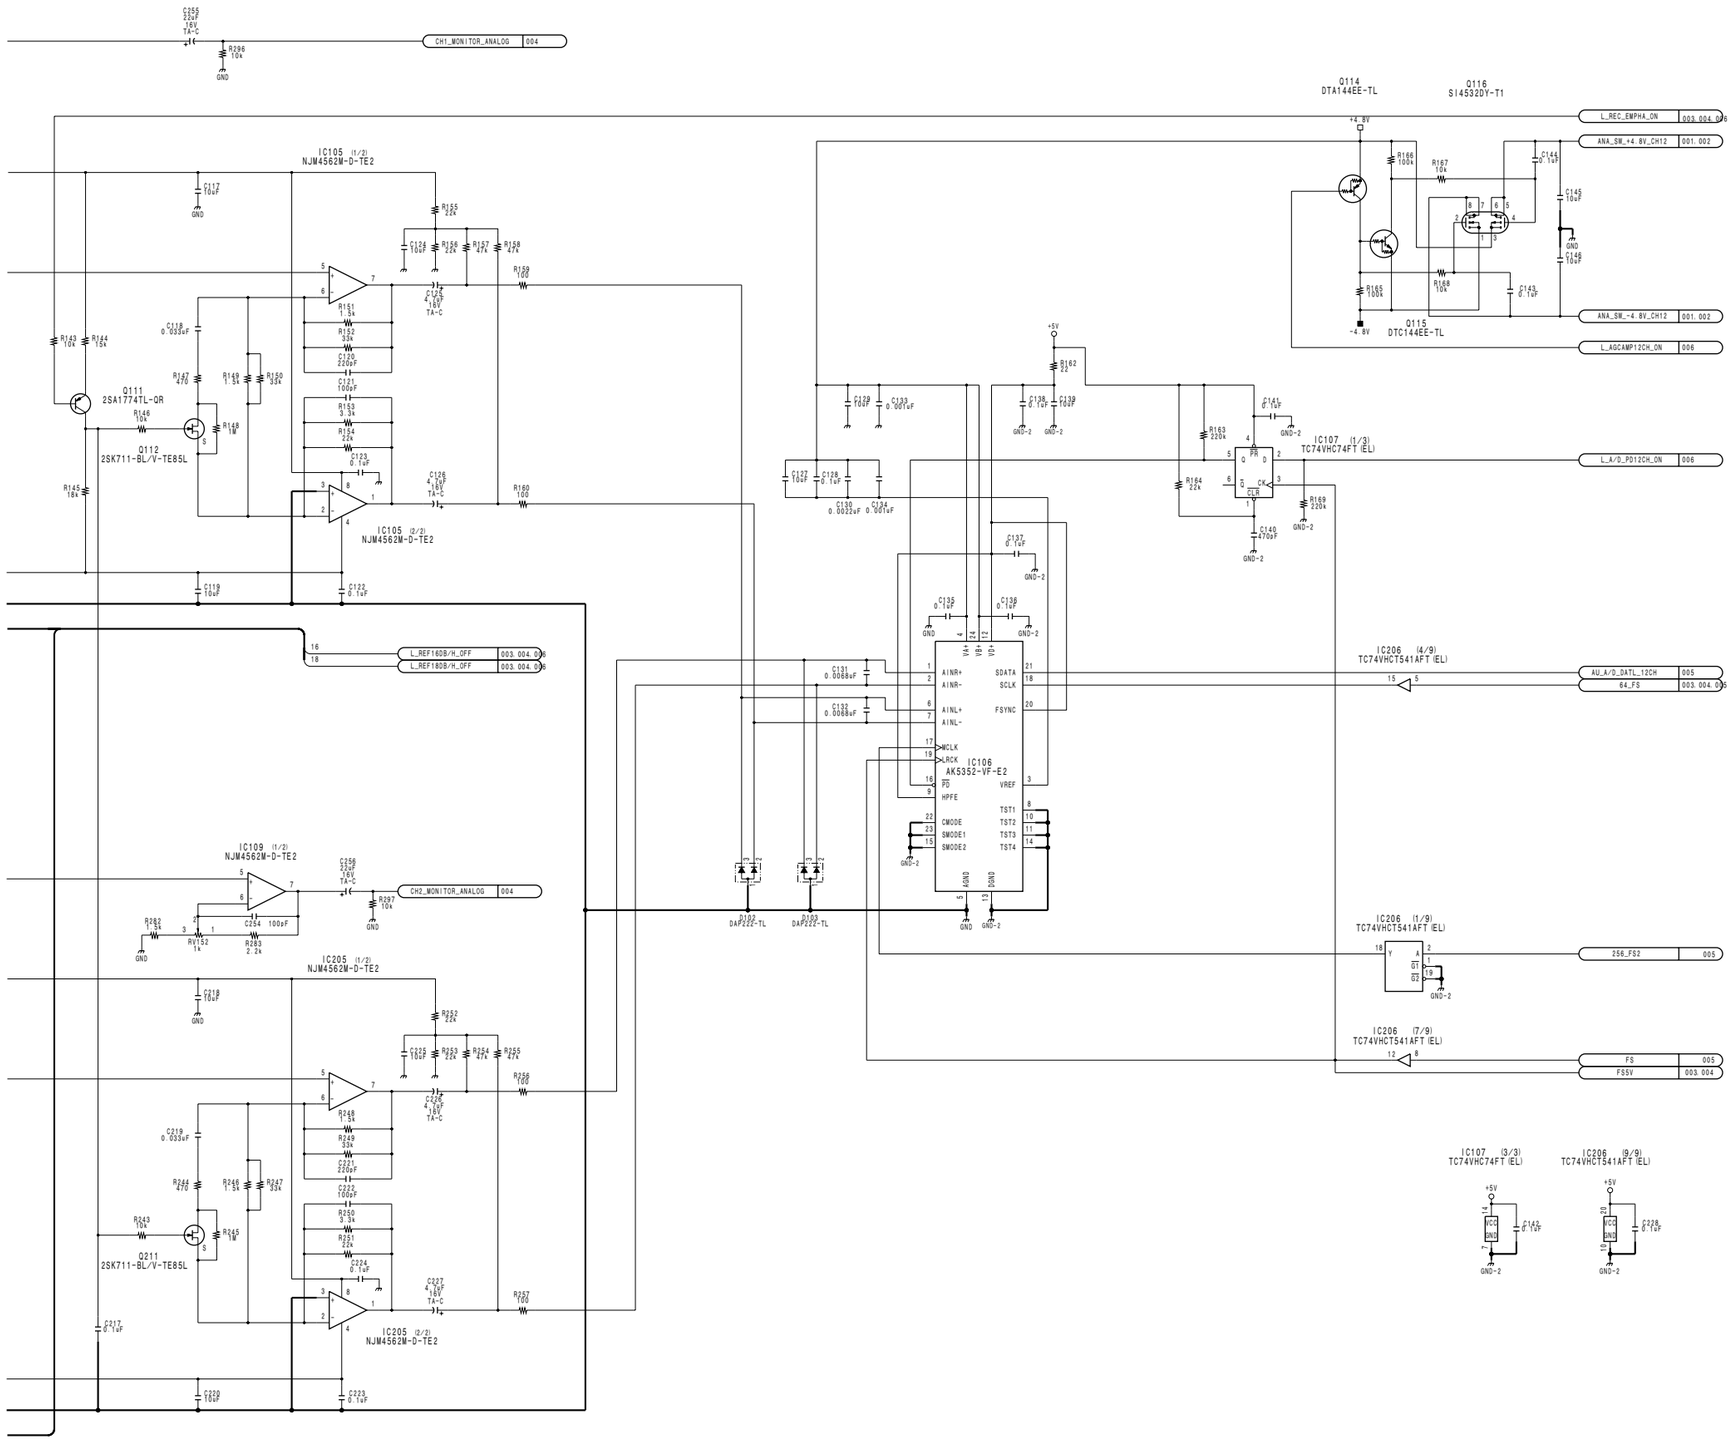

FP-121 (2/6)

BOARD NO. 1-678-732-12, 13
LOT NO. 083-
HDW-750_FP-121_015_2

FP-121 (3/6)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

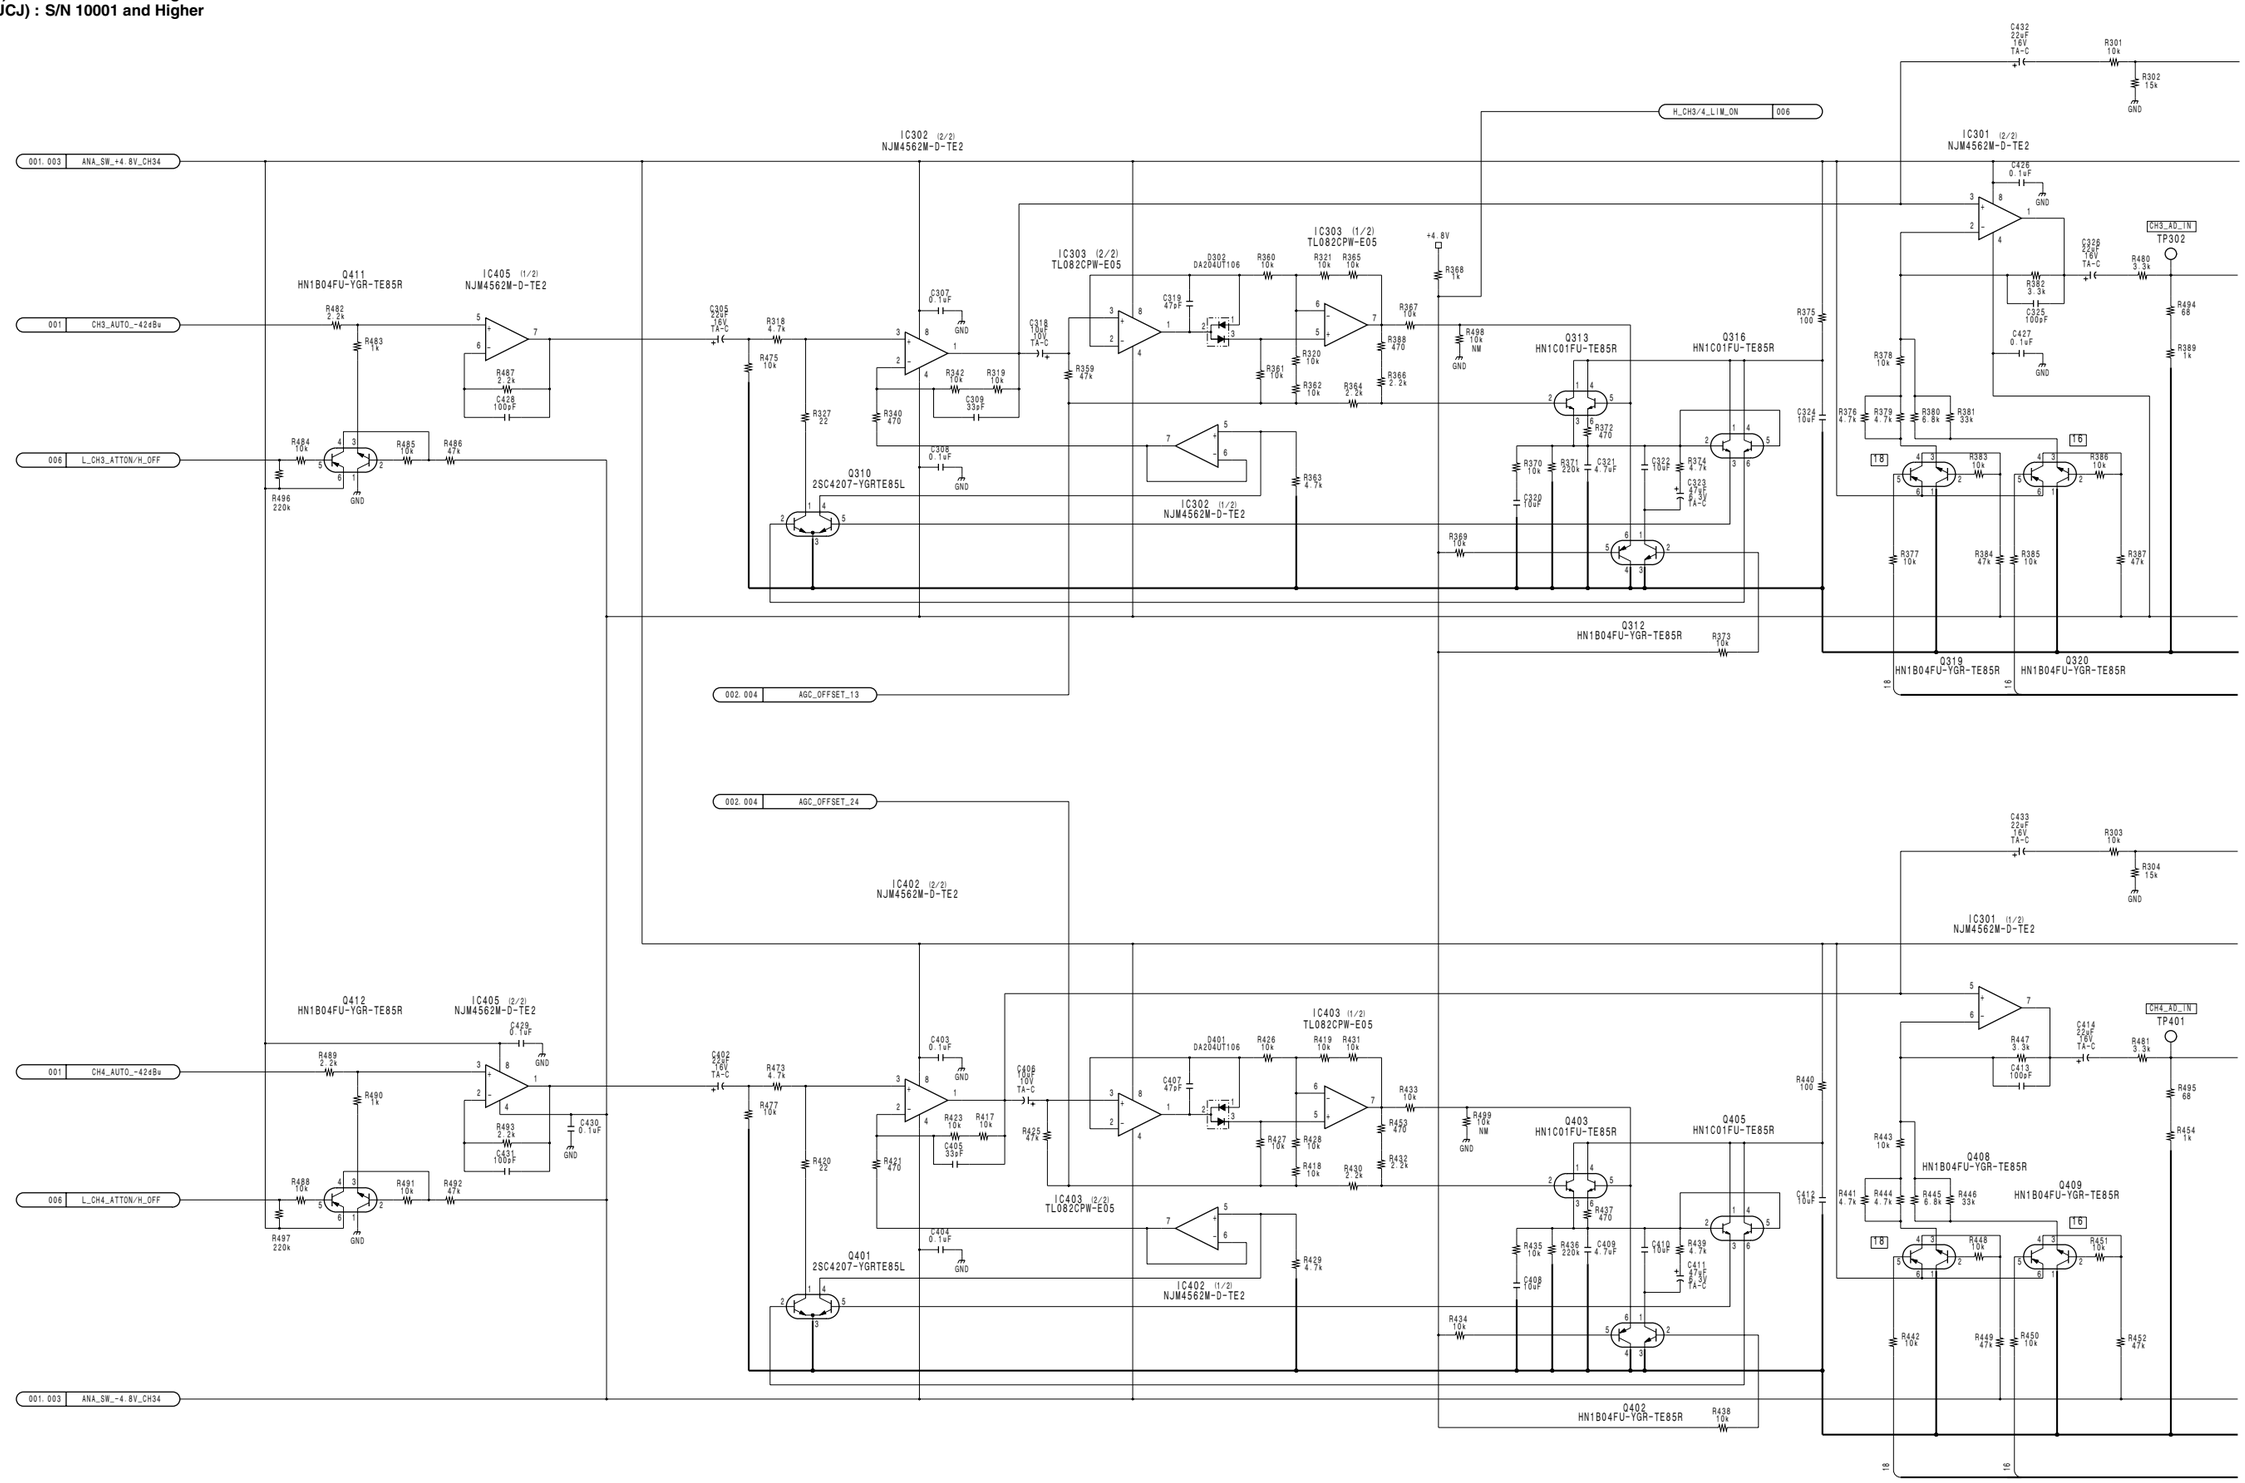

4-122

FP-121 (3/6)

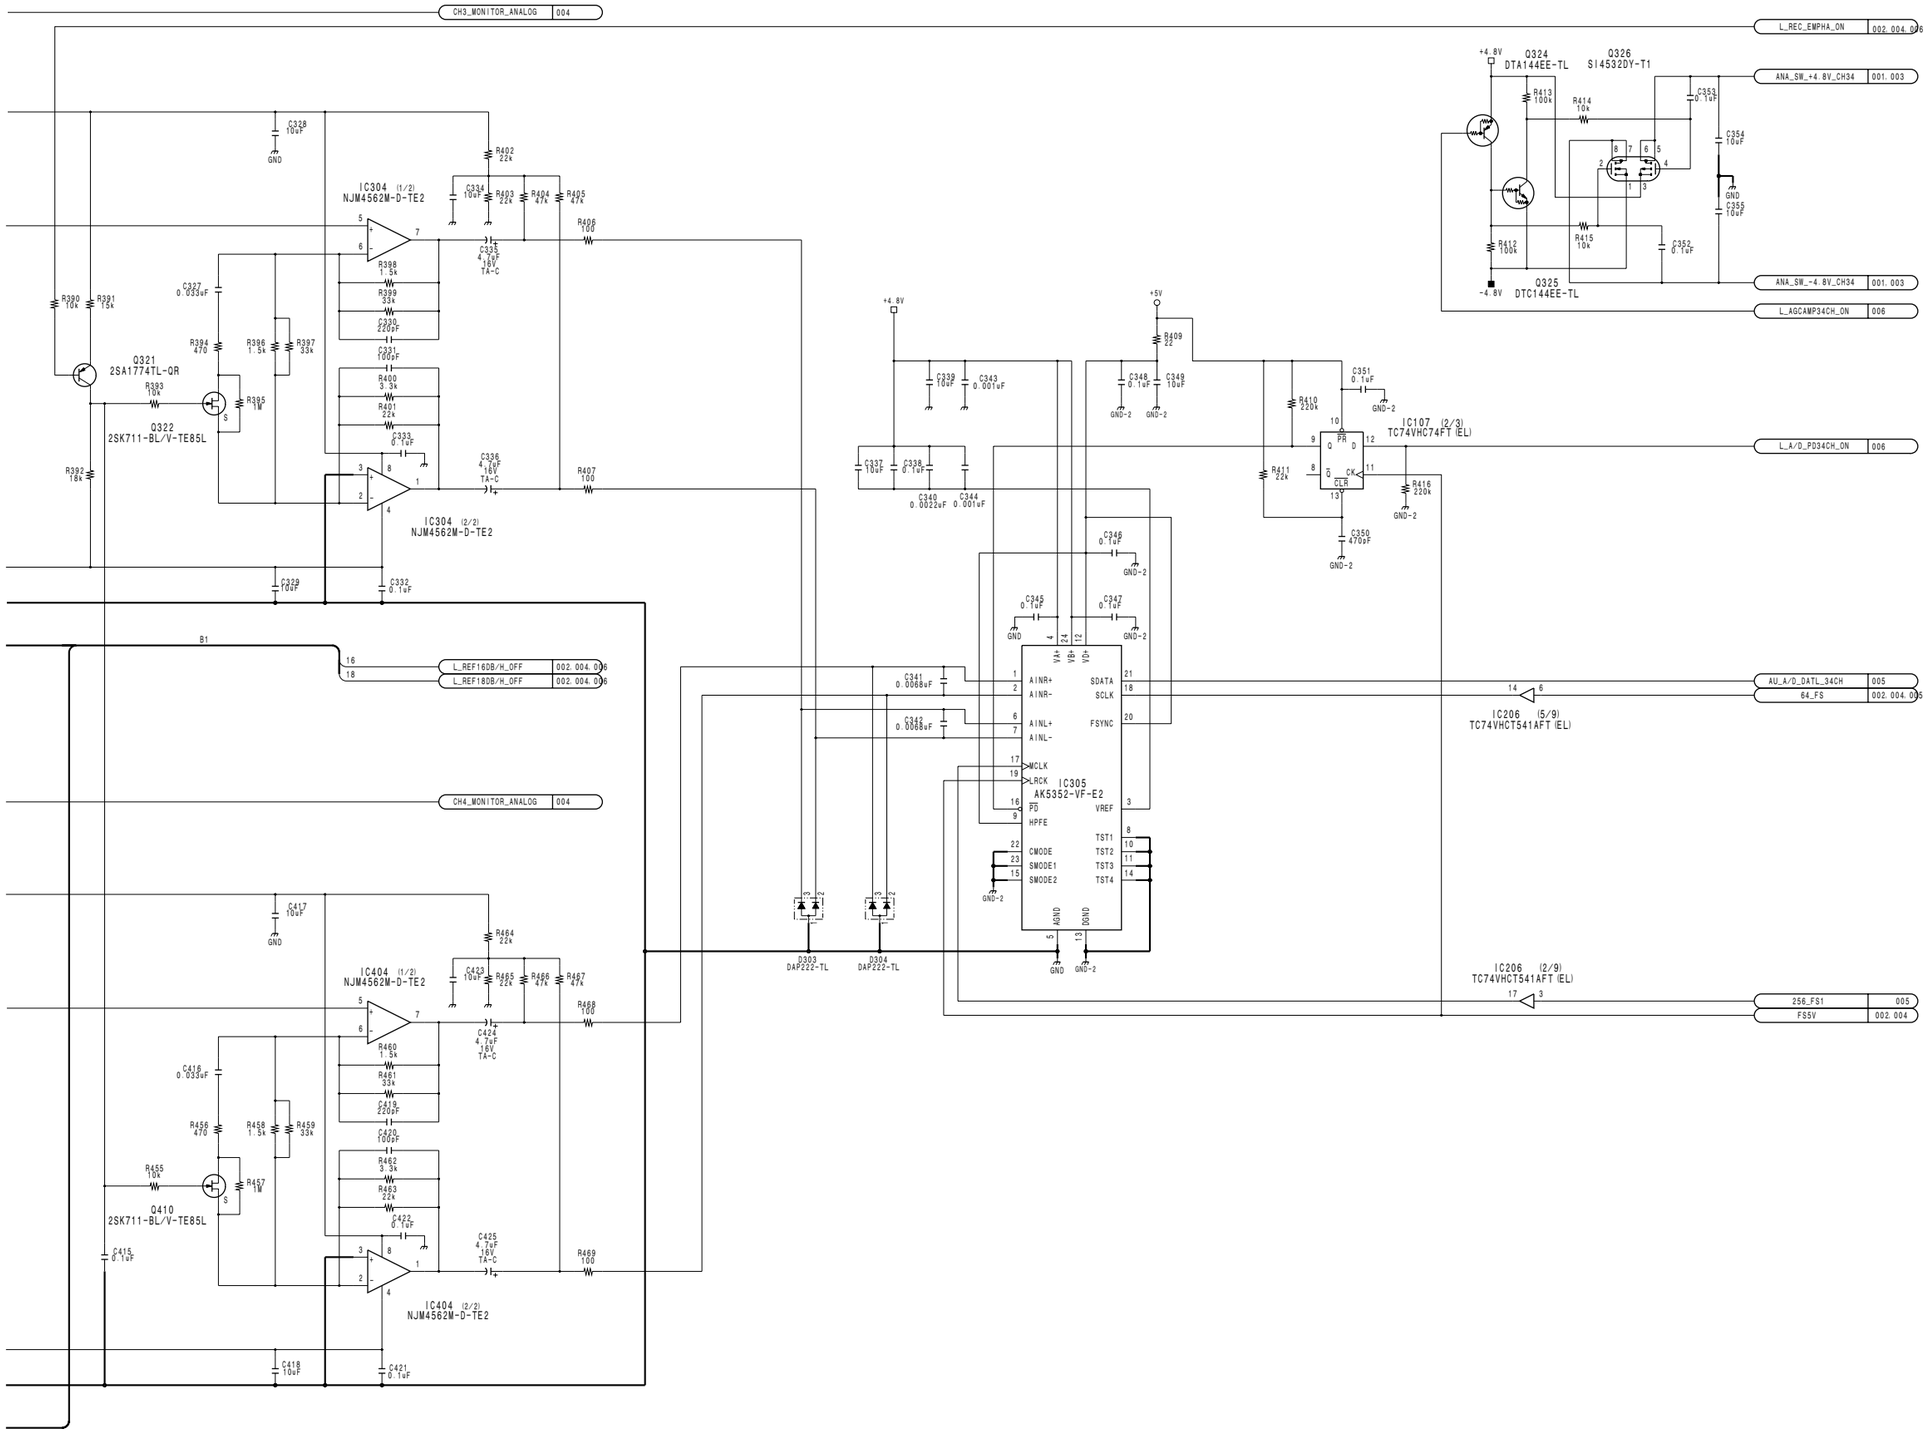

FP-121 (3/6)

BOARD NO. 1-678-732-12, 13
LOT NO. 083-

HDW-750_FP-121_015_3

FP-121 (4/6)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

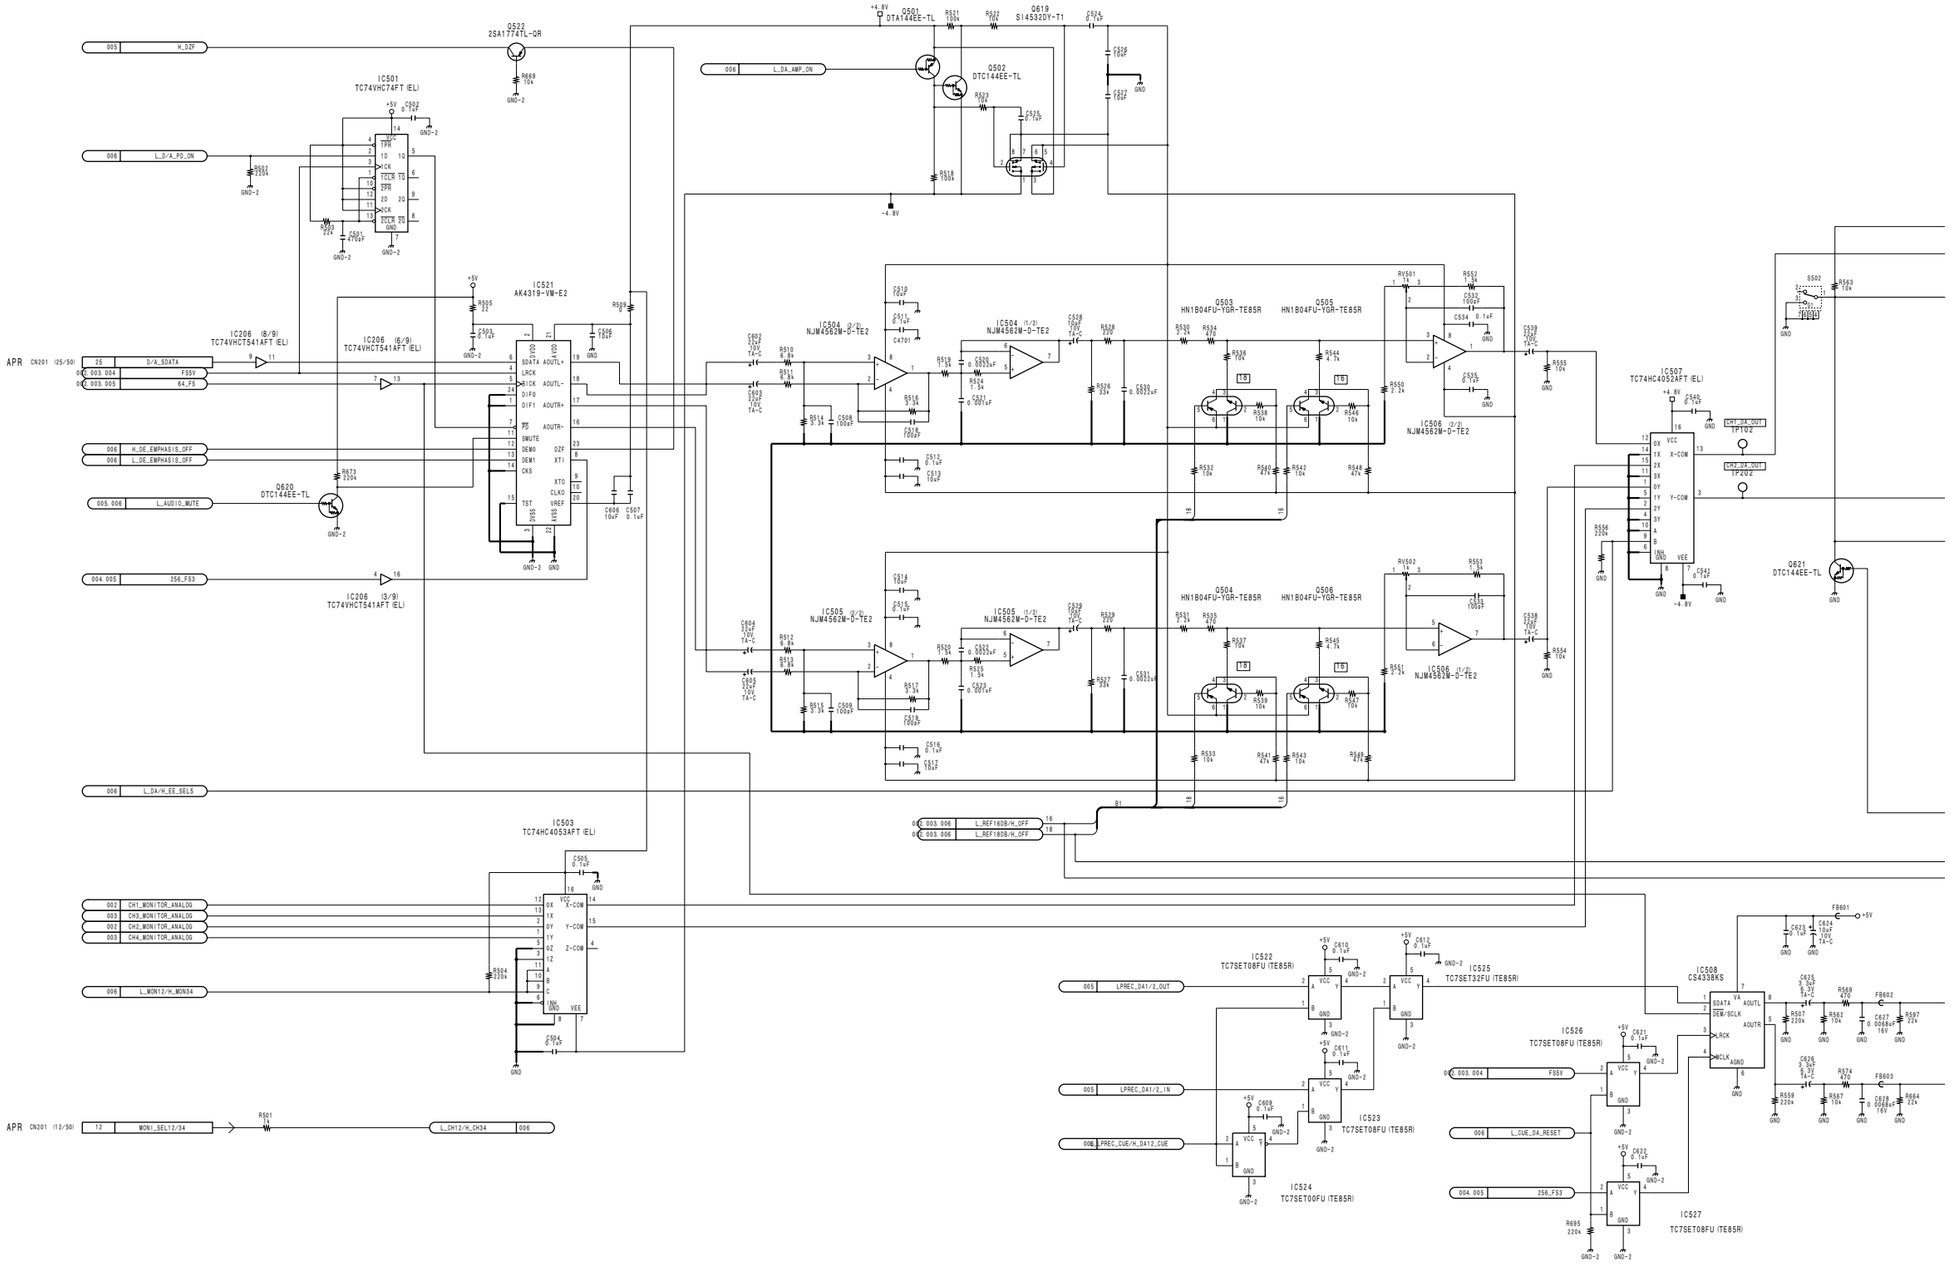

4-124

FP-121 (4/6)

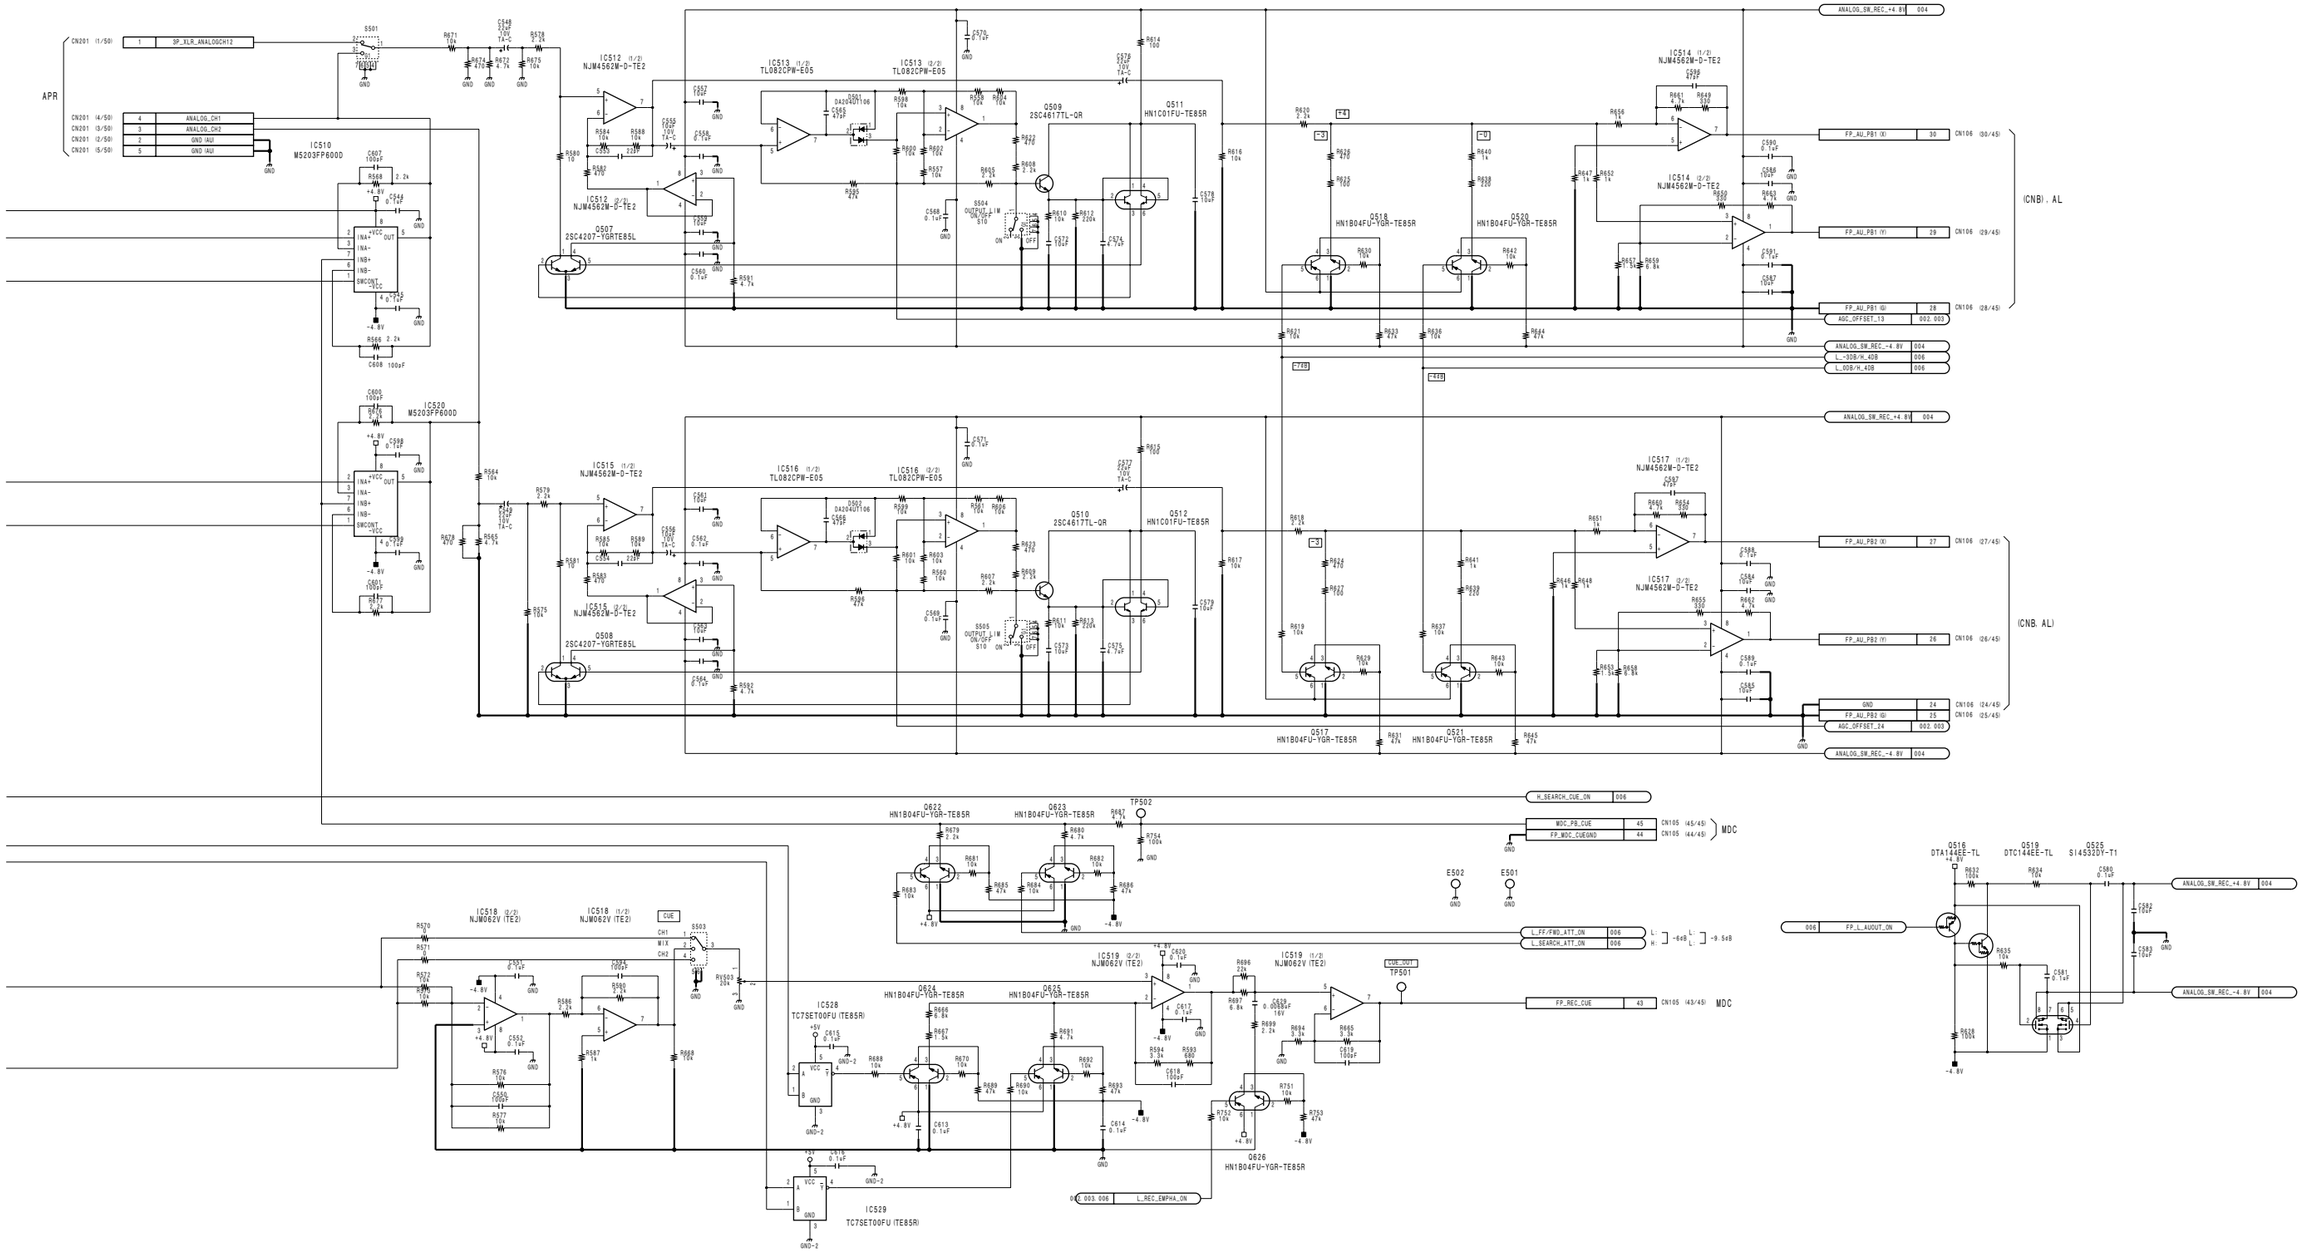

FP-121 (4/6)

BOARD NO. 1-678-732-12, 13
LOT NO. 083-

HDW-750_FP-121_015_4

FP-121 (5/6)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

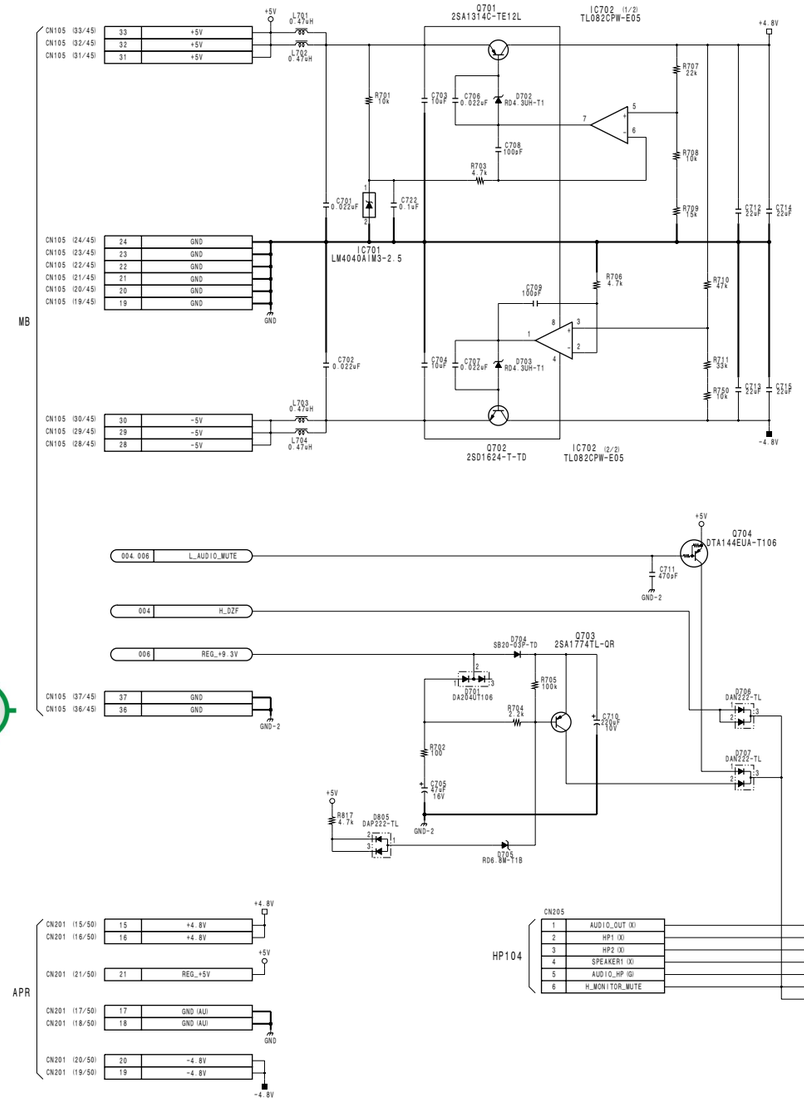

4-126

FP-121 (5/6)

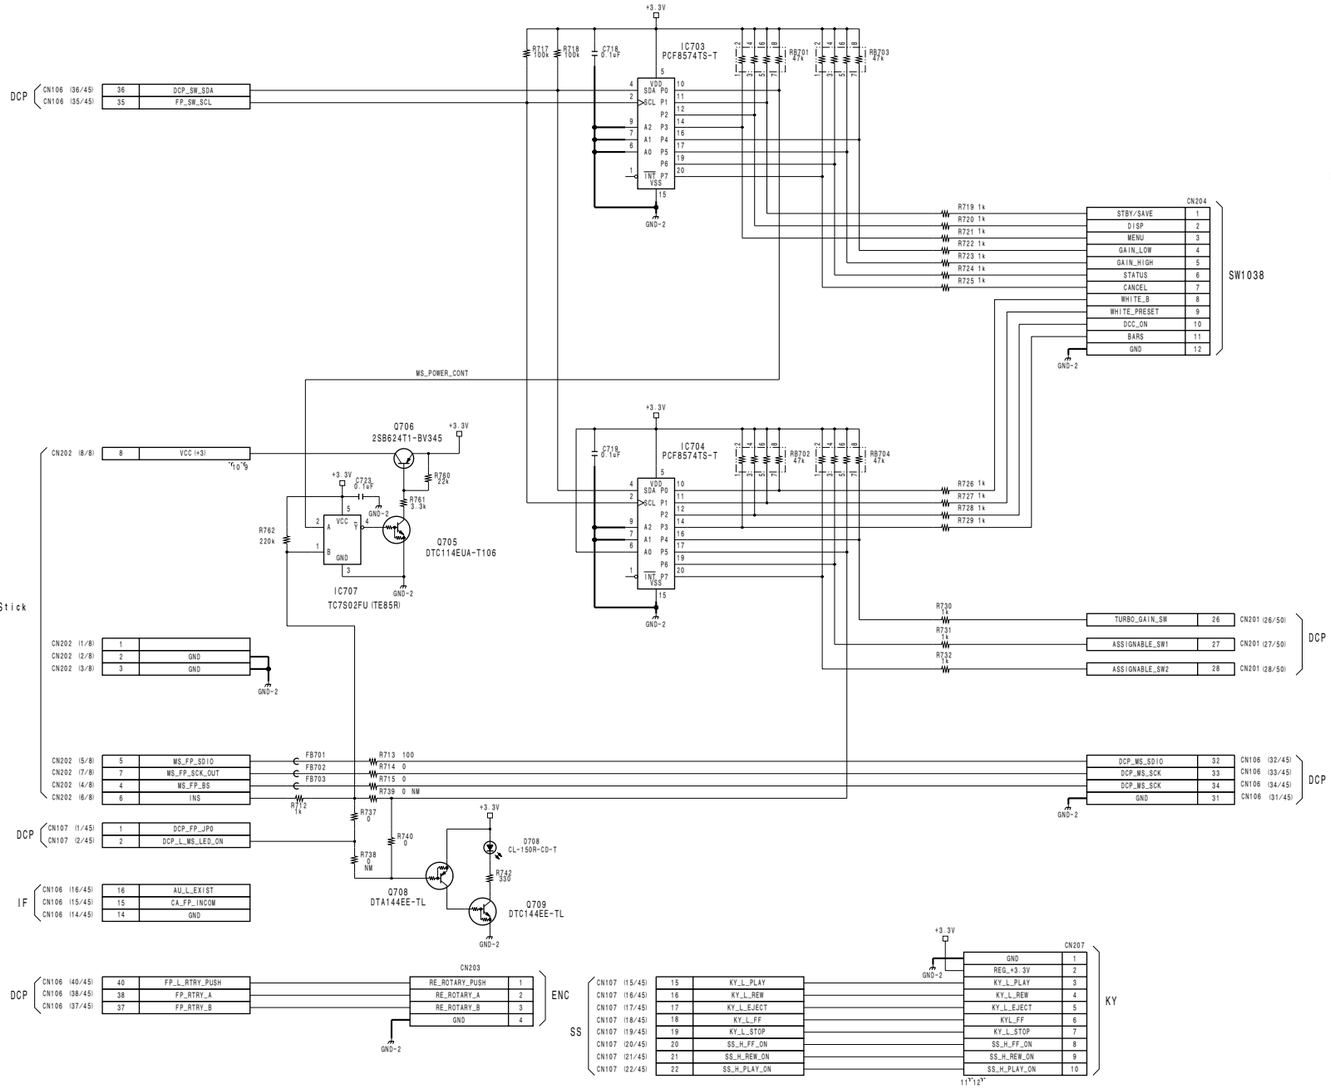

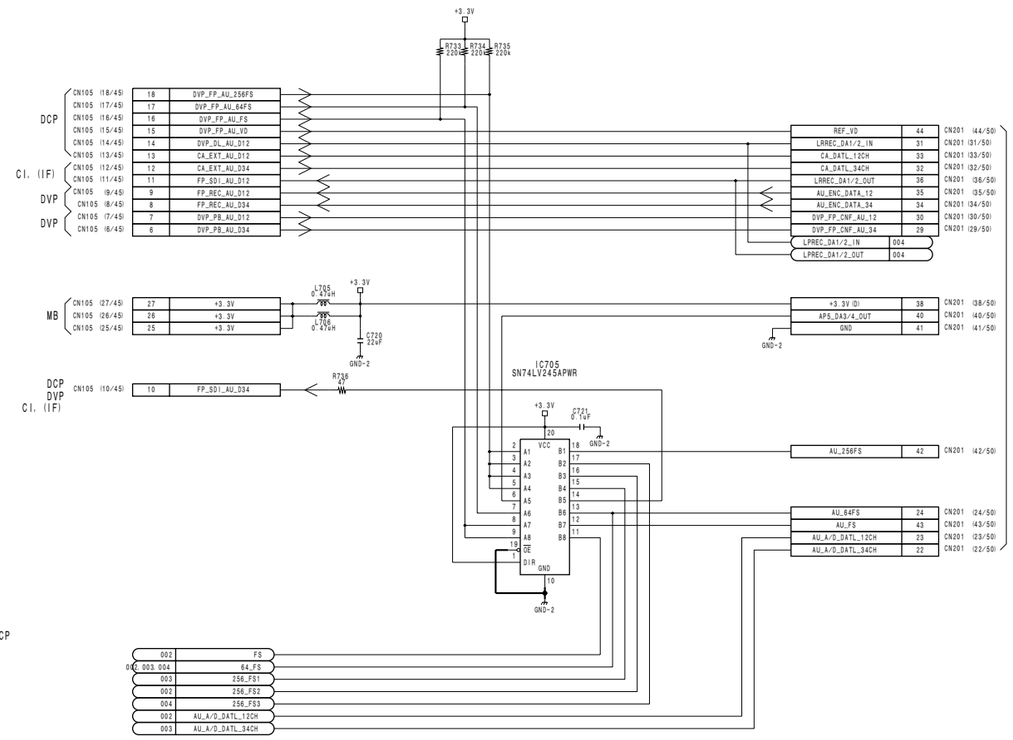

FP-121 (5/6)
BOARD NO. 1-678-732-12, 13
LOT NO. 083-
HDW-750_FP-121_015_5

FP-121 (6/6)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

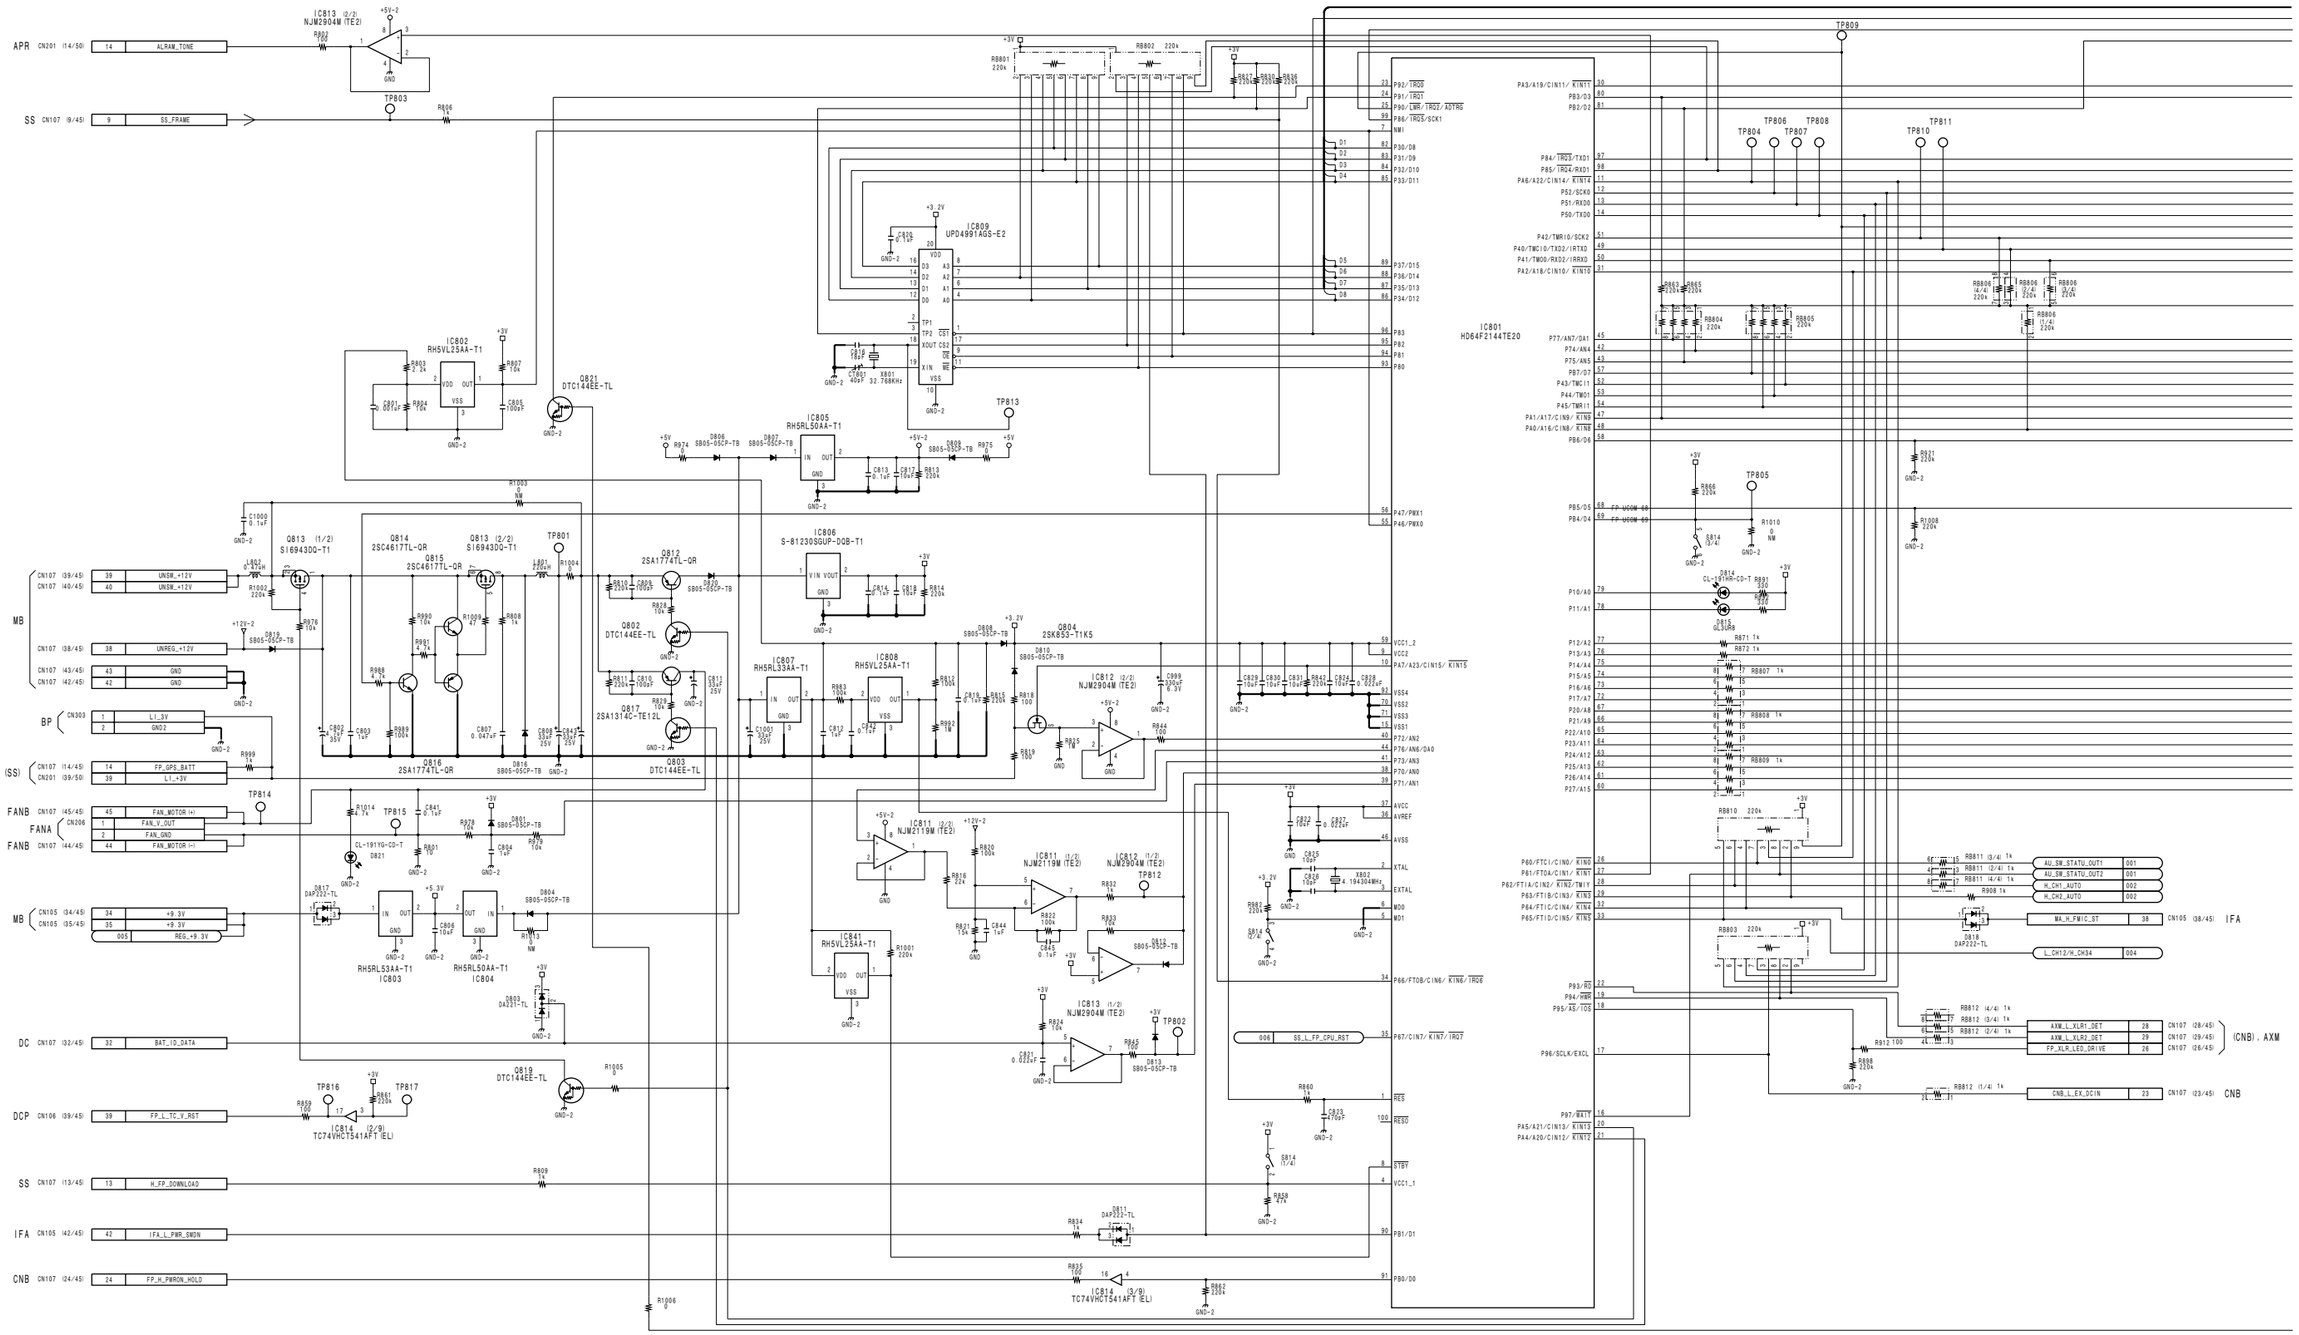

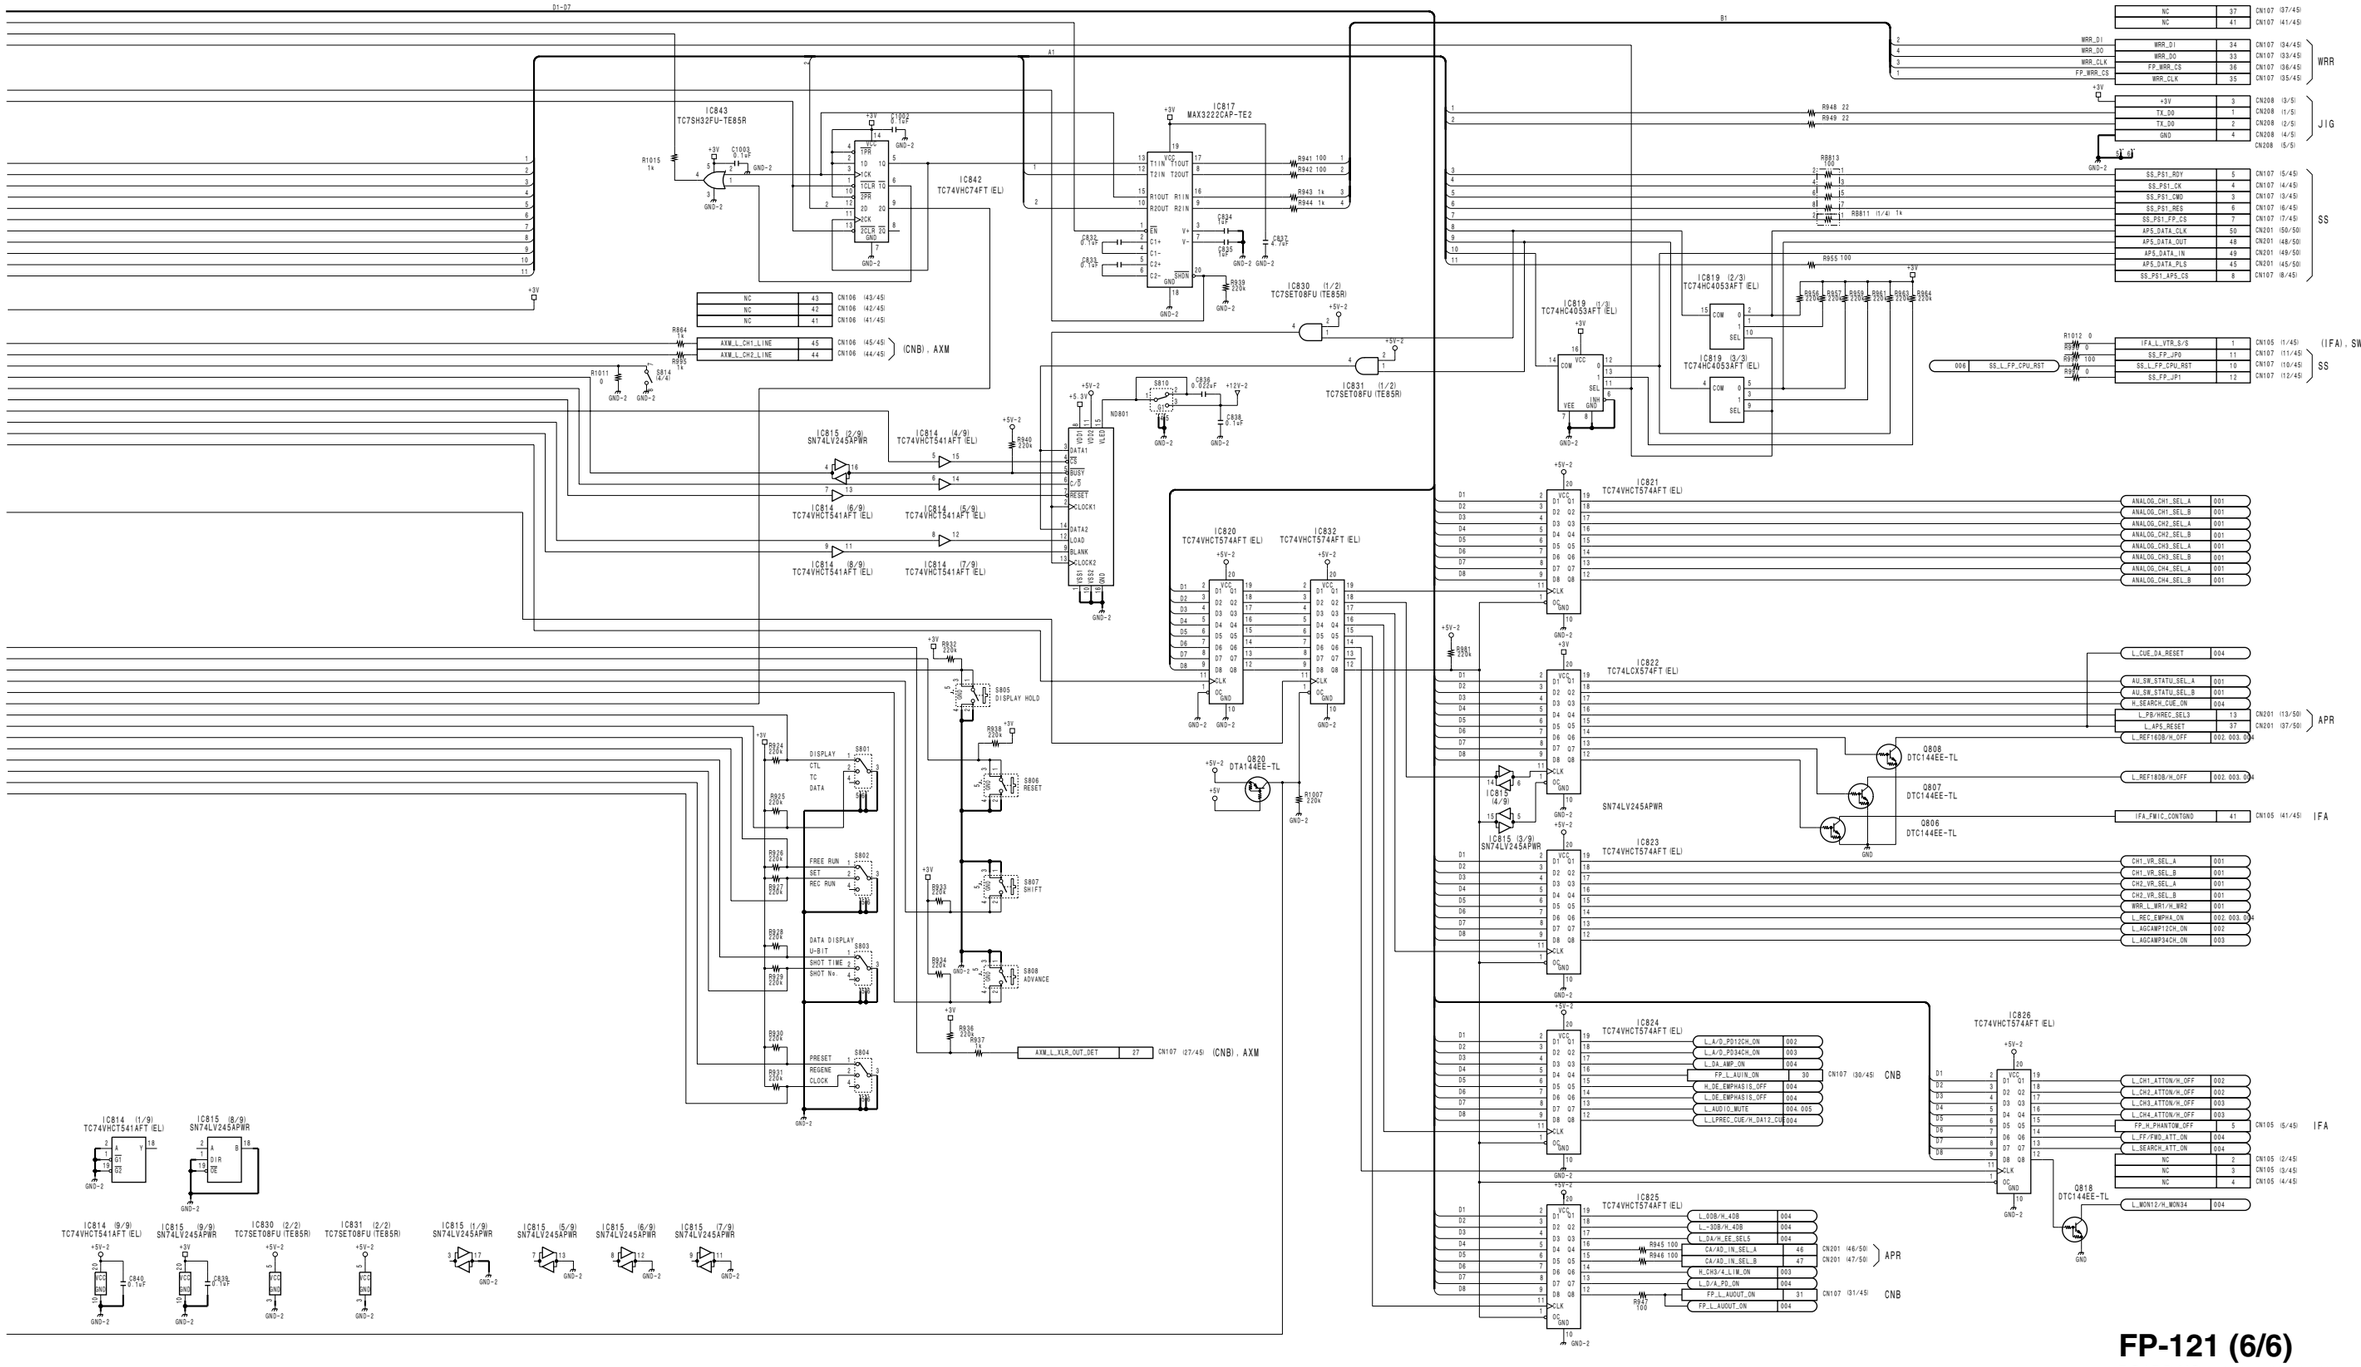

FP-121 (6/6)

BOARD NO. 1-678-732-12, 13

LOT NO. 083-

HDW-750_FP-121_015_6

IFA-11 (1/2)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

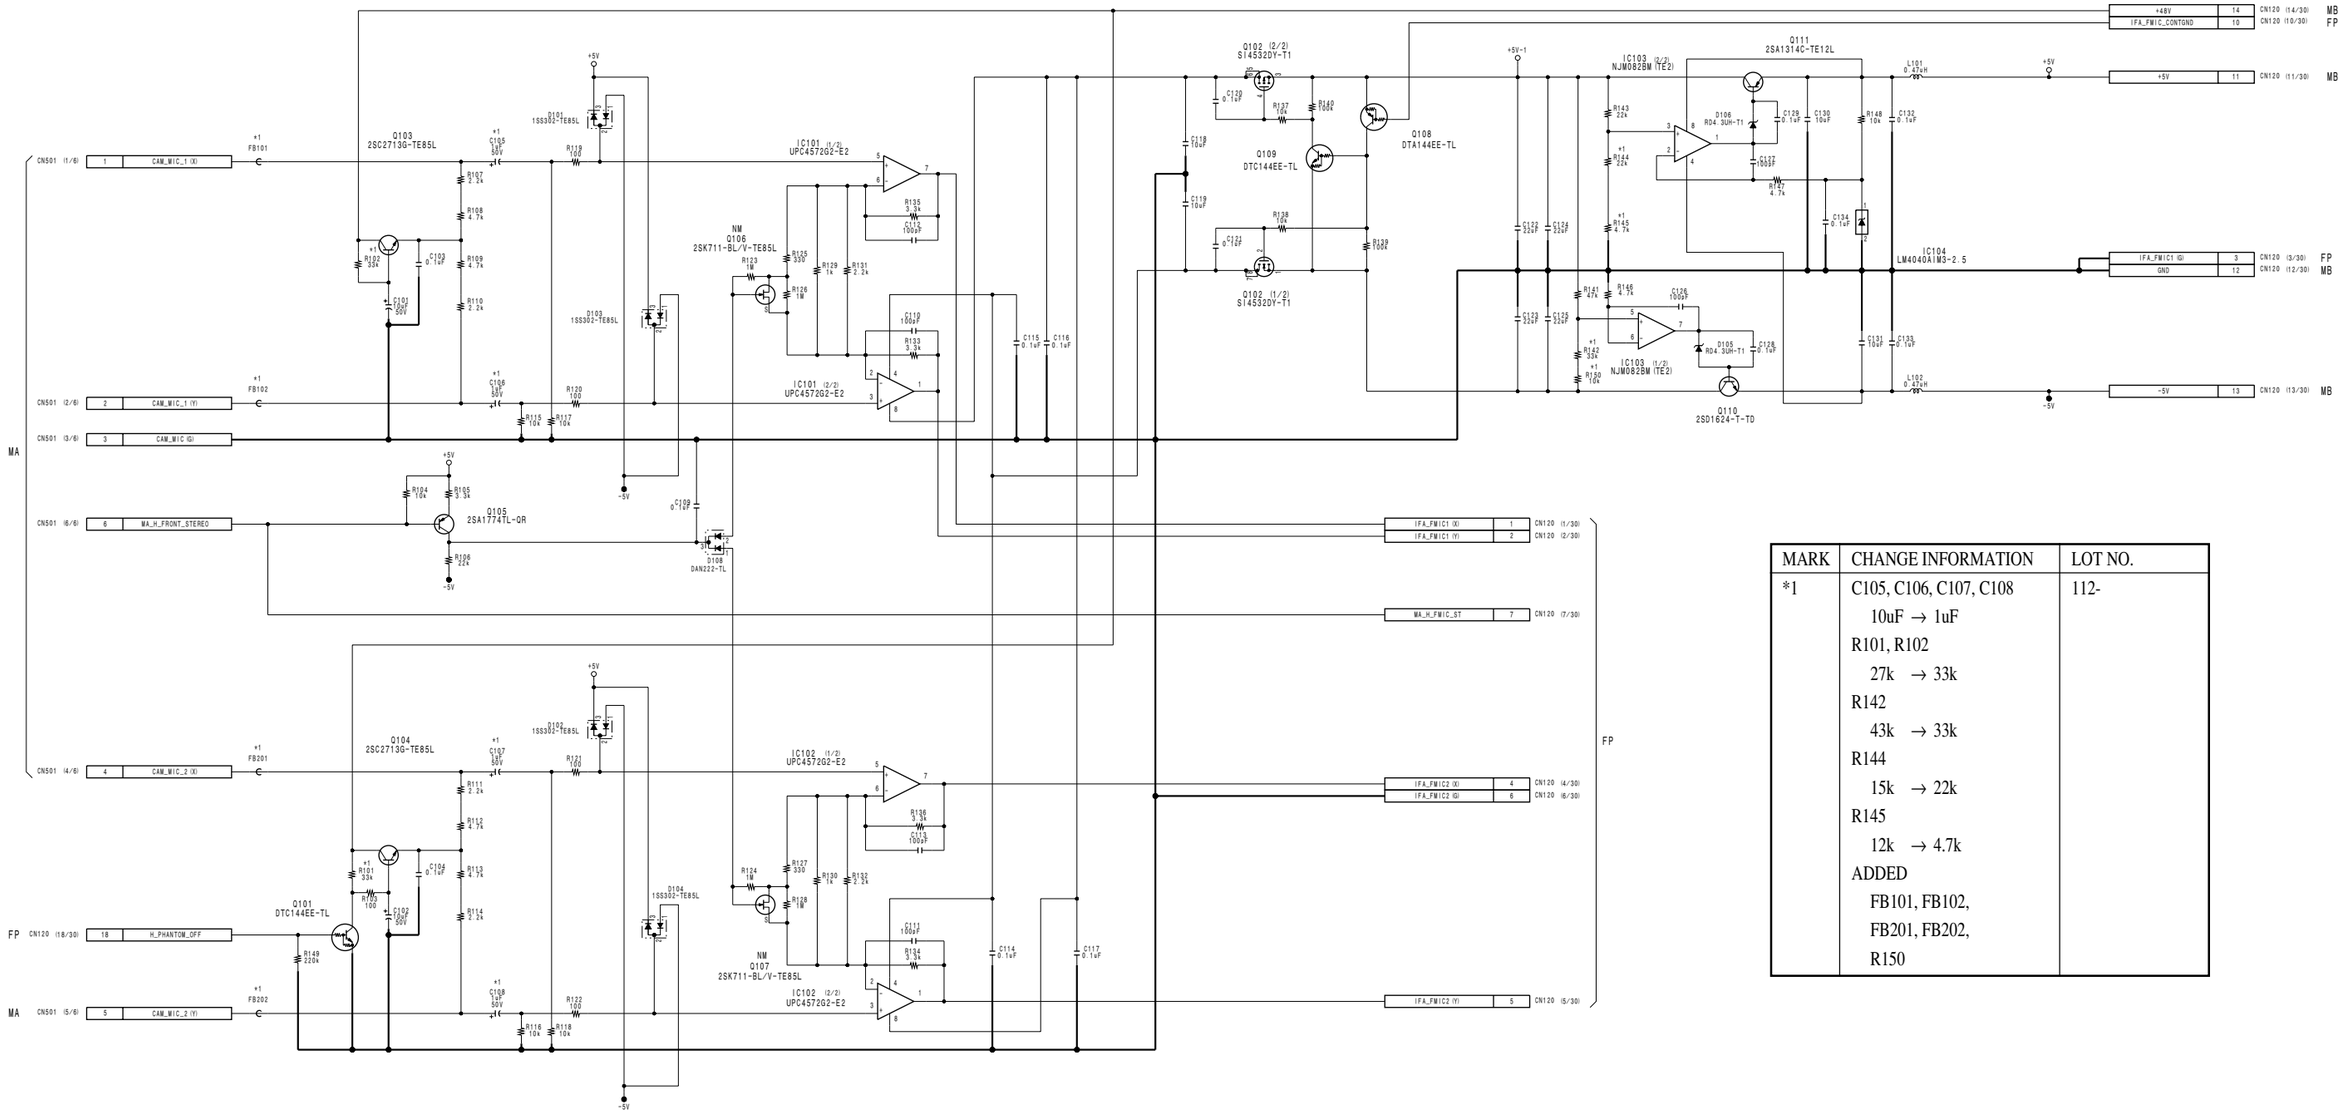

MARK	CHANGE INFORMATION	LOT NO.
*1	C105, C106, C107, C108 10uF → 1uF R101, R102 27k → 33k R142 43k → 33k R144 15k → 22k R145 12k → 4.7k ADDED FB101, FB102, FB201, FB202, R150	112-

IFA-11 (1/2)
BOARD NO. 1-678-752-12, 13
LOT NO. 083-
HDW-750_IFA-11_015_1

4-130

http://getMANUAL.com

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

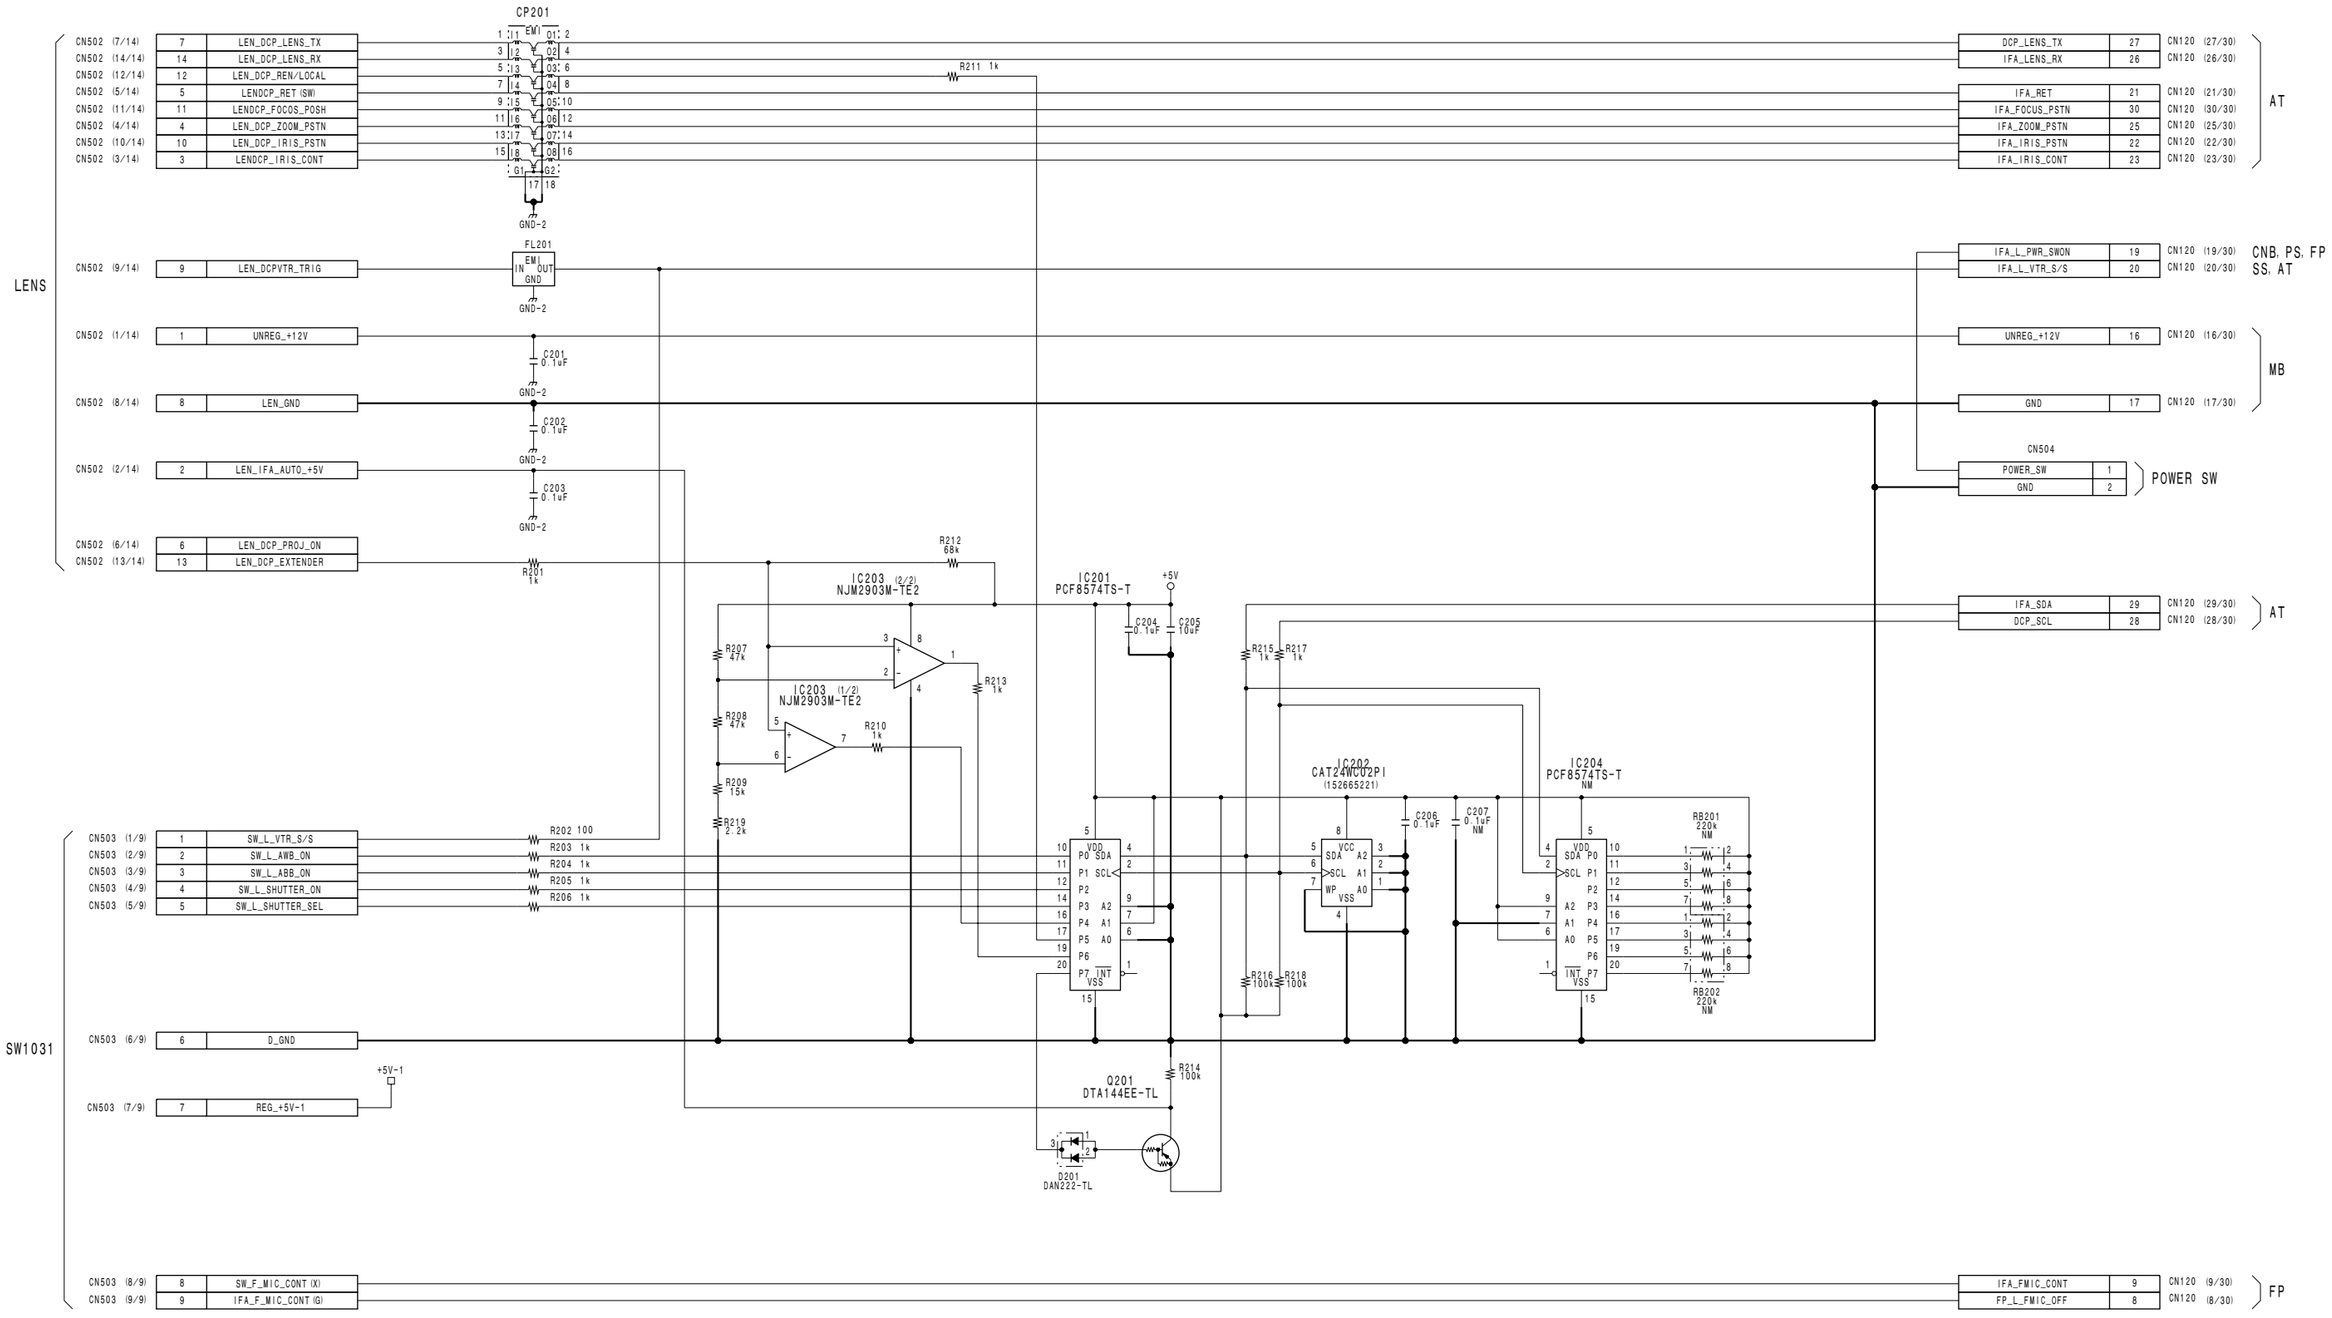

IFA-11 (2/2)

BOARD NO. 1-678-752-12, 13
LOT NO. 083-
HDW-750_IFA-11_015_2

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

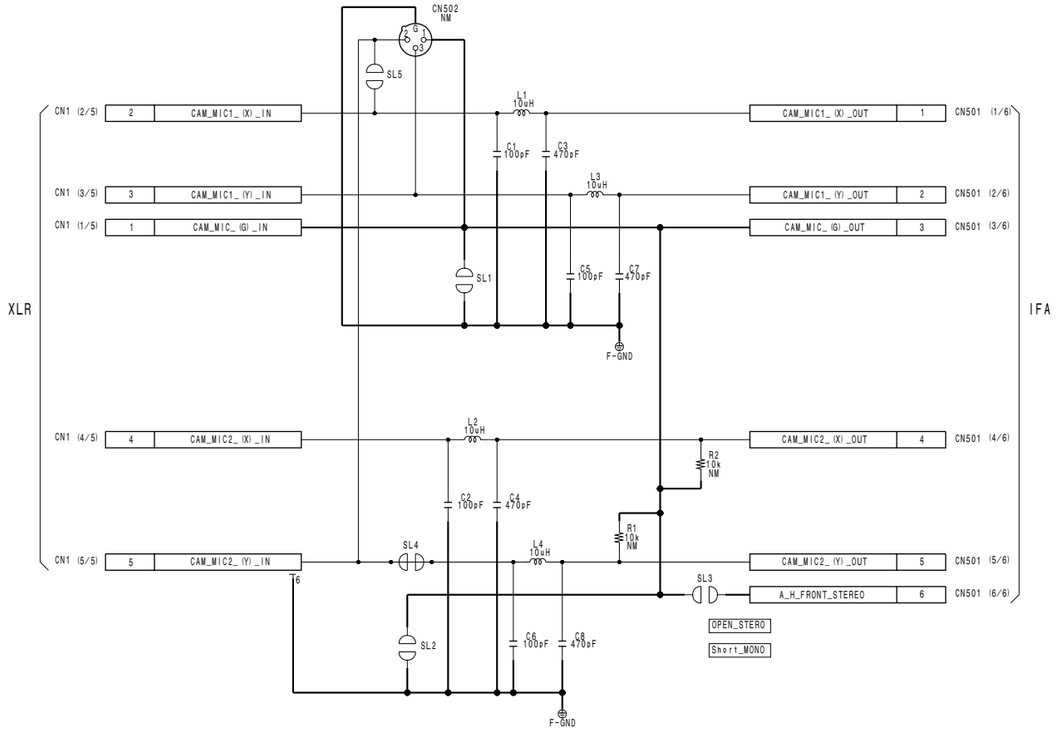

MA-103
BOARD NO. 1-678-753-12
LOT NO. 083-
HDW-750_MA-103_015_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

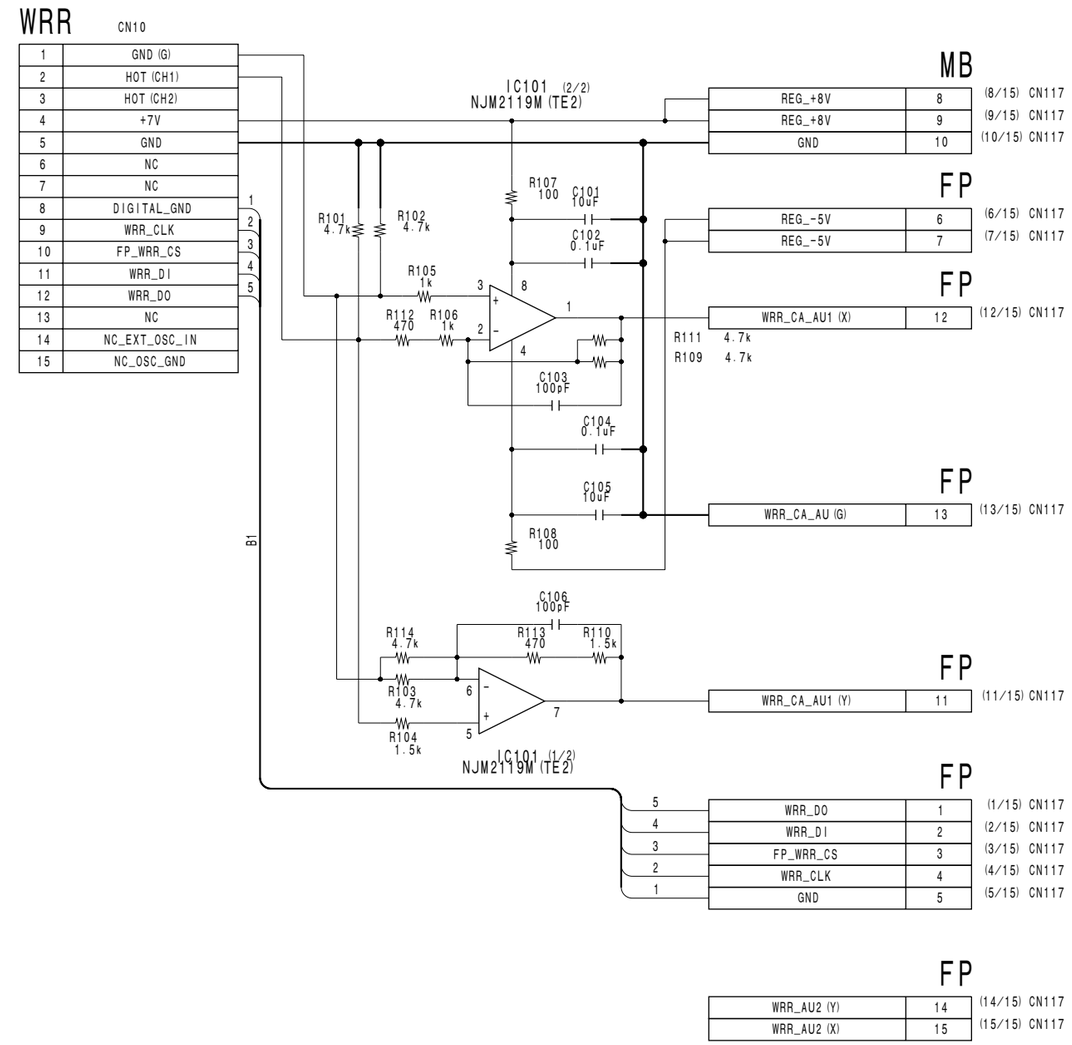

RX-54
BOARD NO. 1-678-754-11
LOT NO. 083-
HDW-750_RX-54_013_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

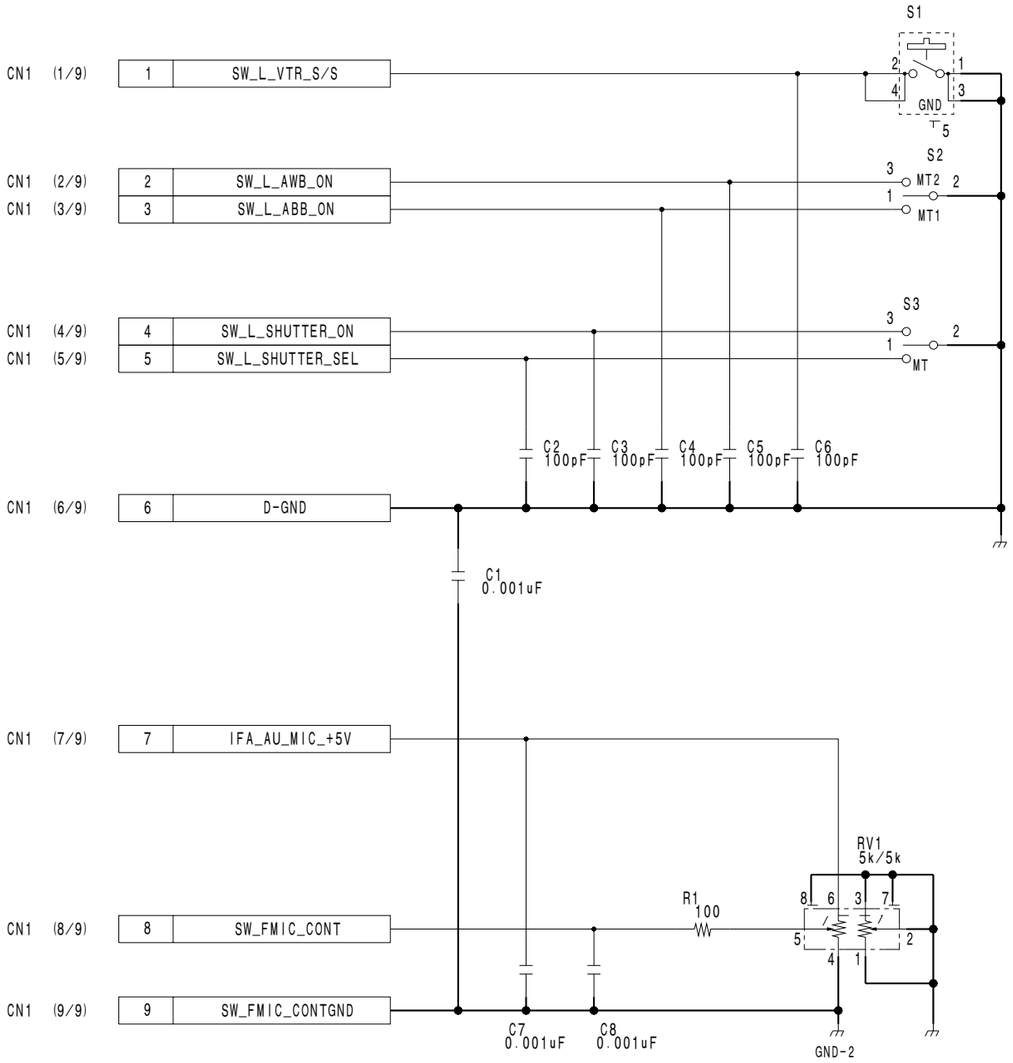

SW-1031

BOARD NO. 1-678-625-11
LOT NO. 083-

HDW-750_SW-1031_004_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

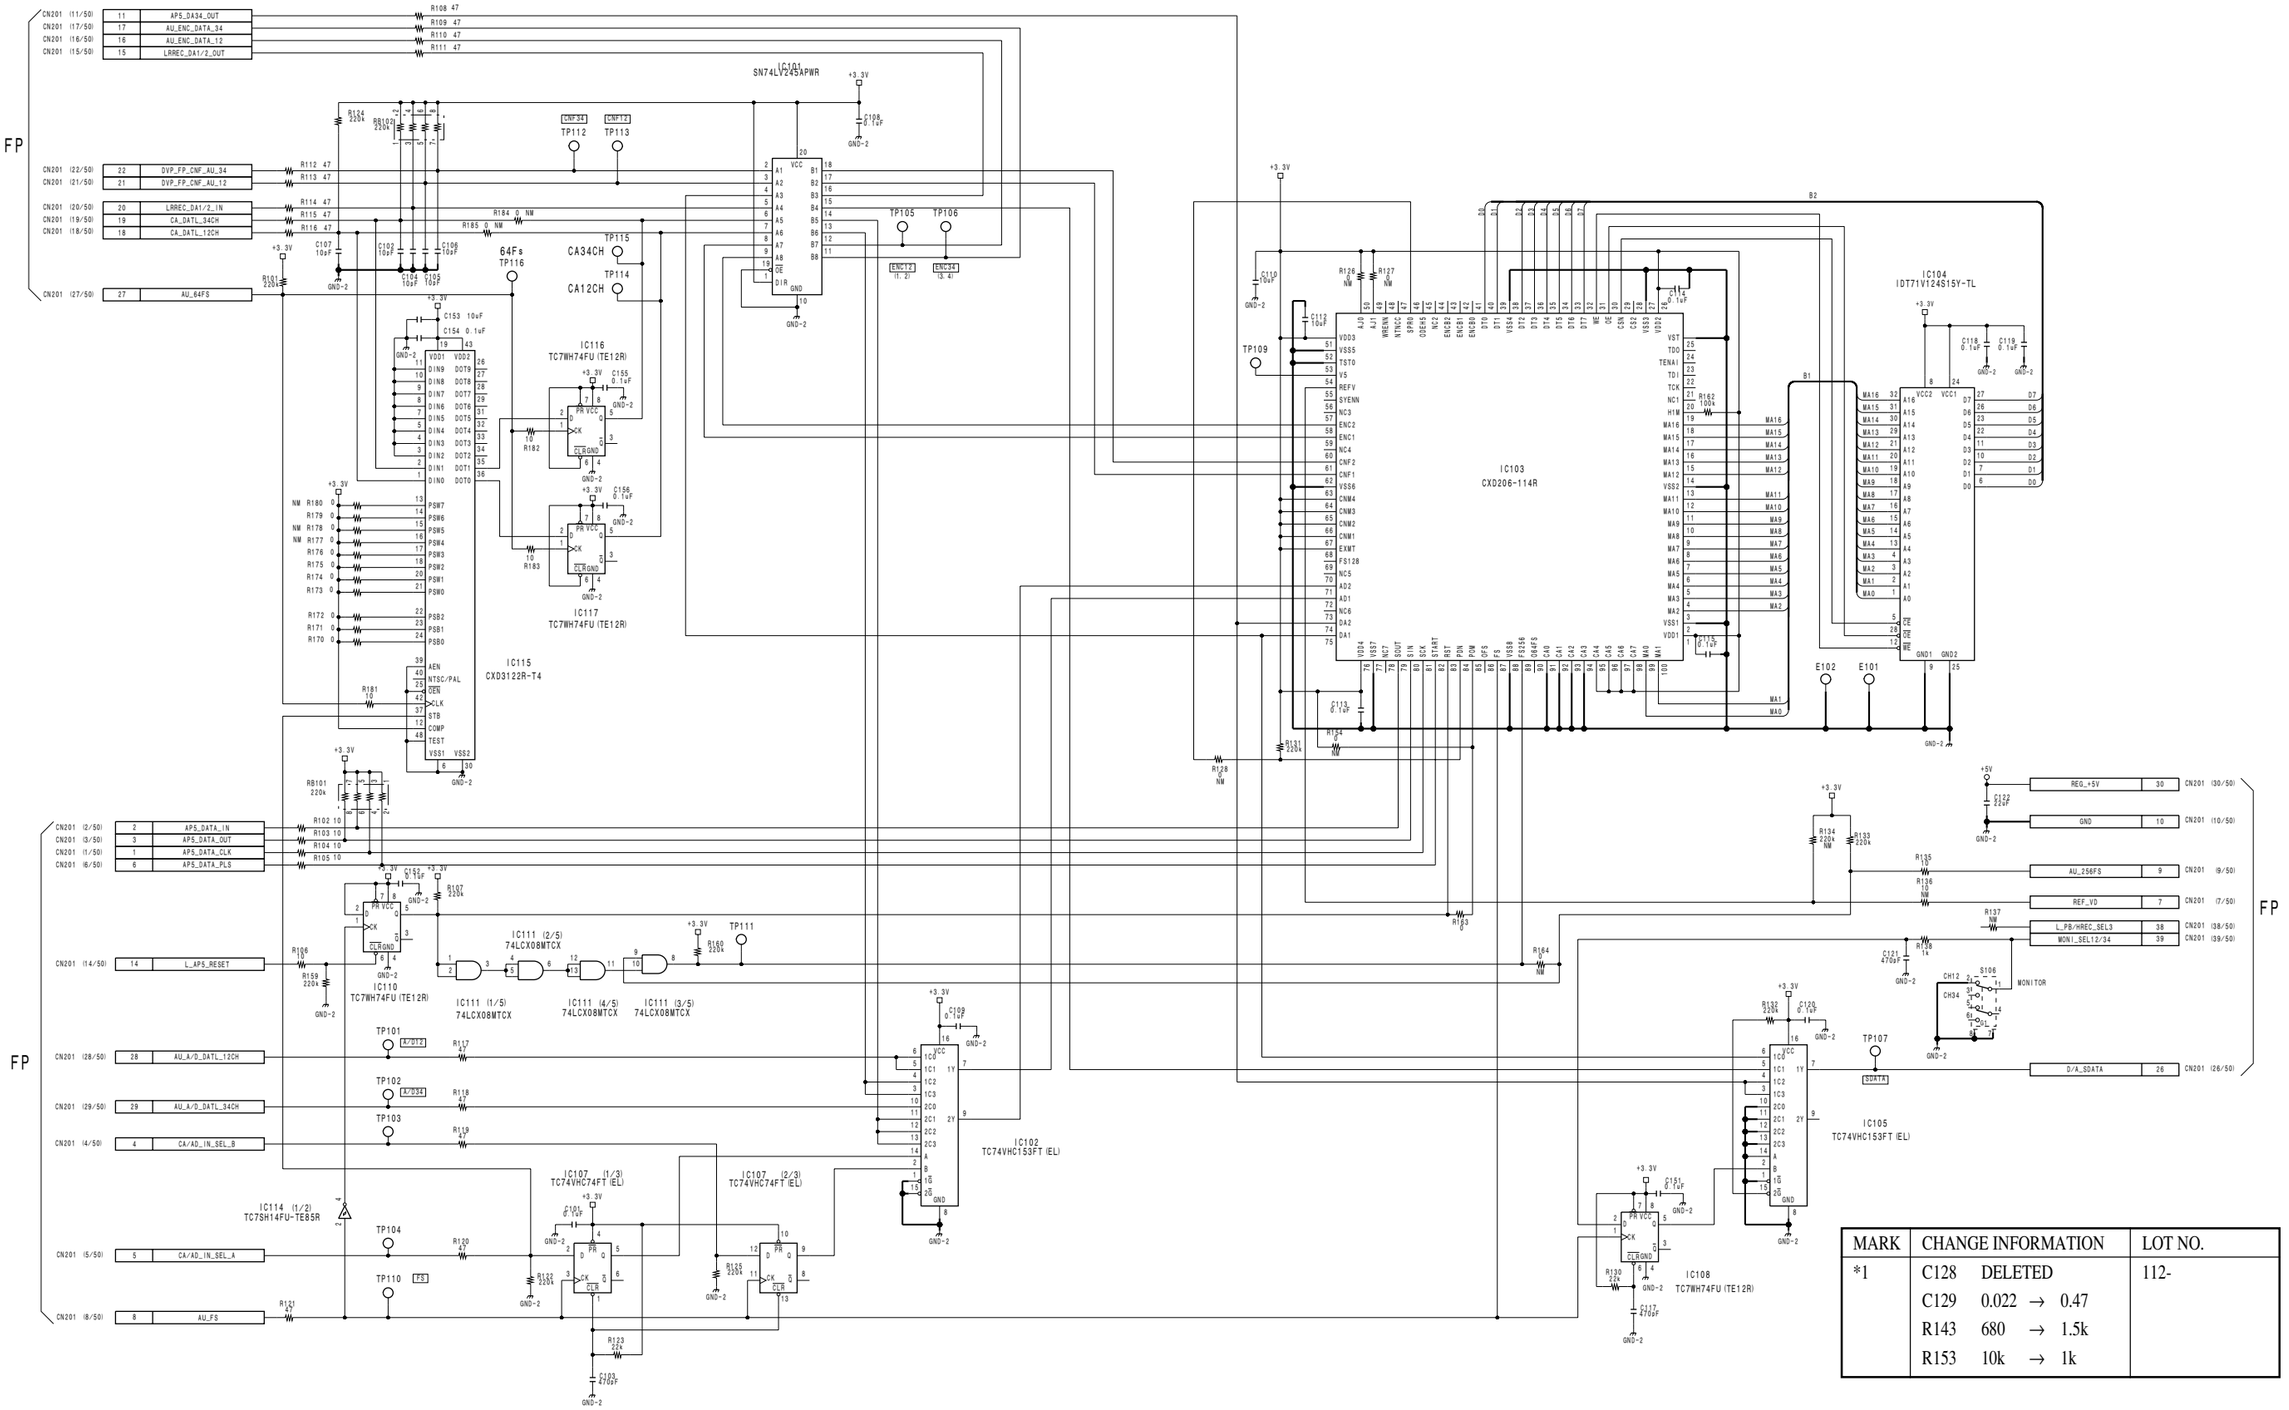

MARK	CHANGE INFORMATION	LOT NO.
*1	C128 DELETED	112-
	C129 0.022 → 0.47	
	R143 680 → 1.5k	
	R153 10k → 1k	

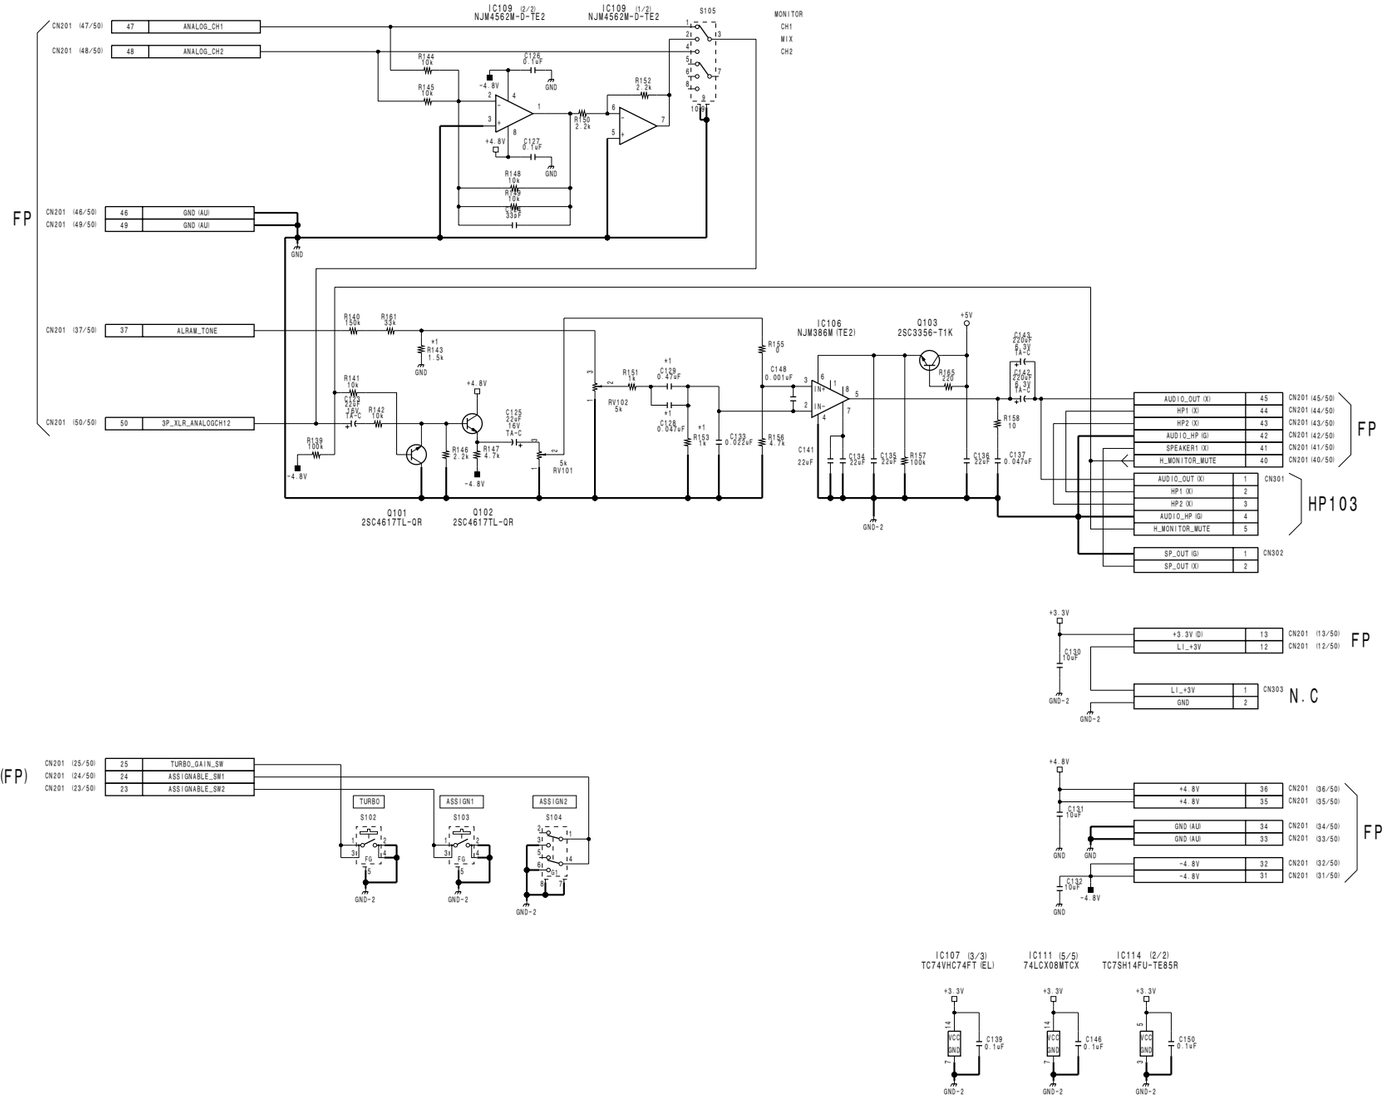

APR-59
BOARD NO. 1-679-771-12
LOT NO. 083-
HDW-750_APR-59_016_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

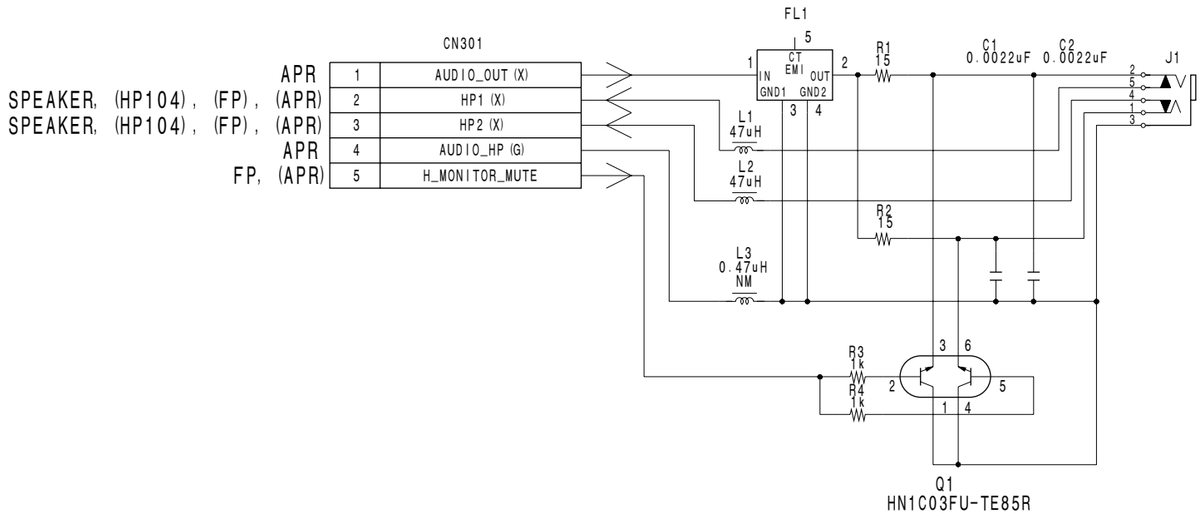

HP-103
BOARD NO. 1-678-746-11
LOT NO. 083-
HDW-750_HP-103_014_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

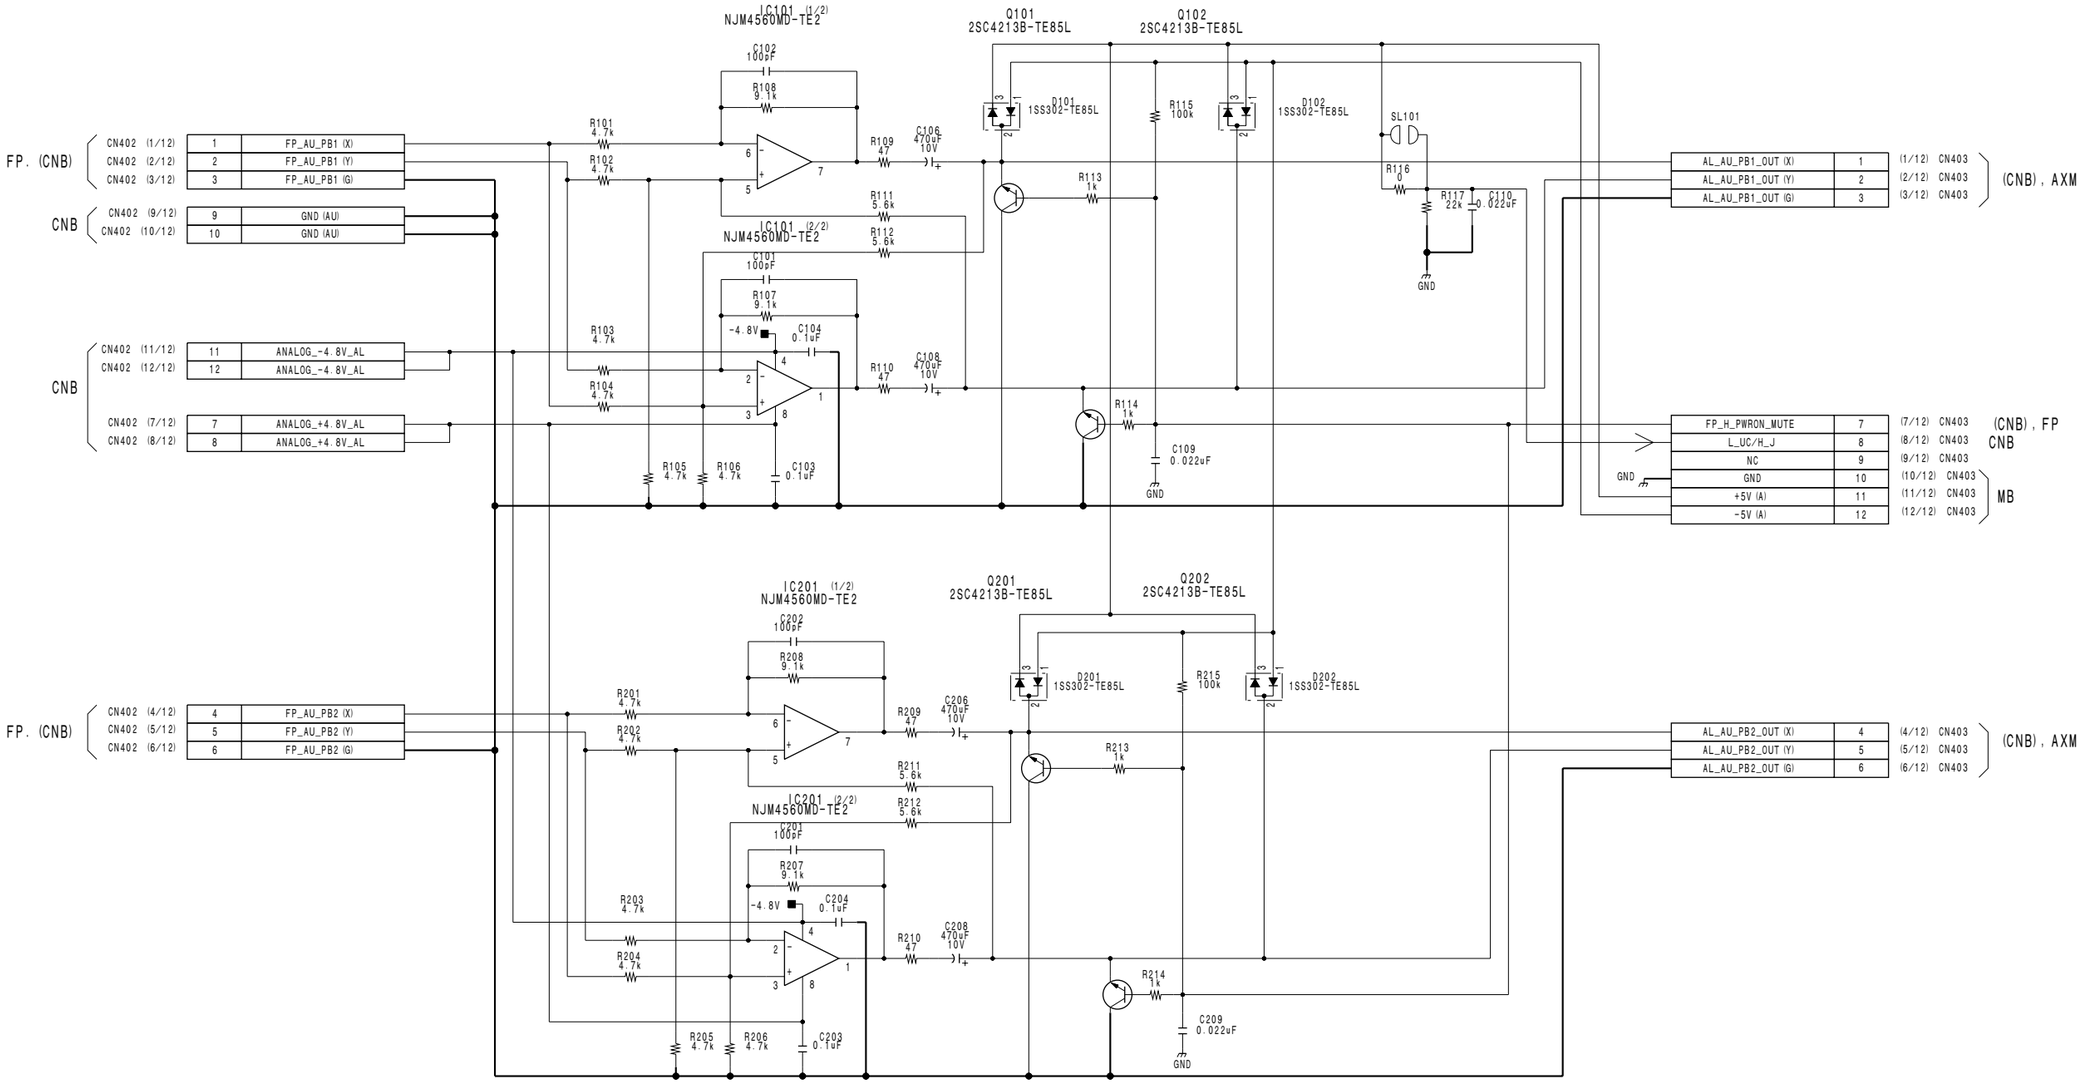

AL-43
BOARD NO. 1-678-750-11
LOT NO. 083-
HDW-750_AL-43_012_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

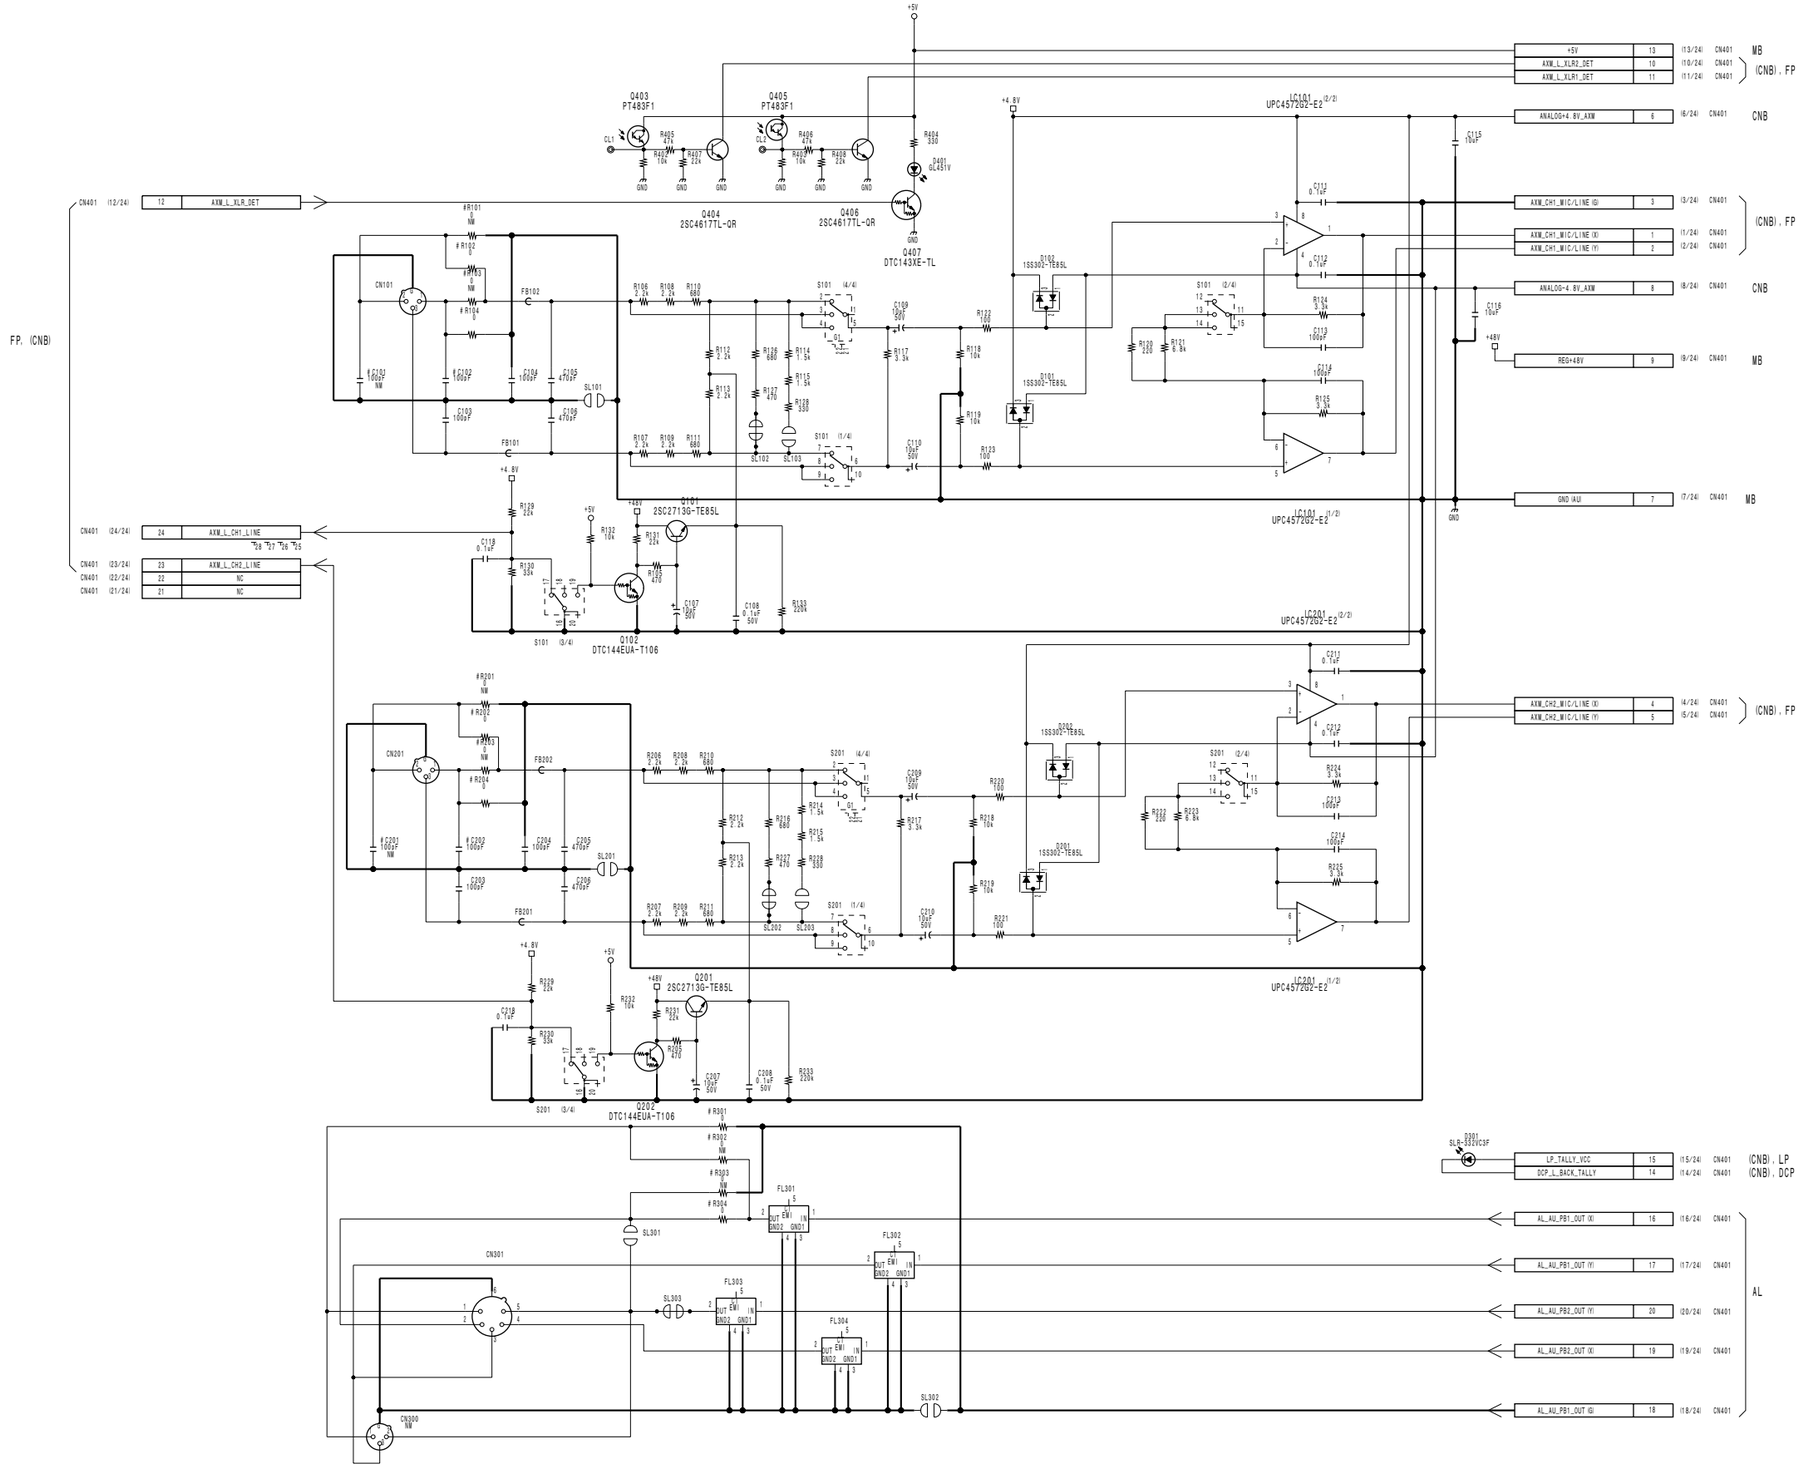

SL / IN	SL102	SL103	SL202	SL203
-3dBu	OPEN	OPEN	OPEN	OPEN
0dBu	OPEN	SHOURT	OPEN	SHOURT
+4dBu	SHOURT	OPEN	SHOURT	OPEN

AXM-24
BOARD NO. 1-678-748-12
LOT NO. 083-
HDW-750_AXM-24_014_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

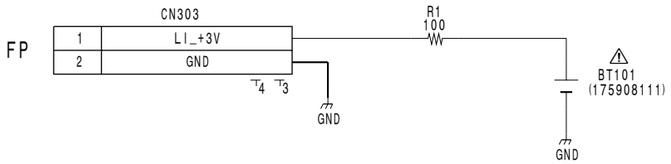

BP-33

BOARD NO. 1-678-734-12
LOT NO. 083-
HDW-750_BP-33_015_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

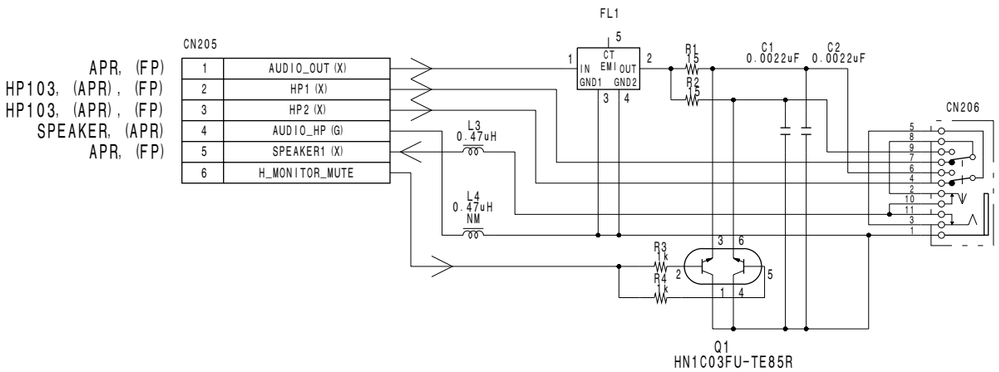

HP-104

BOARD NO. 1-678-747-11
LOT NO. 083-
HDW-750_HP-104_014_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

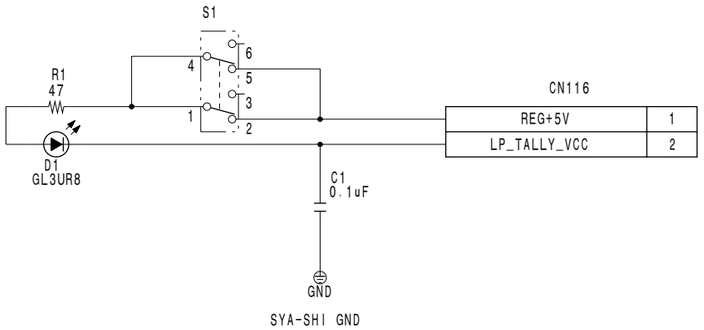

LP-114

BOARD NO. 1-678-623-11
LOT NO. 083-
HDW-750_LP-114_001_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

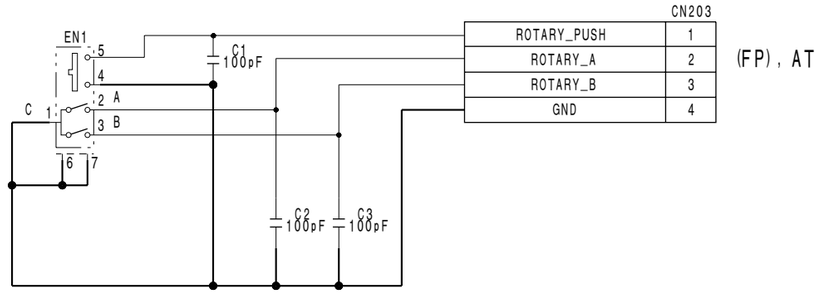

ENC-61

BOARD NO. 1-678-744-11
LOT NO. 083-
HDW-750_ENC-61_013_1

http://getMANUAL.com

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

SS, (FP)

CN1

10	GND
9	+3V
8	KY_L_PLAY
7	KY_L_REW
6	KY_L_EJECT
5	KY_L_FF
4	KY_L_STOP
3	SS_H_FF_ON
2	SS_H_REW_ON
1	SS_H_PLAY_ON

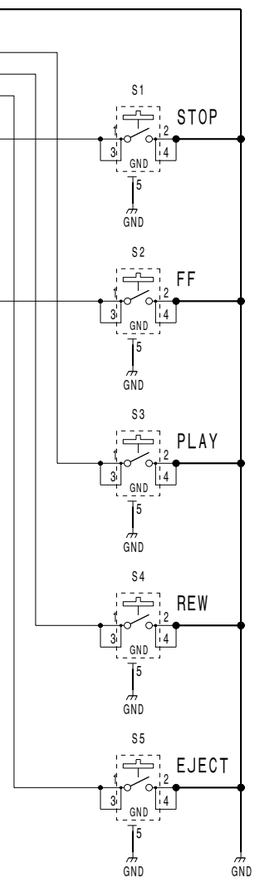

KY-475
BOARD NO. 1-678-742-11
LOT NO. 083-
HDW-750_KY-475_014_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

AT, (FP)

CN204

1	STBY/SAVE
2	DISP
3	MENU
4	GAIN_LOW
5	GAIN_HIGH
6	STATUS
7	CANCEL
8	WHITE_B
9	WHITE_PRESET
10	DCC_ON
11	BARS
12	GND

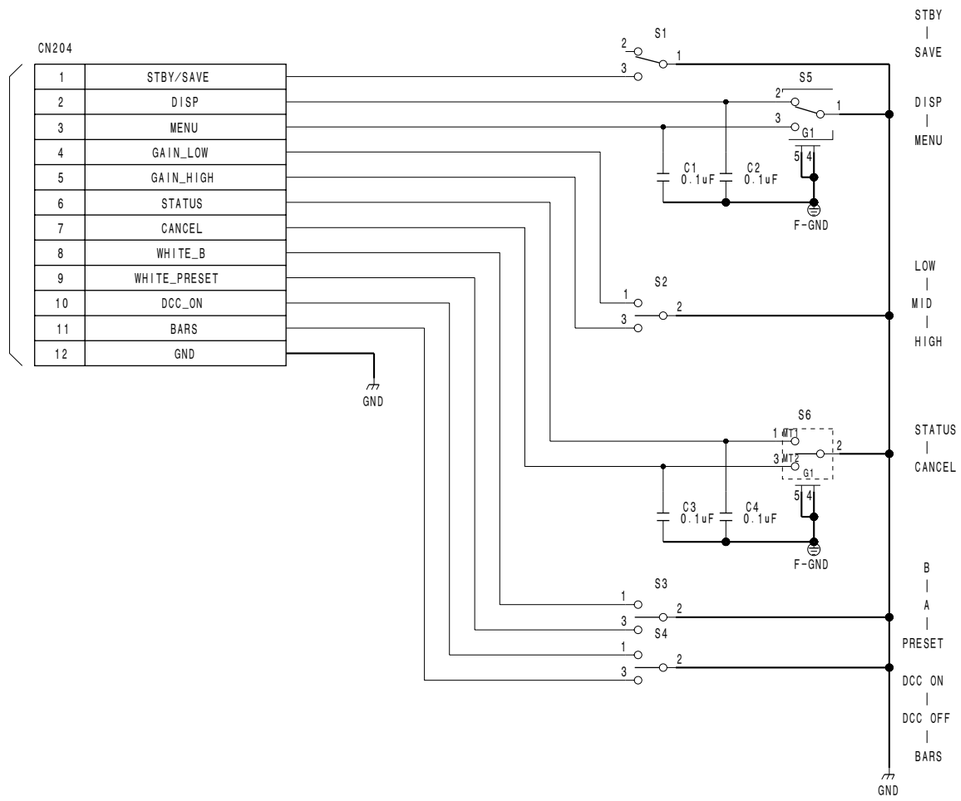

SW-1038
BOARD NO. 1-678-745-12
LOT NO. 083-
HDW-750_SW-1038_013_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

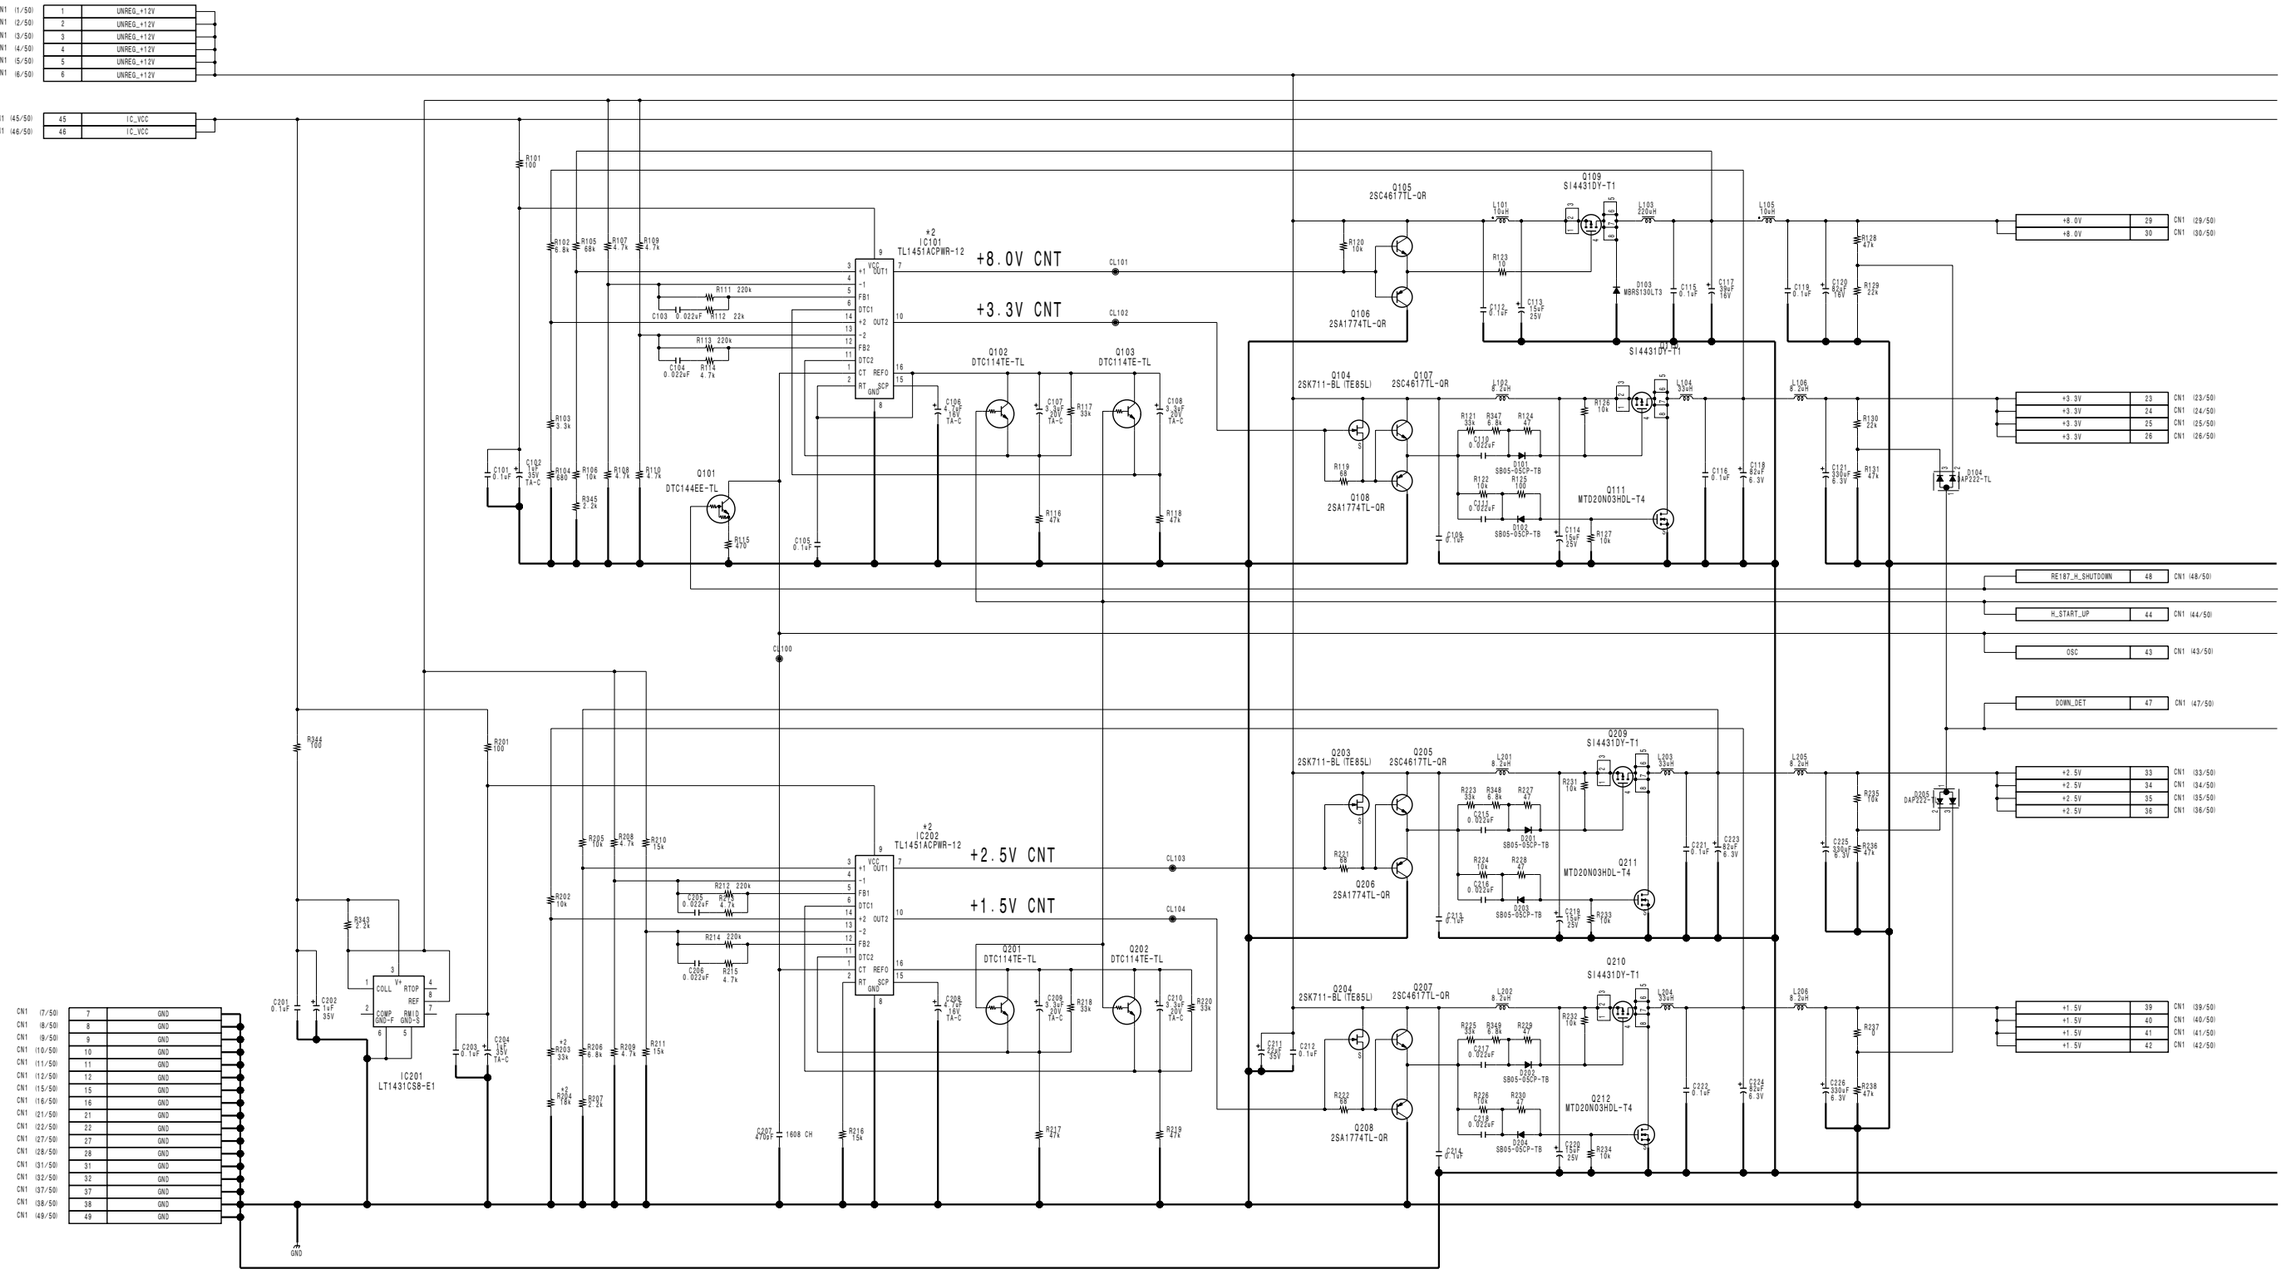

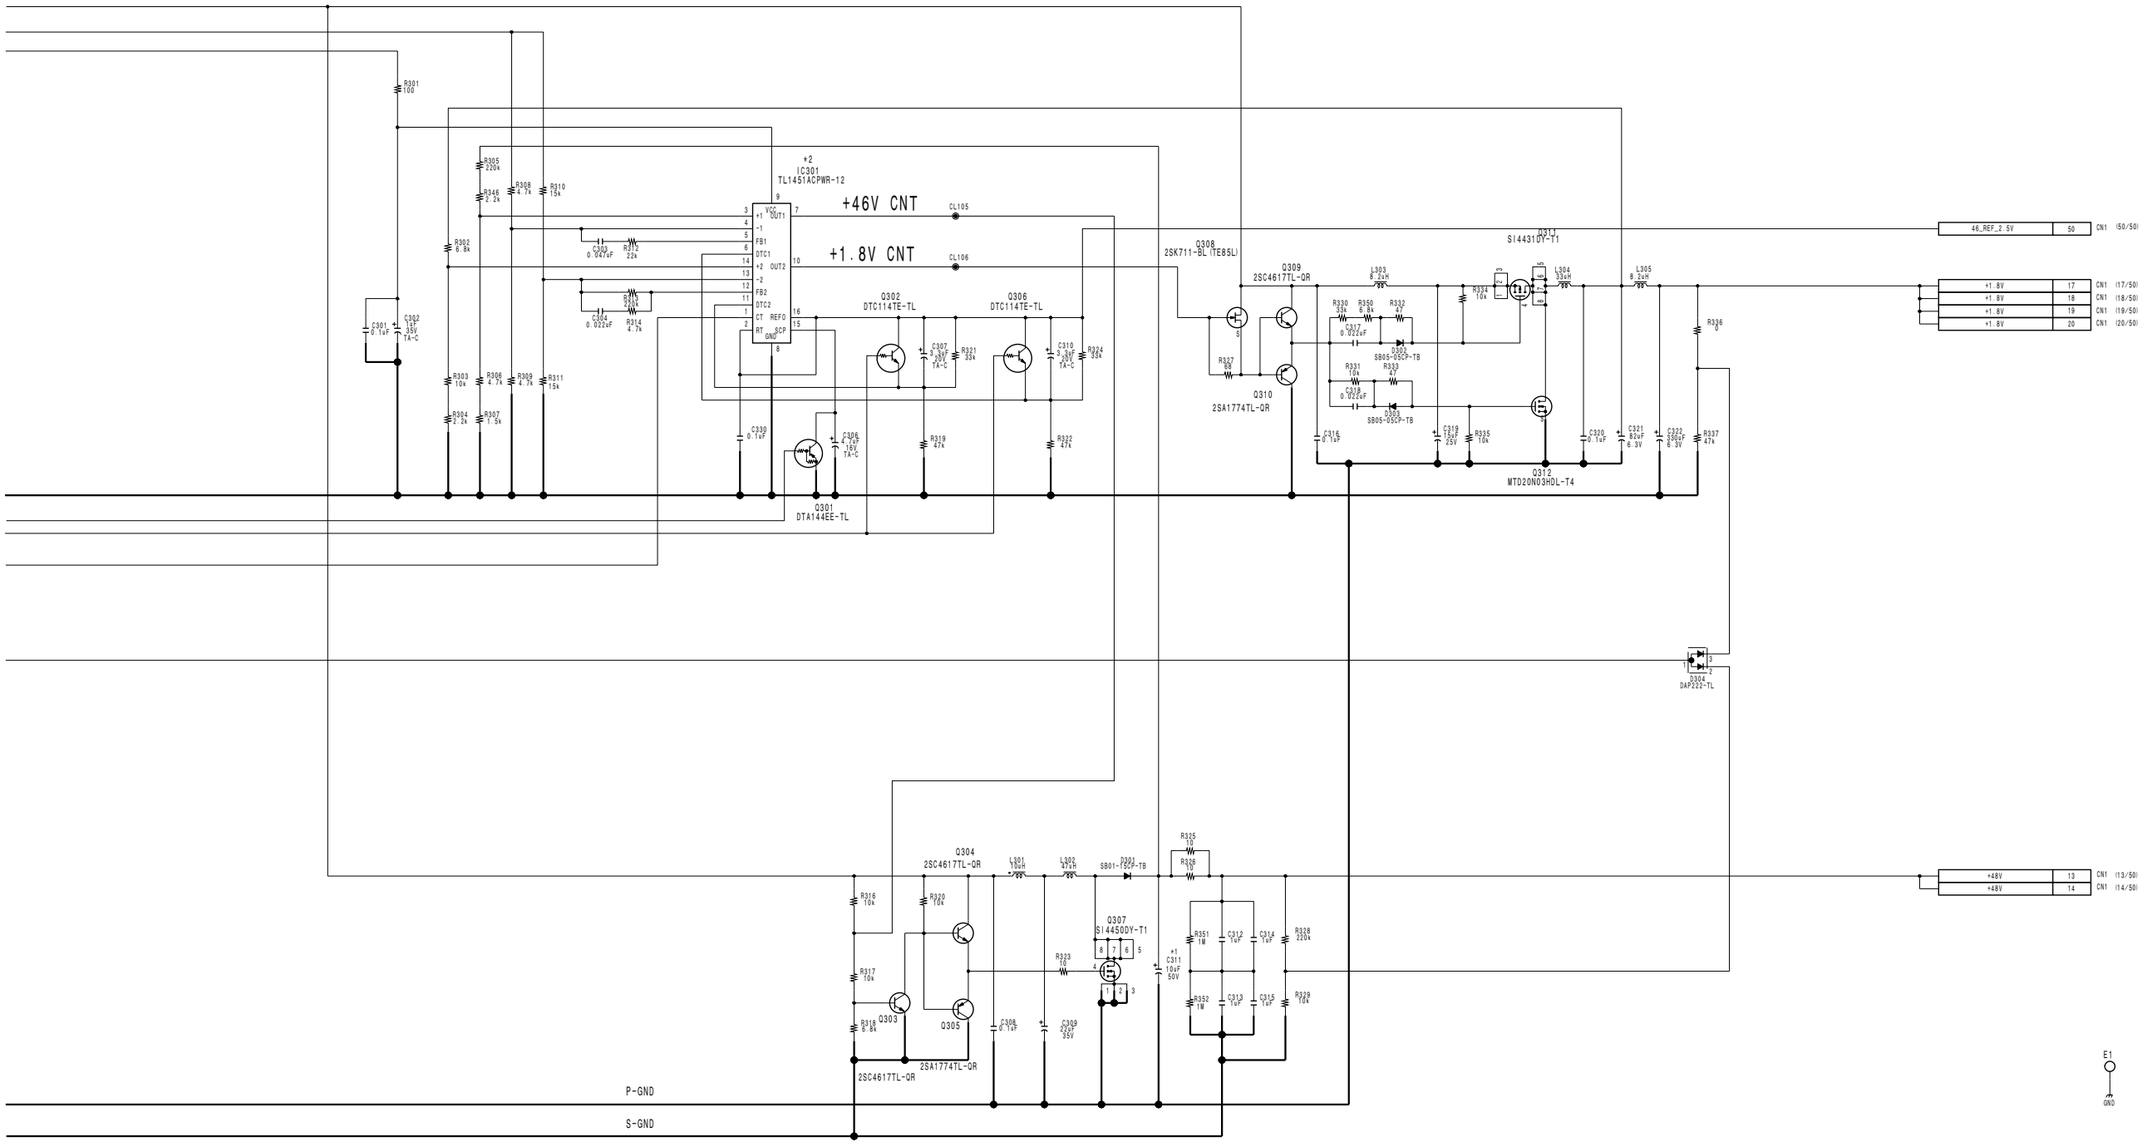

MARK	CHANGE INFORMATION	LOT NO.
*1	C311 22uF → 10uF	0A4-
*2	IC101, IC201, IC301 TL1451ACPW-E20 → TL1451ACPWR-12 R203 47k → 33k R204 2.2k → 18k	112-

RE-186
BOARD NO. 1-678-735-11
LOT NO. 083-
HDW-750_RE-186_004_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

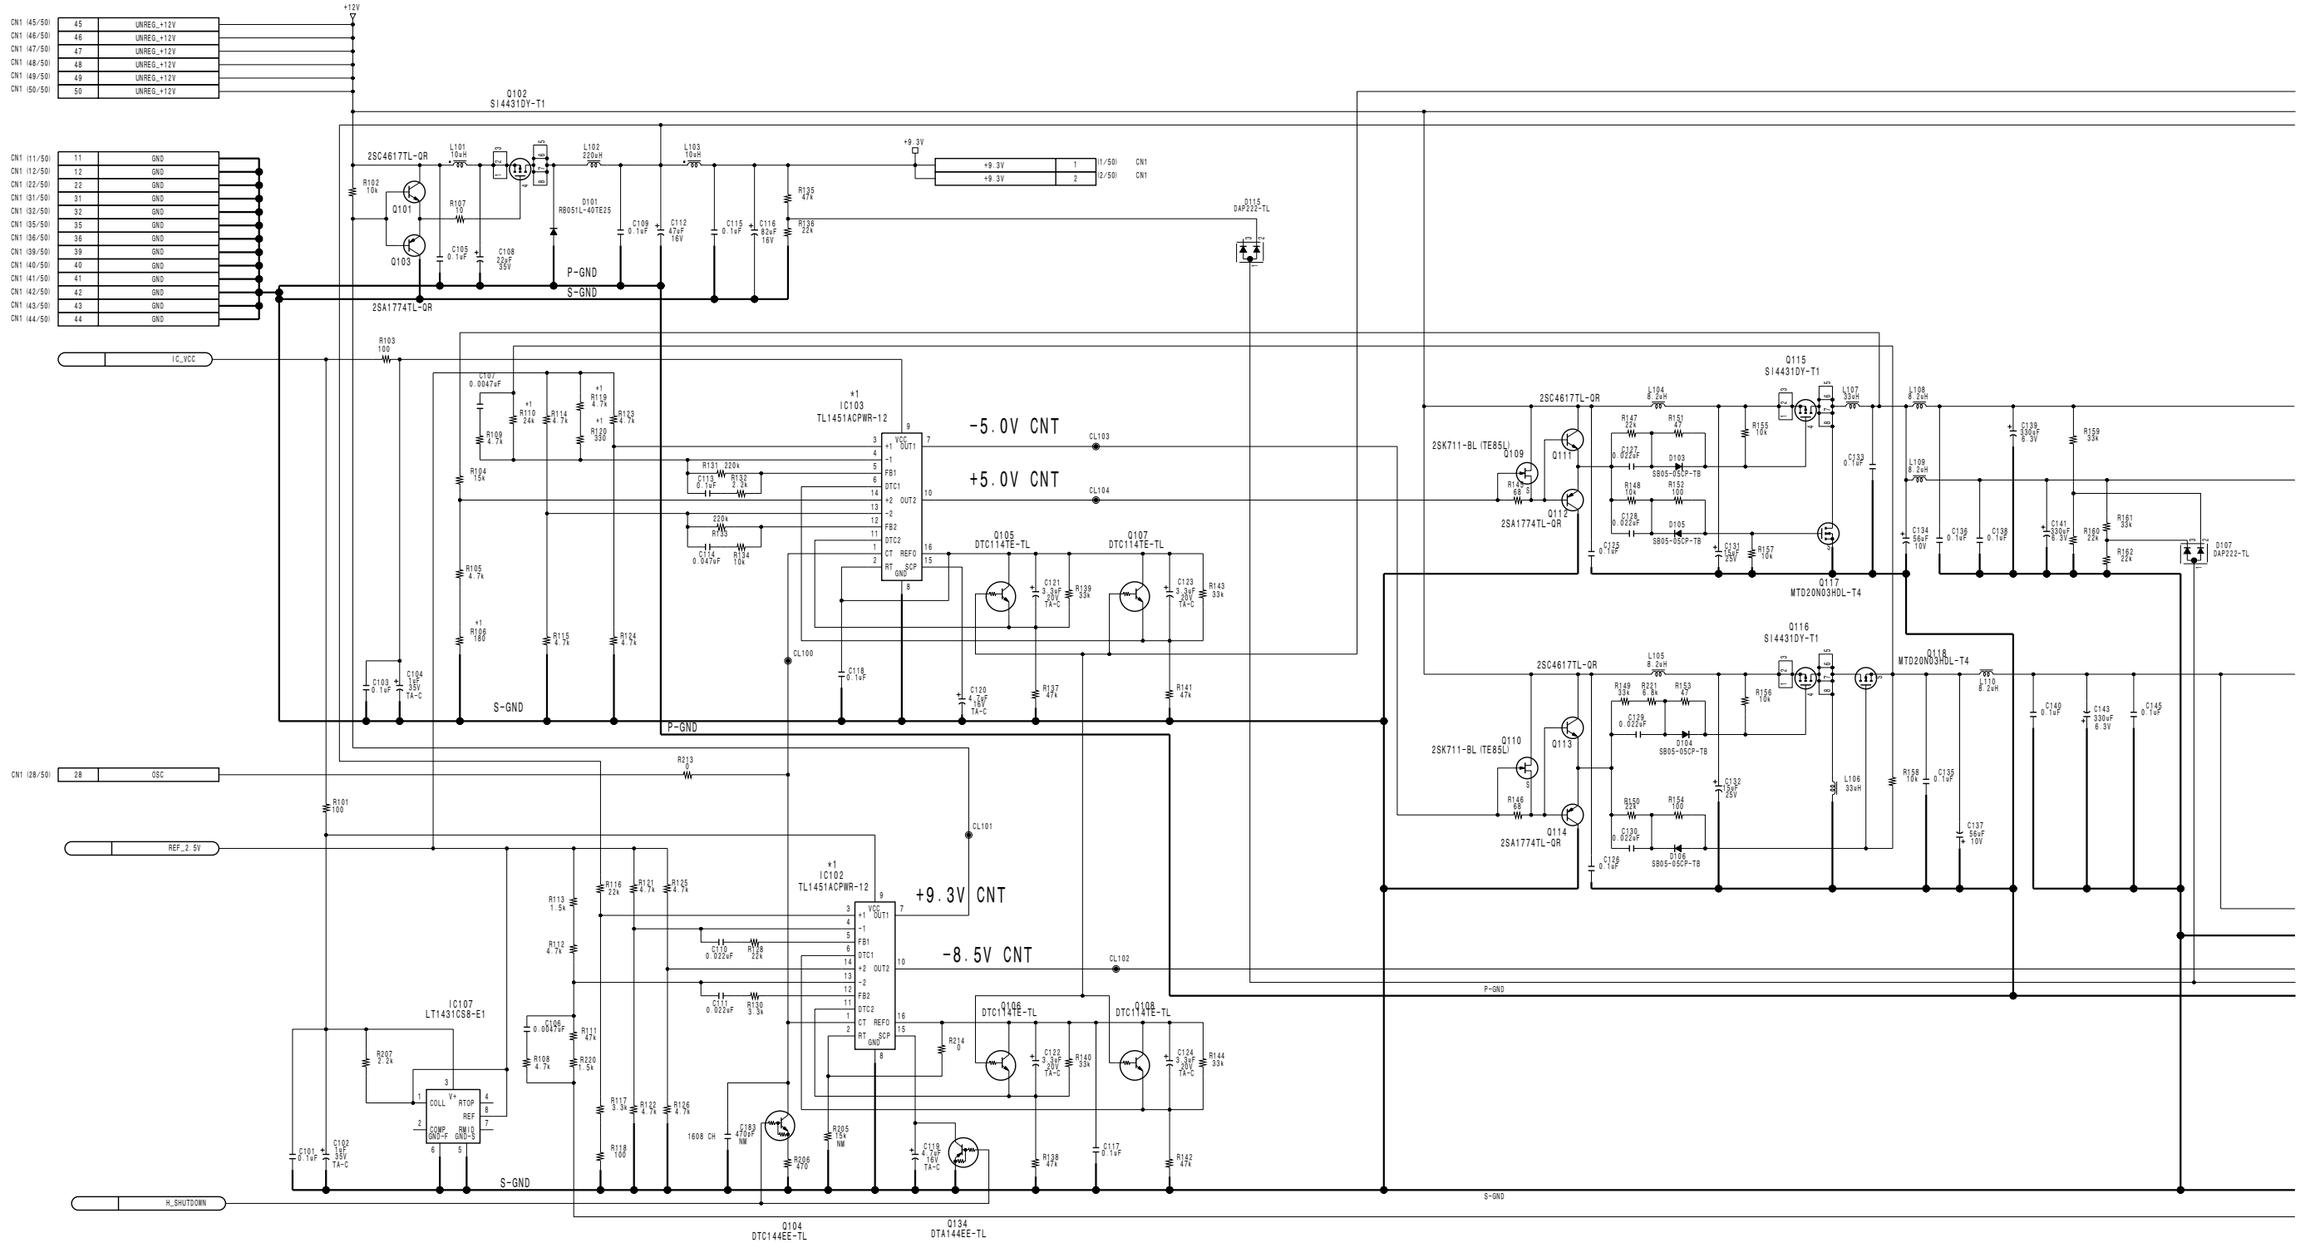

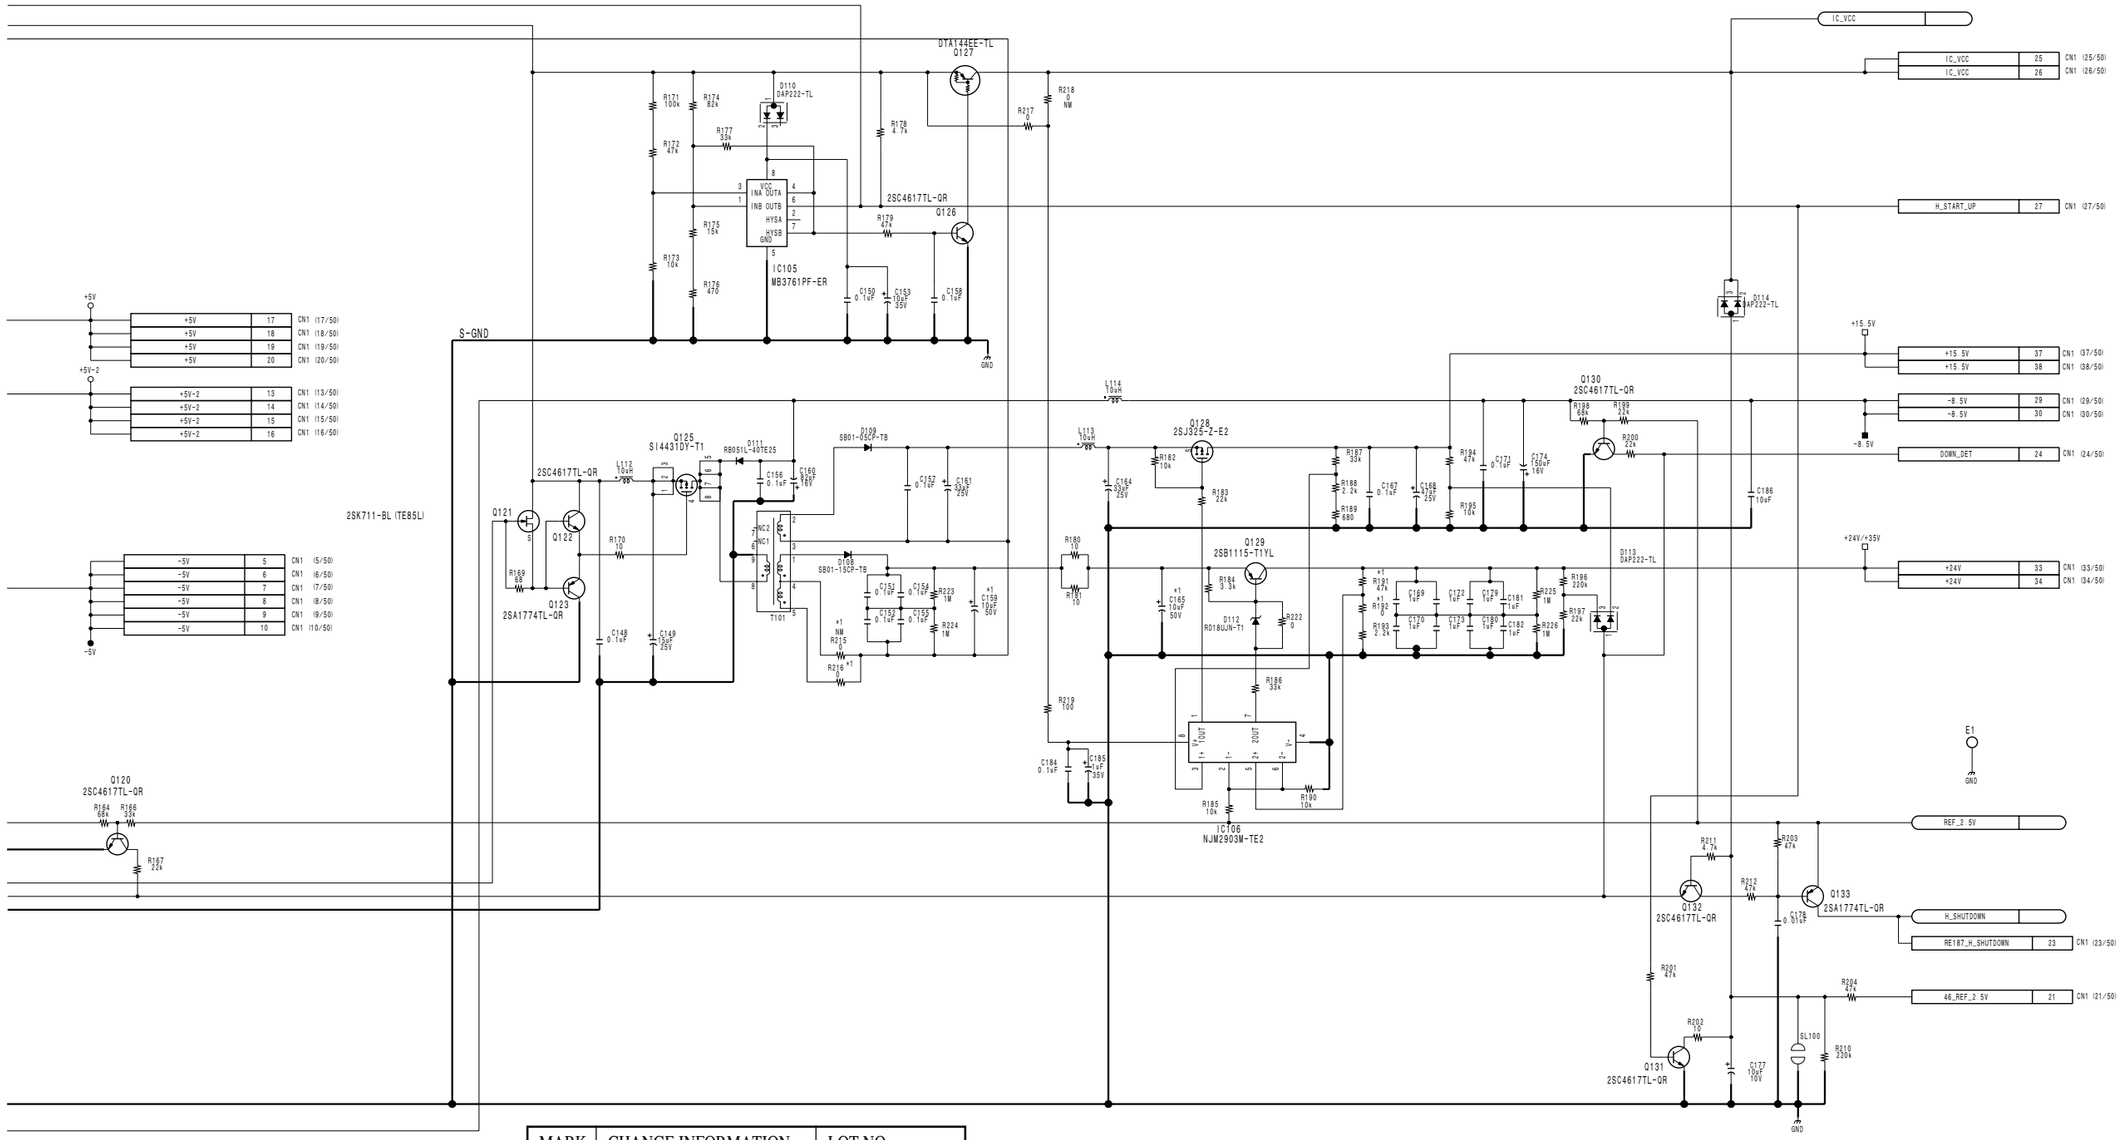

MARK	CHANGE INFORMATION	LOT NO.
*1	ADDED C159, C165, R106, R216 IC102, IC103 TL1451ACPW-E20 → TL1451ACPWR-12 R110 22k → 24k R119 2.2k → 4.7k R120 2.2k → 330 R191 100k → 47k R192 3.3k → 112-k R215 DELETED	112-

RE-187
BOARD NO. 1-678-736-11
LOT NO. 083-
HDW-750_RE-187_004_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

MARK	CHANGE INFORMATION	LOT NO.
*1	ADDED C126, D108 R150 100k → 1M DELETED C108, R131	112-

BATT&EXT KIRIKAE

NO. EXT_DC
COMMON
NC. BAT

EXT DC
CN102

1	COMMON
2	SEL_BAT
3	EXT_DC (+)
4	EXT_DC (+)
5	EXT_DC (+)
6	UNREG_GND
7	UNREG_GND
8	UNREG_GND

BATT
CN101

6	BATT IN (+)
5	BATT IN (+)
4	BATT IN (+)
3	BATT IN (-)
2	BATT IN (-)
1	BATT IN (-)

IFA CN109 (31/60) 31 IFA_L_PWR_SWON
FP CN109 (34/60) 34 FR_H_POWER_HOLD

BATT EXT

D108 RB051L-40TE25
D107 RB051L-40TE25
D105 DAN222-TL

Q110 SI4466DY-T1
Q114 SI4466DY-T1
Q111 SI4466DY-T1
Q115 SI4466DY-T1
Q112 SI4466DY-T1
Q116 SI4466DY-T1
Q120 SI4466DY-T1
Q123 SI4466DY-T1
Q121 SI4466DY-T1
Q124 SI4466DY-T1
Q122 SI4466DY-T1
Q125 SI4466DY-T1

R142 0.05
R143 0.05
R147 0.05

C123 100uF
C124 100uF

UNSW_+12V 29 CN109 (29/60)
UNSW_+12V 30 CN109 (30/60) FP

*1 D108 DAN222-TL
C104 0.1uF
R121 100k
D104 DAN222-TL
R109 10k
R110 100k
C103 0.001uF
R137 47k
Q103 2SC4617TL-QR
R119 100k
*1 R150 1M
IC107 (1/2) TC4S81F (TE85R)
L:POWER ON
H:POWER OFF
*1 R131
*1 C108
Q107 NDS355AN

-11 -12 +12V +5V-2

IC101 MB3761PF-ER
R145 100k
R105 0
R106 680k
R111 100k
R112 33k
R146 47k
R107 10k
R108 1.5k
C117 0.22uF (1608)
R124 100k NM
R151 150k
C105 0.1uF
R113 10k
PROTECT
18.34V
R120 0
H:ON

5V REG
IC108 LT1121CST-5-TR
C112 0.1uF
C114 10uF (10/6.3)

UNREG_+12V 23 CN109 (23/60)
UNREG_+12V 24 CN109 (24/60)
UNREG_+12V 25 CN109 (25/60)
UNREG_+12V 26 CN109 (26/60)
UNREG_+12V 27 CN109 (27/60)
UNREG_+12V 28 CN109 (28/60)
UNREG_GND 17 CN109 (17/60)
UNREG_GND 18 CN109 (18/60)
UNREG_GND 19 CN109 (19/60)
UNREG_GND 20 CN109 (20/60)
UNREG_GND 21 CN109 (21/60)
UNREG_GND 22 CN109 (22/60) MB

DC OUT
UNREG GND 2 CN104
UNREG +12V 1
GND-2

RXE050
THP1
500mA

CN8_L_EX_DCIN 33 CN109 (33/60) FP

LIGHT DC
CN103
UNREG_GND 4
UNREG_GND 3
LIGHT_UNREG 2
LIGHT_UNREG 1
PS

DTC144EE-TL Q119

C101 0.022uF
EXT DC HOLD
IC103 (1/2) TC4S81F (TE85R)
R129 100k
R148 220k
R127 22k
R149 22k
R132 100k
R125 100k
IC104 (1/2) TC4S81F (TE85R)
IC106 (1/2) TC4S69F (TE85R)
IC105 (1/2) TC4S81F (TE85R)
R136 1k
R137 1k
IC109 LTC1473CGN-E2
R138 1k
L1 1uH
R141 470
R154 1k
CL101
C116 0.0047F 25V
DENKAI C 4700uF

R101 100k
D101 DAN222-TL
D102 RD15M-T1B
Q101 2SK2315TYTR
SL101
Q104 2SC4617TL-QR
R152 47k
R126 10k
C125 0.47uF
C109 0.1uF
C110 0.047uF
C111 0.1uF
C122 1uF 50V
Q126 DTC144EE-TL

RE187_H_SHUT_OFF 43 (43/60) CN109 RE

C118 0.1uF
C119 0.1uF
C120 0.1uF
C121 0.1uF
C126 0.1uF
IC103 (2/2) TC4S81F (TE85R)
IC104 (2/2) TC4S81F (TE85R)
IC107 (2/2) TC4S81F (TE85R)
IC105 (2/2) TC4S81F (TE85R)
IC106 (2/2) TC4S69F (TE85R)

GND

CNB-15 (1/3)
BOARD NO. 1-678-751-12, 13
LOT NO. 083-
HDW-750_CNB-15_015_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

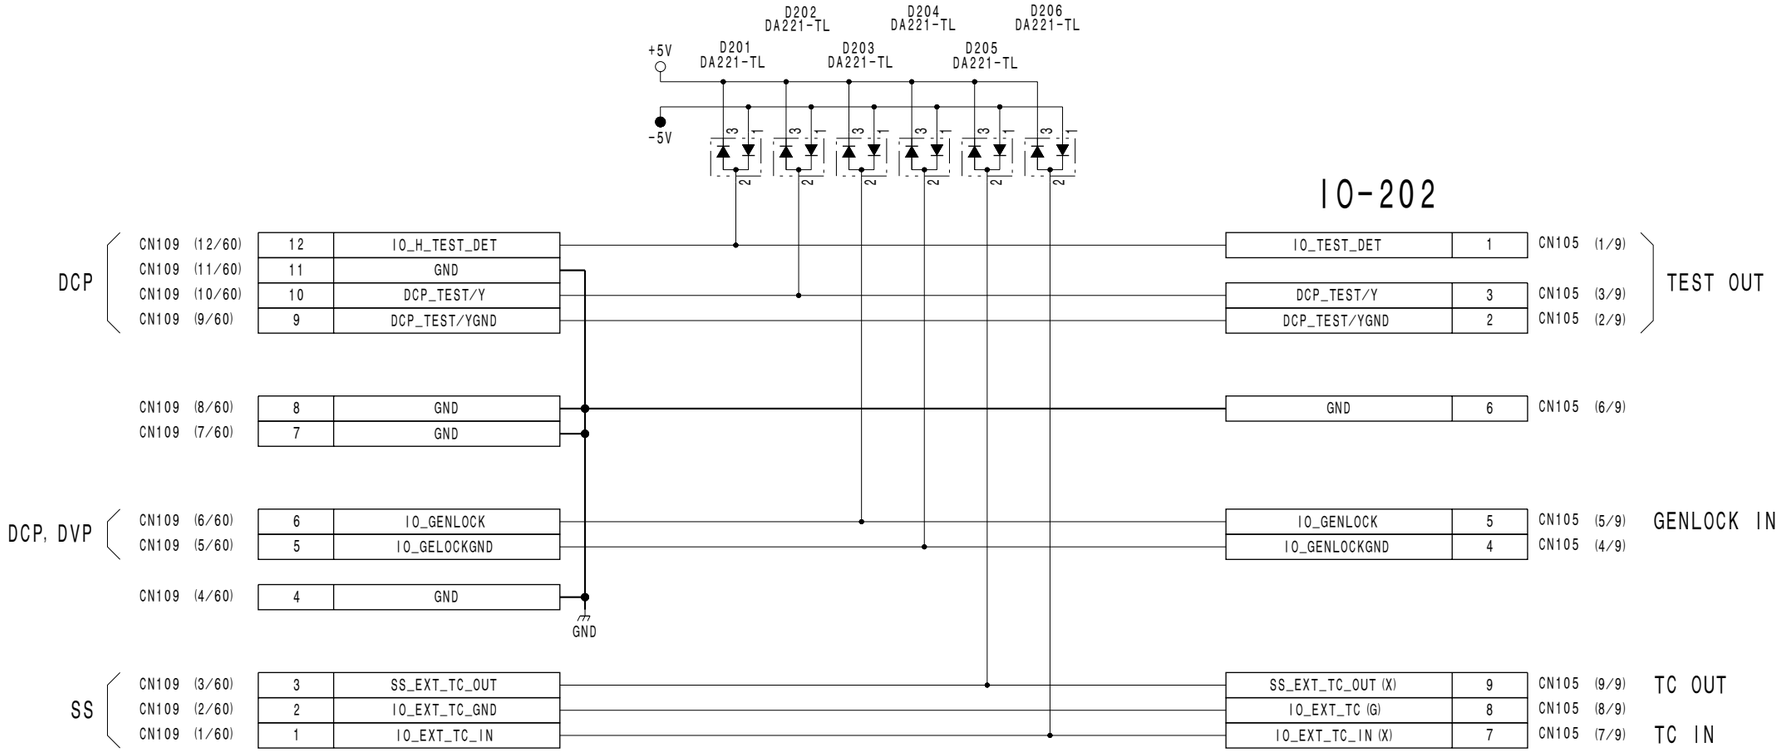

CNB-15 (2/3)

BOARD NO. 1-678-751-12, 13
LOT NO. 083-
HDW-750_CNB-15_015_2

CNB-15 (3/3)

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

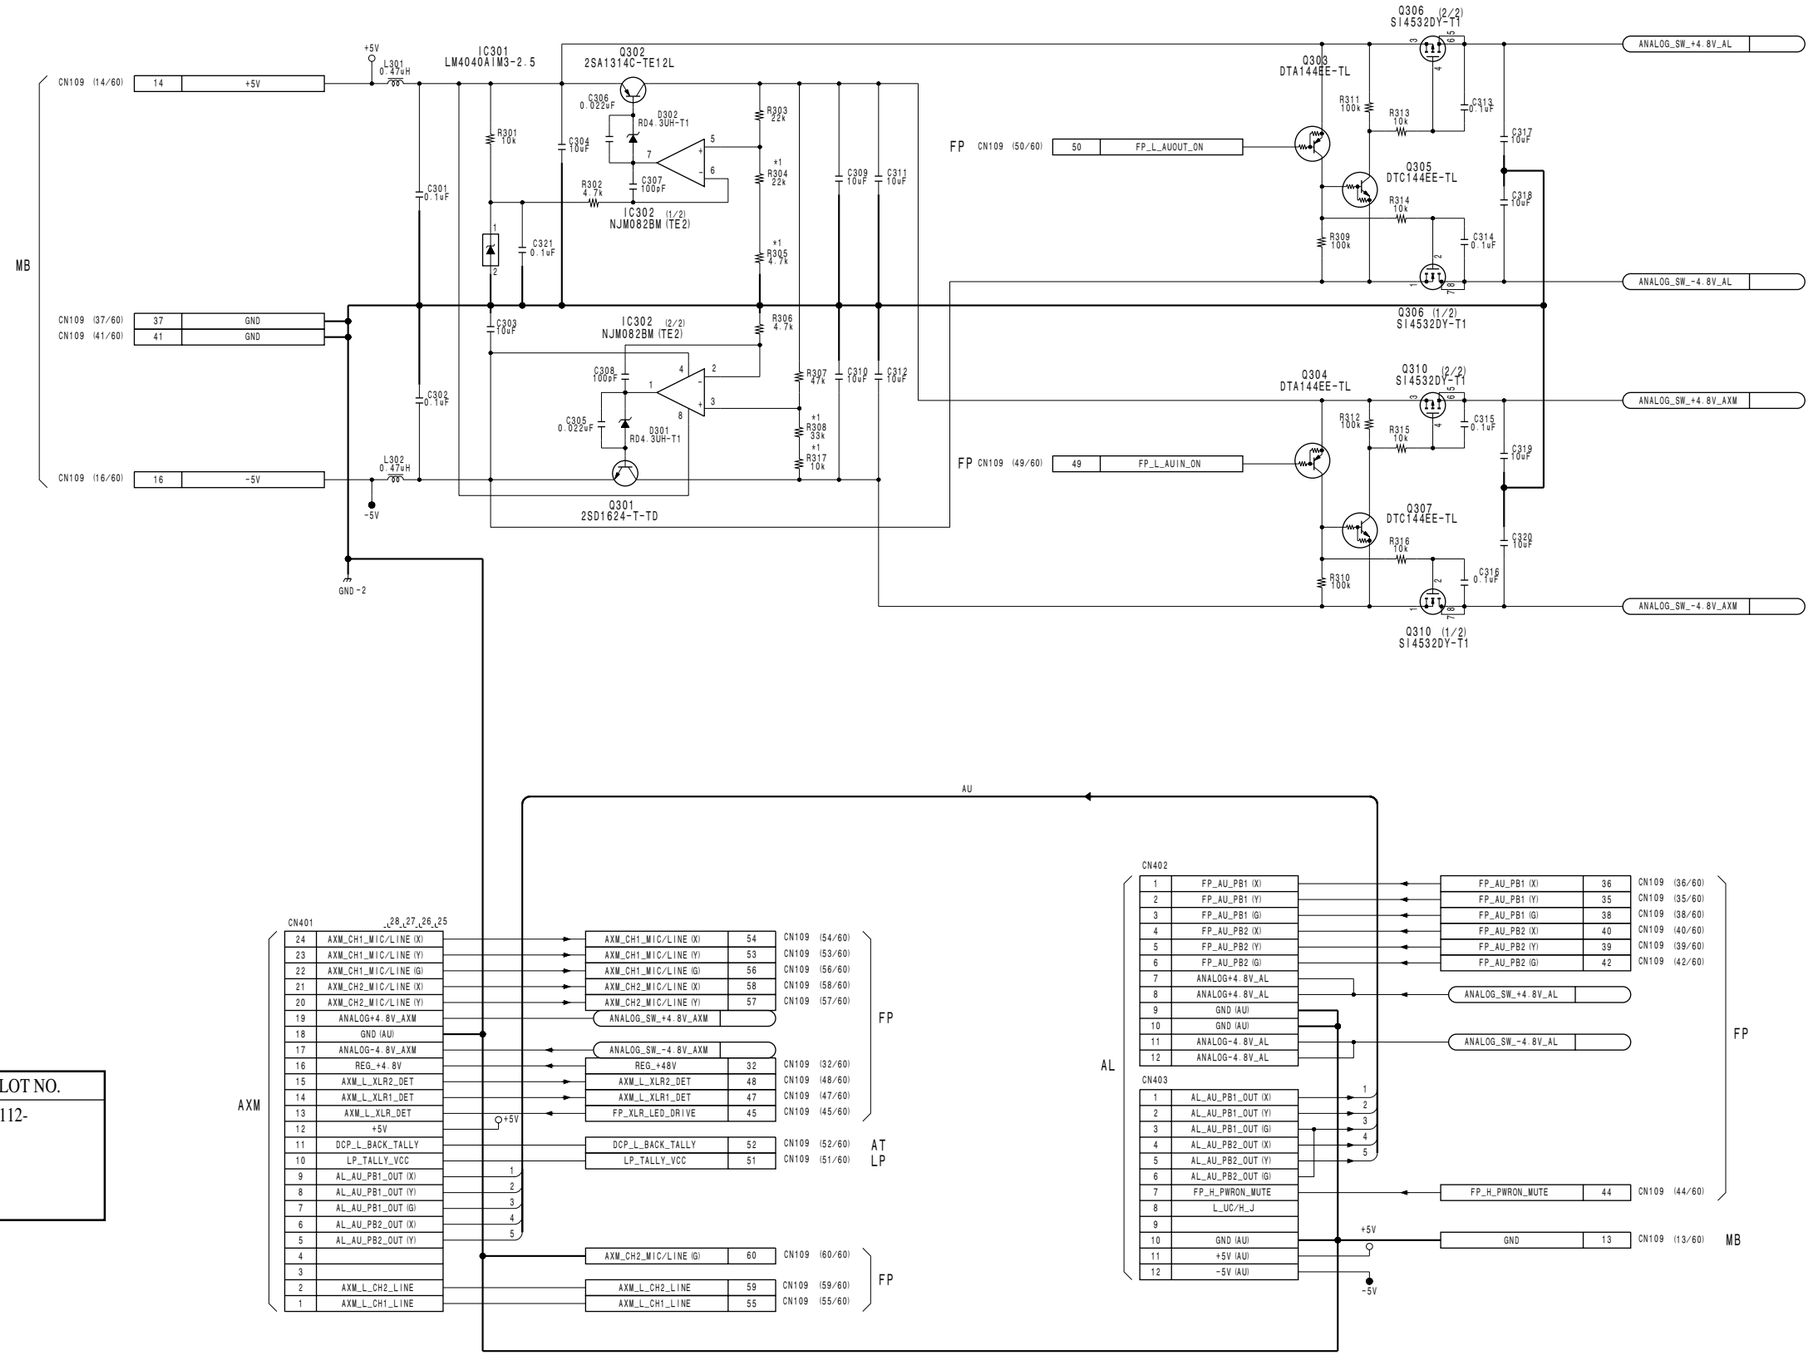

MARK	CHANGE INFORMATION			LOT NO.
*1	R304	12k	→ 22k	112-
	R305	15k	→ 4.7k	
	R308	43k	→ 33k	
	R317	ADDED		

CNB-15 (3/3)
BOARD NO. 1-678-751-12, 13
LOT NO. 083-
HDW-750_CNB-15_015_3

4-148

HDW-750 V2

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

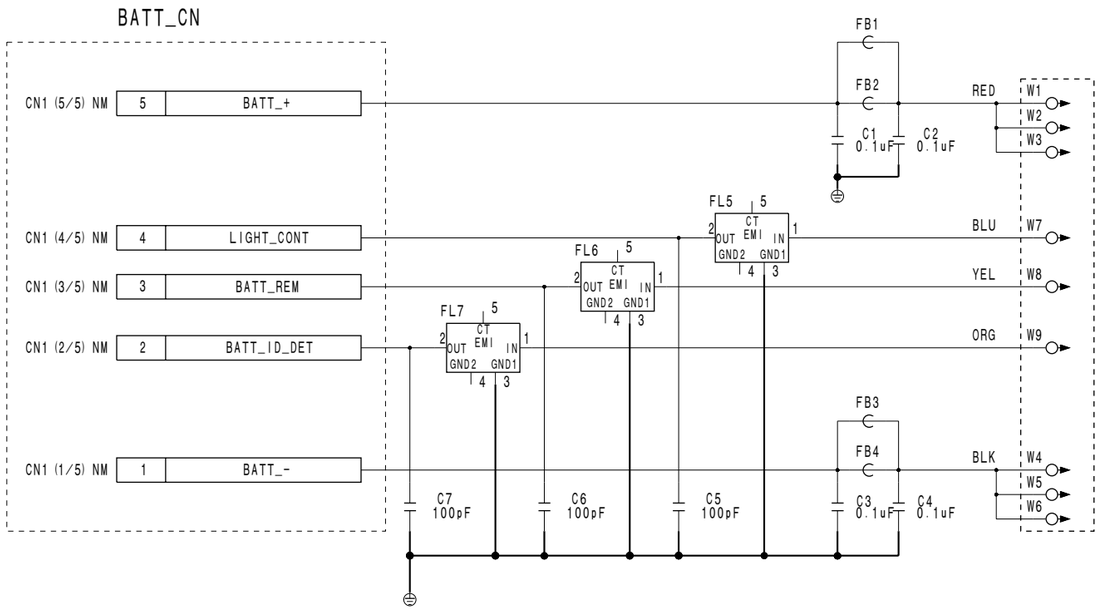

DC-111

BOARD NO. 1-678-620-11
LOT NO. 083-
HDW-750_DC-111_001_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

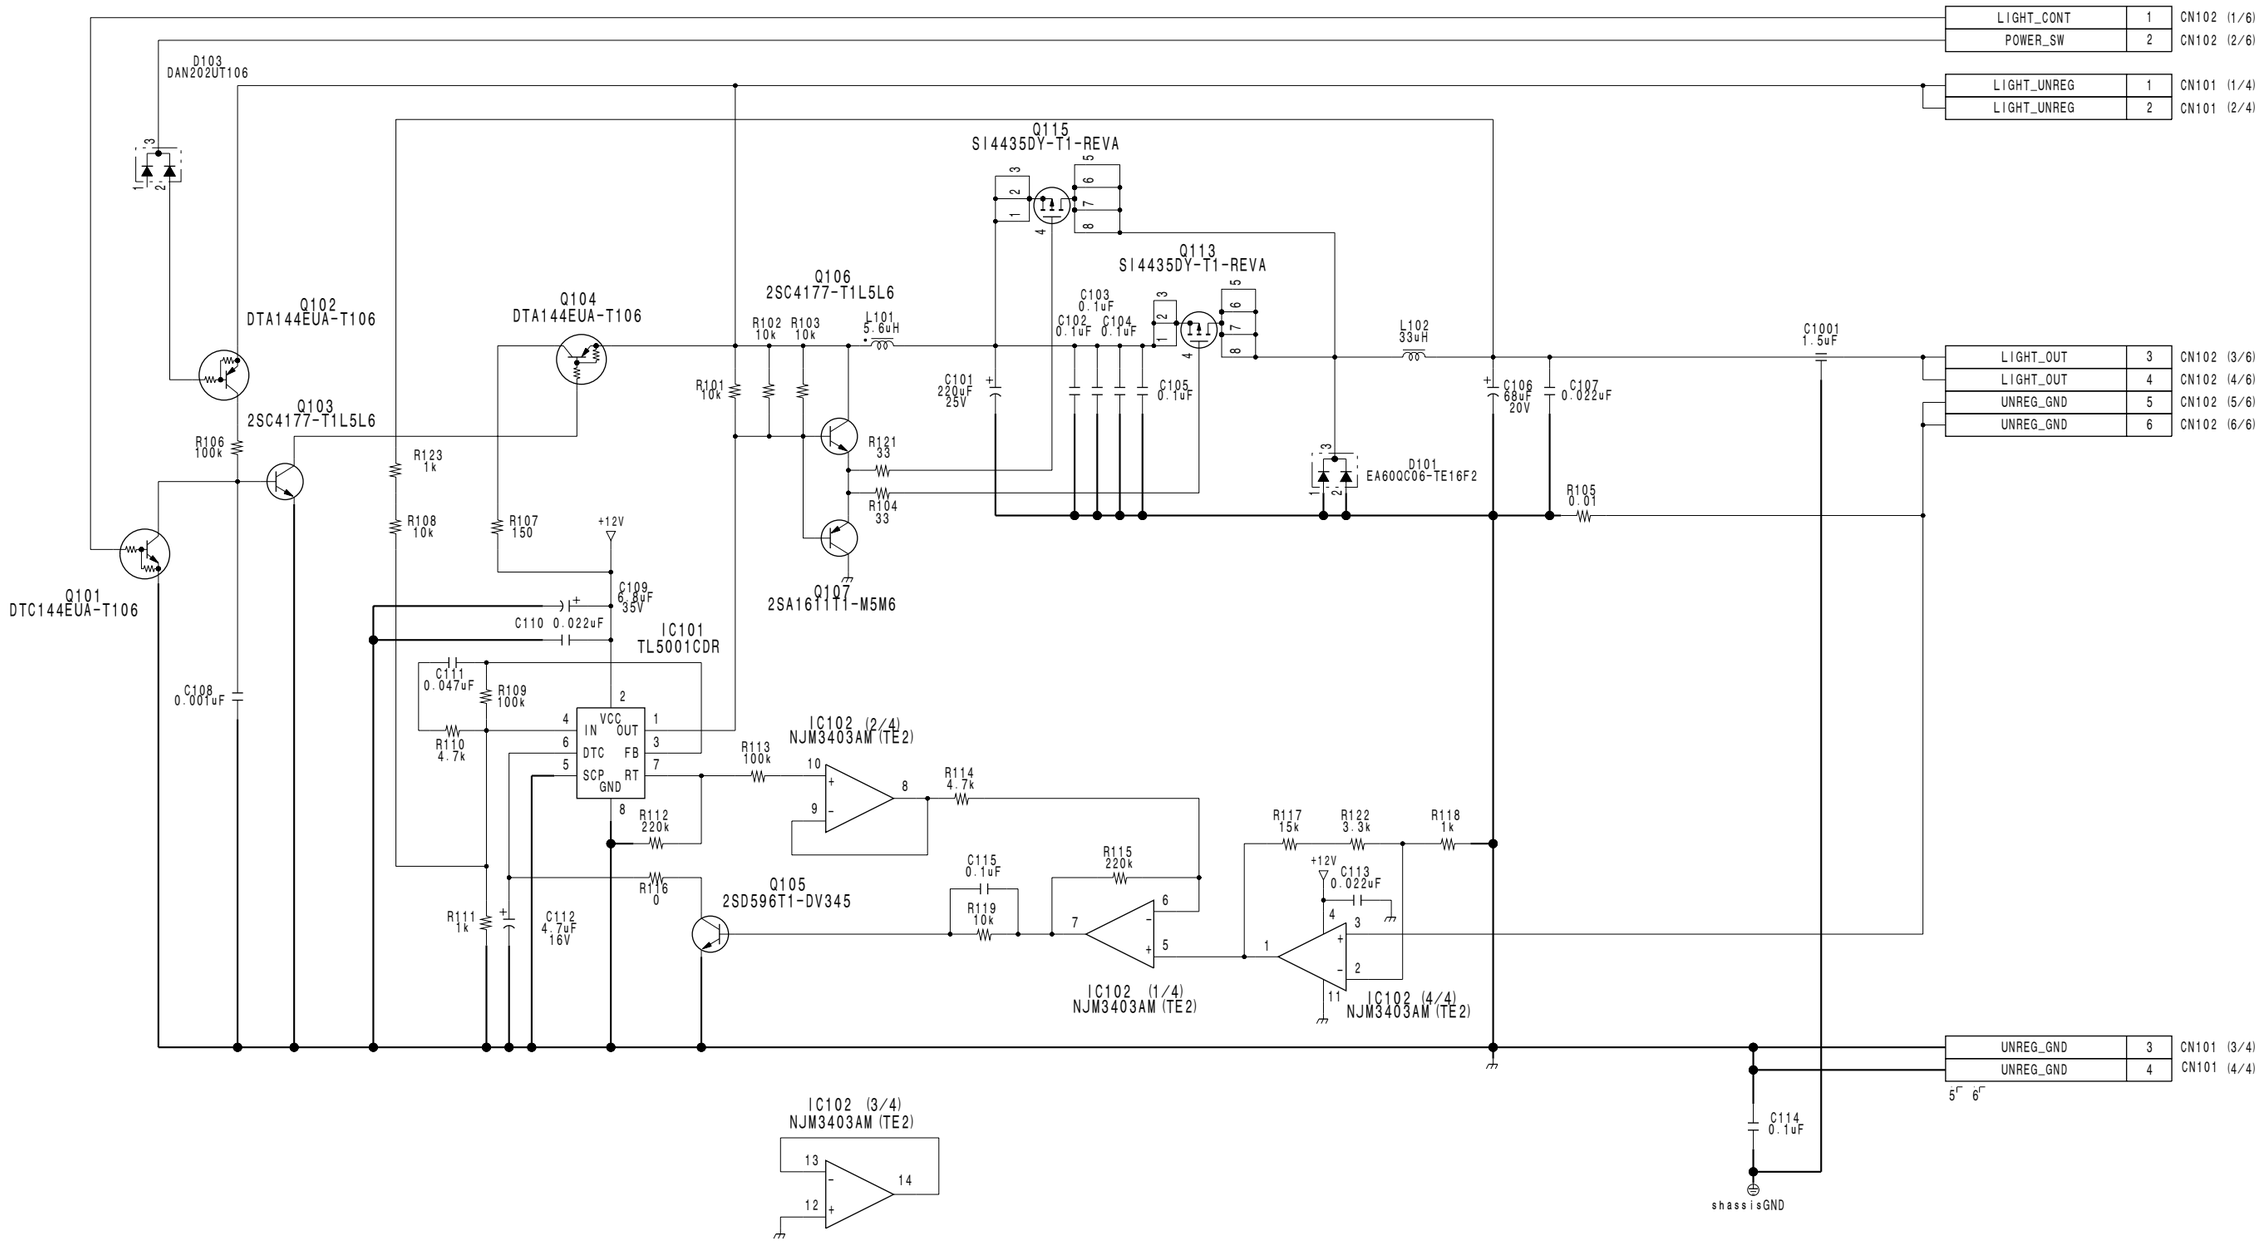

PS-595
BOARD NO. 1-678-626-11
LOT NO. 083-
HDW-750_PS-595_003_1

http://getMANUAL.com

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

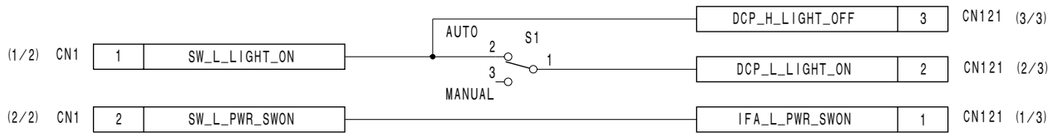

SW-1030

BOARD NO. 1-678-622-11
LOT NO. 083-

HDW-750_SW-1030_001_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

CN101
(MDC-13)

1	+2.5V
2	+1.8V
3	+1.8V
4	GND
5	GND
6	GND
7	GND
8	GND
9	GND
10	GND
11	GND
12	+3.3V
13	+3.3V
14	+3.3V
15	-5V
16	-5V
17	-5V
18	-5V
19	-5V
20	+5V
21	+5V
22	+5V
23	+5V
24	+5V
25	GND
26	GND
27	GND
28	GND
29	GND
30	GND
31	GND
32	
33	UNREG_+12V
34	UNREG_+12V
35	UNREG_+12V
36	UNREG_+12V
37	UNREG_+12V
38	
39	GND
40	GND
41	GND
42	GND
43	MDC_PB_CUE
44	FP_MDC_CUEGND
45	FP_REC_CUE

C1 0.1uF

CN102
(SS-92)

1	JTAG_H_TEST	2	JTAG_L_TRST
3	JTAG_L_TCK	4	JTAG_L_TMS
5	SS_DVP_TDO	6	JTAG_SS_TDI
7	EQ_TRACK_REF_A	8	SS_TAPE_SPEED
9	SS_TRACK_START	10	SS_PS3_EQ_CMD
11	SS_PS3_EQ_CK	12	SS_PS3_EQ_RDY
13	SS_PS3_EQ_RES	14	SS_PS3_EQ_CS
15	SS_L_EQ_CPU_RST	16	SS_L_WRITE_START
17	SS_L_WRITE_END	18	SS_DVP_JP0
19	GND	20	GND
21	GND	22	GND
23	GND	24	SS_DCP_JP0
25	AT_SS_RM_RX	26	SS_AT_RM_TX
27	DCP_L_AT_BUSY	28	SS_PS1_AT_CS
29	SS_PS1_CMD	30	SS_PS1_CK
31	SS_PS1_RDY	32	SS_PS1_RES
33	DVP_SS_AU_FS	34	SS_REC_TC
35	DVP_DL_TC	36	SS_SEG2
37	SS_SEG1	38	SS_SEG0
39	SS_FRP_ADM_B	40	SS_FRP_ADM_A
41	SS_AU_ID2	42	SS_AU_ID1
43	SS_AU_ID0	44	DVP_AU_ID2
45	DVP_AU_ID1	46	DVP_AU_ID0
47	DVP_1/2GOP	48	DVP_REF_CF
49	DVP_REF_FRM	50	SS_L_PIO_RST
51	SS_L_PIO2_CS	52	SS_L_PIO_CS
53	SS_L_DVP_CS	54	DVP_L_BUSY
55	SS_L_STRB	56	SS_L_WR
57	SS_L_RD	58	SS_BUS_D7
59	SS_BUS_D6	60	SS_BUS_D5
61	SS_BUS_D4	62	SS_BUS_D3
63	SS_BUS_D2	64	SS_BUS_D1
65	SS_BUS_D0	66	SS_BUS_A8
67	SS_BUS_A7	68	SS_BUS_A6
69	SS_BUS_A5	70	SS_BUS_A4
71	SS_BUS_A3	72	SS_BUS_A2
73	SS_HCLKGND	74	SS_HCLK
75	GND	76	GND
77	GND	78	GND
79	GND	80	GND
81	GND	82	GND
83	+5V	84	+5V
85	+5V	86	+5V
87	+3.3V	88	+3.3V
89	+3.3V	90	+3.3V
91	+3.3V	92	+3.3V
93	+2.5V	94	+2.5V
95	+2.5V	96	+2.5V
97	-5V	98	-5V
99	-5V	100	-5V
101	SS_PS1_FP_CS	102	SS_PS1_AP5_CS
103	SS_FRAME	104	SS_L_FP_CPU_RST
105	SS_FP_JP0	106	SS_FP_JP1
107	SS_FP_JP2	108	FP_GPS_BATT
109	KY_L_PLAY	110	KY_L_REW
111	KY_L_EJECT	112	KY_L_FF
113	KY_L_STOP	114	SS_H_FF_ON
115	SS_H_REW_ON	116	SS_H_PLAY_ON
117	IFA_L_VTR_S/S	118	IO_EXT_TC_IN
119	IO_EXT_TC_GND	120	SS_EXT_TC_OUT
121	SS_TF_CMD	122	SS_TF_CK
123	TF_S_REQ	124	TF_RES
125	SS_L_TF_ENA	126	SS_L_TF_RST
127	SS_TF_R_REQ	128	AU_L_EXIST
129	CPNT_L_EXIST	130	HDSDI_L_EXIST
131	SS_PS3_HSDI_CMD	132	SS_PS3_HSDI_CK
133	SS_PS3_HSDI_RDY	134	SS_PS3_HSDI_RES
135	SS_PS3_HSDI_CS	136	SS_L_HSDI_CPU_RST
137	GND	138	CA_EXT_TALLY
139	DCP_CA_TX/DATA	140	CA_DCP_RX/V_RESET

CN103
(DVP-18)

1	JTAG_H_TEST	2	JTAG_L_TRST
3	JTAG_L_TCK	4	JTAG_L_TMS
5	DVP_DCP_TDO	6	SS_DVP_TDO
7	DVP_PB_47AU_D34	8	DVP_PB_47AU_D12
9	FP_REC_47AU_D34	10	FP_REC_47AU_D12
11	+1.8V	12	+1.8V
13	+1.8V	14	+1.8V
15	+1.5V	16	+1.5V
17	+1.5V	18	+1.5V
19	+1.5V	20	+1.5V
21	+1.5V	22	+1.5V
23	+2.5V	24	+2.5V
25	+2.5V	26	+2.5V
27	+2.5V	28	+2.5V
29	+2.5V	30	+2.5V
31	+3.3V	32	+3.3V
33	+3.3V	34	+3.3V
35	+3.3V	36	+3.3V
37	+3.3V	38	+3.3V
39	-5V	40	-5V
41	-5V	42	-5V
43	+5V	44	+5V
45	+5V	46	+5V
47	+15.5V	48	+15.5V
49	GND	50	GND
51	GND	52	GND
53	GND	54	GND
55	GND	56	GND
57	GND	58	GND
59	GND	60	GND
61	GND	62	GND
63	IO_GENLOCK	64	IO_GENLOCKGND
65	GND	66	FP_SDI_47AU_D34
67	FP_SDI_47AU_D12	68	DVP_DL_47AU_D12
69	DVP_FP_AU_VD	70	DVP_47_FS
71	DVP_47_64FS	72	DVP_FP_47_256FS
73	GND	74	DCP_DVP_L_CN_NG
75	DVP_SD_VCK	76	DVP_SD_VCKGND
77	DVP_SD_FR	78	DVP_SD_CF1/IN_CF
79	DVP_SD_VD/IN_VD	80	DVP_SD_HD/IN_HD
81	DVP_DCP_JP0	82	DVP_48_FS
83	DVP_48_64FS	84	DVP_DCP_48_128FS
85	DVP_DCP_48AU_D34	86	DVP_DCP_48AU_D12
87	DVP_CA_48_256FS	88	DVP_CA_47_256/512FS
89	EQ_TRACK_REF_A	90	SS_TAPE_SPEED
91	SS_TRACK_START	92	SS_PS3_EQ_CMD
93	SS_PS3_EQ_CK	94	SS_PS3_EQ_RDY
95	SS_PS3_EQ_RES	96	SS_PS3_EQ_CS
97	SS_L_EQ_CPU_RST	98	SS_L_WRITE_START
99	SS_L_WRITE_END	100	SS_DVP_JP0
101	DVP_SS_AU_FS	102	SS_REC_TC
103	DVP_DL_TC	104	SS_SEG2
105	SS_SEG1	106	SS_SEG0
107	SS_FRP_ADM_B	108	SS_FRP_ADM_A
109	SS_AU_ID2	110	SS_AU_ID1
111	SS_AU_ID0	112	DVP_AU_ID2
113	DVP_AU_ID1	114	DVP_AU_ID0
115	DVP_1/2GOP	116	DVP_REF_CF
117	DVP_REF_FRM	118	SS_L_PIO_RST
119	SS_L_PIO2_CS	120	SS_L_PIO_CS
121	SS_L_DVP_CS	122	DVP_L_BUSY
123	SS_L_STRB	124	SS_L_WR
125	SS_L_RD	126	SS_BUS_D7
127	SS_BUS_D6	128	SS_BUS_D5
129	SS_BUS_D4	130	SS_BUS_D3
131	SS_BUS_D2	132	SS_BUS_D1
133	SS_BUS_D0	134	SS_BUS_A8
135	SS_BUS_A7	136	SS_BUS_A6
137	SS_BUS_A5	138	SS_BUS_A4
139	SS_BUS_A3	140	SS_BUS_A2
141	SS_HCLKGND	142	SS_HCLK
143	GND	144	DCP_H_DVP_V_OUT
145	DCP_DVP_VCK	146	DCP_DVP_VCKGND
147	DCP_DVP_C_D0	148	DCP_DVP_C_D1
149	DCP_DVP_C_D2	150	DCP_DVP_C_D3
151	DCP_DVP_C_D4	152	DCP_DVP_C_D5
153	DCP_DVP_C_D6	154	DCP_DVP_C_D7
155	DCP_DVP_C_D8	156	DCP_DVP_C_D9
157	DCP_DVP_V_D0	158	DCP_DVP_V_D1
159	DCP_DVP_V_D2	160	DCP_DVP_V_D3
161	DCP_DVP_V_D4	162	DCP_DVP_V_D5
163	DCP_DVP_V_D6	164	DCP_DVP_V_D7
165	DCP_DVP_V_D8	166	DCP_DVP_V_D9
167	DCP_DVP_FR/VD	168	DCP_DVP_OE
169	DCP_DVP_HD	170	DCP_DVP_CF
171	DCP_DVP_SY	172	DCP_H_CA_V_OUT
173	DCP_L_CA_V_EN	174	DVP_CA_C_D0
175	DVP_CA_C_D1	176	DVP_CA_C_D2
177	DVP_CA_C_D3	178	DVP_CA_C_D4
179	DVP_CA_C_D5	180	DVP_CA_C_D6
181	DVP_CA_C_D7	182	DVP_CA_C_D8
183	DVP_CA_C_D9	184	DVP_CA_V_D0
185	DVP_CA_V_D1	186	DVP_CA_V_D2
187	DVP_CA_V_D3	188	DVP_CA_V_D4
189	DVP_CA_V_D5	190	DVP_CA_V_D6
191	DVP_CA_V_D7	192	DVP_CA_V_D8
193	DVP_CA_V_D9	194	GND
195	DVP_CA_VCK	196	DVP_CA_VCKGND
197	DVP_CA_FR/VD	198	DVP_CA_HD
199	DVP_CA_CF	200	DVP_CA_SY

C2 0.1uF
C3 0.1uF
C4 0.1uF
C5 0.1uF
C6 0.1uF
C7 0.1uF

CN104
(DCP)

1	JTAG_H_TEST	2	JTAG_L_TRST
3	JTAG_L_TCK	4	JTAG_L_TMS
5	DCP_JTAG_TDO	6	DVP_DCP_TDO
7	GND	8	GND
9	GND	10	GND
11	GND	12	GND
13	GND	14	GND
15	-5V	16	-5V
17	-5V	18	-5V
19	-5V	20	-5V
21	+5V	22	+5V
23	+5V	24	+5V
25	+5V	26	+5V
27	+8V	28	+8V
29	IFA_L_VTR_S/S	30	IFA_RET
31	IFA_IRIS_PSTN	32	IFA_IRIS_CONT
33	IFA_DCP_JP0	34	IFA_ZOOM_PSTN
35	IFA_LENS_RX	36	DCP_LENS_TX
37	DCP_SCL	38	IFA_SDA
39	IFA_FOCUS_PTSN	40	IFA_FMIC_CONT
41	DCP_L_LIGHT_ON	42	DCP_H_LIGHT_OFF
43	GND	44	GND
45	DCP_TEST/Y	46	DCP_TEST/YGND
47	DCP_RM_TEST	48	DCP_RM_TESTGND
49	IO_GENLOCK	50	IO_GENLOCKGND
51		52	DCP_DVP_L_CN_NG
53	VTR_SYNC	54	VTR_SYNCGND
55	CA_CCU_RET_Pb	56	CA_CCU_RET_PbGND
57	CA_CCU_RET_Pr/V (Y)	58	CA_CCU_RET_PrGND
59	CA_CCU_RET_Y/V (X)	60	CA_CCU_RET_YGND
61	DCP_L_SDI_AU_MUTE	62	CPNT_L_ACTIVE
63	DCP_HD_Pb	64	DCP_HD_PbGND
65	DCP_HD_Pr	66	DCP_HD_PrGND
67	DCP_HD_Y	68	DCP_HD_YGND
69	+9.3V	70	+9.3V
71	GND	72	GND
73	GND	74	GND
75	GND	76	GND
77	UNREG_+12V	78	UNREG_+12V
79	UNREG_+12V	80	UNREG_+12V
81	DVP_DCP_48AU_D34	82	DVP_DCP_48AU_D12
83	DVP_SD_VCK	84	DVP_SD_VCKGND
85	DVP_SD_FR	86	DVP_SD_CF1/IN_CF
87	DVP_SD_VD/IN_VD	88	DVP_SD_HD/IN_HD
89	DVP_DCP_JP0	90	DVP_48_FS
91	DVP_48_64FS	92	DVP_DCP_48_128FS
93	RM_DCP_RX (-)	94	RM_DCP_RX (+)
95	DCP_RM_TX (-)	96	DCP_RM_TX (+)
97	DCP_MS_SDIO	98	DCP_MS_SCK
99	DCP_MS_BS	100	
101		102	SS_DCP_JP0
103	FP_SW_SCL	104	DCP_SW_SDA
105	FP_RTRY_B	106	FP_RTRY_A
107	FP_L_TC_V_RST	108	FP_L_RTRY_PUSH
109	DCP_FP_JP1	110	DCP_L_MS_LED_ON
111	AT_SS_RM_RX	112	SS_AT_RM_TX
113	DCP_L_AT_BUSY	114	SS_PS1_AT_CS
115	SS_PS1_CMD	116	SS_PS1_CK
117	SS_PS1_RDY	118	SS_PS1_RES
119	+1.5V	120	+1.5V
121	+1.5V	122	+1.5V
123	+1.5V	124	+1.5V
125	+1.8V	126	+1.8V
127	+1.8V	128	+1.8V
129	+1.8V	130	+1.8V
131	+2.5V	132	+2.5V
133	+2.5V	134	+2.5V
135	+2.5V	136	+2.5V
137	+3.3V	138	+3.3V
139	+3.3V	140	+3.3V
141	+3.3V	142	+3.3V
143	GND	144	DCP_H_DVP_V_OUT
145	DCP_DVP_VCKGND	146	DCP_DVP_VCK
147	DCP_DVP_C_D0	148	DCP_DVP_C_D1
149	DCP_DVP_C_D2	150	DCP_DVP_C_D3
151	DCP_DVP_C_D4	152	DCP_DVP_C_D5
153	DCP_DVP_C_D6	154	DCP_DVP_C_D7
155	DCP_DVP_C_D8	156	DCP_DVP_C_D9
157	DCP_DVP_V_D0	158	DCP_DVP_V_D1
159	DCP_DVP_V_D2	160	DCP_DVP_V_D3
161	DCP_DVP_V_D4	162	DCP_DVP_V_D5
163	DCP_DVP_V_D6	164	DCP_DVP_V_D7
165	DCP_DVP_V_D8	166	DCP_DVP_V_D9
167	DCP_DVP_FR/VD	168	DCP_DVP_OE
169	DCP_DVP_HD	170	DCP_DVP_CF
171	DCP_DVP_SY	172	
173	GND	174	GND
175	DCP_H_CA_V_OUT	176	DCP_L_CA_V_EN
177	DCP_L_CA_AU_EN	178	DCP_L_CA_SY_EN
179		180	DCP_SKIN_GATE
181	CA_EXT_TALLY	182	DCP_CA_BLKG
183	CA_CCU_F/H_CONT (Y)	184	CA_CCU_H/H_CONT (X)
185	DCP_CA_TX/DATA	186	CA_DCP_RX/V_RESET
187		188	
189	DCP_L_BACK_TALLY	190	IO_H_TEST_DET
191	DCP_L_BAT_LIGHT_ON	192	BAT_REMAIN
193	GND	194	GND
195	GND	196	GND
197	GND	198	GND
199	GND	200	GND

C8 0.1uF
C9 0.1uF
C10 0.1uF
C11 0.1uF
C12 0.1uF
C13 0.1uF
C14 0.1uF
C15 0.1uF

CN105
(FP-121)

1	MDC_PB_CUE
2	FP_MDC_CUEGND
3	FP_REC_CUE
4	IFA_L_PWR_SWON
5	IFA_FMIC_CONTGND
6	IFA_FMIC_CONT
7	FP_L_FMIC_OFF
8	MA_L_FMIC_ST
9	GND
10	GND
11	+9.3V
12	+9.3V
13	+5V
14	+5V
15	+5V
16	-5V
17	-5V
18	-5V
19	+3.3V
20	+3.3V
21	+3.3V
22	GND
23	GND
24	GND
25	GND
26	GND
27	GND
28	DVP_FP_47_256FS
29	DVP_47_64FS
30	DVP_47_FS
31	DVP_FP_AU_VD
32	DVP_DL_47AU_D12
33	CA_EXT_47AU_D12
34	CA_EXT_47AU_D34
35	FP_SDI_47AU_D12
36	FP_SDI_47AU_D34
37	FP_REC_47AU_D12
38	FP_REC_47AU_D34
39	DVP_PB_47AU_D12
40	DVP_PB_47AU_D34
41	FP_H_PHANTOM_OFF
42	
43	
44	
45	IFA_L_VTR_S/S

CN106
(FP-121)

1	AXM_L_CH1_LINE
2	AXM_L_CH2_LINE
3	
4	
5	
6	FP_L_RTRY_PUSH
7	FP_L_TC_V_RST
8	FP_RTRY_A
9	FP_RTRY_B
10	DCP_SW_SDA
11	FP_SW_SCL
12	DCP_MS_BS
13	DCP_MS_SCK
14	DCP_MS_SDIO
15	GND
16	FP_AU_PB1 (X)
17	FP_AU_PB1 (Y)
18	FP_AU_PB1 (G)
19	FP_AU_PB2 (X)
20	FP_AU_PB2 (Y)
21	FP_AU_PB2 (G)
22	GND
23	WRR_CA_AU1 (X)
24	WRR_CA_AU1 (Y)
25	WRR_CA_AU (G)
26	WRR_CA_AU2 (X)
27	WRR_CA_AU2 (Y)
28	WRR_CA_AU (G)
29	GND
30	AU_L_EXIST
31	CA_FP_INCOM
32	GND
33	AXM_CH1_MIC/LINE (X)
34	AXM_CH1_MIC/LINE (Y)
35	AXM_CH1_MIC/LINE (G)
36	AXM_CH2_MIC/LINE (X)
37	AXM_CH2_MIC/LINE (Y)
38	AXM_CH2_MIC/LINE (G)
39	GND
40	IFA_FMIC1 (X)
41	IFA_FMIC1 (Y)
42	IFA_FMIC1 (G)
43	IFA_FMIC2 (X)
44	IFA_FMIC2 (Y)
45	IFA_FMIC2 (G)

CN107
(FP-121)

1	FAN_MOTOR (+)
2	FAN_MOTOR (-)
3	GND
4	GND
5	
6	UNSW_+12V
7	UNSW_+12V
8	UNREG_+12V
9	
10	WRR_CLK
11	FP_WRR_CS
12	WRR_DI
13	WRR_DO
14	BAT_ID_DATA
15	FP_L_AUOUT_ON
16	FP_L_AUIN_ON
17	AXM_L_XLR2_DET
18	AXM_L_XLR1_DET
19	AXM_L_XLR_OUT_DET
20	FP_XLR_LED_DRIVE
21	FP_H_PWRON_MUTE
22	FP_H_PWR_HOLD
23	CNB_L_EX_DCIN
24	SS_H_PLAY_ON
25	SS_H_REW_ON
26	SS_H_FF_ON
27	KY_L_STOP
28	KY_L_FF
29	KY_L_EJECT
30	KY_L_REW
31	KY_L_PLAY
32	FP_GPS_BATT
33	SS_FP_JP2
34	SS_FP_JP1
35	SS_FP_JP0
36	SS_L_FP_CPU_RST
37	SS_FRAME
38	SS_PS1_AP5_CS
39	SS_PS1_FP_CS
40	SS_PS1_RES
41	SS_PS1_RDY
42	SS_PS1_CK
43	SS_PS1_CMD
44	DCP_L_MS_LED_ON
45	DCP_FP_JP1

CN108
(KY-475)

1	GND
2	REG_+3.3V
3	KY_L_PLAY
4	KY_L_REW
5	KY_L_EJECT
6	KY_L_FF
7	KY_L_STOP
8	SS_H_FF_ON
9	SS_H_REW_ON
10	SS_H_PLAY_ON

CN201

1	FAN_MOTOR (+)
2	FAN_MOTOR (-)

VTR_SYNC — CL101
VTR_SYNCGND — CL102

MB-898 (1/2)
BOARD NO. 1-678-730-12
LOT NO. 083-
HDW-750_MB-898_013_1

HDW-750 (J) : S/N 70001 and Higher
HDW-750 (UCJ) : S/N 10001 and Higher

CN109
(CNB-15)

1	IO_EXT_TC_IN	2	IO_EXT_TC_GND
3	SS_EXT_TC_OUT	4	GND
5	IO_GENLOCKGND	6	IO_GENLOCK
7	GND	8	GND
9	DCP_TEST/YGND	10	DCP_TEST/Y
11	GND	12	IO_H_TEST_DET
13	GND	14	+5V
15	DCP_DVP_L_CN_NG	16	+5V
17	GND	18	GND
19	GND	20	GND
21	GND	22	GND
23	UNREG_+12V	24	UNREG_+12V
25	UNREG_+12V	26	UNREG_+12V
27	UNREG_+12V	28	UNREG_+12V
29	UNSW_+12V	30	UNSW_+12V
31	IFA_L_PWR_SWON	32	+48V
33	CNB_L_EX_DCIN	34	FP_H_PWR_HOLD
35	FP_AU_PB1 (Y)	36	FP_AU_PB1 (X)
37	GND	38	FP_AU_PB1 (G)
39	FP_AU_PB2 (Y)	40	FP_AU_PB2 (X)
41	GND	42	FP_AU_PB2 (G)
43	RE187_H_SHUT_OFF	44	FP_H_PWRON_MUTE
45	FP_XLR_LED_DRIVE	46	AXM_L_XLR_OUT_DET
47	AXM_L_XLR1_DET	48	AXM_L_XLR2_DET
49	FP_L_AUIN_ON	50	FP_L_AUOUT_ON
51	LP_TALLY_VCC	52	DCP_L_BACK_TALLY
53	AXM_CH1_MIC/LINE (Y)	54	AXM_CH1_MIC/LINE (X)
55	AXM_L_CH1_LINE	56	AXM_CH1_MIC/LINE (G)
57	AXM_CH2_MIC/LINE (Y)	58	AXM_CH2_MIC/LINE (X)
59	AXM_L_CH2_LINE	60	AXM_CH2_MIC/LINE (G)

C102 0.1uF → GND

CN110
(RE-186)

1	UNREG_+12V	2	UNREG_+12V
3	UNREG_+12V	4	UNREG_+12V
5	UNREG_+12V	6	UNREG_+12V
7	GND	8	GND
9	GND	10	GND
11	GND	12	GND
13	+48V	14	+48V
15	GND	16	GND
17	+1.8V	18	+1.8V
19	+1.8V	20	+1.8V
21	GND	22	GND
23	+3.3V	24	+3.3V
25	+3.3V	26	+3.3V
27	GND	28	GND
29	+8V	30	+8V
31	GND	32	GND
33	+2.5V	34	+2.5V
35	+2.5V	36	+2.5V
37	GND	38	GND
39	+1.5V	40	+1.5V
41	+1.5V	42	+1.5V
43	OSC	44	H_START_VP
45	IC_VCC	46	IC_VCC
47	DOWN_DET	48	RE187_H_SHUT_OFF
49	GND	50	46_REF_2.5V

C103 0.1uF
C104 0.1uF
C105 0.1uF
C106 0.1uF
C107 0.1uF
C108 0.1uF

CN111
(RE-187)

1	+9.3V	2	+9.3V
3		4	
5	-5V	6	-5V
7	-5V	8	-5V
9	-5V	10	-5V
11	GND	12	GND
13	+5V_CCD	14	+5V_CCD
15	+5V_CCD	16	+5V_CCD
17	+5V	18	+5V
19	+5V	20	+5V
21	46_REF_2.5V	22	GND
23	RE187_H_SHUT_OFF	24	DOWN_DET
25	IC_VCC	26	IC_VCC
27	H_START_VP	28	OSC
29	-8.5V	30	-8.5V
31	GND	32	GND
33	+24V	34	+24V
35	GND	36	GND
37	+15.5V	38	+15.5V
39	GND	40	GND
41	GND	42	GND
43	GND	44	GND
45	UNREG_+12V	46	UNREG_+12V
47	UNREG_+12V	48	UNREG_+12V
49	UNREG_+12V	50	UNREG_+12V

C101 0.1uF
C109 0.1uF
C110 0.1uF
C111 0.1uF
C112 0.1uF
C113 0.1uF
C114 0.1uF

CN112
(CA)

1	DVP_CA_V_D9	2	DVP_CA_VCK
3	DVP_CA_V_D8	4	DVP_CA_VCKGND
5	DVP_CA_V_D7	6	DVP_CA_FR/VD
7	DVP_CA_V_D6	8	DVP_CA_HD
9	DVP_CA_V_D5	10	DVP_CA_CF
11	DVP_CA_V_D4	12	DVP_CA_SY
13	DVP_CA_V_D3	14	GND
15	DVP_CA_V_D2	16	DVP_CA_47_256/512FS
17	DVP_CA_V_D1	18	DVP_CA_48_256FS
19	DVP_CA_V_D0	20	DVP_48_64FS
21	DVP_CA_C_D9	22	DVP_48_FS
23	DVP_CA_C_D8	24	DVP_47_64FS
25	DVP_CA_C_D7	26	DVP_47_FS
27	DVP_CA_C_D6	28	CA_EXT_47AU_D12
29	DVP_CA_C_D5	30	CA_EXT_47AU_D34
31	DVP_CA_C_D4	32	FP_SDI_47AU_D12
33	DVP_CA_C_D3	34	FP_SDI_47AU_D34
35	DVP_CA_C_D2	36	DCP_H_CA_V_OUT
37	DVP_CA_C_D1	38	DCP_L_CA_V_EN
39	DVP_CA_C_D0	40	DCP_L_CA_AU_EN
41	DCP_SKIN_GATE	42	DCP_L_CA_SY_EN
43	GND	44	UNREG_+12V
45	+5V	46	-5V
47	+3.3V	48	-5V
49	+3.3V	50	-5V
51	+3.3V	52	+9.3V
53		54	
55		56	
57		58	
59		60	
61		62	
63		64	
65		66	
67		68	
69		70	
71	SS_TF_CMD	72	SS_L_TF_ENA
73	SS_TF_CK	74	SS_L_TF_RST
75	TF_S_REQ	76	SS_TF_R_REQ
77	TF_RES	78	SS_L_HSDI_CPU_RST
79	+1.8V	80	SS_PS3_HSDI_CS
81	+1.8V	82	SS_PS3_HSDI_RES
83	+1.8V	84	SS_PS3_HSDI_RDY
85	GND	86	SS_PS3_HSDI_CK
87	GND	88	SS_PS3_HSDI_CMD
89	GND	90	HDSDI_L_EXIST
91	GND	92	CPNT_L_EXIST
93	GND	94	AU_L_EXIST
95	WRR_CA_AU2 (X)	96	WRR_CA_AU1 (X)
97	WRR_CA_AU2 (Y)	98	WRR_CA_AU1 (Y)
99	WRR_CA_AU (G)	100	CA_FP_INCOM
101	DCP_HD_Y	102	DCP_HD_YGND
103	DCP_HD_Pr	104	DCP_HD_PrGND
105	DCP_HD_Pb	106	DCP_HD_PbGND
107	DCP_L_SDI_AU_MUTE	108	CPNT_L_ACTIVE
109	CA_CCU_RET_Y/V (X)	110	CA_CCU_RET_YGND
111	CA_CCU_RET_Pr/V (Y)	112	CA_CCU_RET_PrGND
113	CA_CCU_RET_Pb	114	CA_CCU_RET_PbGND
115	DCP_CA_BLKG	116	CA_EXT_TALLY
117	CA_CCU_H/H_CONT (X)	118	CA_CCU_F/H_CONT (Y)
119	CA_DCP_RX/V_RESET	120	DCP_CA_TX/DATA

CN114
(RM)

1	DCP_RM_TX (+)
2	DCP_RM_TX (-)
3	RM_DCP_RX (+)
4	RM_DCP_RX (-)
5	GND
6	UNREG_+12V
7	DCP_RM_TESTGND
8	DCP_RM_TEST

CN115
(BATT)

1	BAT_REMAIN
2	BAT_ID_DATA
3	DCP_L_BAT_LIGHT_ON

CN116
(TALLY)

1	+5V
2	LP_TALLY_VCC

CN117
(WRR)

1	WRR_CA_AU2 (X)
2	WRR_CA_AU2 (Y)
3	WRR_CA_AU (G)
4	WRR_CA_AU1 (X)
5	WRR_CA_AU1 (Y)
6	GND
7	REG_+8V
8	REG_+8V
9	REG_-5V
10	REG_-5V
11	GND
12	WRR_CLK
13	FP_WRR_CS
14	WRR_DI
15	WRR_DO

CN118
(CHB)

1	GND
2	-8.5V
3	-8.5V
4	-8.5V
5	+15.5V
6	+8V
7	+8V
8	+5V_CCD
9	+5V_CCD
10	-5V
11	-5V
12	+24V

C115 0.1uF
C116 0.1uF
C117 0.1uF
C118 0.1uF
C119 0.1uF
C120 0.1uF

CN119
(CHB)

1	UNREG_+12V
2	GND
3	GND
4	GND
5	GND
6	+3.3V
7	+1.8V
8	+1.8V
9	+2.5V
10	+2.5V

C121 0.1uF
C122 0.1uF
C123 0.1uF
C124 0.1uF

CN120
(IFA)

1	IFA_FOCUS_PTSN
2	IFA_SDA
3	DCP_SCL
4	DCP_LENS_TX
5	IFA_LENS_RX
6	IFA_ZOOM_PSTN
7	IFA_DCP_JP0
8	IFA_IRIS_CONT
9	IFA_IRIS_PSTN
10	IFA_RET
11	IFA_L_VTR_S/S
12	IFA_L_PWR_SWON
13	FP_H_PHANTOM_OFF
14	GND
15	UNREG_+12V
16	GND
17	+48V
18	-5V
19	GND
20	+5V
21	IFA_FMIC_CONTGND
22	IFA_FMIC_CONT
23	FP_L_FMIC_OFF
24	MA_L_FMIC_ST
25	IFA_FMIC2 (G)
26	IFA_FMIC2 (Y)
27	IFA_FMIC2 (X)
28	IFA_FMIC1 (G)
29	IFA_FMIC1 (Y)
30	IFA_FMIC1 (X)

32 31

CN121
(LIGHT)

1	IFA_L_PWR_SWON
2	DCP_L_LIGHT_ON
3	DCP_H_LIGHT_OFF

CN122
(JTAG)

1	JTAG_SS_TDI
2	DCP_JTAG_TDO
3	JTAG_L_TMS
4	JTAG_L_TCK
5	JTAG_L_TRST
6	JTAG_H_TEST
7	GND
8	REG_+3.3V

MB-898 (2/2)
BOARD NO. 1-678-730-12
LOT NO. 083-
HDW-750_MB-898_013_2

BI-147 (R)

CN2	
1	GND
2	+15 V
3	+6.5 V
4	VLOT
5	SMD
6	SMG
7	+4.5 V
8	XH1
9	XH2
10	XRG
11	XLH1
12	HHG
13	VH2
14	VH1
15	R-ST8
16	R-ST7
17	R-ST6
18	R-ST5
19	R-ST4
20	R-ST3
21	R-ST2
22	R-ST1
23	R-IM1
24	R-IM2
25	R-IM3
26	R-IM4
27	R-SUB
28	−SHUTTER
29	+SHUTTER
30	GND

PA-253 CN101 ⟺ HN101 HARNESS(BI-G) CN2

1	1	−TEMP
1	2	+TEMP
1	3	GND
1	4	CCD_CH2_OUT
1	5	GND
1	6	CCD_CH1_OUT

BI-147 (G)

CN4	
1	GND
2	+15 V
3	+6.5 V
4	VLOT
5	SMD
6	SMG
7	+4.5 V
8	XH1
9	XH2
10	XRG
11	XLH1
12	HHG
13	VH2
14	VH1
15	G-ST8
16	G-ST7
17	G-ST6
18	G-ST5
19	G-ST4
20	G-ST3
21	G-ST2
22	G-ST1
23	G-IM1
24	G-IM2
25	G-IM3
26	G-IM4
27	G-SUB
28	−SHUTTER
29	+SHUTTER
30	GND

PA-253 CN102 ⟺ HN102 HARNESS(BI-G) CN2

1	1	−TEMP
1	2	+TEMP
1	3	GND
1	4	CCD_CH2_OUT
1	5	GND
1	6	CCD_CH1_OUT

BI-147 (B)

CN3	
1	GND
2	+15 V
3	+6.5 V
4	VLOT
5	SMD
6	SMG
7	+4.5 V
8	XH1
9	XH2
10	XRG
11	XLH1
12	HHG
13	VH2
14	VH1
15	B-ST8
16	B-ST7
17	B-ST6
18	B-ST5
19	B-ST4
20	B-ST3
21	B-ST2
22	B-ST1
23	B-IM1
24	B-IM2
25	B-IM3
26	B-IM4
27	B-SUB
28	−SHUTTER
29	+SHUTTER
30	GND

PA-253 CN103 ⟺ HN103 HARNESS(BI-G) CN2

1	1	−TEMP
1	2	+TEMP
1	3	GND
1	4	CCD_CH2_OUT
1	5	GND
1	6	CCD_CH1_OUT

VF ⟺ HN104 HARNESS(VF) CN4

2	1	Pr_VIDEO/VF_R_Y
6	2	Pb_VIDEO/VF_B_Y
8	3	COLOR1BW/COLOR_DET
9	4	G_TALLY/G_TALLY
6	5	S_CK_REC_TALLY(D)
1	6	POWER_OFF/V_SIZE
4	7	NC/NOSTD
3	8	S-DATA/VTR_SAVE
0	9	NC/VF_VIDEO(G)
9	10	Y_VIDEO/VF_VIDEO(X)
4	11	REC_TALLY
1	12	NC/VF_L/NT/H:PAL
8	13	VIDEO(G)/VF_MIC_VR
6	14	NC/ZEBRA
3	15	NC/BATT_IND
7	16	NC/DISP
1	17	UNREG+12 V
9	18	NC/VF_VIDEO(X)
0	19	VF_GND
2	20	NC/+9.3 V

CN-2037

CN1		CN6	
GND	1	1	GND
R-IM3	2	2	R-IM3
GND	3	3	GND
R-IM4	4	4	R-IM4
+7 V	5	5	+7 V
R-SUB	6	6	R-SUB
+7 V	7	7	+7 V
R-IM2	8	8	R-IM2
+7V	9	9	+7V
GND	10	10	GND
+4.5 V	11	11	+4.5 V
R-IM1	12	12	R-IM1
+4.5 V	13	13	+4.5 V
R-ST1	14	14	R-ST1
+4.5 V	15	15	+4.5 V
R-ST2	16	16	R-ST2
−5 V	17	17	−5 V
R-ST3	18	18	R-ST3
−5 V	19	19	−5 V
R-ST4	20	20	R-ST4
R-ST5	21	21	R-ST5
+ 15 V	22	22	+ 15 V
R-ST6	23	23	R-ST6
+15 V	24	24	+15 V
R-ST7	25	25	R-ST7
+15 V	26	26	+15 V
R-ST8	27	27	R-ST8
VLOUT	28	28	VLOUT
SMD	29	29	SMD
GND	30	30	GND
SMG	31	31	SMG
GND	32	32	GND
HHG	33	33	HHG
XH1	34	34	XH1
VH2	35	35	VH2
XH2	36	36	XH2
VH1	37	37	VH1
XRG	38	38	XRG
G-ST8	39	39	G-ST8
XKH1	40	40	XKH1
G-ST7	41	41	G-ST7
GND	42	42	GND
G-ST6	43	43	G-ST6
GND	44	44	GND
G-ST5	45	45	G-ST5
GND	46	46	GND
G-ST4	47	47	G-ST4
GND	48	48	GND
G-ST3	49	49	G-ST3
GND	50	50	GND
G-ST2	51	51	G-ST2
+SHUTTER	52	52	+SHUTTER
G-ST1	53	53	G-ST1
−SHUTTER	54	54	−SHUTTER
G-IM1	55	55	G-IM1
B-SUB	56	56	B-SUB
G-IM2	57	57	G-IM2
B-IM4	58	58	B-IM4
G-IM3	59	59	G-IM3
B-IM3	60	60	B-IM3
G-IM4	61	61	G-IM4
B-IM2	62	62	B-IM2
G-SUB	63	63	G-SUB
B-IM1	64	64	B-IM1
GND	65	65	GND
B-ST1	66	66	B-ST1
GND	67	67	GND
B-ST2	68	68	B-ST2
GND	69	69	GND
B-ST3	70	70	B-ST3
B-ST4	71	71	B-ST4
GND	72	72	GND
B-ST5	73	73	B-ST5
GND	74	74	GND
B-ST6	75	75	B-ST6
GND	76	76	GND
B-ST7	77	77	B-ST7
B-ST8	78	78	B-ST8
GND	79	79	GND
H_VCC	80	80	H_VCC

DR-433

CN4		CN1	
GND	1	1	GND
GND	2	2	GND
GND	3	3	GND
GND	4	4	GND
+3.3 V	5	5	+3.3 V
+3.3 V	6	6	+3.3 V
LD_FBC	7	7	LD_FBC
OHB_VD	8	8	OHB_VD
CXDCLK_EN	9	9	CXDCLK_EN
H_CLK	10	10	H_CLK
MODE3/BCSSCK	11	11	MODE3/BCSSCK
MODE2/BCSSIN	12	12	MODE2/BCSSIN
MODE1/BCSSOUT	13	13	MODE1/BCSSOUT
LD_OHB1	14	14	LD_OHB1
SDO	15	15	SDO
SCL	16	16	SCL
SDA	17	17	SDA
G_TEMP−	18	18	G_TEMP−
G_TEMP+	19	19	G_TEMP+
FRM_RST	20	20	FRM_RST
H_PHASE	21	21	H_PHASE
FLD/FRM/D-RST	22	22	FLD/FRM/D-RST
CLP_OUT	23	23	CLP_IN
DFS1/WSH_R	24	24	DFS1/WSH_R
POWER_SAVE_ON	25	25	POWER_SAVE_ON
XLH1_IN	26	26	XLH1_OUT
H_PHASE_IN	27	27	H_PHASE_IN
XRG_IN	28	28	XRG_OUT
CONT_59_60	29	29	CONT_59_60
XH2_IN	30	30	XH2_OUT
SLOW_SCAN_IN/WSH_G	31	31	SLOW_SCAN_IN/WSH_G
XH1_IN	32	32	XH1_OUT
OBLK1	33	33	OBLK1
OBLK2	34	34	OBLK2
PLL+_IN	35	35	PLL+_IN
PLL− _IN	36	36	PLL− _IN
+74M_IN	37	37	+74M_OUT
−74M_IN	38	38	−74M_OUT
+1.8 V	39	39	+1.8 V
+1.8 V	40	40	+1.8 V
+2.5 V	41	41	+2.5 V
PBLK/DEFS0/WSH_B	42	42	PBLK/DEFS0/WSH_B
+5 V	43	43	+5 V
+5 V	44	44	+5 V
−5 V	45	45	−5 V
−5 V	46	46	−5 V
GND	47	47	GND
GND	48	48	GND

CN3

CC_FILT_D_IN	1
CC_FILT_4_IN	2
CC_FILT_C_IN	3
CC_FILT_3_IN	4
CC_FILT_B_IN	5
CC_FILT_2_IN	6
CC_FILT_A_IN	7
CC_FILT_1_IN	8
ND_COMMON	9
CC_COMMON	10

FILTER UNIT

FACTORY USE

CN2

UNREG_OUT	1
UNREG_GND	2
UNREG_OUT	3
UNREG_GND	4
5 V_OUT	5
GND	6
SV_CONT_OUT	7
SERVO_EN_IN	8
CC_POSI_IN	9
SERVO_OFF_IN	10
CC_CONT_1_OUT	11
NC	12
CC_CONT_0_OUT	13
NC	14
ND_POSI_IN	15
NC	16
ND_CONT_1_OUT	17
SDA	18
ND_CONT_0_OUT	19
SCL	20

TG-219

CN2		CN104	
GND	1	1	GND
GND	2	2	GND
PA_GND	3	3	PA_GND
GND	4	4	GND
SHP/DEFS1/WSH_R	5	5	SHP/DEFS1/WSH_R
GND	6	6	GND
SLOW_SCAN/WSH_G	7	7	SLOW_SCAN/WSH_G
PA_+4.5 V	8	8	PA_+4.5 V
PA_+4.5FB	9	9	PA_+4.5FB
PA_+4.5 V	10	10	PA_+4.5 V
PA_+2.1 V	11	11	PA_+2.1 V
PA_+2.1 V	12	12	PA_+2.1 V
PBLK/DEFS0/WSH_B	13	13	DEFS0/WSH_B
+3.3 V	14	14	+3.3 V
SHPG74M	15	15	SHPG74M
+3.3 V	16	16	+3.3 V
SHD74M	17	17	SHD74M
PA_−4.5 V	18	18	PA_−4.5 V
PA_−4.5FB	19	19	PA_−4.5FB
PA_−4.5 V	20	20	PA_−4.5 V
G_TEMP+	21	21	G_TEMP+
BCS_+1.8 V	22	22	BCS_+1.8 V
G_TEMP−	23	23	G_TEMP−
BCS_+1.8 V	24	24	BCS_+1.8 V
MODE3/BCSSCK	25	25	MODE3/BCSSCK
FLD/FRM/D-RST	26	26	FLD/FRM/D-RST
CLP_OUT	27	27	CLP_IN
H_PHASE	28	28	H_PHASE
MPX1/37N	29	29	MPX1/37N
FRM_RST	30	30	FRM_RST
MPX2/LD_FBC	31	31	MPX2/LD_FBC
SDA	32	32	SDA
SCL	33	33	SCL
SDAO	34	34	SDAO
LD_OHB1	35	35	LD_OHB1
MODE1/BCSSOUT	36	36	MODE1/BCSSOUT
MODE2/BCSSIN	37	37	MODE2/BCSSIN
RP_CLK	38	38	RP_CLK
H_CLK	39	39	H_CLK
CXDCLK_EN	40	40	CXDCLK_EN
OHB_VD	41	41	OHB_VD
BCS_+2.5 V	42	42	BCS_+2.5 V
+5 V	43	43	+5 V
−5 V	44	44	−5 V
+5 V	45	45	+5 V
−5 V	46	46	−5 V
GND	47	47	GND
GND	48	48	GND

PA-253

CN1		CN1	
GND	1	1	GND
+5 V	2	2	+5 V
GND	3	3	GND
+5 V	4	4	+5 V
−5 V	5	5	−5 V
+5 V	6	6	+5 V
−5 V	7	7	−5 V
R_BSH	8	8	R_BSH
BCS+2.5 V	9	9	BCS+2.5 V
OHB_VD	10	10	OHB_VD
BCS+2.5 V	11	11	BCS+2.5 V
H_CLK	12	12	H_CLK
CXDCLK_EN	13	13	CXDCLK_EN
MODE2/BCSSIN	14	14	MODE2/BCSSIN
RP_CLK	15	15	RP_CLK
G_BSH	16	16	G_BSH
MODE1/BCSSOUT	17	17	MODE1/BCSSOUT
LD_OHB1	18	18	LD_OHB1
SDAO	19	19	SDAO
SCL	20	20	SCL
SDA	21	21	SDA
MPX2/LD_FBC	22	22	MPX2/LD_FBC
FRM_RST	23	23	FRM_RST
MPX1/37N	24	24	MPX1/37N
NC	25	25	NC
B_BSH	26	26	B_BSH
H_PHASE	27	27	H_PHASE
CLP_IN	28	28	CLP_IN
FLD/FRM/D-RST	29	29	FLD/FRM/D-RST
MODE3/BCSSCK	30	30	MODE3/BCSSCK
BCS_+1.8 V	31	31	BCS_+1.8 V
G_TEMP−	32	32	G_TEMP−
BCS_+1.8 V	33	33	BCS_+1.8 V
G_TEMP+	34	34	G_TEMP+
BCS_+1.8 V	35	35	BCS_+1.8 V
NC	36	36	NC
PA_−4.5 V	37	37	PA_−4.5 V
PA_−4.5 V	38	38	PA_−4.5 V
PA_−4.5 V	39	39	PA_−4.5 V
REG_+2.5 V	40	40	REG_+2.5 V
+3.3 V	41	41	+3.3 V
TH_COMPE	42	42	TH_COMPE
+3.3 V	43	43	+3.3 V
+3.3 V	44	44	+3.3 V
PA_+2.1 V	45	45	PA_+2.1 V
DEFS0/WSH_B	46	46	DEFS0/WSH_B
PA_+2.1 V	47	47	PA_+2.1 V
PA_+2.1 V	48	48	PA_+2.1 V
PA_+4.5 V	49	49	PA_+4.5 V
PA_+4.5 V	50	50	PA_+4.5 V
PA_+4.5 V	51	51	PA_+4.5 V
SLOW_SCAN/WSH_G	52	52	SLOW_SCAN/WSH_G
GND	53	53	GND
SHP/DEFS1/WSH_R	54	54	SHP/DEFS1/WSH_R
GND	55	55	GND
GND	56	56	GND
GND	57	57	GND
GND	58	58	GND
GND	59	59	GND
R_MPX_1N	60	60	R_MPX_1N
GND	61	61	GND
R_MPX_2P	62	62	R_MPX_2P
GND	63	63	GND
R_MPX_3N	64	64	R_MPX_3N
GND	65	65	GND
R_MPX_4P	66	66	R_MPX_4P
R_SH4	67	67	R_SH4
GND	68	68	GND
R_SH2	69	69	R_SH2
G_SH4	70	70	G_SH4
B_SH4	71	71	B_SH4
G_SH2	72	72	G_SH2
B_SH2	73	73	B_SH2
R_FITV	74	74	R_FITV
B_FITV	75	75	B_FITV
G_FITV	76	76	G_FITV
R_FB1	77	77	R_FB1
R_FB2	78	78	R_FB2
R_FB3	79	79	R_FB3
R_FB4	80	80	R_FB4
B_FB1	81	81	B_FB1
G_FB1	82	82	G_FB1
B_FB2	83	83	B_FB2
G_FB2	84	84	G_FB2
B_FB3	85	85	B_FB3
G_FB3	86	86	G_FB3
B_FB4	87	87	B_FB4
G_FB4	88	88	G_FB4
GND	89	89	GND
GND	90	90	GND
GND	91	91	GND
GND	92	92	GND
B_MPX_1N	93	93	B_MPX_1N
G_MPX_1N	94	94	G_MPX_1N
B_MPX_2P	95	95	B_MPX_2P
G_MPX_2P	96	96	G_MPX_2P
B_MPX_3N	97	97	B_MPX_3N
G_MPX_3N	98	98	G_MPX_3N
B_MPX_4P	99	99	B_MPX_4P
G_MPX_4P	100	100	G_MPX_4P

RP-123

CN1

1	GND
2	+5 V
3	GND
4	+5 V
5	−5 V
6	+5 V
7	−5 V
8	R_BSH
9	BCS+2.5 V
10	OHB_VD
11	BCS+2.5 V
12	H_CLK
13	CXDCLK_EN
14	MODE2/BCSSIN
15	RP_CLK
16	G_BSH
17	MODE1/BCSSOUT
18	LD_OHB1
19	SDAO
20	SCL
21	SDA
22	MPX2/LD_FBC
23	FRM_RST
24	MPX1/37N
25	NC
26	B_BSH
27	H_PHASE
28	CLP_IN
29	FLD/FRM/D-RST
30	MODE3/BCSSCK
31	BCS_+1.8 V
32	G_TEMP−
33	BCS_+1.8 V
34	G_TEMP+
35	BCS_+1.8 V
36	NC
37	PA_−4.5 V
38	PA_−4.5 V
39	PA_−4.5 V
40	REG_+2.5 V
41	+3.3 V
42	TH_COMPE
43	+3.3 V
44	+3.3 V
45	PA_+2.1 V
46	DEFS0/WSH_B
47	PA_+2.1 V
48	PA_+2.1 V
49	PA_+4.5 V
50	PA_+4.5 V
51	PA_+4.5 V
52	SLOW_SCAN/WSH_G
53	GND
54	SHP/DEFS1/WSH_R
55	GND
56	GND
57	GND
58	GND
59	GND
60	R_MPX_1N
61	GND
62	R_MPX_2P
63	GND
64	R_MPX_3N
65	GND
66	R_MPX_4P
67	R_SH4
68	GND
69	R_SH2
70	G_SH4
71	B_SH4
72	G_SH2
73	B_SH2
74	R_FITV
75	B_FITV
76	G_FITV
77	R_FB1
78	R_FB2
79	R_FB3
80	R_FB4
81	B_FB1
82	G_FB1
83	B_FB2
84	G_FB2
85	B_FB3
86	G_FB3
87	B_FB4
88	G_FB4
89	GND
90	GND
91	GND
92	GND
93	B_MPX_1N
94	G_MPX_1N
95	B_MPX_2P
96	G_MPX_2P
97	B_MPX_3N
98	G_MPX_3N
99	B_MPX_4P
100	G_MPX_4P

MB-898

CN118 ⟺ HN106 HARNESS (MB898-DR430) ⟺ CN9

GND	−8.5 V	−8.5 V	+15.5 V	+7 V	+7 V	+5 V	+5 V	−5 V	−5 V	+24 V
1	2	3	4	5	6	7	8	9	10	11	12

CN119 ⟺ HN107 HARNESS (DR430-MB898) ⟺ CN10

UNREG_+12 V	GND	GND	GND	+3.3 V	+1.8 V	+2.5 V	+2.5 V
1	2	3	4	5	6	7	8	9	10

CN1 ⟺ HN105 FLEXIBLE FLAT CABLE ⟺ CN105

DEFS1/WSH_R	WSH_G	DEFS0_WSH_B	LD_OHB1	EEPROM_CS	G	GND	PLL(+)	PLL(−)	POWER_SAVE_X_ON	OHB_RST	GND	CK74M(+)	CK74M(−)	GND	FRM_RST_H	H_PHASE_H	CC_POS	NC_POS	CC_POS	TEMP	SDA_OHB	SCL_OHB	GND	BCONSH_TX	BCONSH_RX	BCONSH_CX	H'SIG	GND
30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1

DEFS1/WSH_R	WSH_G	DEFS0_WSH_B	LD_OHB1	EEPROM_CS	G	GND	PLL(+)	PLL(−)	POWER_SAVE_X_ON	OHB_RST	GND	CK74M(+)	CK74M(−)	GND	FRM_RST_H	H_PHASE_H	CC_POS	NC_POS	CC_POS	TEMP	SDA_OHB	SCL_OHB	GND	BCONSH_TX	BCONSH_RX	BCONSH_CX	H'SIG	GND
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30

DCP-28 (1/2)

CN3

R_PA(G)	1
R_PA(X)	2
G_PA(G)	3
G_PA(X)	4
B_PA(G)	5
B_PA(X)	6

HN108 HARNESS (PA249-DCP28) ⟺ CN303

1	R_PA_VIDEO(G)
2	R_PA_VIDEO(X)
3	G_PA_VIDEO(G)
4	G_PA_VIDEO(X)
5	B_PA_VIDEO(G)
6	B_PA_VIDEO(X)

CN101 ⟺ HN101 HARNESS(BI-G) ⟺ CN2 BI-147 (R)

R-TEMP−	R-TEMP+	GND	R-CCD_CH2_IN	GND	R-CCD_CH1_IN
1	2	3	4	5	6

CN102 ⟺ HN102 HARNESS(BI-G) ⟺ CN2 BI-147 (G)

G-TEMP−	G-TEMP+	GND	G-CCD_CH2_IN	GND	G-CCD_CH1_IN
1	2	3	4	5	6

CN103 ⟺ HN103 HARNESS(BI-G) ⟺ CN2 BI-147 (B)

B-TEMP−	B-TEMP+	GND	B-CCD_CH2_IN	GND	B-CCD_CH1_IN
1	2	3	4	5	6

Frame Wiring (1/4)

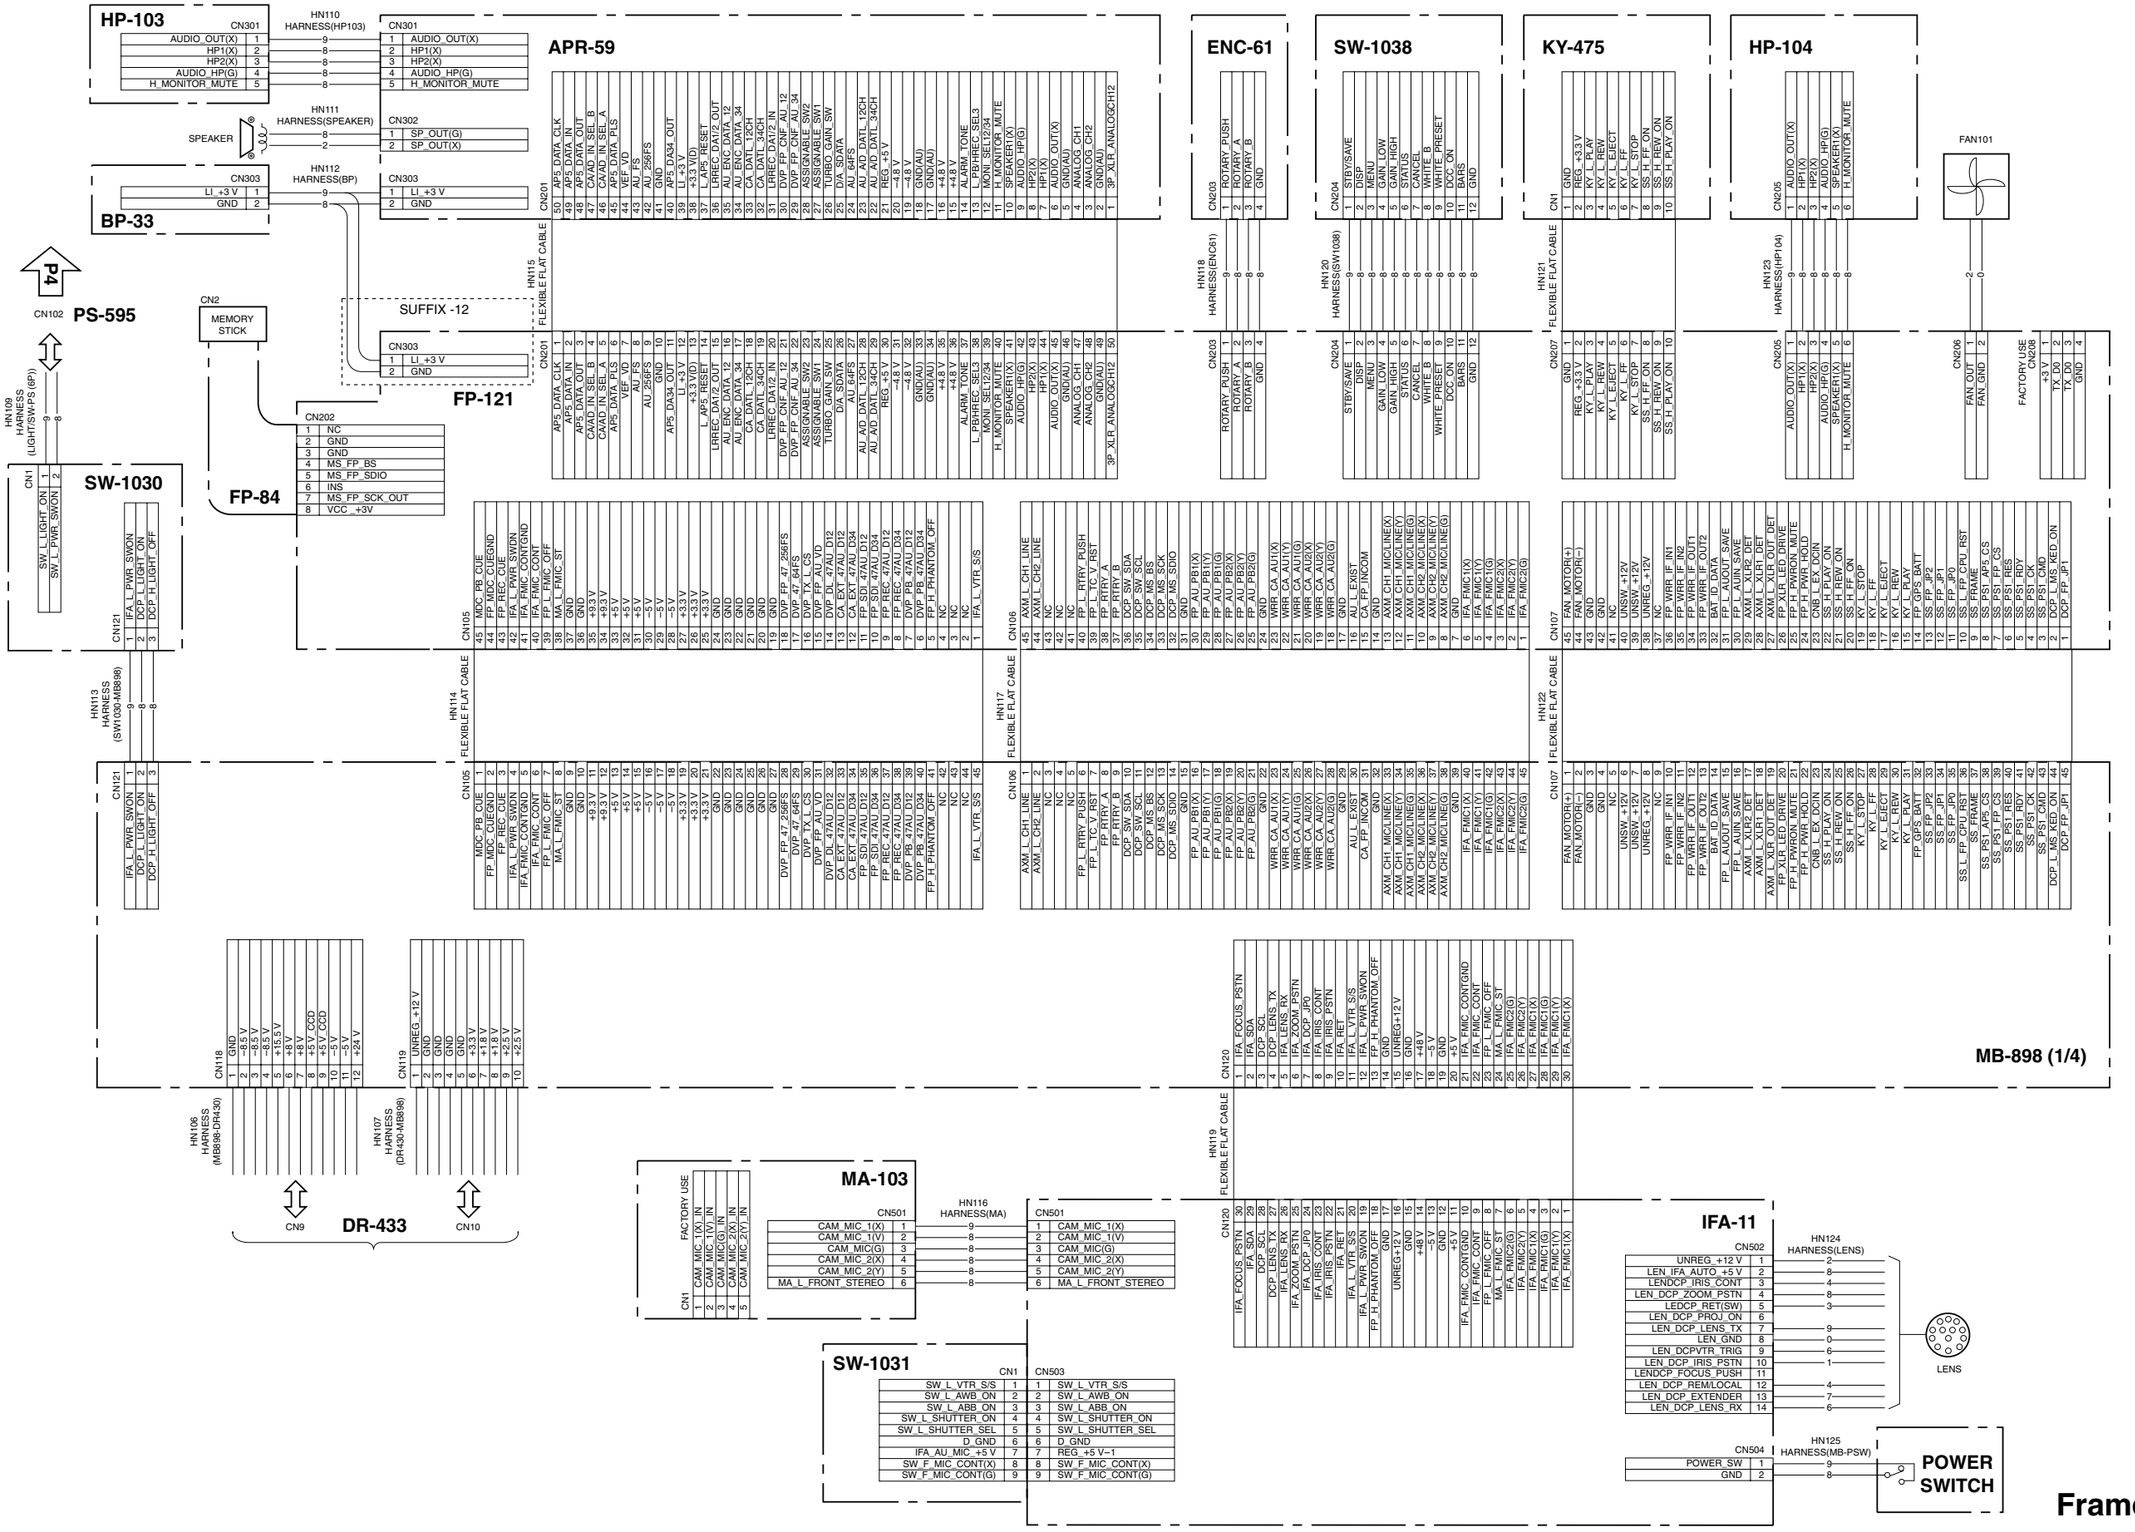

MY-99 (HKDW-703)

CN101		
HENCA_VD7	1	HENCA_VD7
HENCA_VD6	2	HENCA_VD6
HENCA_VD5	3	HENCA_VD5
HENCA_VD4	4	HENCA_VD4
HENCA_VD3	5	HENCA_VD3
HENCA_VD2	6	HENCA_VD2
HENCA_VD1	7	HENCA_VD1
HENCA_VD0	8	HENCA_VD0
HENCA_SYNC	9	HENCA_SYNC
HENCA_FRM	10	HENCA_FRM
HENCA_SEG	11	HENCA_SEG
GND	12	GND
GND	13	GND
HENCB_VD7	14	HENCB_VD7
HENCB_VD6	15	HENCB_VD6
HENCB_VD5	16	HENCB_VD5
HENCB_VD4	17	HENCB_VD4
HENCB_VD3	18	HENCB_VD3
HENCB_VD2	19	HENCB_VD2
HENCB_VD1	20	HENCB_VD1
HENCB_VD0	21	HENCB_VD0
HENCB_SYNC	22	HENCB_SYNC
HENCB_FRM	23	HENCB_FRM
HENCB_SEG	24	HENCB_SEG
GND	25	GND
L_V0_BYPASS	26	L_V0_BYPASS
DL_HENCA_VD0	27	DL_HENCA_VD0
DL_HENCA_VD1	28	DL_HENCA_VD1
DL_HENCA_VD2	29	DL_HENCA_VD2
DL_HENCA_VD3	30	DL_HENCA_VD3
DL_HENCA_VD4	31	DL_HENCA_VD4
DL_HENCA_VD5	32	DL_HENCA_VD5
DL_HENCA_VD6	33	DL_HENCA_VD6
DL_HENCA_VD7	34	DL_HENCA_VD7
GND	35	GND
L_V1_BYPASS	36	L_V1_BYPASS
DL_HENCB_VD0	37	DL_HENCB_VD0
DL_HENCB_VD1	38	DL_HENCB_VD1
DL_HENCB_VD2	39	DL_HENCB_VD2
DL_HENCB_VD3	40	DL_HENCB_VD3
DL_HENCB_VD4	41	DL_HENCB_VD4
DL_HENCB_VD5	42	DL_HENCB_VD5
DL_HENCB_VD6	43	DL_HENCB_VD6
DL_HENCB_VD7	44	DL_HENCB_VD7
GND	45	GND
FP_SDI_AU_D12	46	FP_SDI_AU_D12
FPREC_AU_D12	47	FPREC_AU_D12
DL_AU_DATA34	48	DL_AU_DATA34
DL_AU_DATA12	49	DL_AU_DATA12
DVP_DL_AU_D12	50	DVP_DL_AU_D12
DVP_DL_TC	51	DVP_DL_TC
L_AUD_BYPASS	52	L_AUD_BYPASS
LOOPREC_CONECT	53	LOOPREC_CONECT
L_REC_MODE	54	L_REC_MODE
LOOPREC_RST	55	LOOPREC_RST
LOOPREC_ACTIVE	56	LOOPREC_ACTIVE
SS_REC_TC	57	SS_REC_TC
SS_L_PIO_CS2	58	SS_L_PIO_CS2
SS_BUS_D0	59	SS_BUS_D0
SS_BUS_D1	60	SS_BUS_D1
SS_BUS_D2	61	SS_BUS_D2
SS_BUS_D3	62	SS_BUS_D3
SS_BUS_D4	63	SS_BUS_D4
SS_BUS_D5	64	SS_BUS_D5
SS_BUS_D6	65	SS_BUS_D6
SS_BUS_D7	66	SS_BUS_D7
SS_L_WR	67	SS_L_WR
SS_L_RD	68	SS_L_RD
SS_L_WR	69	SS_L_WR
SS_L_PIO_CS2	70	SS_L_PIO_CS2
DPR_PAD_ST0	71	DPR_PAD_ST0
DPR_PAD_ST1	72	DPR_PAD_ST1
DPR_PAD_ST2	73	DPR_PAD_ST2
JTAG_TMS	74	JTAG_TMS
JTAG_TDO	75	JTAG_TDO
MY_DVP_TDO	76	MY_DVP_TDO
MY_DVP_TDO	77	MY_DVP_TDO
FS256_47_SDI	78	FS256_47_SDI
FS64_47_SDI	79	FS64_47_SDI
FS_47_SDI	80	FS_47_SDI
GND	81	GND
GND	82	GND
CK46_LOOP	84	CK46_LOOP
REF_F_ECC	85	REF_F_ECC
GND	86	GND
GND	87	GND
GND	88	GND
GND	89	GND
GND	90	GND
REG_–5.0 V	91	REG_–5.0 V
REG_–5.0 V	92	REG_–5.0 V
REG_+2.5 V	93	REG_+2.5 V
REG_+2.5 V	94	REG_+2.5 V
REG_+2.5 V	95	REG_+2.5 V
REG_+3.3V	96	REG_+3.3V
REG_+3.3V	97	REG_+3.3V
REG_+3.3V	98	REG_+3.3V
REG_+3.3V	99	REG_+3.3V
REG_+3.3V	100	REG_+3.3V

TX-78

CN104		
GND	1	GND
GND	2	GND
–5 V	3	–5 V
–5 V	4	–5 V
+1.5 V	5	+1.5 V
+1.5 V	6	+1.5 V
+5 V	7	+5 V
+5 V	8	+5 V
+5 V	9	+5 V
+5 V	10	+5 V
+3.3 V	11	+3.3 V
+3.3 V	12	+3.3 V
+3.3 V	13	+3.3 V
+3.3 V	14	+3.3 V
GND	15	GND
GND	16	GND
DVP_TX_L_ACTIVE	17	DVP_TX_L_ACTIVE
TX_DVP_L_EXIST	18	TX_DVP_L_EXIST
TX_DVP_SDI_BUSY	19	TX_DVP_SDI_BUSY
DVP_TX_TDO	20	DVP_TX_TDO
DVP_TX_TDO	21	DVP_TX_TDO
JTAG_L_TRST	22	JTAG_L_TRST
JTAG_L_TMS	23	JTAG_L_TMS
JTAG_L_TCK	24	JTAG_L_TCK
DVP_TX_HCLK	25	DVP_TX_HCLK
DVP_TX_RST	26	DVP_TX_RST
DVP_TX_CS	27	DVP_TX_CS
DVP_TX_BUS_A1	29	DVP_TX_BUS_A1
DVP_TX_BUS_0	30	DVP_TX_BUS_0
DVP_TX_BUS_D7	31	DVP_TX_BUS_D7
DVP_TX_BUS_D6	32	DVP_TX_BUS_D6
DVP_TX_BUS_D5	33	DVP_TX_BUS_D5
DVP_TX_BUS_D4	34	DVP_TX_BUS_D4
DVP_TX_BUS_D3	35	DVP_TX_BUS_D3
DVP_TX_BUS_D2	36	DVP_TX_BUS_D2
DVP_TX_BUS_D1	37	DVP_TX_BUS_D1
DVP_TX_BUS_D0	38	DVP_TX_BUS_D0
GND	39	GND
GND	40	GND
DVP_TX_AU_64FS	41	DVP_TX_AU_64FS
DVP_TX_AU_FS	42	DVP_TX_AU_FS
NC	43	NC
NC	44	NC
NC	45	NC
NC	46	NC
DVP_TX_AU_D34	47	DVP_TX_AU_D34
NC	48	NC
DVP_TX_AU_D12	50	DVP_TX_AU_D12
GND	51	GND
GND	52	GND
DVP_TX_CK_74	53	DVP_TX_CK_74
NC	54	NC
DVP_TX_FR	55	DVP_TX_FR
DVP_TX_HD	56	DVP_TX_HD
DVP_TX_C_D9	57	DVP_TX_C_D9
DVP_TX_C_D8	58	DVP_TX_C_D8
DVP_TX_C_D7	59	DVP_TX_C_D7
DVP_TX_C_D6	60	DVP_TX_C_D6
DVP_TX_C_D5	61	DVP_TX_C_D5
DVP_TX_C_D4	62	DVP_TX_C_D4
DVP_TX_C_D3	63	DVP_TX_C_D3
DVP_TX_C_D2	64	DVP_TX_C_D2
DVP_TX_C_D1	65	DVP_TX_C_D1
DVP_TX_C_D0	66	DVP_TX_C_D0
DVP_TX_C_P	67	DVP_TX_C_P
DVP_TX_Y_P	68	DVP_TX_Y_P
DVP_TX_Y_D9	69	DVP_TX_Y_D9
DVP_TX_Y_D8	70	DVP_TX_Y_D8
DVP_TX_Y_D7	71	DVP_TX_Y_D7
DVP_TX_Y_D6	72	DVP_TX_Y_D6
DVP_TX_Y_D5	73	DVP_TX_Y_D5
DVP_TX_Y_D4	74	DVP_TX_Y_D4
DVP_TX_Y_D3	75	DVP_TX_Y_D3
DVP_TX_Y_D2	76	DVP_TX_Y_D2
DVP_TX_Y_D1	77	DVP_TX_Y_D1
DVP_TX_Y_D0	78	DVP_TX_Y_D0
GND	79	GND
GND	80	GND

HD SDI OUT

HN201

CN201

DVP-18 (1/2)

CN103		
JTAG_H_TEST	1	JTAG_H_TEST
JTAG_L_TRST	2	JTAG_L_TRST
JTAG_L_CLK	3	JTAG_L_CLK
JTAG_L_TMS	4	JTAG_L_TMS
DVP_JTAG_TDO	5	DVP_JTAG_TDO
SS_DVP_TDO	6	SS_DVP_TDO
GND	7	GND
DVP_PB_47AU_D12	7	DVP_PB_47AU_D12
GND	8	GND
FP_REC_47AU_D34	9	FP_REC_47AU_D34
FP_REC_47AU_D12	10	FP_REC_47AU_D12
+1.8 V	11	+1.8 V
+1.8 V	12	+1.8 V
+1.8 V	13	+1.8 V
+1.8 V	14	+1.8 V
+1.5 V	15	+1.5 V
+1.5 V	16	+1.5 V
+1.5 V	17	+1.5 V
+1.5 V	18	+1.5 V
+1.5 V	19	+1.5 V
+1.5 V	20	+1.5 V
+3.3 V	31	+3.3 V
+3.3 V	32	+3.3 V
+3.3 V	33	+3.3 V
+3.3 V	34	+3.3 V
+3.3 V	35	+3.3 V
+3.3 V	36	+3.3 V
+3.3 V	37	+3.3 V
+3.3 V	38	+3.3 V
+3.3 V	39	+3.3 V
–5 V	39	–5 V
–5 V	40	–5 V
–5 V	41	–5 V
–5 V	42	–5 V
–5 V	43	–5 V
+5 V	44	+5 V
+5 V	45	+5 V
+5 V	46	+5 V
+15.5 V	47	+15.5 V
+15.5 V	48	+15.5 V
GND	49	GND
GND	50	GND
GND	51	GND
GND	60	GND
GND	61	GND
GND	62	GND
CN4B_GENLOCK	63	CN4B_GENLOCK
NC	64	NC
GND	65	GND
FP_SDI_47AU_D34	66	FP_SDI_47AU_D34
FP_SDI_47AU_D12	67	FP_SDI_47AU_D12
GND	68	GND
FP_FP_AU_VD	69	FP_FP_AU_VD
DVP_FP_AU_VD	70	DVP_FP_AU_VD
DVP_47_64FS	71	DVP_47_64FS
DVP_FP_47_256FS	72	DVP_FP_47_256FS
GND	73	GND
DCP_DVP_LCN_NG	74	DCP_DVP_LCN_NG
NC	75	NC
NC	76	NC
DVP_SD_FR	77	DVP_SD_FR
DVP_SD_CFIIN_CF	78	DVP_SD_CFIIN_CF
DVP_SD_VDIIN_VD	79	DVP_SD_VDIIN_VD
DVP_SD_HDIIN_HD	80	DVP_SD_HDIIN_HD
DVP_DCP_JP0	81	DVP_DCP_JP0
DVP_48_FS	82	DVP_48_FS
DVP_48_64FS	83	DVP_48_64FS
DVP_48_128FS	84	DVP_48_128FS
DVP_DCP_48AU_D34	85	DVP_DCP_48AU_D34
DVP_DCP_48AU_D12	86	DVP_DCP_48AU_D12
DVP_CA_47_256FS	87	DVP_CA_47_256FS
EQ_TRACK_REF_A	88	EQ_TRACK_REF_A
DVP_TAPE_SPEED	89	DVP_TAPE_SPEED
SS_TRACK_STATE	90	SS_TRACK_STATE
SS_PS3_EQ_CMD	91	SS_PS3_EQ_CMD
SS_PS3_EQ_CK	92	SS_PS3_EQ_CK
RM_DCP_RX(–)	93	RM_DCP_RX(–)
RM_DCP_RX(+)	94	RM_DCP_RX(+)
DCP_RM_TX(–)	95	DCP_RM_TX(–)
DCP_RM_TX(+)	96	DCP_RM_TX(+)
DCP_MS_SDIO	97	DCP_MS_SDIO
DCP_MS_SCK	98	DCP_MS_SCK
DCP_MS_BS	99	DCP_MS_BS
NC	100	NC
NC	101	NC
SS_DCP_JP0	102	SS_DCP_JP0
FP_SW_SCL	103	FP_SW_SCL
DCP_FP_SDA	104	DCP_FP_SDA
FP_FRRY_A	105	FP_FRRY_A
FP_FRRY_A	106	FP_FRRY_A
FP_L_TC_V_RST	107	FP_L_TC_V_RST
FP_L_RTRY_PUSH	108	FP_L_RTRY_PUSH
DCP_FP_JP1	109	DCP_FP_JP1
DCP_L_MS_LED_ON	110	DCP_L_MS_LED_ON
SS_AU_ID1	111	SS_AU_ID1
DVP_AU_ID2	112	DVP_AU_ID2
DVP_AU_ID1	113	DVP_AU_ID1
DVP_AU_ID0	114	DVP_AU_ID0
NC	115	NC
DVP_REF_CF	116	DVP_REF_CF
DVP_REF_FRM	117	DVP_REF_FRM
SS_L_PIO_RST	118	SS_L_PIO_RST
SS_L_PIO2_CS	119	SS_L_PIO2_CS
+1.5 V	120	+1.5 V
+1.5 V	121	+1.5 V
+1.5 V	122	+1.5 V
+1.5 V	123	+1.5 V
+1.5 V	124	+1.5 V
+1.8 V	125	+1.8 V
+1.8 V	126	+1.8 V
+1.8 V	127	+1.8 V
+1.8 V	128	+1.8 V
+1.8 V	129	+1.8 V
+1.8 V	130	+1.8 V
+2.5 V	131	+2.5 V
+2.5 V	132	+2.5 V
+2.5 V	133	+2.5 V
+2.5 V	134	+2.5 V
+2.5 V	135	+2.5 V
+3.3 V	136	+3.3 V
+3.3 V	137	+3.3 V
+3.3 V	138	+3.3 V
+3.3 V	139	+3.3 V
+3.3 V	140	+3.3 V
+3.3 V	141	+3.3 V
+3.3 V	142	+3.3 V
GND	143	GND
NC	144	NC
DCP_DVP_VCKGND	145	DCP_DVP_VCKGND
DCP_DVP_VCK	146	DCP_DVP_VCK
DCP_DVP_C_D0	147	DCP_DVP_C_D0
DCP_DVP_C_D1	148	DCP_DVP_C_D1
DCP_DVP_C_D2	149	DCP_DVP_C_D2
DCP_DVP_C_D3	150	DCP_DVP_C_D3
DCP_DVP_C_D4	151	DCP_DVP_C_D4
DCP_DVP_C_D5	152	DCP_DVP_C_D5
DCP_DVP_C_D6	153	DCP_DVP_C_D6
DCP_DVP_C_D7	154	DCP_DVP_C_D7
DCP_DVP_C_D8	155	DCP_DVP_C_D8
DCP_DVP_C_D9	156	DCP_DVP_C_D9
DCP_DVP_V_D0	157	DCP_DVP_V_D0
DCP_DVP_V_D1	158	DCP_DVP_V_D1
DCP_DVP_V_D2	159	DCP_DVP_V_D2
DCP_DVP_V_D3	160	DCP_DVP_V_D3
DCP_DVP_V_D4	161	DCP_DVP_V_D4
DCP_DVP_V_D5	162	DCP_DVP_V_D5
DCP_DVP_V_D6	163	DCP_DVP_V_D6
DCP_DVP_V_D7	164	DCP_DVP_V_D7
DCP_DVP_V_D8	165	DCP_DVP_V_D8
DCP_DVP_V_D9	166	DCP_DVP_V_D9
DCP_DVP_FRP	167	DCP_DVP_FRP
DCP_DVP_OE	168	DCP_DVP_OE
DCP_DVP_HD	169	DCP_DVP_HD
DCP_DVP_CF	170	DCP_DVP_CF
DCP_DVP_SY	171	DCP_DVP_SY
NC	172	NC
GND	173	GND
DCP_H_CA_V_EN	174	DCP_H_CA_V_EN
DCP_H_CA_V_OUT	175	DCP_H_CA_V_OUT
DCP_L_CA_V_EN	176	DCP_L_CA_V_EN
DCP_L_CA_AU_EN	177	DCP_L_CA_AU_EN
DCP_L_CA_SV_EN	178	DCP_L_CA_SV_EN
NC	179	NC
DCP_SKIN_GATE	180	DCP_SKIN_GATE

MB-898 (2/4)

CN104		
DCP_H_CA_V_OUT	175	DCP_H_CA_V_OUT
DCP_L_CA_V_EN	176	DCP_L_CA_V_EN
DCP_L_CA_AU_EN	177	DCP_L_CA_AU_EN
DCP_L_CA_SV_EN	178	DCP_L_CA_SV_EN
NC	179	NC
DCP_SKIN_GATE	180	DCP_SKIN_GATE

CN103		
DCP_H_CA_V_OUT	175	DCP_H_CA_V_OUT
DCP_L_CA_V_EN	176	DCP_L_CA_V_EN
DCP_L_CA_AU_EN	177	DCP_L_CA_AU_EN
DCP_L_CA_SV_EN	178	DCP_L_CA_SV_EN
NC	179	NC
DCP_SKIN_GATE	180	DCP_SKIN_GATE

DCP-28 (2/2)

Frame Wiring (2/4)

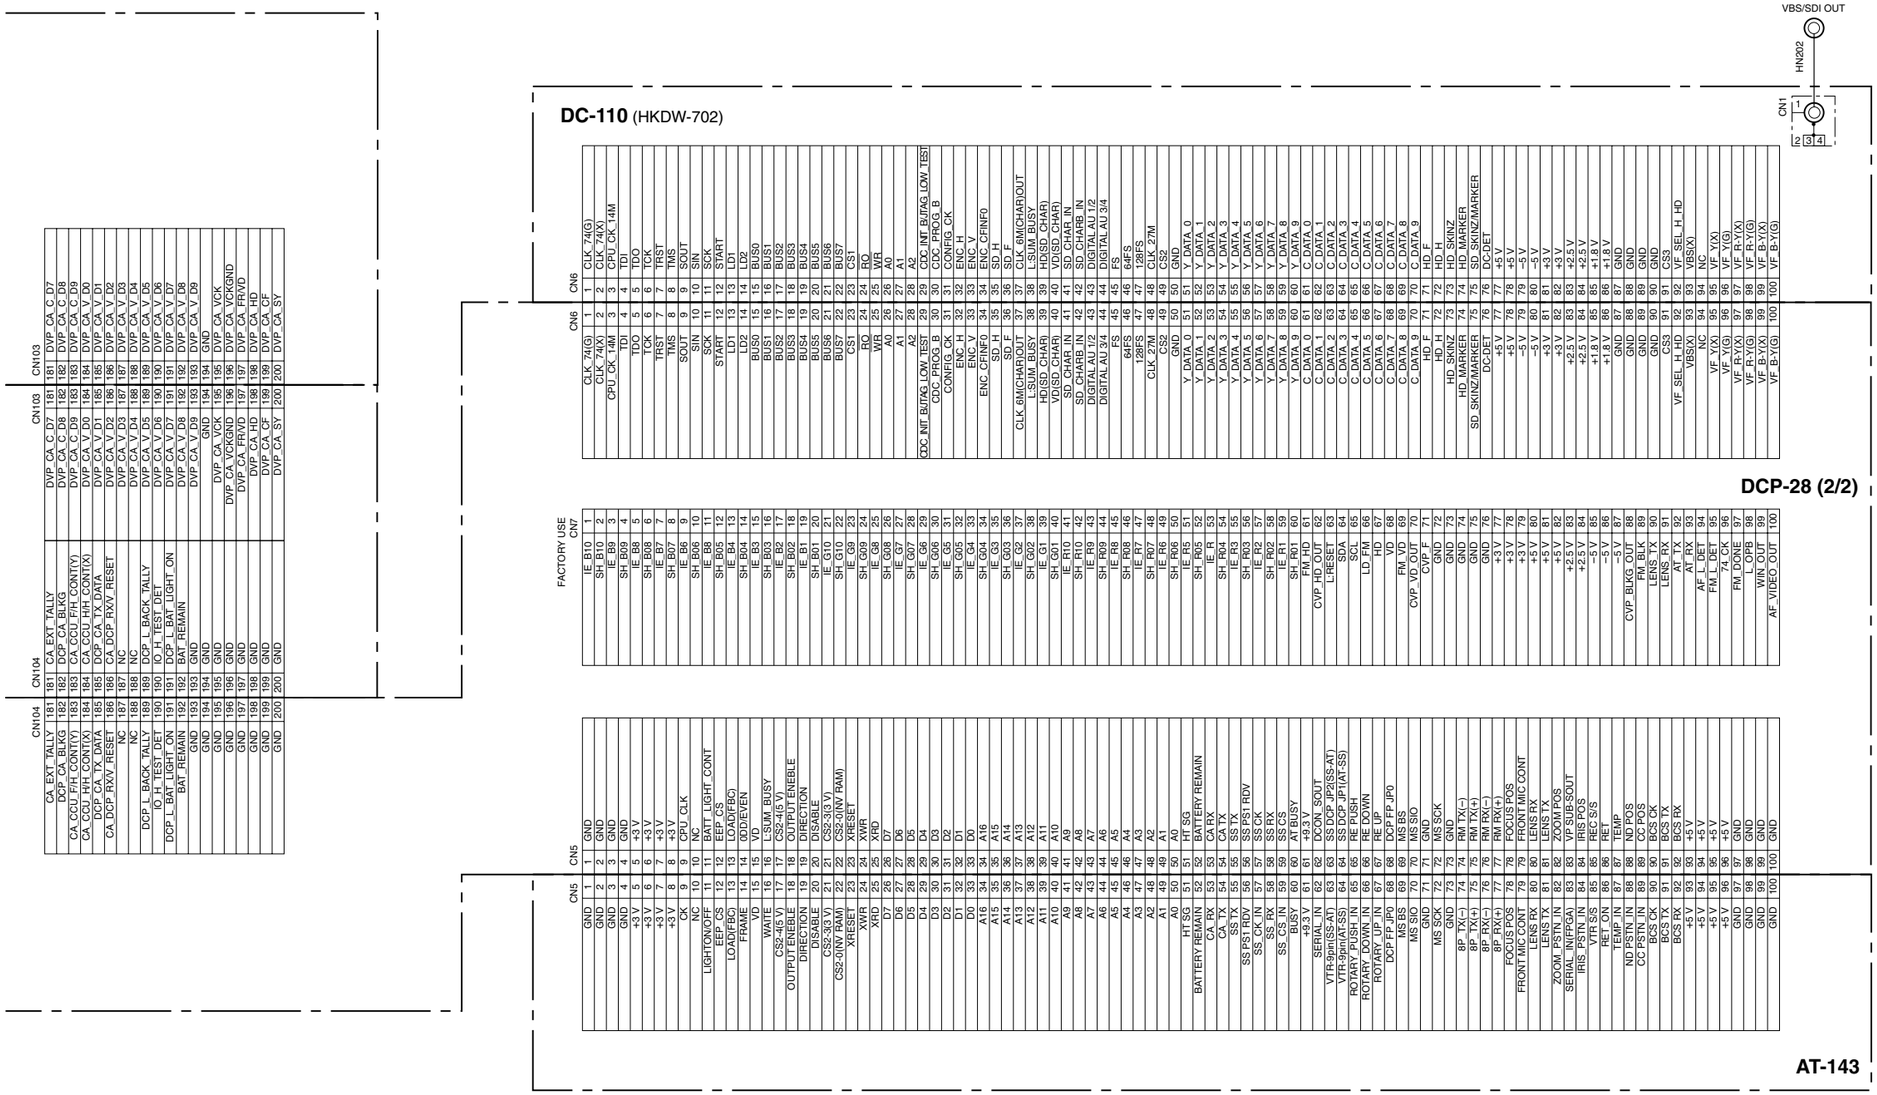

Frame Wiring (3/4)

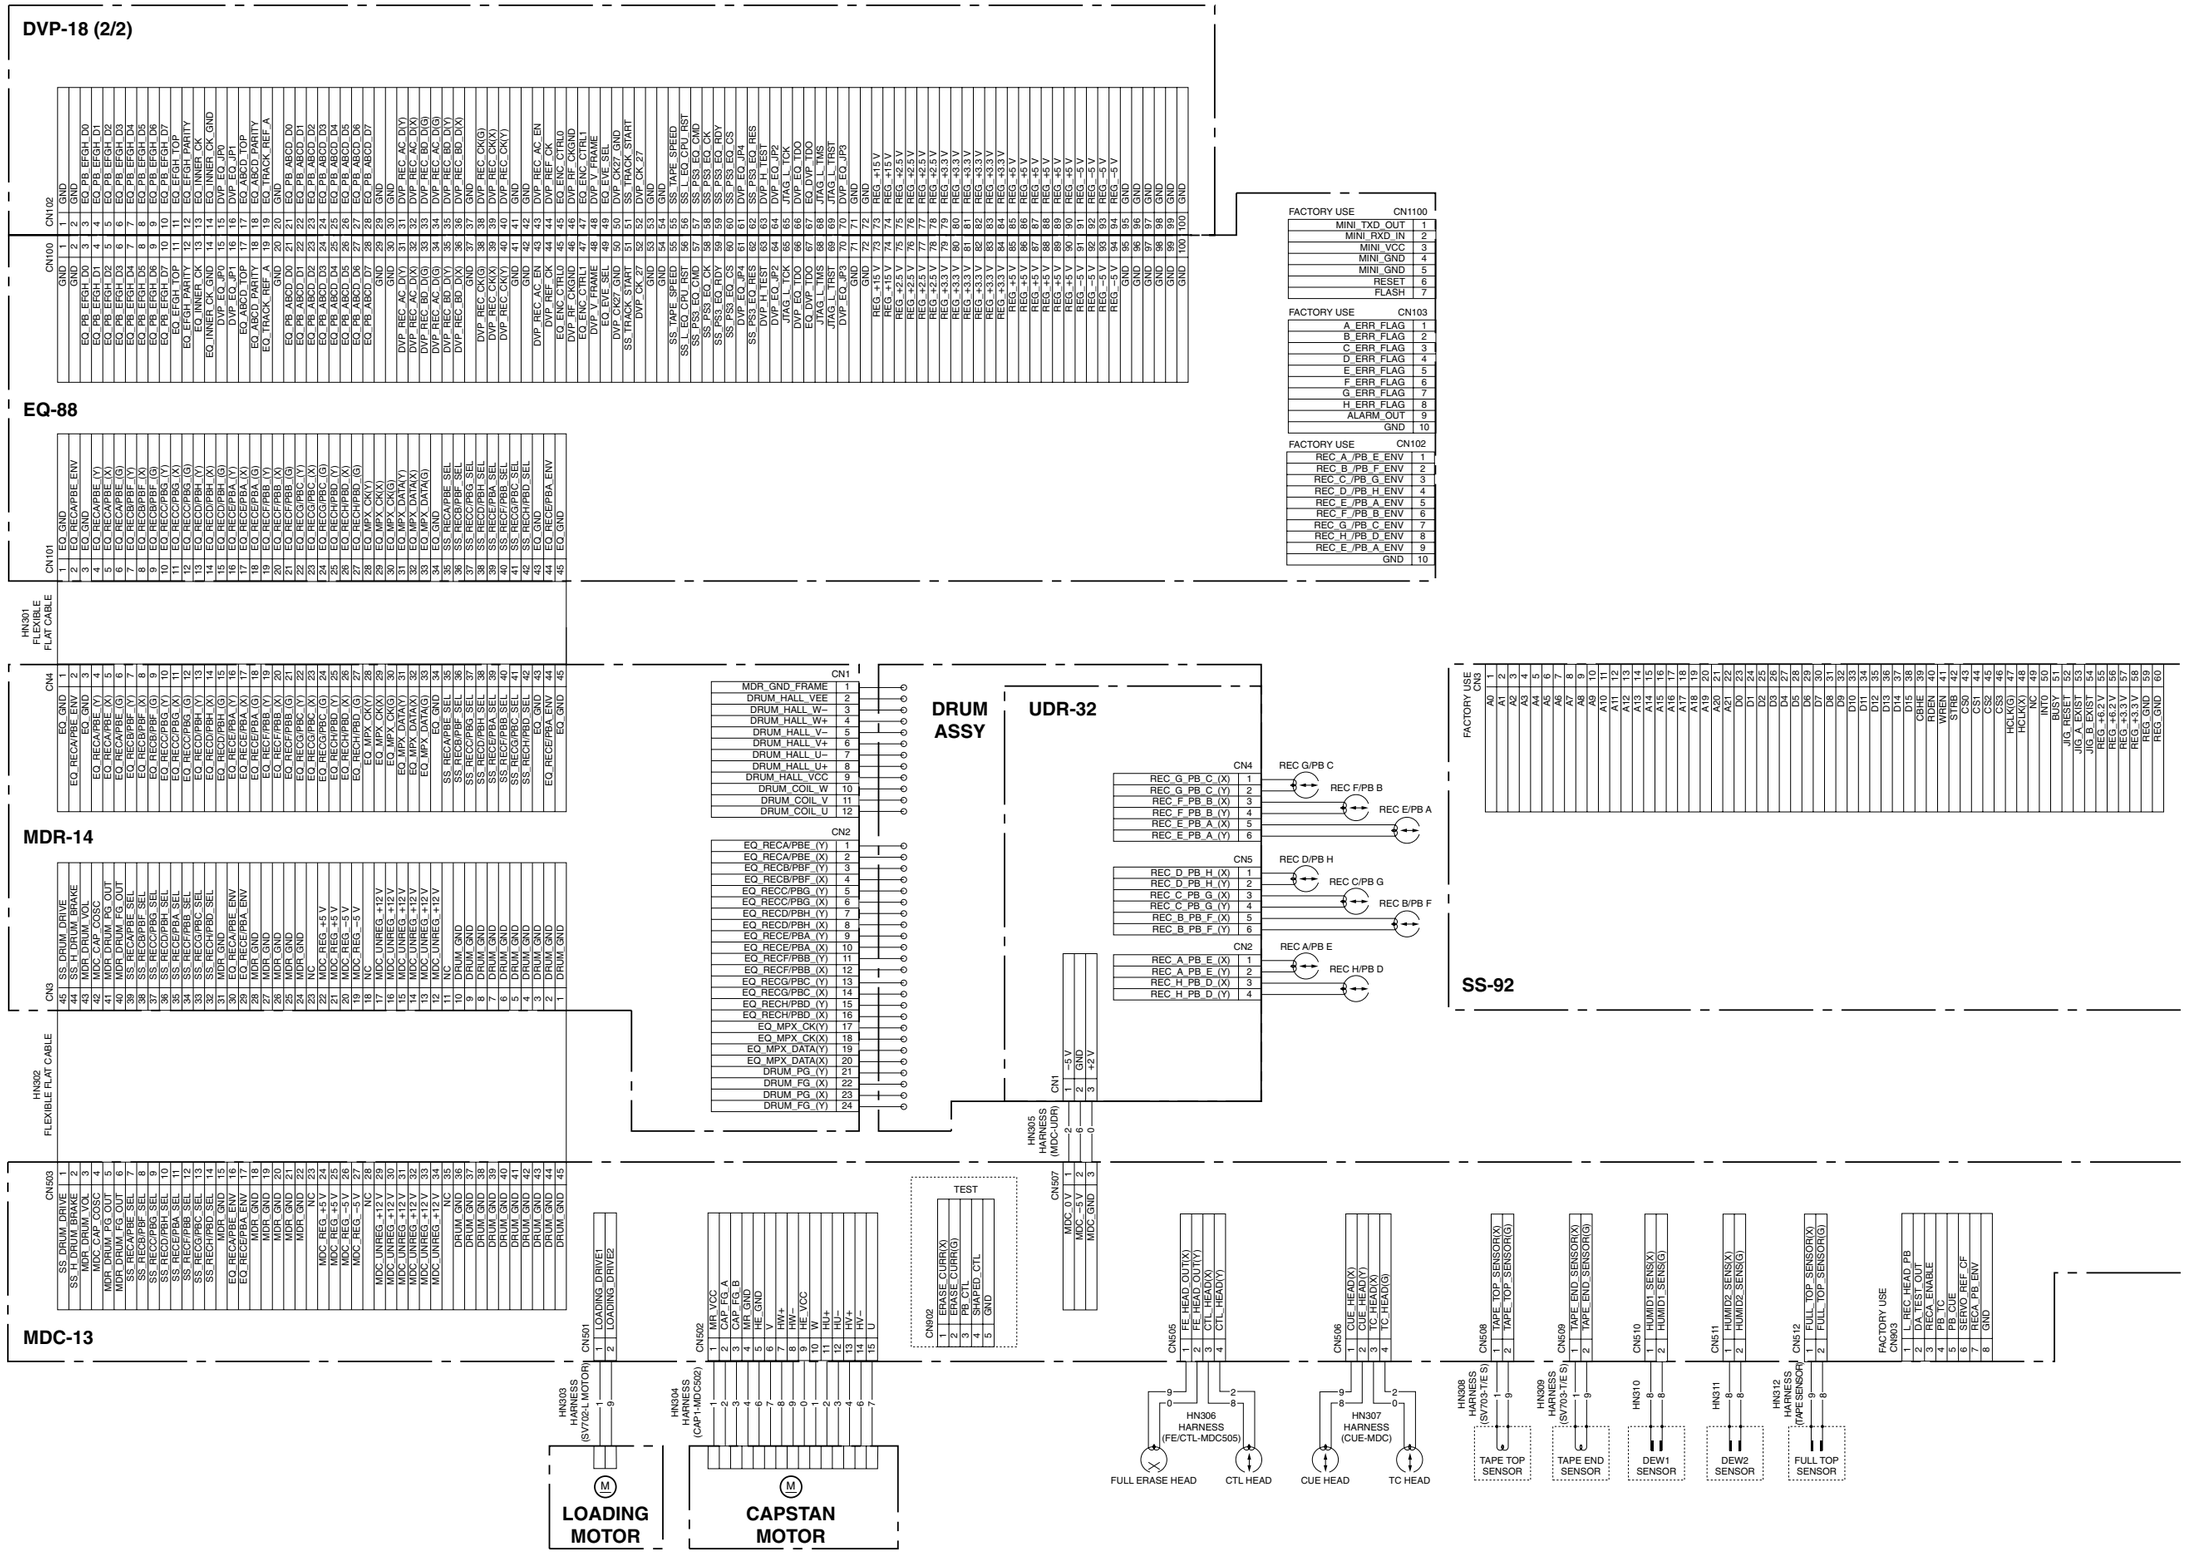

4-158

Frame Wiring (3/4)

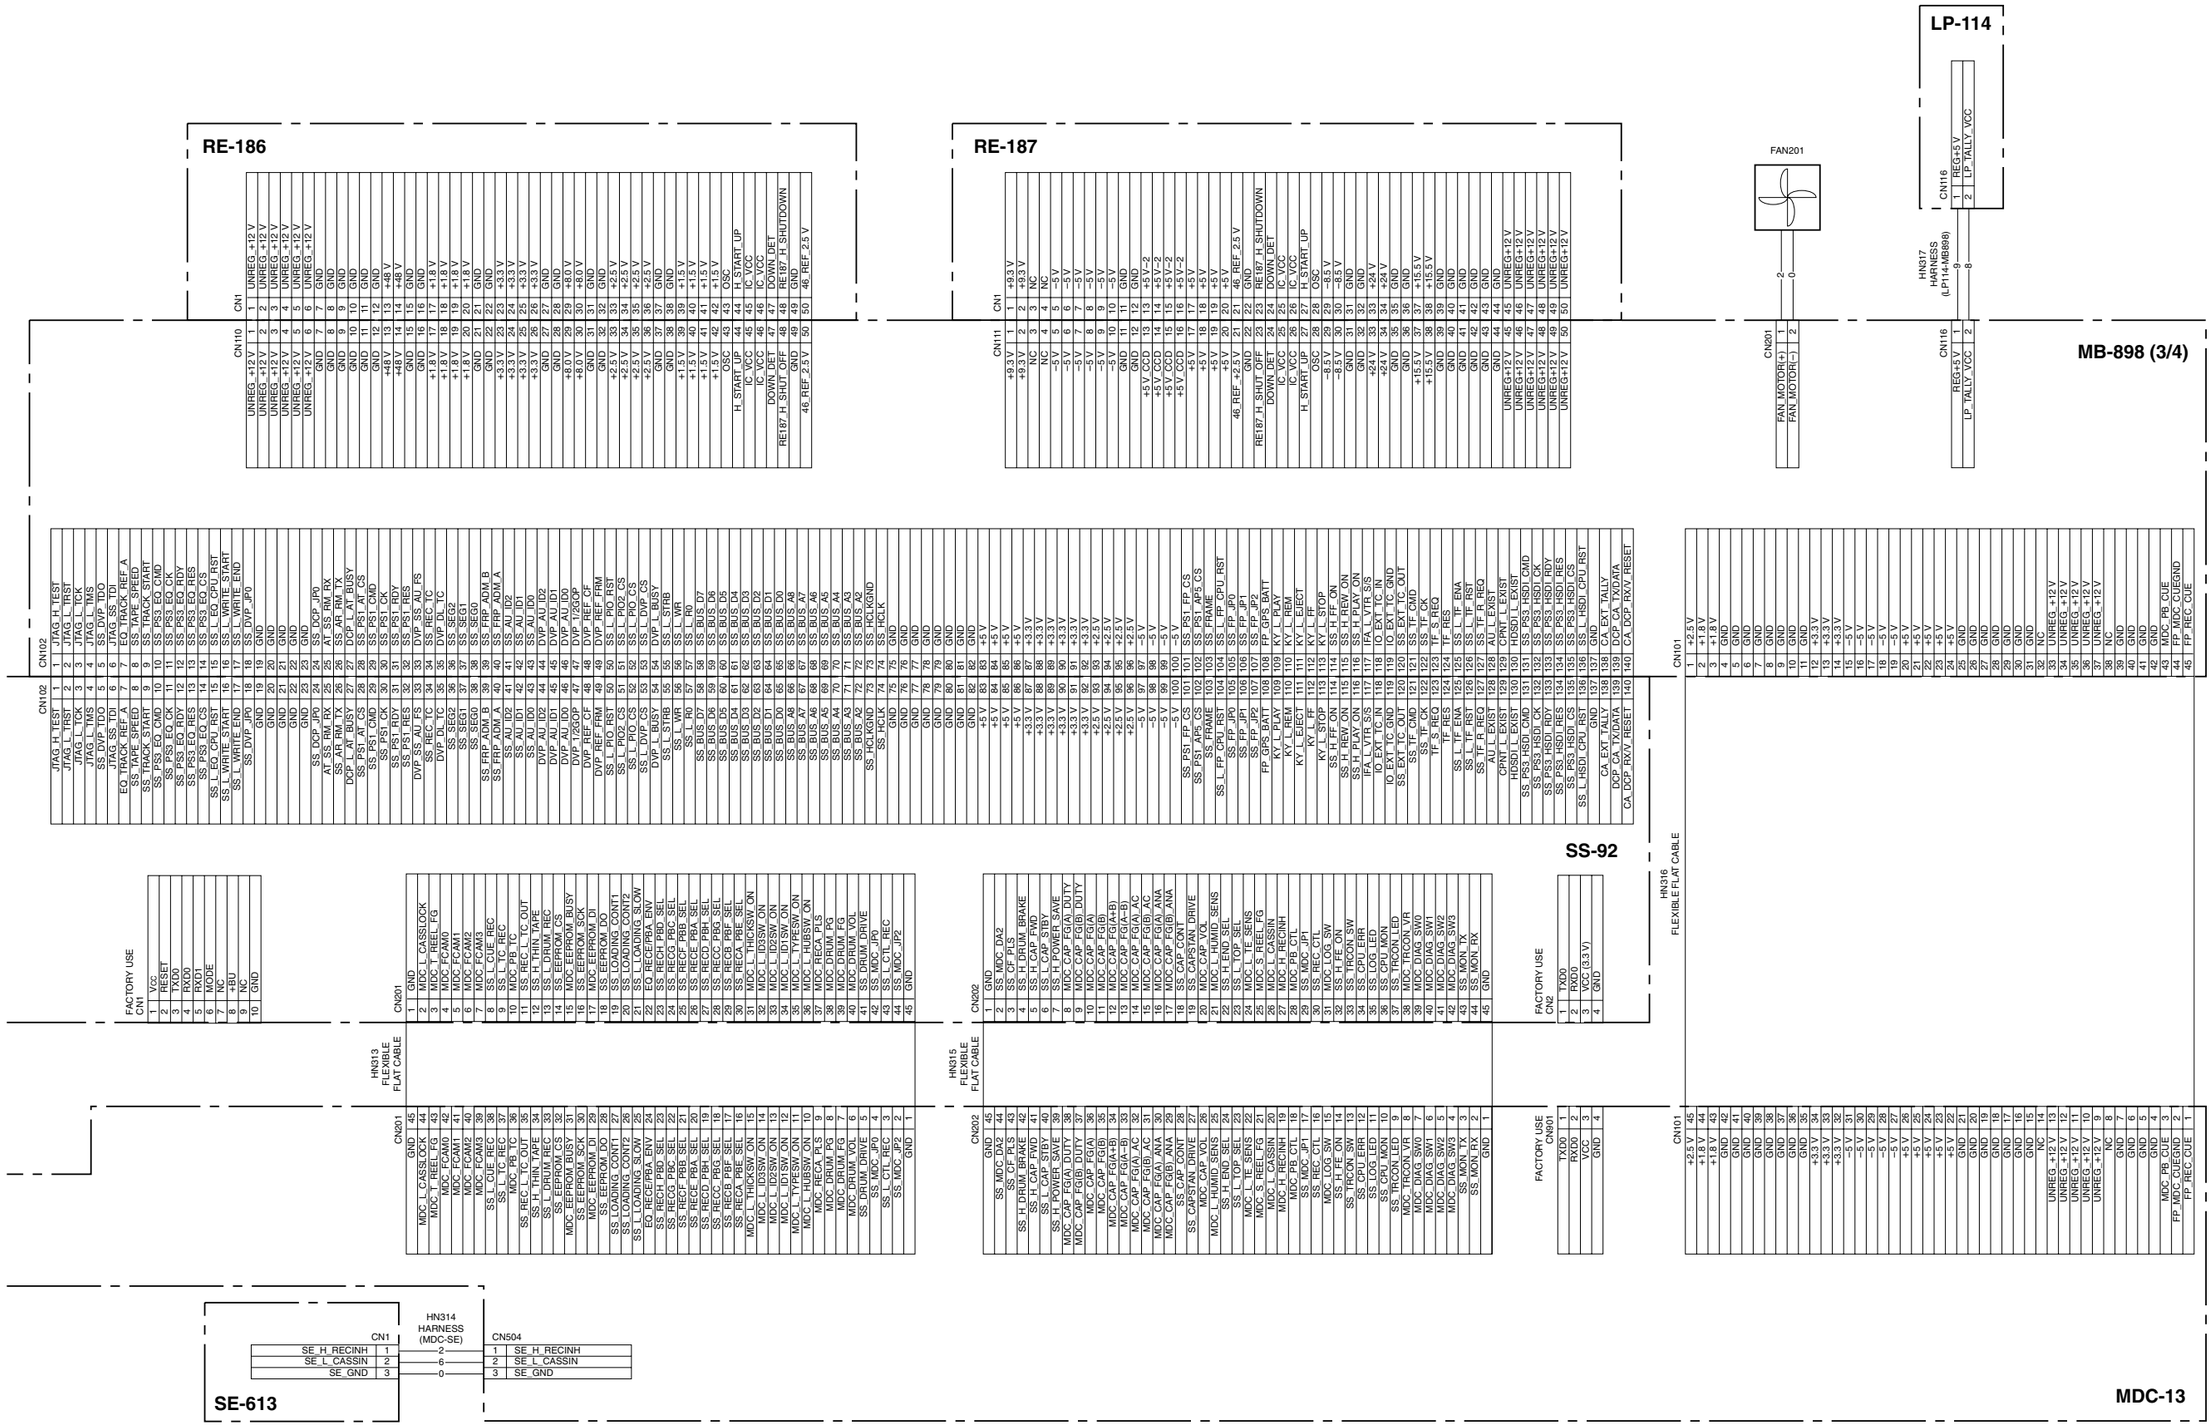
RE-186
RE-187
LP-114
FAN201
MB-898 (3/4)
SS-92
MDC-13
SE-613
HN317 HARNESS (LP114-MB898)
HN316 FLEXIBLE FLAT CABLE
HN313 FLEXIBLE FLAT CABLE
HN315 FLEXIBLE FLAT CABLE
HN314 HARNESS (MDC-SE)
FACTORY USE CN1
FACTORY USE CN12
FACTORY USE CN401
CN102
CN110
CN111
CN116
CN201
CN101
CN202
CN504
JTAG_H_TEST
JTAG_L_TEST
JTAG_L_TCK
JTAG_L_TMS
SS_DVP_TDO
JTAG_SS_TDI
EQ_TRACK_REF_A
EQ_TRACK_REF_B
SS_THACK_START
SS_PS2_EQ_CMD
SS_PS2_EQ_CK
SS_PS2_EQ_RDY
SS_PS2_EQ_RES
SS_PS2_EQ_CS
SS_L_EQ_CPU_RST
SS_L_WRITE_START
SS_L_WRITE_END
SS_DVP_JPO
SS_DCP_JPO
AT_SS_RM_RX
SS_AR_RM_TX
DCP_L_AT_BUSY
SS_PS1_EQ_CMD
SS_PS1_CK
SS_PS1_RDY
SS_PS1_RES
SS_PS1_EQ_FS
DVP_SS_AU_FS
SS_HCLK
DVP_DL_TC
SS_SEG2
SS_SEG1
SS_SEG0
SS_FRP_ADM_B
SS_FRP_ADM_A
SS_AU_D2
SS_AU_ID1
SS_AU_D0
DVP_AU_ID2
DVP_AU_ID1
DVP_AU_D0
DVP_T2SOP
DVP_REF_CF
DVP_REF_FRAM
SS_L_PIO_FSW
SS_L_PIO2_CS
SS_L_PIO_CS
SS_L_DVP_CS
DVP_L_BUSY
SS_L_WR
SS_L_RD
SS_BUS_D7
SS_BUS_D6
SS_BUS_D5
SS_BUS_D4
SS_BUS_D3
SS_BUS_D2
SS_BUS_D1
SS_BUS_D0
SS_BUS_A8
SS_BUS_A7
SS_BUS_A6
SS_BUS_A5
SS_BUS_A4
SS_BUS_A3
SS_BUS_A2
SS_HCLKGND
GND
SS_PS1_FP_CS
SS_PS1_APS_CS
SS_FRAME
SS_L_FP_CPU_RST
SS_FP_JPO
SS_FP_JPI
FP_GPS_BATT
KY_L_PLAY
KY_L_REM
KY_L_EJECT
KY_L_STOP
SS_H_FF_ON
SS_H_REW_ON
SS_H_PLAY_ON
SS_L_TFE_SENS
IO_EXT_TC_IN
IO_EXT_TC_GND
SS_EXT_TC_OUT
SS_TF_CMD
SS_TF_CK
TF_S_REQ
TF_RES
SS_L_TF_ENA
SS_L_TF_RST
SS_L_TF_REQ
AU_L_EXIST
CPNT_L_EXIST
HDSD1_L_EXIST
SS_PS3_HSD_CMD
SS_PS3_HSD1_CK
SS_PS3_HSD1_RDY
SS_PS3_HSD1_RES
SS_PS3_HSD1_CS
SS_L_HSD1_CPU_RST
CA_EXT_TXDATA
DCP_CA_TXDATA
CA_DCP_RXV_RESET
UNREG +12 V
GND
+8.0 V
+8 V
+1.8 V
+3.3 V
+2.5 V
+5 V
+1.5 V
OSC
H_START_UP
IC_VCC
DOWN_DET
RE187_H_SHUTDOWN
46_REF_2.5 V
+9.3 V
NC
−5 V
−5V_D
−5V_A
+5V_CCD
+5V_D
+5V_A
46_REF_+2.5 V
REG+5 V
LP_TALLY_VCC
FAN_MOTOR(+)
FAN_MOTOR(−)
SE_H_RECINH
SE_L_CASSIN
SE_GND
SS_MDC_DA2
SS_CF_PLS
SS_H_DRUM_BRAKE
SS_H_CAP_FWD
SS_H_CAP_REV
SS_H_POWER_SAVE
MDC_CAP_FG(A_DUTY
MDC_CAP_FG(B_DUTY
MDC_CAP_FG(A)
MDC_CAP_FG(B)
MDC_CAP_FG(A+B)
MDC_CAP_FG(A−B)
MDC_CAP_FG(A_AC
MDC_CAP_FG(B_AC
MDC_CAP_FG(A_ANA
MDC_CAP_FG(B_ANA
SS_CAP_CONT
SS_CAPSTAN_DRIVE
MDC_CAP_VOL
MDC_CAP_SENS
SS_H_END_SEL
SS_L_TOP_SEL
MDC_L_TE_SENS
MDC_S_REEL_FG
MDC_L_REGSW
SS_H_REGSW
MDC_PB_CTL
SS_MDC_JP1
SS_REC_CTL
MDC_LOG_SW
SS_TF_CMD
SS_TRCON_SW
SS_CPU_ERR
SS_LOG_LED
SS_CPU_MON
SS_TRCON_EN
MDC_TRCON_VR
MDC_DIAG_SW0
MDC_DIAG_SW1
MDC_DIAG_SW2
MDC_DIAG_SW3
SS_MON_TX
SS_MON_RX
SS_MDC_JP0
SS_MDC_JP2
SS_L_CTL_REC
SS_L_TAPE_REC
SS_L_DRUM_REC
SS_L_DRUM_VOL
SS_L_DRUM_FG
SS_L_DRUM_PG
SS_L_CAPSTAN_ON
SS_L_CAPSTAN_HSW
SS_L_LOADING_SLOW
SS_L_LOADING_CONT2
SS_L_LOADING_CONT1
SS_L_LOADING_ON
SS_L_THIN_TAPE
SS_L_REC_L_I²C_OUT
SS_L_REC_L_I²C_IN
SS_EEPROM_CS
SS_EEPROM_CK
SS_EEPROM_DI
SS_EEPROM_DO
SS_L_CUE_REC
SS_L_TC_REC
SS_L_TC_OUT
SS_L_TC_IN
SS_L_CUE_REC
SS_L_REVIEW_REC
SS_L_REVIEW_ON
SS_L_REVIEW_SLOW
SS_L_REVIEW_HSW
SS_L_REVIEW_CONT
SS_L_REVIEW_VOL
SS_L_REVIEW_FG
SS_L_REVIEW_PG
SS_L_REVIEW_PBD
SS_L_REVIEW_PBC
SS_L_REVIEW_PBA
SS_L_REVIEW_PBB
SS_L_REVIEW_PBE
SS_L_REVIEW_PBF
SS_L_REVIEW_PBG
SS_L_REVIEW_PBH
SS_L_REVIEW_PBI
SS_L_REVIEW_PBJ
SS_L_REVIEW_PBK
SS_L_REVIEW_PBL
SS_L_REVIEW_PBM
SS_L_REVIEW_PBN
SS_L_REVIEW_PBO
SS_L_REVIEW_PBP
SS_L_REVIEW_PBQ
SS_L_REVIEW_PBR
SS_L_REVIEW_PBS
SS_L_REVIEW_PBT
SS_L_REVIEW_PBU
SS_L_REVIEW_PBV
SS_L_REVIEW_PBW
SS_L_REVIEW_PBX
SS_L_REVIEW_PBY
SS_L_REVIEW_PBZ
SS_L_REVIEW_PBA2
SS_L_REVIEW_PBB2
SS_L_REVIEW_PBC2
SS_L_REVIEW_PBD2
SS_L_REVIEW_PBE2
SS_L_REVIEW_PBF2
SS_L_REVIEW_PBG2
SS_L_REVIEW_PBH2
SS_L_REVIEW_PBI2
SS_L_REVIEW_PBJ2
SS_L_REVIEW_PBK2
SS_L_REVIEW_PBL2
SS_L_REVIEW_PBM2
SS_L_REVIEW_PBN2
SS_L_REVIEW_PBO2
SS_L_REVIEW_PBP2
SS_L_REVIEW_PBQ2
SS_L_REVIEW_PBR2
SS_L_REVIEW_PBS2
SS_L_REVIEW_PBT2
SS_L_REVIEW_PBU2
SS_L_REVIEW_PBV2
SS_L_REVIEW_PBW2
SS_L_REVIEW_PBX2
SS_L_REVIEW_PBY2
SS_L_REVIEW_PBZ2
SS_L_REVIEW_PBA3
SS_L_REVIEW_PBB3
SS_L_REVIEW_PBC3
SS_L_REVIEW_PBD3
SS_L_REVIEW_PBE3
SS_L_REVIEW_PBF3
SS_L_REVIEW_PBG3
SS_L_REVIEW_PBH3
SS_L_REVIEW_PBI3
SS_L_REVIEW_PBJ3
SS_L_REVIEW_PBK3
SS_L_REVIEW_PBL3
SS_L_REVIEW_PBM3
SS_L_REVIEW_PBN3
SS_L_REVIEW_PBO3
SS_L_REVIEW_PBP3
SS_L_REVIEW_PBQ3
SS_L_REVIEW_PBR3
SS_L_REVIEW_PBS3
SS_L_REVIEW_PBT3
SS_L_REVIEW_PBU3
SS_L_REVIEW_PBV3
SS_L_REVIEW_PBW3
SS_L_REVIEW_PBX3
SS_L_REVIEW_PBY3
SS_L_REVIEW_PBZ3
SS_L_REVIEW_PBA4
SS_L_REVIEW_PBB4
SS_L_REVIEW_PBC4
SS_L_REVIEW_PBD4
SS_L_REVIEW_PBE4
SS_L_REVIEW_PBF4
SS_L_REVIEW_PBG4
SS_L_REVIEW_PBH4
SS_L_REVIEW_PBI4
SS_L_REVIEW_PBJ4
SS_L_REVIEW_PBK4
SS_L_REVIEW_PBL4
SS_L_REVIEW_PBM4
SS_L_REVIEW_PBN4
SS_L_REVIEW_PBO4
SS_L_REVIEW_PBP4
SS_L_REVIEW_PBQ4
SS_L_REVIEW_PBR4
SS_L_REVIEW_PBS4
SS_L_REVIEW_PBT4
SS_L_REVIEW_PBU4
SS_L_REVIEW_PBV4
SS_L_REVIEW_PBW4
SS_L_REVIEW_PBX4
SS_L_REVIEW_PBY4
SS_L_REVIEW_PBZ4

Frame Wiring (4/4)

MB-898 (4/4)

HN-277

IF-794

CI-27

CCM-45

HN402 FLEXIBLE FLAT CABLE

HN401 FLEXIBLE FLAT CABLE

HN403 FLEXIBLE FLAT CABLE

FLEXIBLE ANTENA

TELEFILE

4-160

http://getMANUAL.com

Frame Wiring (4/4)

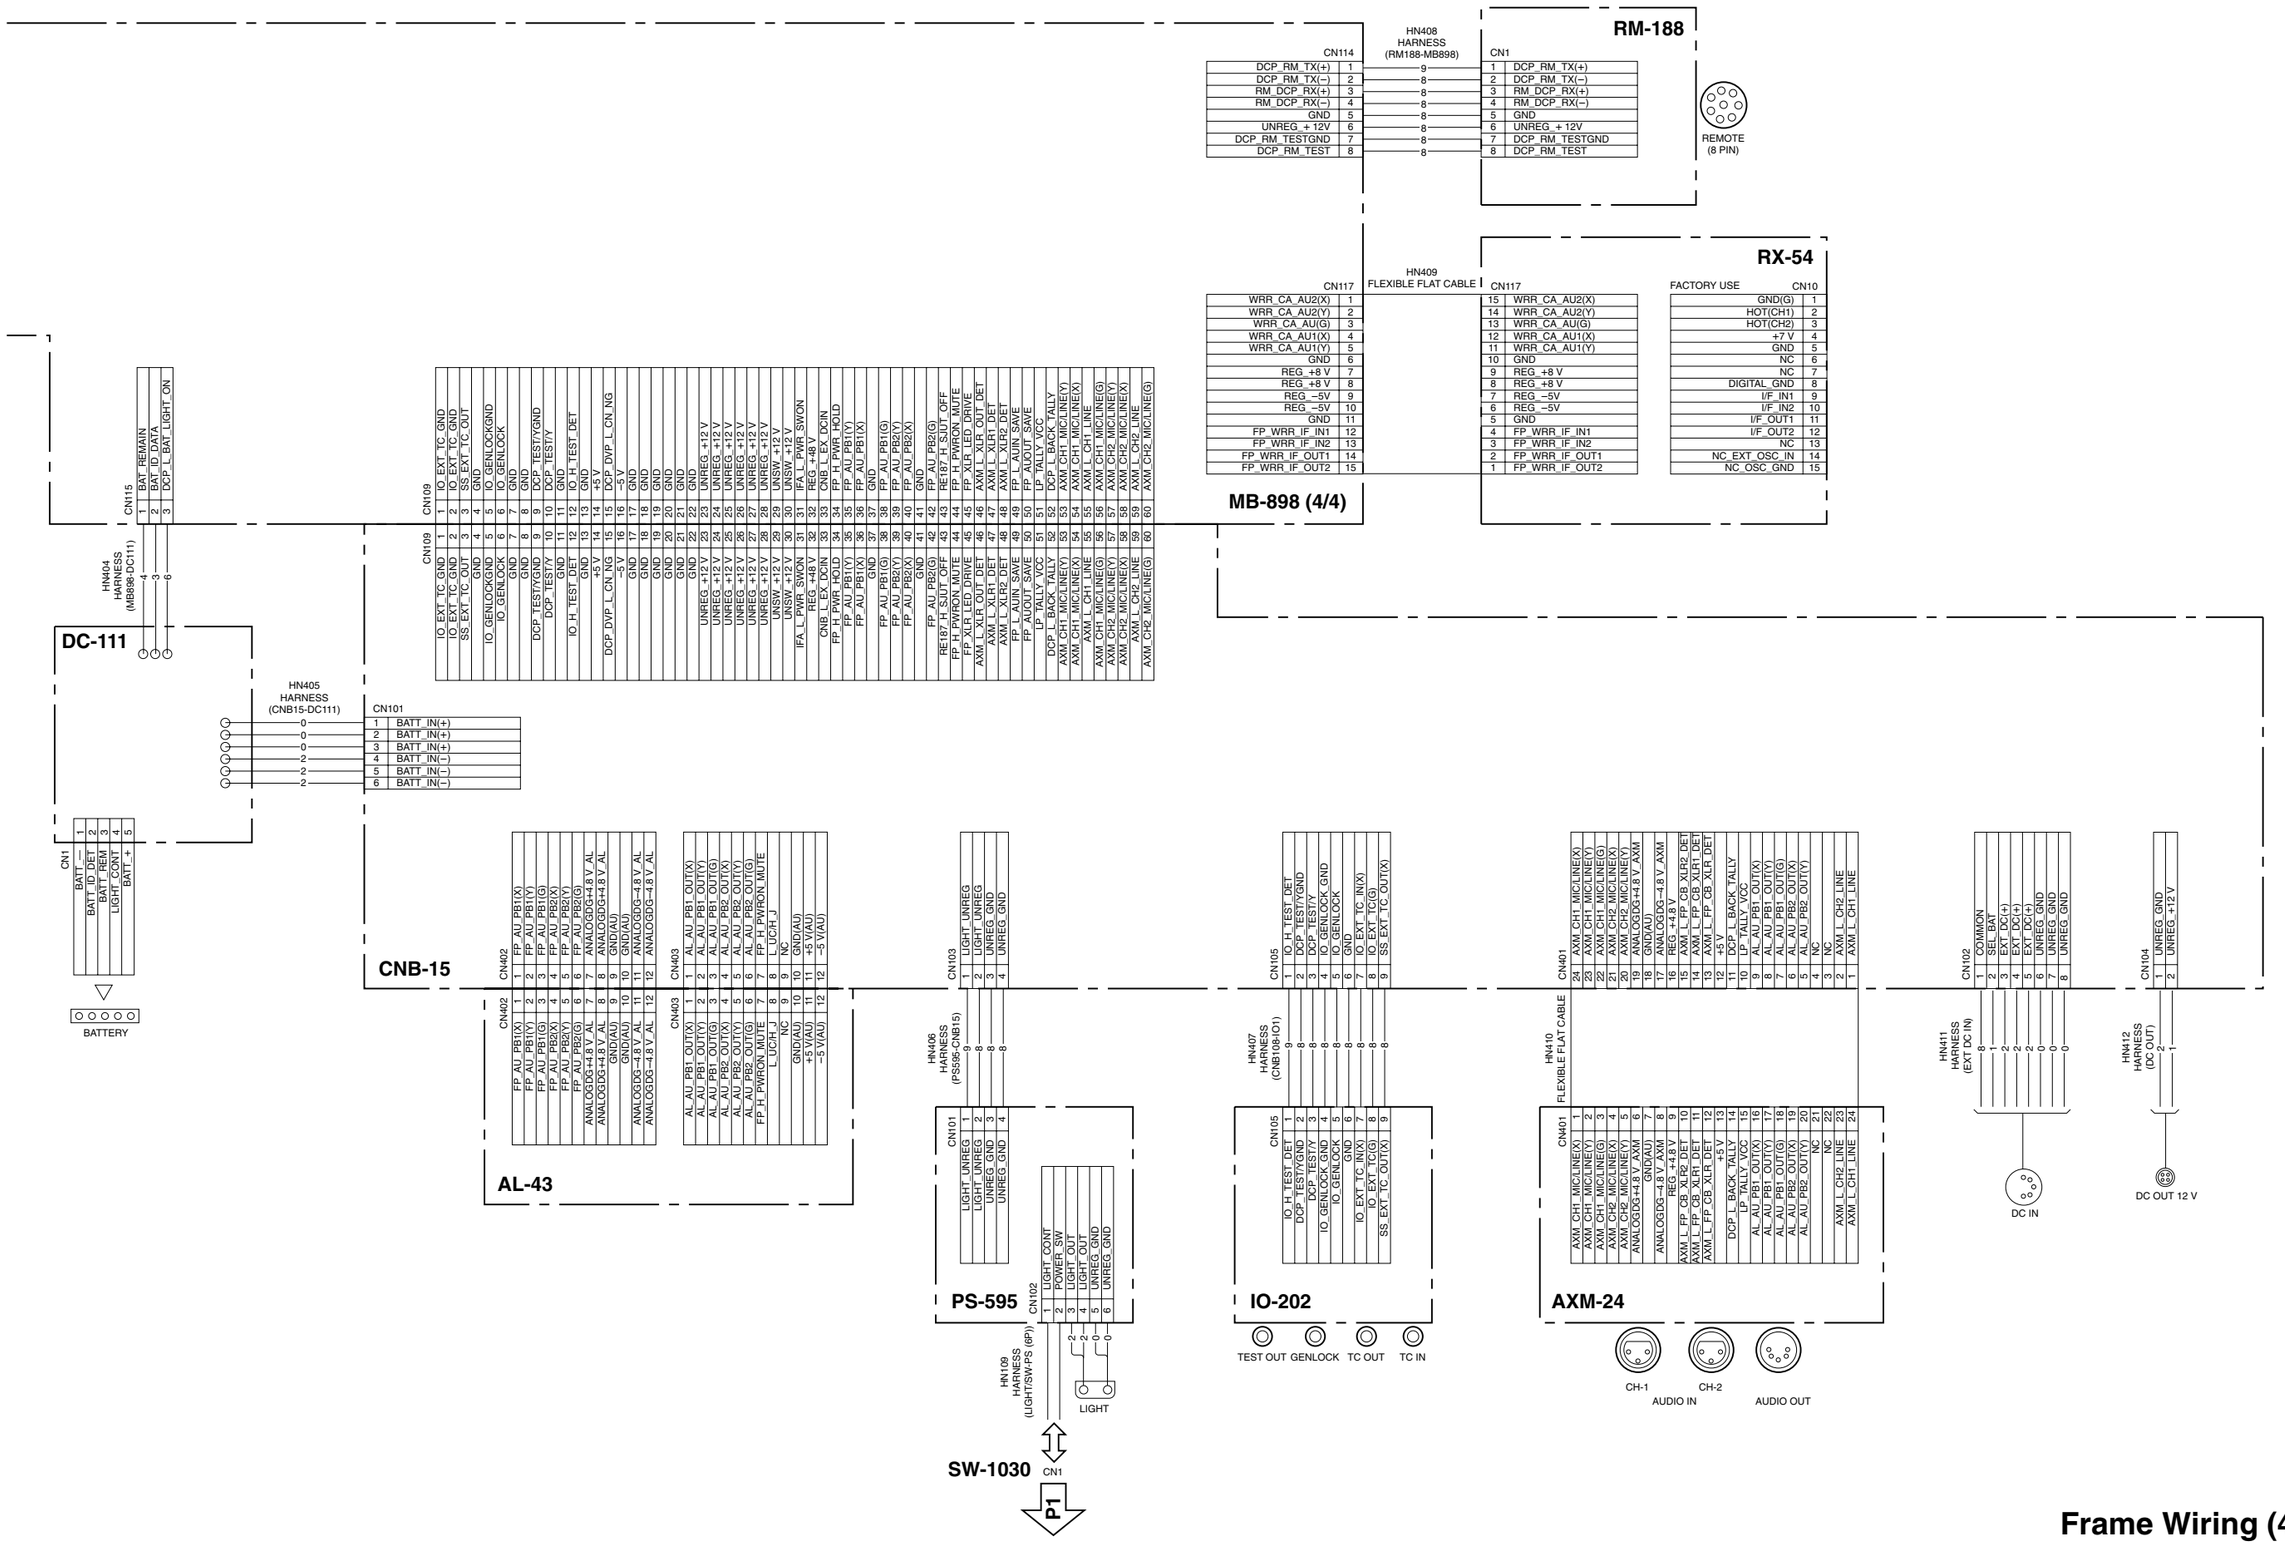

Section 5
Board Layouts

Index

Board Name	Function	Page
AL-43	AUDIO AMP	5-38
APR-59	AUDIO PROCESSOR	5-37
AT-143	SYSTEM CONTROL	5-16
AXM-24	CONNECTOR	5-39
BP-33	BATTERY	5-39
CCM-45	TELE FILE	5-23
CI-27	50PIN ADAPTOR INTERFACE	5-22
CN-2037	CONNECTOR for DR-433	5-4
CNB-15	CIRCUIT BREAKER	5-43
DC-110 (HKDW-702)	DOWN CONVERTER	5-13
DC-111	BATTERY DC FILTER	5-44
DCP-28	CAMERA PROCESSOR	5-6
DR-433	CCD DRIVER	5-3
DVP-18	VTR PROCESSOR	5-17
ENC-61	ROTARY ENCODER	5-40
EQ-88	EQUALIZER	5-29
FP-121	ANALOG AUDIO PROCESSOR	5-31
HN-277	HARNESS	5-21
HP-103	HEADPHONE	5-38
HP-104	HEADPHONE	5-40
IF-794	INTERFACE	5-21
IFA-11	LENS CONTROL	5-35
IO-202	IN/OUT	5-12
KY-475	FUNCTION KEY	5-40
LP-114	REAR TALLY	5-40
MA-103	MIC AMP	5-36
MB-898	MOTHERBOARD	5-45
MDC-13	MECHA DECK CONTROL	5-25
MDR-14	DRUM MOTOR DRIVE	5-28
MY-99 (HKDW-703)	PICTURE CACHE	5-20
PA-253	PRE AMP	5-2
PS-595	POWER SUPPLY (LIGHT)	5-44
RE-186	REGULATOR	5-41
RE-187	REGULATOR	5-42
RM-188	CONNECTOR (RM)	5-12
RX-54	WIRELESS RECEIVER INTERFACE	5-36
SE-613	SENSOR	5-28
SS-92	SERVO/SYSCON	5-24
SW-1030	LIGHT SWITCH	5-44
SW-1031	SWITCH	5-36
SW-1038	SWITCH	5-40
TG-219	TIMING GENERATOR	5-5

5-1

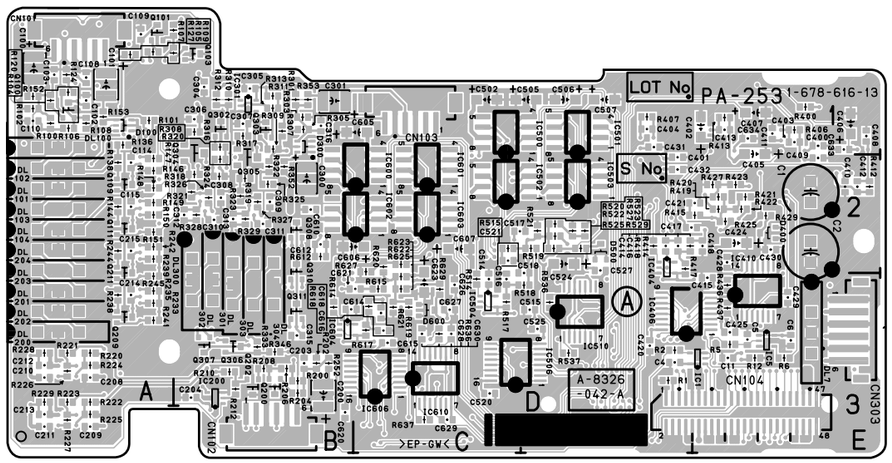

PA-253 -A SIDE-
SUFFIX: -13

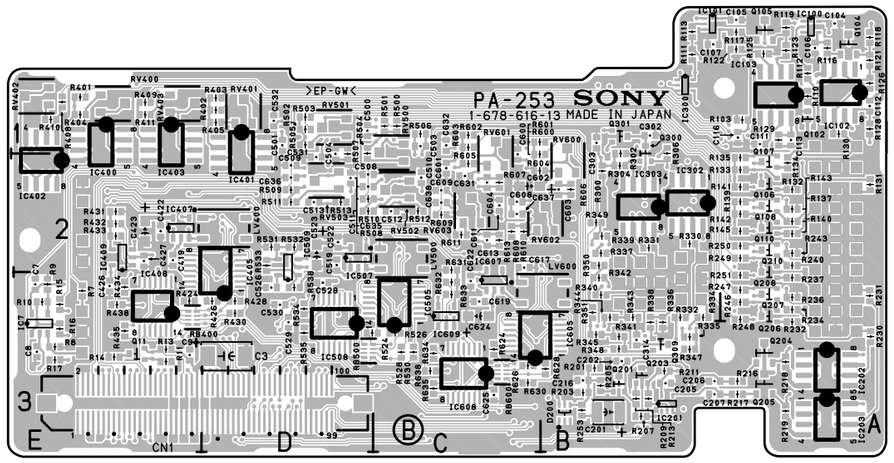

PA-253 -B SIDE-
SUFFIX: -13

PA-253 (1-678-616-13)
---

*:B SIDE

C1	E2	C216	*B3	C425	E3	C602	*C2	CN303	E3	IC402	*E1	Q106	*A2	R15	*E3	R142	*A2	R233	A3
C2	E2	C300	B2	C426	*E3	C603	*B2			IC403	*E1	Q107	*A2	R16	*E3	R143	*A2	R234	*A3
C3	*D3	C301	B1	C427	*E2	C604	*C2	D100	A1	IC404	D2	Q108	*A2	R17	*E3	R144	A2	R235	A3
C4	D3	C302	*B1	C428	E2	C605	C1	D200	*B3	IC405	*D3	Q109	A2	R100	A1	R145	*A2	R236	*A3
C5	E3	C303	*B1	C429	E3	C606	C2	D300	B1	IC406	E3	Q110	*A2	R101	A1	R146	A2	R237	*A3
C6	E3	C304	B1	C430	E2	C607	C2	D400	E2	IC407	*E2	Q111	A2	R102	A1	R147	A2	R238	A3
C7	*E3	C305	B1	C431	D1	C608	*C2	D500	D2	IC408	*E3	Q200	B3	R103	*A1	R148	A2	R239	A2
C8	*E3	C306	B1	C432	D2	C609	*C2	D600	C3	IC409	*E2	Q201	*B3	R104	A1	R149	A2	R240	*A2
C9	*E3	C307	B1	C500	*D1	C610	B2			IC410	E3	Q202	B3	R105	A1	R150	A2	R241	A3
C11	E3	C308	B2	C501	*D1	C611	*C2	DL7	E3	IC500	D1	Q203	*B3	R106	A1	R151	A2	R242	A2
C100	A1	C309	B2	C502	C1	C612	B2	DL100	A1	IC501	D1	Q204	*A3	R107	A1	R152	A1	R243	*A2
C101	A1	C310	B2	C503	*C1	C613	*C2	DL101	A2	IC502	D2	Q205	*A3	R108	A1	R153	A1	R244	A2
C102	A1	C311	B2	C504	*D2	C614	B3	DL102	A2	IC503	D2	Q206	*A3	R109	A1	R200	B3	R245	A3
C103	A1	C312	B2	C505	D1	C615	C3	DL103	A2	IC504	C3	Q207	*A3	R110	*A1	R201	*B3	R246	*A3
C104	*A1	C313	B2	C506	D1	C616	C3	DL104	A2	IC505	*C3	Q208	*A2	R111	*B1	R202	B3	R247	*A3
C105	*A1	C314	*B3	C507	D1	C617	*C2	DL200	A3	IC506	D3	Q209	A3	R112	*A1	R203	*B3	R248	*A3
C106	*A1	C315	B3	C508	*D2	C618	C3	DL201	A3	IC507	*D2	Q210	*A2	R113	*B1	R204	B3	R249	*A2
C107	*B1	C316	B1	C509	*D2	C619	*C3	DL202	A3	IC508	*D3	Q211	A2	R116	*A1	R205	*B3	R250	*A2
C108	A1	C400	E1	C510	*C2	C620	B3	DL203	A2	IC509	*D2	Q300	*B1	R117	*A1	R206	B3	R251	*A3
C109	A1	C401	D2	C511	*D2	C621	C3	DL204	A2	IC510	D3	Q301	*B1	R118	*A1	R207	*B3	R252	B3
C110	A1	C402	E1	C512	*C2	C622	*C3	DL300	B3	IC600	C2	Q302	B1	R119	*A1	R208	B3	R253	*B3
C111	*A1	C403	E1	C513	*D2	C623	C3	DL301	B3	IC601	C2	Q303	B1	R120	A1	R209	*B3	R300	*B2
C112	*A1	C404	D1	C514	C3	C624	*C3	DL302	B3	IC602	C2	Q304	B1	R121	*A1	R210	B3	R301	B1
C113	*A1	C405	E1	C515	D3	C625	*C3	DL303	B3	IC603	C2	Q305	B2	R122	*A1	R211	*B3	R302	*B1
C114	A2	C406	E1	C516	C3	C626	C3	DL304	B3	IC604	B3	Q306	B3	R123	*A1	R212	B3	R303	B1
C115	A2	C407	E1	C517	C2	C627	C3			IC605	*B3	Q307	B3	R124	A1	R213	*B3	R304	*B2
C116	*A1	C408	E1	C518	D2	C628	C3	IC1	E3	IC606	C3	Q308	B2	R125	*A1	R216	*A3	R305	B1
C200	B3	C409	E2	C519	*D2	C629	C3	IC5	E3	IC607	*C3	Q309	*B3	R126	*A1	R217	*A3	R306	*B1
C201	*B3	C410	E2	C520	C3	C630	C3	IC7	*E3	IC608	*C3	Q310	B2	R127	A1	R218	*A3	R307	B1
C202	*B3	C411	E1	C521	C2	C631	*C2	IC100	*A1	IC609	*C3	Q311	B3	R128	*A1	R219	*A3	R308	B1
C203	B3	C412	E2	C522	*D2	C632	*C1	IC101	*B1	IC610	C3			R129	*A1	R220	A3	R309	B1
C204	B3	C413	E1	C523	*D2	C633	E1	IC102	*A1			R1	D3	R130	*A1	R221	A3	R310	B1
C205	*B3	C414	D2	C524	D2	C634	E1	IC103	*A1	LV400	*D2	R2	D3	R131	*A2	R222	A3	R311	B1
C206	*B3	C415	E3	C525	D3	C635	*D2	IC200	B3	LV500	*C2	R5	E3	R132	*A2	R223	A3	R312	B1
C207	*B3	C416	D2	C526	*D3	C636	*D2	IC201	*B3	LV600	*B3	R6	E3	R133	*A2	R224	A3	R313	B1
C208	A3	C417	D2	C527	D2	C637	*C2	IC202	*A3			R7	*E3	R134	*A2	R225	A3	R316	B1
C209	A3	C418	E2	C528	*D3	C638	*C2	IC203	*A3	Q11	*E3	R8	*E3	R135	*A2	R226	A3	R317	B1
C210	A3	C419	*E2	C529	*D3			IC300	*B1	Q100	A1	R9	*E3	R136	A1	R227	A3	R318	B2
C211	A3	C420	D3	C530	*D3	CN1	*D3	IC301	B1	Q101	A1	R10	*E3	R137	*A2	R228	A3	R319	B2
C212	A3	C421	E2	C531	*D2	CN101	A1	IC302	*B2	Q102	*A1	R11	*E3	R138	A2	R229	A3	R320	B2
C213	A3	C422	*E2	C532	*D1	CN102	B3	IC303	*B2	Q103	B1	R12	E3	R139	*A2	R230	*A3	R321	B2
C214	A3	C423	*E2	C600	*C2	CN103	C1	IC400	*E1	Q104	*A1	R13	*E3	R140	*A2	R231	*A3	R322	B2
C215	A2	C424	E2	C601	*C2	CN104	E3	IC401	*D1	Q105	*A1	R14	*E3	R141	*A2	R232	*A3	R323	B2

R324	B2	R413	E1	R519	D2	R624	*C3												
R325	B2	R414	D2	R520	D2	R625	C3												
R326	B2	R415	E2	R521	D2	R626	*C3												
R327	B2	R417	D2	R522	D2	R627	C2												
R328	B2	R418	D2	R523	D2	R628	*B3												
R329	B2	R419	E2	R524	*D3	R629	C3												
R330	*B2	R420	E2	R525	D2	R630	*C3												
R331	*B2	R421	E2	R526	*C3	R631	*C2												
R332	*B3	R422	E2	R527	D2	R632	*C3												
R333	B3	R423	E2	R528	*C3	R633	*C3												
R334	*B3	R424	*E3	R529	D2	R634	*C3												
R335	*B3	R425	E2	R530	*C3	R635	*C3												
R336	*B3	R426	*D3	R531	*D2	R636	C3												
R337	*B2	R427	E2	R532	*D2	R637	C3												
R338	*B3	R428	*D3	R533	*D2	R638	*C3												
R339	*B2	R429	E2	R534	*D3														
R340	*B3	R430	*D3	R535	*D3	RB400	*E3												
R341	*B3	R431	*E2	R536	D3	RB500	*D3												
R342	*B3	R432	*E2	R537	D3	RB600	*C3												
R343	*B3	R433	*E2	R538	*D3														
R344	*B3	R434	*E3	R600	*C2	RV400	*E1												
R345	*B3	R435	*E3	R601	*C1	RV401	*D1												
R346	B3	R436	E3	R602	*C1	RV402	*E1												
R347	*B3	R437	E3	R603	*C1	RV403	*E1												
R348	*B3	R438	*E3	R604	*C2	RV500	*C1												
R349	*B2	R500	*C1	R605	*C2	RV501	*D1												
R350	*B2	R501	*C1	R606	*B2	RV502	*C2												
R351	*B3	R502	*D1	R607	*C2	RV503	*D2												
R352	B2	R503	*D1	R608	*C2	RV600	*B2												
R353	B1	R504	*D1	R609	*C2	RV601	*C1												
R400	*E1	R505	*D1	R610	*C2	RV602	*B2												
R401	*E1	R506	*C1	R611	*C2	RV603	*C2												
R402	*D1	R507	*D2	R612	B2														
R403	*D1	R508	*D2	R613	*C2														
R404	*E1	R509	*D2	R614	B3														
R405	*D1	R510	*D2	R615	C3														
R406	E1	R511	*D2	R617	C3														
R407	D1	R512	*C2	R618	C3														
R408	*E1	R513	*D2	R619	C3														
R409	*E1	R514	C3	R620	C2														
R410	*E1	R515	C2	R621	C3														
R411	*E1	R517	C3	R622	C3														
R412	E2	R518	D3	R623	C2														

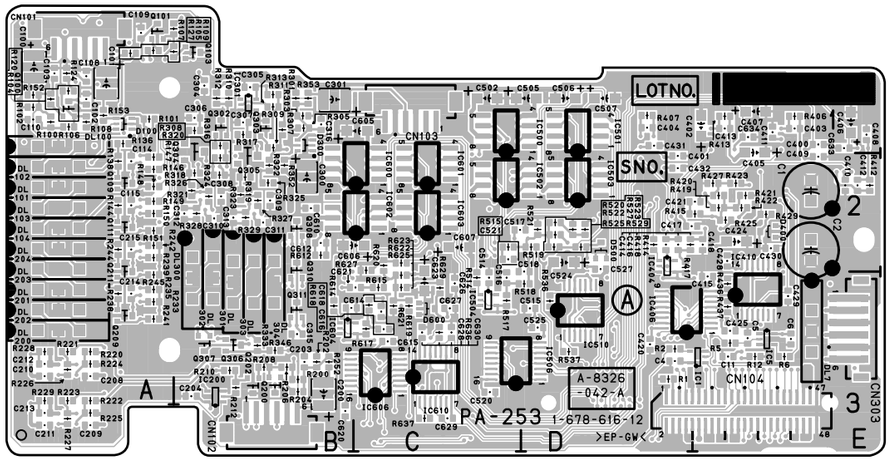

PA-253 -A SIDE-
SUFFIX: -12

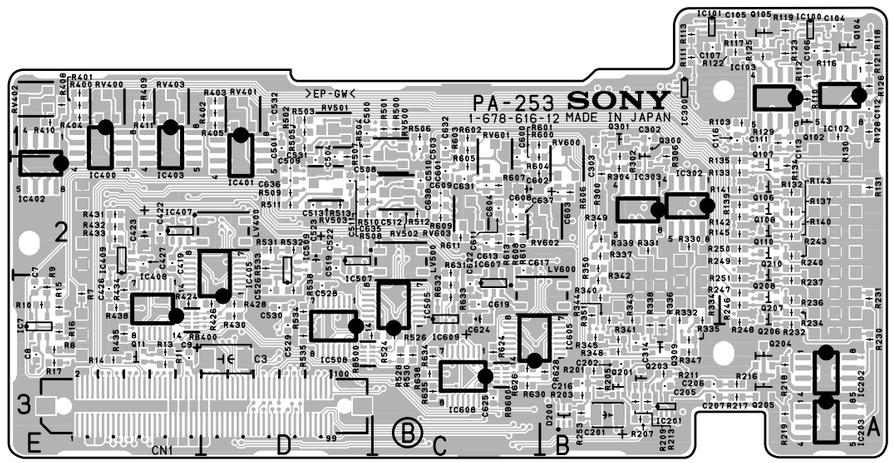

PA-253 -B SIDE-
SUFFIX: -12

PA-253 (1-678-616-12)
---

*:B SIDE

C1	E2	C216	*B3	C425	E3	C602	*C2	CN303	E3	IC402	*E1	Q106	*A2	R15	*E3	R142	*A2	R233	A3
C2	E2	C300	B2	C426	*E3	C603	*B2			IC403	*E1	Q107	*A2	R16	*E3	R143	*A2	R234	*A3
C3	*D3	C301	B1	C427	*E2	C604	*C2	D100	A1	IC404	D2	Q108	*A2	R17	*E3	R144	A2	R235	A3
C4	D3	C302	*B1	C428	E2	C605	C1	D200	*B3	IC405	*D3	Q109	A2	R100	A1	R145	*A2	R236	*A3
C5	E3	C303	*B1	C429	E3	C606	C2	D300	B1	IC406	E3	Q110	*A2	R101	A1	R146	A2	R237	*A3
C6	E3	C304	B1	C430	E2	C607	C2	D400	E2	IC407	*E2	Q111	A2	R102	A1	R147	A2	R238	A3
C7	*E3	C305	B1	C431	D1	C608	*C2	D500	D2	IC408	*E3	Q200	B3	R103	*A1	R148	A2	R239	A2
C8	*E3	C306	B1	C432	D2	C609	*C2	D600	C3	IC409	*E2	Q201	*B3	R104	A1	R149	A2	R240	*A2
C9	*E3	C307	B1	C500	*D1	C610	B2			IC410	E3	Q202	B3	R105	A1	R150	A2	R241	A3
C11	E3	C308	B2	C501	*D1	C611	*C2	DL7	E3	IC500	D1	Q203	*B3	R106	A1	R151	A2	R242	A2
C100	A1	C309	B2	C502	C1	C612	B2	DL100	A1	IC501	D1	Q204	*A3	R107	A1	R152	A1	R243	*A2
C101	A1	C310	B2	C503	*C1	C613	*C2	DL101	A2	IC502	D2	Q205	*A3	R108	A1	R153	A1	R244	A2
C102	A1	C311	B2	C504	*D2	C614	B3	DL102	A2	IC503	D2	Q206	*A3	R109	A1	R200	B3	R245	A3
C103	A1	C312	B2	C505	D1	C615	C3	DL103	A2	IC504	C3	Q207	*A3	R110	*A1	R201	*B3	R246	*A3
C104	*A1	C313	B2	C506	D1	C616	C3	DL104	A2	IC505	*C3	Q208	*A2	R111	*B1	R202	B3	R247	*A3
C105	*A1	C314	*B3	C507	D1	C617	*C2	DL200	A3	IC506	D3	Q209	A3	R112	*A1	R203	*B3	R248	*A3
C106	*A1	C315	B3	C508	*D2	C618	C3	DL201	A3	IC507	*D2	Q210	*A2	R113	*B1	R204	B3	R249	*A2
C107	*B1	C316	B1	C509	*D2	C619	*C3	DL202	A3	IC508	*D3	Q211	A2	R116	*A1	R205	*B3	R250	*A2
C108	A1	C400	E1	C510	*C2	C620	B3	DL203	A2	IC509	*D2	Q300	*B1	R117	*A1	R206	B3	R251	*A3
C109	A1	C401	D2	C511	*D2	C621	C3	DL204	A2	IC510	D3	Q301	*B1	R118	*A1	R207	*B3	R252	B3
C110	A1	C402	E1	C512	*C2	C622	*C3	DL300	B3	IC600	C2	Q302	B1	R119	*A1	R208	B3	R253	*B3
C111	*A1	C403	E1	C513	*D2	C623	C3	DL301	B3	IC601	C2	Q303	B1	R120	A1	R209	*B3	R300	*B2
C112	*A1	C404	D1	C514	C3	C624	*C3	DL302	B3	IC602	C2	Q304	B1	R121	*A1	R210	B3	R301	B1
C113	*A1	C405	E1	C515	D3	C625	*C3	DL303	B3	IC603	C2	Q305	B2	R122	*A1	R211	*B3	R302	*B1
C114	A2	C406	E1	C516	C3	C626	C3	DL304	B3	IC604	B3	Q306	B3	R123	*A1	R212	B3	R303	B1
C115	A2	C407	E1	C517	C2	C627	C3			IC605	*B3	Q307	B3	R124	A1	R213	*B3	R304	*B2
C116	*A1	C408	E1	C518	D2	C628	C3	IC1	E3	IC606	C3	Q308	B2	R125	*A1	R216	*A3	R305	B1
C200	B3	C409	E2	C519	*D2	C629	C3	IC5	E3	IC607	*C3	Q309	*B3	R126	*A1	R217	*A3	R306	*B1
C201	*B3	C410	E2	C520	C3	C630	C3	IC7	*E3	IC608	*C3	Q310	B2	R127	A1	R218	*A3	R307	B1
C202	*B3	C411	E1	C521	C2	C631	*C2	IC100	*A1	IC609	*C3	Q311	B3	R128	*A1	R219	*A3	R308	B1
C203	B3	C412	E2	C522	*D2	C632	*C1	IC101	*B1	IC610	C3			R129	*A1	R220	A3	R309	B1
C204	B3	C413	E1	C523	*D2	C633	E1	IC102	*A1			R1	D3	R130	*A1	R221	A3	R310	B1
C205	*B3	C414	D2	C524	D2	C634	E1	IC103	*A1	LV400	*D2	R2	D3	R131	*A2	R222	A3	R311	B1
C206	*B3	C415	E3	C525	D3	C635	*D2	IC200	B3	LV500	*C2	R5	E3	R132	*A2	R223	A3	R312	B1
C207	*B3	C416	D2	C526	*D3	C636	*D2	IC201	*B3	LV600	*B3	R6	E3	R133	*A2	R224	A3	R313	B1
C208	A3	C417	D2	C527	D2	C637	*C2	IC202	*A3			R7	*E3	R134	*A2	R225	A3	R316	B1
C209	A3	C418	E2	C528	*D3	C638	*C2	IC203	*A3	Q11	*E3	R8	*E3	R135	*A2	R226	A3	R317	B1
C210	A3	C419	*E2	C529	*D3			IC300	*B1	Q100	A1	R9	*E3	R136	A1	R227	A3	R318	B2
C211	A3	C420	D3	C530	*D3	CN1	*D3	IC301	B1	Q101	A1	R10	*E3	R137	*A2	R228	A3	R319	B2
C212	A3	C421	E2	C531	*D2	CN101	A1	IC302	*B2	Q102	*A1	R11	*E3	R138	A2	R229	A3	R320	B2
C213	A3	C422	*E2	C532	*D1	CN102	B3	IC303	*B2	Q103	B1	R12	E3	R139	*A2	R230	*A3	R321	B2
C214	A3	C423	*E2	C600	*C2	CN103	C1	IC400	*E1	Q104	*A1	R13	*E3	R140	*A2	R231	*A3	R322	B2
C215	A2	C424	E2	C601	*C2	CN104	E3	IC401	*D1	Q105	*A1	R14	*E3	R141	*A2	R232	*A3	R323	B2

R324	B2	R413	E1	R519	D2	R624	*C3												
R325	B2	R414	D2	R520	D2	R625	C3												
R326	B2	R415	E2	R521	D2	R626	*C3												
R327	B2	R417	D2	R522	D2	R627	C2												
R328	B2	R418	D2	R523	D2	R628	*B3												
R329	B2	R419	E2	R524	*D3	R629	C3												
R330	*B2	R420	E2	R525	D2	R630	*C3												
R331	*B2	R421	E2	R526	*C3	R631	*C2												
R332	*B3	R422	E2	R527	D2	R632	*C3												
R333	B3	R423	E2	R528	*C3	R633	*C3												
R334	*B3	R424	*E3	R529	D2	R634	*C3												
R335	*B3	R425	E2	R530	*C3	R635	*C3												
R336	*B3	R426	*D3	R531	*D2	R636	C3												
R337	*B2	R427	E2	R532	*D2	R637	C3												
R338	*B3	R428	*D3	R533	*D2	R638	*C3												
R339	*B2	R429	E2	R534	*D3														
R340	*B3	R430	*D3	R535	*D3	RB400	*E3												
R341	*B3	R431	*E2	R536	D3	RB500	*D3												
R342	*B3	R432	*E2	R537	D3	RB600	*C3												
R343	*B3	R433	*E2	R538	*D3														
R344	*B3	R434	*E3	R600	*C2	RV400	*E1												
R345	*B3	R435	*E3	R601	*C1	RV401	*D1												
R346	B3	R436	E3	R602	*C1	RV402	*E1												
R347	*B3	R437	E3	R603	*C1	RV403	*E1												
R348	*B3	R438	*E3	R604	*C2	RV500	*C1												
R349	*B2	R500	*C1	R605	*C2	RV501	*D1												
R350	*B2	R501	*C1	R606	*B2	RV502	*C2												
R351	*B3	R502	*D1	R607	*C2	RV503	*D2												
R352	B2	R503	*D1	R608	*C2	RV600	*B2												
R353	B1	R504	*D1	R609	*C2	RV601	*C1												
R400	*E1	R505	*D1	R610	*C2	RV602	*B2												
R401	*E1	R506	*C1	R611	*C2	RV603	*C2												
R402	*D1	R507	*D2	R612	B2														
R403	*D1	R508	*D2	R613	*C2														
R404	*E1	R509	*D2	R614	B3														
R405	*D1	R510	*D2	R615	C3														
R406	E1	R511	*D2	R617	C3														
R407	D1	R512	*C2	R618	C3														
R408	*E1	R513	*D2	R619	C3														
R409	*E1	R514	C3	R620	C2														
R410	*E1	R515	C2	R621	C3														
R411	*E1	R517	C3	R622	C3														
R412	E2	R518	D3	R623	C2														

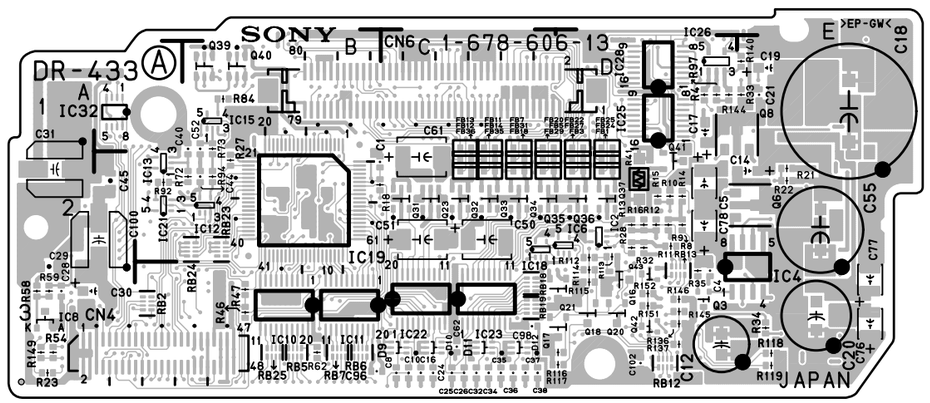

DR-433 -A SIDE-
SUFFIX: -13

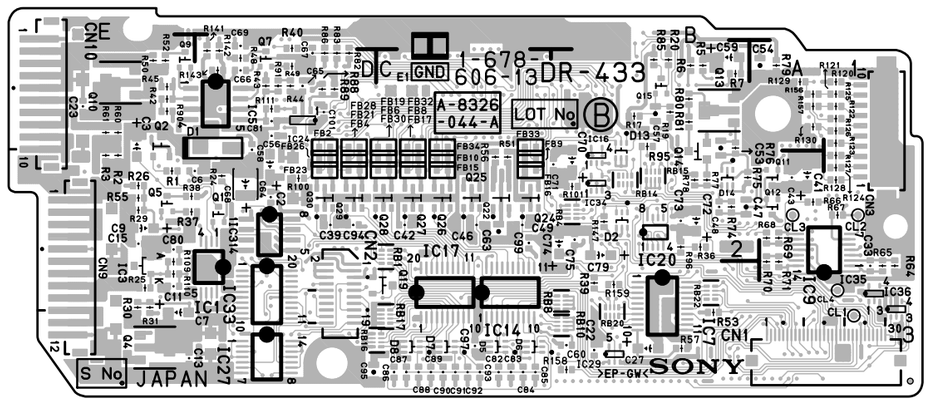

DR-433 -B SIDE-
SUFFIX: -13

DR-433 (1-678-606-13)
---

*:B SIDE

C1	B2	C44	B2	C87	*C3	E1	*C1	IC5	*E1	Q12	*A2	R12	D2	R55	*E2	R110	*E3	RB6	B3
C2	*D2	C45	A2	C88	*C3			IC6	D2	Q13	*B1	R13	D2	R56	*C2	R111	*D1	RB7	B3
C3	*E1	C46	*C2	C89	*C3	FB1	D2	IC7	*B3	Q14	*B2	R14	D2	R57	*B3	R112	D2	RB8	*B3
C4	D3	C47	*B2	C90	*C3	FB2	*D1	IC8	A3	Q15	*B1	R15	D2	R58	A3	R113	D2	RB10	*B3
C5	D2	C48	*B2	C91	*C3	FB3	D2	IC9	*A3	Q16	D3	R16	D2	R59	A3	R114	D3	RB12	D3
C6	*D2	C49	*C2	C92	*C3	FB4	*D2	IC10	B3	Q17	D3	R17	*B1	R60	*E1	R115	D3	RB13	D3
C7	*E3	C50	C2	C93	*C3	FB5	C2	IC11	B3	Q18	D3	R18	B2	R61	*E1	R116	D3	RB14	*B2
C8	C3	C51	C2	C94	*D2	FB6	*C2	IC12	B2	Q19	*C3	R19	*B1	R62	B3	R117	D3	RB15	*B2
C9	*E2	C52	B1	C95	*D3	FB7	C1	IC13	A2	Q20	D3	R20	*B1	R64	*A3	R118	E3	RB16	*C3
C10	C3	C53	*B1	C96	B3	FB8	*C2	IC14	*C3	Q21	D3	R21	E2	R65	*A3	R119	E3	RB17	*C3
C11	*E3	C54	*A1	C97	*C3	FB9	*C2	IC15	B1	Q22	*C2	R22	E2	R66	*A2	R120	*A1	RB18	C3
C12	D3	C55	E2	C98	C3	FB10	*C2	IC16	*B2	Q23	C2	R23	A3	R67	*A2	R121	*A1	RB19	C3
C13	*E3	C56	*D1	C99	*C2	FB11	C1	IC17	*C3	Q24	*C2	R24	*D2	R68	*A2	R122	*A1	RB20	*B3
C14	E2	C57	*B1	C100	A2	FB12	C2	IC18	C2	Q25	*C2	R25	*E3	R69	*A2	R123	*A1	RB22	*B3
C15	*E2	C58	*D1	C101	*D1	FB13	C1	IC19	B2	Q26	*C2	R26	*E2	R70	*A3	R124	*A2	RB23	B2
C16	C3	C59	*B1	C102	D3	FB14	C2	IC20	*B2	Q27	*C2	R27	B2	R71	*A3	R125	*A1	RB24	B2
C17	D1	C60	*B3			FB15	*C2	IC21	A2	Q28	*C2	R28	D2	R72	B2	R126	*A1	RB25	B3
C18	E1	C61	C2	CL1	*A3	FB16	*C2	IC22	C3	Q29	*D2	R29	*E2	R73	B1	R127	*A2		
C19	E1	C62	C3	CL2	*A2	FB17	*C2	IC23	C3	Q30	*D2	R30	*E3	R74	*B2	R128	*A2		
C20	E3	C63	*C2	CL3	*A2	FB18	C2	IC24	*D1	Q31	C2	R31	*E3	R75	*B2	R129	*A1		
C21	E1	C64	*D2	CL4	*A3	FB19	*C1	IC25	D1	Q32	C2	R32	D2	R76	*B1	R130	*A1		
C22	*B3	C65	*D1			FB20	C1	IC26	D1	Q33	C2	R33	E1	R77	*B2	R136	D3		
C23	*E1	C66	*D1	CN1	*A3	FB21	*D2	IC27	*D3	Q34	C2	R34	E3	R78	*B2	R137	D3		
C24	C3	C67	*D1	CN2	*D3	FB22	D1	IC28	D1	Q35	C2	R35	D3	R79	*A1	R140	E1		
C25	C3	C68	*D2	CN3	*A1	FB23	*D2	IC29	*B3	Q36	D2	R36	*B2	R80	*B1	R141	*D1		
C26	C3	C69	*D1	CN4	A3	FB24	D2	IC31	*D2	Q37	D2	R37	*E2	R81	*B1	R142	*D1		
C27	*B3	C70	*B2	CN6	C1	FB25	D1	IC32	A1	Q39	B1	R38	*E2	R82	*D1	R143	*D1		
C28	A3	C71	*B2	CN9	*E3	FB26	*D2	IC33	*D3	Q40	B1	R39	*B3	R83	*D1	R144	D1		
C29	A3	C72	*B2	CN10	*E1	FB27	D2	IC34	*B2	Q41	D2	R40	*D1	R84	B1	R145	D3		
C30	A3	C73	*B2			FB28	*D1	IC35	*A3	Q42	D3	R41	D2	R85	*B1	R146	D3		
C31	A2	C74	*B2	D1	*D1	FB29	C2	IC36	*A3	Q43	D3	R42	*E1	R86	*D1	R147	*B2		
C32	C3	C75	*B2	D2	*B2	FB30	*C2					R43	*D1	R88	*D1	R149	A3		
C33	*A3	C76	E3	D5	*C3	FB31	C2	Q1	*D2	R1	*E2	R44	*D1	R89	*D1	R151	D3		
C34	C3	C77	E3	D6	*C3	FB32	*C1	Q2	*E1	R2	*E2	R45	*E1	R90	*E1	R152	D3		
C35	C3	C78	D2	D7	*C3	FB33	*C1	Q3	D3	R3	*E2	R46	B3	R91	*D1	R156	*A1		
C36	C3	C79	*B2	D8	*C3	FB34	*C1	Q4	*E3	R4	D1	R47	B3	R92	A2	R157	*A1		
C37	C3	C80	*E2	D9	C3	FB35	C2	Q5	*E2	R5	*B1	R48	*D1	R94	B2	R158	*B3		
C38	C3	C81	*D1	D10	C3	FB36	C2	Q6	E2	R6	*B1	R49	*D1	R95	*B1	R159	*B3		
C39	*D2	C82	*C3	D11	C3			Q7	*D1	R7	*B1	R50	*E1	R96	*B2				
C40	B1	C83	*C3	D12	C3	IC1	*D2	Q8	D1	R8	D2	R51	*C2	R97	D1	RB1	*C2		
C41	*A2	C84	*C3	D13	*B1	IC2	D2	Q9	*E1	R9	D2	R52	*E1	R100	*D2	RB2	A3		
C42	*C2	C85	*C3	D14	*B2	IC3	*E3	Q10	*E1	R10	D2	R53	*B3	R101	*B2	RB4	*B2		
C43	*A2	C86	*C3			IC4	D3	Q11	*A2	R11	D2	R54	A3	R109	*E3	RB5	B3		

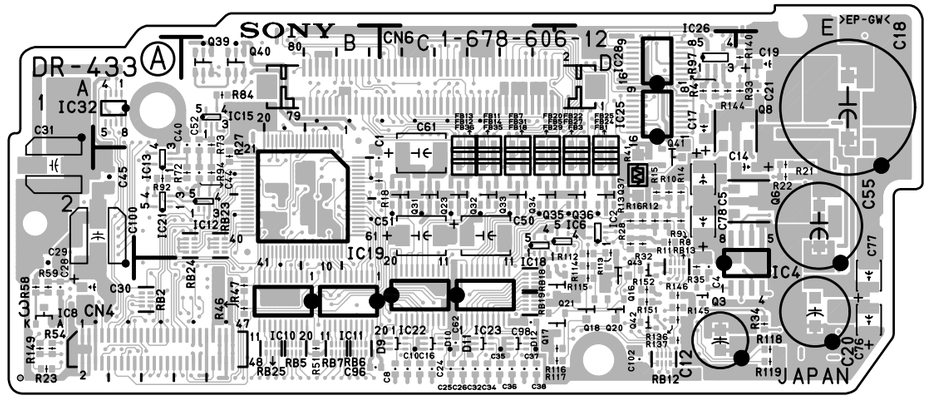

DR-433 -A SIDE-
SUFFIX: -12

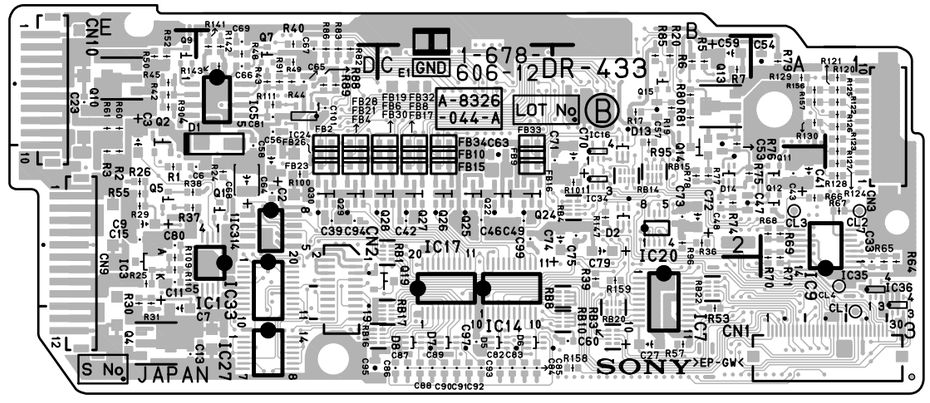

DR-433 -B SIDE-
SUFFIX: -12

DR-433 (1-678-606-12)
---

*:B SIDE

C1	B2	C45	A2	C88	*C3	FB1	D2	IC7	*B3	Q15	*B1	R15	D2	R59	A3	R115	D3	RB12	D3
C2	*D2	C46	*C2	C89	*C3	FB2	*D1	IC8	A3	Q16	D3	R16	D2	R60	*E1	R116	D3	RB13	D3
C3	*E1	C47	*B2	C90	*C3	FB3	D2	IC9	*A3	Q17	D3	R17	*B1	R61	*E1	R117	D3	RB14	*B2
C4	D3	C48	*B2	C91	*C3	FB4	*D2	IC10	B3	Q18	D3	R18	B2	R64	*A3	R118	E3	RB15	*B2
C5	D2	C49	*C2	C92	*C3	FB5	C2	IC11	B3	Q19	*C3	R19	*B1	R65	*A3	R119	E3	RB16	*C3
C6	*D2	C50	C2	C93	*C3	FB6	*C2	IC12	B2	Q20	D3	R20	*B1	R66	*A2	R120	*A1	RB17	*C3
C7	*E3	C51	C2	C94	*D2	FB7	C1	IC13	A2	Q21	D3	R21	E2	R67	*A2	R121	*A1	RB18	C3
C8	C3	C52	B1	C95	*D3	FB8	*C2	IC14	*C3	Q22	*C2	R22	E2	R68	*A2	R122	*A1	RB19	C3
C9	*E2	C53	*B1	C96	B3	FB9	*C2	IC15	B1	Q23	C2	R23	A3	R69	*A2	R123	*A1	RB20	*B3
C10	C3	C54	*A1	C97	*C3	FB10	*C2	IC16	*B2	Q24	*C2	R24	*D2	R70	*A3	R124	*A2	RB22	*B3
C11	*E3	C55	E2	C98	C3	FB11	C1	IC17	*C3	Q25	*C2	R25	*E3	R71	*A3	R125	*A1	RB23	B2
C12	D3	C56	*D1	C99	*C2	FB12	C2	IC18	C2	Q26	*C2	R26	*E2	R72	B2	R126	*A1	RB24	B2
C13	*E3	C57	*B1	C100	A2	FB13	C1	IC19	B2	Q27	*C2	R27	B2	R73	B1	R127	*A2	RB25	B3
C14	E2	C58	*D1	C101	*D1	FB14	C2	IC20	*B2	Q28	*C2	R28	D2	R74	*B2	R128	*A2		
C15	*E2	C59	*B1	C102	D3	FB15	*C2	IC21	A2	Q29	*D2	R29	*E2	R75	*B2	R129	*A1		
C16	C3	C60	*B3			FB16	*C2	IC22	C3	Q30	*D2	R30	*E3	R76	*B1	R130	*A1		
C17	D1	C61	C2	CL1	*A3	FB17	*C2	IC23	C3	Q31	C2	R31	*E3	R77	*B2	R136	D3		
C18	E1	C62	C3	CL2	*A2	FB18	C2	IC24	*D1	Q32	C2	R32	D2	R78	*B2	R137	D3		
C19	E1	C63	*C2	CL3	*A2	FB19	*C1	IC25	D1	Q33	C2	R33	E1	R79	*A1	R140	E1		
C20	E3	C64	*D2	CL4	*A3	FB20	C1	IC26	D1	Q34	C2	R34	E3	R80	*B1	R141	*D1		
C21	E1	C65	*D1			FB21	*D2	IC27	*D3	Q35	C2	R35	D3	R81	*B1	R142	*D1		
C23	*E1	C66	*D1	CN1	*A3	FB22	D1	IC28	D1	Q36	D2	R36	*B2	R82	*D1	R143	*D1		
C24	C3	C67	*D1	CN2	*D3	FB23	*D2	IC31	*D2	Q37	D2	R37	*E2	R83	*D1	R144	D1		
C25	C3	C68	*D2	CN3	*A1	FB24	D2	IC32	A1	Q39	B1	R38	*E2	R84	B1	R145	D3		
C26	C3	C69	*D1	CN4	A3	FB25	D1	IC33	*D3	Q40	B1	R39	*B3	R85	*B1	R146	D3		
C27	*B3	C70	*B2	CN6	C1	FB26	*D2	IC34	*B2	Q41	D2	R40	*D1	R86	*D1	R147	*B2		
C28	A3	C71	*B2	CN9	*E3	FB27	D2	IC35	*A3	Q42	D3	R41	D2	R88	*D1	R149	A3		
C29	A3	C72	*B2	CN10	*E1	FB28	*D1	IC36	*A3	Q43	D3	R42	*E1	R89	*D1	R151	D3		
C30	A3	C73	*B2			FB29	C2					R43	*D1	R90	*E1	R152	D3		
C31	A2	C74	*B2	D1	*D1	FB30	*C2	Q1	*D2	R1	*E2	R44	*D1	R91	*D1	R156	*A1		
C32	C3	C75	*B2	D2	*B2	FB31	C2	Q2	*E1	R2	*E2	R45	*E1	R92	A2	R157	*A1		
C33	*A3	C76	E3	D5	*C3	FB32	*C1	Q3	D3	R3	*E2	R46	B3	R94	B2	R158	*B3		
C34	C3	C77	E3	D6	*C3	FB33	*C1	Q4	*E3	R4	D1	R47	B3	R95	*B1	R159	*B3		
C35	C3	C78	D2	D7	*C3	FB34	*C1	Q5	*E2	R5	*B1	R48	*D1	R96	*B2				
C36	C3	C79	*B2	D8	*C3	FB35	C2	Q6	E2	R6	*B1	R49	*D1	R97	D1	RB1	*C2		
C37	C3	C80	*E2	D9	C3	FB36	C2	Q7	*D1	R7	*B1	R50	*E1	R100	*D2	RB2	A3		
C38	C3	C81	*D1	D10	C3			Q8	D1	R8	D2	R51	B3	R101	*B2	RB3	*B3		
C39	*D2	C82	*C3	D11	C3	IC1	*D2	Q9	*E1	R9	D2	R52	*E1	R109	*E3	RB4	*B2		
C40	B1	C83	*C3	D12	C3	IC2	D2	Q10	*E1	R10	D2	R53	*B3	R110	*E3	RB5	B3		
C41	*A2	C84	*C3	D13	*B1	IC3	*E3	Q11	*A2	R11	D2	R54	A3	R111	*D1	RB6	B3		
C42	*C2	C85	*C3	D14	*B2	IC4	D3	Q12	*A2	R12	D2	R55	*E2	R112	D2	RB7	B3		
C43	*A2	C86	*C3			IC5	*E1	Q13	*B1	R13	D2	R57	*B3	R113	D2	RB8	*B3		
C44	B2	C87	*C3	E1	*C1	IC6	D2	Q14	*B2	R14	D2	R58	A3	R114	D3	RB10	*B3		

```
----------------------
CN-2037 (1-678-609-12)
----------------------

*:B SIDE

C1      *A1
C2       A1
C3       A1
C4      *A1
C5      *A1
C6       A1
C7      *A1
C9       A1
C10      A1
C11      A1
C12      A1
C13     *A1
C14     *A1
C15     *A1

CN1      A1
CN2      A1
CN3      A1
CN4      A1

IC1     *A1
IC2      A1

Q1      *A1
Q3       A1

R1      *A1
R2      *A1
R3      *A1
R4      *A1
R7      *A1
R8       A1
R9      *A1
R10      A1
```

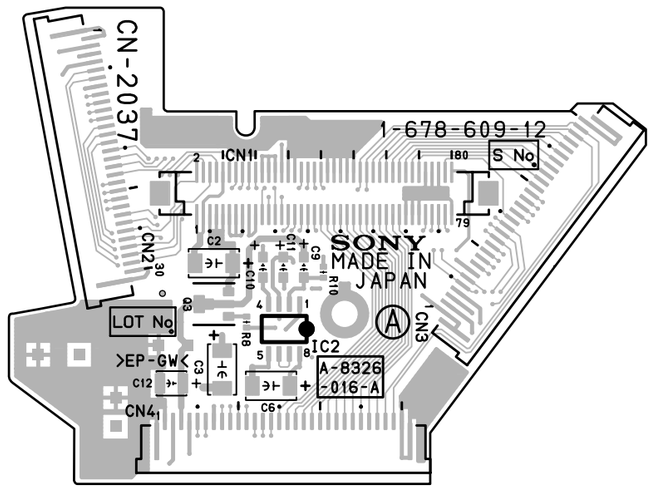

CN-2037 -A SIDE-
SUFFIX: -12

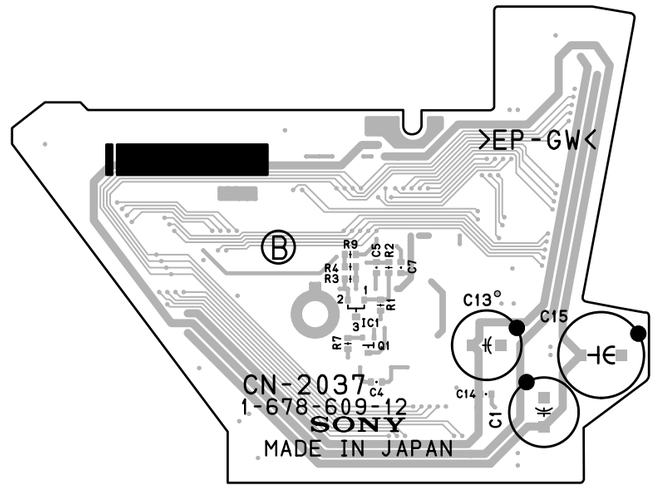

CN-2037 -B SIDE-
SUFFIX: -12

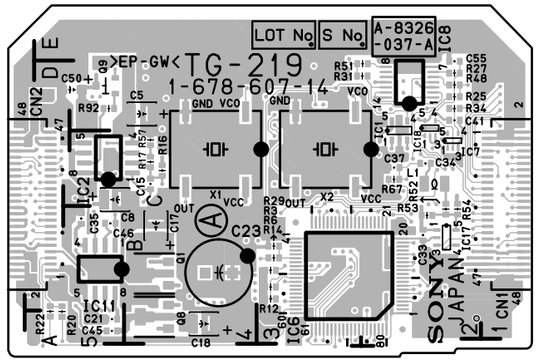

TG-219 -A SIDE-
SUFFIX: -14

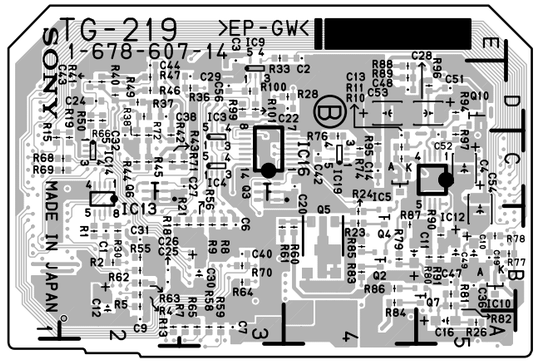

TG-219 -B SIDE-
SUFFIX: -14

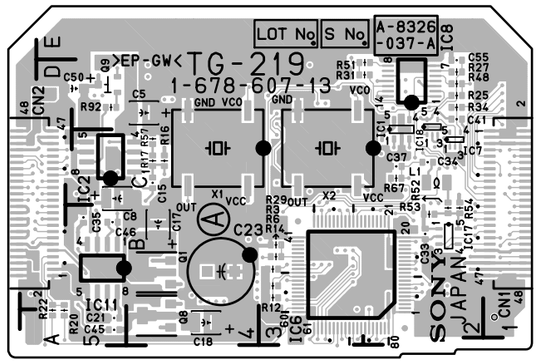

TG-219 -A SIDE-
SUFFIX: -13

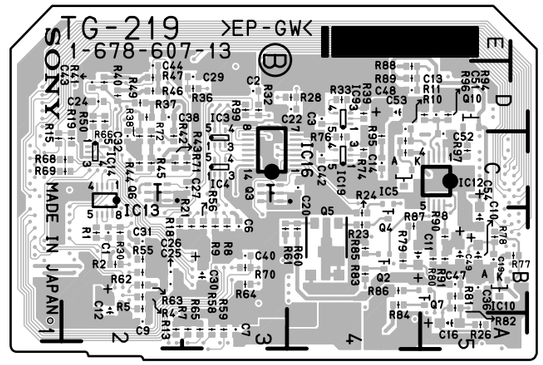

TG-219 -B SIDE-
SUFFIX: -13

TG-219 (1-678-607-14)
---

*:B SIDE

C1	*B2	C53	*D4	R12	B3	R66	*D2
C2	*E4	C54	*B5	R13	*A2	R67	C2
C3	*D3	C55	D2	R14	B3	R68	*C2
C4	*C5	C56	*D3	R15	*C1	R69	*C2
C5	D4			R16	C4	R70	*B3
C6	*B3	CN1	C1	R17	C4	R71	*C3
C7	*A3	CN2	C5	R18	*B2	R72	*C2
C8	C5			R19	*C2	R74	*C4
C9	*A2	IC1	C2	R20	A5	R76	*C4
C10	*B5	IC2	C4	R21	*B3	R77	*B5
C11	*B4	IC3	*C3	R22	A5	R78	*B5
C12	*B2	IC4	*C3	R23	*B4	R79	*B4
C13	*C4	IC5	*C4	R24	*B4	R80	*B5
C14	*C4	IC6	B3	R25	D2	R81	*B5
C15	C4	IC7	C2	R26	*A5	R82	*B5
C16	*A5	IC8	D2	R27	D2	R83	*B4
C17	B4	IC9	*D3	R28	*D4	R84	*B4
C18	A4	IC10	*B5	R29	B3	R85	*B4
C19	*B5	IC11	B5	R30	*B2	R86	*B4
C20	*C4	IC12	*C5	R31	D2	R87	*B4
C21	A5	IC13	*C2	R33	*E3	R88	*D4
C22	*D4	IC14	*C2	R34	D2	R89	*D4
C23	B4	IC16	*C4	R36	*D3	R90	*B5
C24	*D2	IC17	B2	R37	*D2	R91	*B5
C25	*B2	IC18	D2	R38	*C2	R92	D5
C26	*B2	IC19	*C4	R40	*D2	R94	*D5
C27	*C3			R41	*D2	R95	*C4
C28	*D5	L1	C2	R42	*C2	R96	*D5
C29	*D3			R43	*C2	R97	*C5
C30	*B3	Q1	B4	R44	*C2	R99	*D3
C31	*B2	Q2	*B4	R45	*C2	R100	*D3
C32	*C2	Q3	*C3	R46	*D2	R101	*D3
C33	B2	Q4	*B4	R47	*D2		
C34	C2	Q5	*B4	R48	D2	X1	C4
C35	B5	Q6	*C2	R49	*D2	X2	C3
C36	*B5	Q7	*B5	R50	*D2		
C37	C2	Q8	A4	R51	D2		
C38	*D2	Q9	D5	R52	B2		
C40	*B3	Q10	*D5	R53	B2		
C41	D2			R54	B2		
C42	*C4	R1	*B2	R55	*B2		
C43	*D2	R2	*B2	R56	*B3		
C44	*D2	R3	B3	R57	C4		
C45	A5	R4	*B2	R58	*A3		
C46	B5	R5	*B2	R59	*A3		
C47	*B5	R6	B3	R60	*B4		
C48	*D4	R7	*A3	R61	*B3		
C49	*B5	R8	*B3	R62	*B2		
C50	D5	R9	*B3	R63	*B2		
C51	*D5	R10	*C4	R64	*B3		
C52	*C5	R11	*C4	R65	*A3		

TG-219 (1-678-607-13)
---

*:B SIDE

C1	*B2	C55	D2	R15	*C1	R67	C2
C2	*D3			R16	C4	R68	*C2
C3	*D4	CN1	C1	R17	C4	R69	*C2
C5	D4	CN2	C5	R18	*B2	R70	*B3
C6	*B3			R19	*C2	R71	*C3
C7	*A3	IC1	C2	R20	A5	R72	*C2
C8	C5	IC2	C4	R21	*B3	R74	*C4
C9	*A2	IC3	*C3	R22	A5	R76	*C4
C10	*B5	IC4	*C3	R23	*B4	R77	*B5
C11	*B4	IC5	*C4	R24	*B4	R78	*B5
C12	*B2	IC6	B3	R25	D2	R79	*B4
C13	*D4	IC7	C2	R26	*A5	R80	*B5
C14	*C4	IC8	D2	R27	D2	R81	*B5
C15	C4	IC9	*D4	R28	*D4	R82	*B5
C16	*A5	IC10	*B5	R29	B3	R83	*B4
C17	B4	IC11	B5	R30	*B2	R84	*B4
C18	A4	IC12	*C5	R31	D2	R85	*B4
C19	*B5	IC13	*C2	R32	*D3	R86	*B4
C20	*C4	IC14	*C2	R33	*D4	R87	*B4
C21	A5	IC16	*C4	R34	D2	R88	*D4
C22	*D4	IC17	B2	R36	*D3	R89	*D4
C23	B4	IC18	D2	R37	*D2	R90	*B5
C24	*D2	IC19	*C4	R38	*C2	R91	*B5
C25	*B2			R39	*D4	R92	D5
C26	*B2	L1	C2	R40	*D2	R94	*D5
C27	*C3			R41	*D2	R95	*C4
C29	*D3	Q1	B4	R42	*C2	R96	*D5
C30	*B3	Q2	*B4	R43	*C2	R97	*C5
C31	*B2	Q3	*C3	R44	*C2	R99	*D3
C32	*C2	Q4	*B4	R45	*C2		
C33	B2	Q5	*B4	R46	*D2	X1	C4
C34	C2	Q6	*C2	R47	*D2	X2	C3
C35	B5	Q7	*B5	R48	D2		
C36	*B5	Q8	A4	R49	*D2		
C37	C2	Q9	D5	R50	*D2		
C38	*D2	Q10	*D5	R51	D2		
C40	*B3			R52	B2		
C41	D2	R1	*B2	R53	B2		
C42	*C4	R2	*B2	R54	B2		
C43	*D2	R3	B3	R55	*B2		
C44	*D2	R4	*B2	R56	*B3		
C45	A5	R5	*B2	R57	C4		
C46	B5	R6	B3	R58	*A3		
C47	*B5	R7	*A3	R59	*A3		
C48	*D4	R8	*B3	R60	*B4		
C49	*B5	R9	*B3	R61	*B3		
C50	D5	R10	*C4	R62	*B2		
C51	*D5	R11	*C4	R63	*B2		
C52	*C5	R12	B3	R64	*B3		
C53	*D4	R13	*A2	R65	*A3		
C54	*B5	R14	B3	R66	*D2		

DCP-28 (1-678-617-12)
---

*:B SIDE

C1	A2	C244	B1	C334	*C1	C424	D2	C515	E2	C638	E3	C858	*C4	C1031	C3	C1164	*A4	C1332	*B4	DL100	C2	IC135	*C1	IC615	*C3	IC1016	*E3	Q160	*D2	Q954	A2
C2	A2	C245	*C2	C335	*C1	C425	D1	C516	E2	C639	E4	C859	*C4	C1032	C4	C1165	A3	C1333	*A4	DL101	C1	IC136	*C1	IC616	*C4	IC1017	*E2	Q161	*D1	Q955	B2
C101	*A3	C246	*C1	C336	*C2	C426	D1	C517	E2	C640	E3	C860	*D3	C1033	C3	C1166	B4	C1334	*A4	DL102	C1	IC137	C2	IC617	*D3	IC1018	*D3	Q162	*D1	Q956	B4
C102	*A2	C247	*C1	C337	*C1	C427	D1	C518	E2	C641	E3	C861	*C4	C1034	C4	C1167	A3	C1335	*B4			IC138	*C2	IC619	D4	IC1019	E3	Q163	*D2	Q957	B1
C103	*A2	C248	*C2	C338	*C1	C428	D1	C519	E2	C642	E3	C862	*C4	C1035	C3	C1168	A4	C1336	*B4	E1	*B2	IC140	C1	IC620	*C4	IC2002	*E4	Q164	D2	Q958	B4
C104	*A1	C249	*C2	C339	*C2	C429	D1	C520	E2	C643	E3	C863	D4	C1036	C4	C1169	B4	C1337	*A4	E2	*E2	IC141	*C1	IC621	D4	IC2003	*E4	Q165	*D1	Q959	B4
C105	*A2	C250	*C1	C340	*C2	C430	D2	C521	E2	C644	E3	C864	D3	C1037	C3	C1170	*A4	C1338	*A4	E3	B2	IC143	C1	IC622	*C4	IC2004	*E4	Q166	D1	Q960	B2
C106	*A3	C251	*C2	C341	*C1	C431	D1	C522	D1	C645	E3	C865	D3	C1038	C4	C1171	B4	C1339	B4	E4	E4	IC144	*C1	IC623	*C4	IC2005	E4	Q167	*D1	Q961	A2
C107	A3	C252	*C2	C342	*C1	C432	*D2	C523	D1	C646	E4	C866	*D4	C1039	C3	C1172	*A4	C1340	A4	E5	B1	IC146	C2	IC625	D3	IC2006	*D3	Q168	D1	Q962	B4
C108	*A3	C253	*C1	C343	*C1	C433	*D1	C524	E2	C701	*E4	C867	C3	C1040	C4	C1173	A3	C1341	*B4	E6	*B1	IC147	C1	IC626	*C3	IC2007	*E4	Q200	B3	Q963	A2
C109	A3	C254	*B2	C344	*C1	C434	*D1	C525	E2	C702	E4	C868	C4	C1041	C3	C1174	*B4	C1342	*A4			IC148	C1	IC627	*C3	IC2008	*E3	Q201	B3	Q964	B4
C110	B2	C255	*B1	C345	C2	C435	*D2	C526	E2	C703	E4	C869	*C3	C1042	C4	C1175	*B4	C1343	*B4	FB200	C3	IC149	*C2	IC628	D4	IC2009	E4	Q202	*B3	Q965	A4
C111	*B2	C256	*B1	C346	C2	C436	*D1	C527	E2	C704	D4	C870	*C3	C1043	*B4	C1176	A3	C1344	*A4	FB201	C3	IC150	*C1	IC629	*C4	IC2010	E4	Q203	*B3	Q966	A2
C112	B2	C257	C2	C347	C2	C437	*D1	C528	E2	C705	E3	C871	D4	C1044	*C3	C1177	*A3	C1345	*B4	FB202	C3	IC151	*C1	IC630	*D4	IC2011	*D3	Q204	*B3	Q967	A2
C113	B2	C258	C2	C348	C1	C438	D2	C529	E2	C706	*E4	C872	*D3	C1045	*B4	C1178	*A3	C1346	*A4	FB203	C3	IC152	C2	IC631	*B4	IC2012	E4	Q205	*B3	Q968	A4
C114	*A2	C259	C1	C349	C1	C439	D2	C530	E1	C707	*E4	C873	*D3	C1046	*C3	C1179	*A3	C1347	*A2	FB700	C2	IC153	C1	IC700	C2	IC2013	*E3	Q206	B3	Q969	A2
C115	*A2	C260	*C2	C350	C1	C440	D1	C531	E2	C709	*E3	C874	*D3	C1047	*B4	C1180	A4	C1348	*A2			IC154	C1	IC702	C2			Q207	*B3	Q970	A4
C116	*A2	C261	*C1	C351	*C2	C441	D1	C532	E2	C710	*E3	C875	*D3	C1048	C3	C1181	A4	C1349	*A1	FL100	B2	IC158	C2	IC703	D2	L1	D4	Q208	*B3	Q971	B1
C117	*A2	C262	*C1	C352	*C1	C442	D1	C533	E1	C711	*E3	C876	D3	C1049	B3	C1182	A4	C1350	*A1	FL101	B1	IC160	C1	IC706	*C2			Q209	B3	Q972	A4
C118	B2	C263	C2	C353	*C1	C443	D1	C534	E1	C712	*E3	C877	*C4	C1050	*C3	C1183	A4	C1351	*A1	FL102	B1	IC162	C1	IC707	*C2	Q1	*E4	Q601	*C4	Q973	A4
C119	B2	C264	C1	C354	*C2	C444	D2	C535	D2	C713	*E4	C901	C2	C1051	B3	C1184	*A4	C1352	*A1	FL103	D2	IC173	D2	IC708	C2	Q2	*E4	Q602	*C4	Q974	A2
C120	A2	C265	C1	C355	*C1	C445	D1	C536	E1	C714	*E4	C902	C2	C1052	*C3	C1185	*B3	C1353	A2	FL104	D1	IC174	D1	IC709	C2	Q3	*C4	Q603	*B4	Q975	A2
C121	B2	C266	C2	C356	*C1	C446	D1	C537	E1	C715	*E4	C903	C2	C1053	*B4	C1186	*B3	C1354	*A1	FL105	D1	IC175	D1	IC710	*C2	Q50	A2	Q604	B4	Q976	A4
C122	*B2	C267	C2	C357	*C2	C447	D2	C538	D1	C716	*E3	C904	C2	C1054	*B3	C1187	A3	C1355	*B1	FL700	C3	IC176	*D2	IC711	*C3	Q51	*A2	Q605	*C4	Q977	A2
C123	*B2	C268	C1	C358	*C1	C448	D1	C539	D1	C717	*E4	C905	C2	C1055	B3	C1188	*B3	C1356	*A1	FL701	D3	IC177	*D1	IC712	D3	Q52	A2	Q606	*C4	Q978	A2
C124	*B2	C269	C1	C359	*C1	C449	D1	C540	E1	C718	*E3	C906	C2	C1056	B3	C1189	*A4	C1357	*B1	FL800	B4	IC178	*D1	IC713	C3	Q53	A2	Q607	C4	Q979	*A1
C125	*B2	C270	C1	C360	*C2	C450	D2	C541	E2	C719	*E3	C907	C2	C1057	*B3	C1190	*A4	C1358	B4	FL801	B3	IC179	D2	IC714	*D3	Q54	*A2	Q608	C4	Q980	*B1
C126	*B2	C271	C1	C361	*C1	C451	D1	C542	*E1	C720	*E4	C908	C2	C1101	*B3	C1191	*A4	C1359	A1	FL802	B3	IC180	D1	IC715	D3	Q55	B2	Q609	C4	Q981	*B1
C127	*B2	C272	C2	C362	*C1	C452	D1	C543	*E1	C721	*D4	C909	C2	C1102	*B3	C1192	*A4			FL803	B2	IC182	*D2	IC716	D3	Q56	*B2	Q610	C4	Q982	*A1
C128	*B2	C273	C1	C363	*C2	C453	D2	C544	*E1	C722	*D3	C910	*C2	C1103	*B2	C1193	*B3	CL1	A2	FL804	B3	IC183	*D1	IC717	*D2	Q57	*C4	Q611	C4	Q983	B2
C129	*B2	C274	C1	C364	*C1	C454	D1	C545	*E1	C723	*D3	C911	*C2	C1104	*B3	C1194	*A4	CL2	A2	FL807	B2	IC184	*D1	IC718	*C2	Q100	*B2	Q612	*B4	Q984	*B2
C130	*B2	C275	C2	C365	*C1	C455	D1	C546	*E1	C724	*D3	C912	*D2	C1105	*B3	C1195	*B3	CL50	A3	FL808	B3	IC188	*D2	IC719	C2	Q101	*B1	Q613	*B4	Q985	*B2
C131	*B2	C276	C1	C366	*C2	C456	*D2	C547	*E1	C725	*D4	C913	C2	C1106	*B2	C1196	*A3	CL51	B2	FL809	B3	IC189	*D1	IC720	*D2	Q102	*B1	Q614	B4	Q986	E4
C132	*B2	C277	C1	C367	*C2	C457	*D1	C548	E2	C801	*B4	C914	C2	C1107	*B2	C1197	A3	CL52	A2	FL810	B3	IC190	*D1	IC800	*B2	Q103	B1	Q615	D4	Q2000	*D3
C133	*B2	C278	*C2	C368	*C1	C458	*D1	C549	*E1	C802	*B4	C915	D2	C1108	*B3	C1198	A3	CL53	A2	FL811	B4	IC194	D2	IC801	*B3	Q104	*B2	Q616	D4	Q2001	*E4
C134	*B2	C279	*C1	C369	*C1	C459	D2	C550	*E1	C803	D4	C916	*C2	C1109	*B3	C1199	*A3	CL54	A2			IC195	D1	IC802	*B3	Q105	*B2	Q618	D4	Q2002	*D3
C135	B2	C280	*C1	C370	*C1	C460	D2	C551	*E1	C804	*C4	C917	*C2	C1110	*B3	C1200	*A4	CL600	D3	IC1	*C4	IC198	*D2	IC803	*B3	Q106	*B2	Q619	D4		
C136	B2	C281	*C2	C371	*C1	C461	D1	C552	*E1	C805	*C4	C918	*D2	C1111	*B3	C1201	A4	CL601	D3	IC2	*B4	IC200	D1	IC804	*B3	Q107	B2	Q620	D4	R1	*E4
C137	B2	C282	*C2	C372	*C2	C462	D2	C553	E1	C806	*E4	C919	*C3	C1112	*B3	C1202	*A3	CL602	D3	IC3	A2	IC201	*C3	IC805	*B3	Q108	*B1	Q621	D4	R2	*E4
C138	*B2	C283	*C1	C373	*C1	C463	D2	C554	E1	C807	*B4	C920	*D3	C1113	*B4	C1203	A4	CL603	D3	IC51	*A2	IC202	C3	IC806	*B4	Q109	*B1	Q622	D4	R3	*D4
C139	B2	C284	*C1	C374	*C1	C464	D1	C555	E1	C808	C4	C921	*D3	C1114	B4	C1204	A4	CL604	D3	IC52	*A3	IC203	C3	IC807	*B4	Q110	*B1	Q623	B4	R4	*D4
C140	*C4	C285	*C2	C375	*C1	C465	*D2	C556	*D1	C809	C4	C922	*D3	C1115	B3	C1205	A4	CL605	D3	IC53	A3	IC204	C3	IC808	*B4	Q111	B2	Q700	D3	R5	*C4
C141	*C4	C286	*C2	C376	*C2	C466	*D2	C557	*D1	C810	C4	C923	D3	C1116	B3	C1206	A4	CL606	D3	IC54	A2	IC205	C4	IC809	B4	Q112	B1	Q701	D3	R6	*C4
C142	B2	C287	*C2	C377	*C1	C467	*D1	C558	E2	C811	C4	C924	D3	C1117	B3	C1207	A3	CL607	D3	IC55	*A3	IC206	*C3	IC810	*B4	Q113	B1	Q702	*C3	R7	*C4
C143	*C4	C288	C2	C378	C1	C468	D2	C559	*E1	C812	*B4	C925	C3	C1118	B3	C1208	A4	CL608	D4	IC56	*A2	IC207	B3	IC811	*B4	Q114	C2	Q703	*D3	R8	*E4
C144	B2	C289	C1	C379	C2	C469	D2	C560	*E1	C813	C4	C926	D3	C1119	*B3	C1209	A4	CL609	D3	IC57	B2	IC208	B3	IC812	A4	Q115	C2	Q704	*D3	R9	*C4
C145	B2	C290	C1	C380	C1	C470	D1	C561	*E1	C814	*C4	C927	D3	C1120	B4	C1210	A4	CL610	D3	IC58	*B2	IC211	*C3	IC813	*A4	Q116	C1	Q705	*C3	R10	*D4
C201	B2	C291	*C2	C381	*C2	C471	D2	C562	*E1	C815	*C4	C928	C3	C1121	*B4	C1211	A4	CL611	D3	IC59	B2	IC212	*C4	IC814	A4	Q117	C2	Q706	*C3	R11	*E4
C202	B1	C292	*C2	C382	*C1	C472	D1	C563	*E1	C816	*C4	C929	D3	C1122	*B3	C1212	A4	CL612	D3	IC61	*B2	IC213	C3	IC815	*A4	Q118	*C2	Q707	*D3	R12	*E4
C203	B1	C293	*C1	C383	*C1	C473	D1	C564	*E1	C817	*D4	C930	D3	C1123	B3	C1213	A4	CL613	C3	IC62	*B2	IC214	C3	IC816	B4	Q119	C2	Q800	*B4	R13	*B4
C204	*B2	C294	C2	C384	C2	C474	D2	C565	*E1	C818	B4	C931	*D3	C1124	B3	C1214	*A4	CL614	C3	IC63	*B2	IC215	B4	IC817	A4	Q120	*C1	Q801	*A4	R14	*B4
C205	*B2	C295	C1	C385	C1	C475	D1	C566	*E1	C819	*C4	C932	*D3	C1125	B3	C1215	A3	CL617	*D3	IC65	B2	IC220	B4	IC818	*A4	Q121	C1	Q802	*A4	R15	*E4
C206	*B1	C296	C1	C386	C1	C476	D1	C567	*E1	C820	*C4	C933	*D3	C1126	*B3	C1216	*A4	CL618	*D3	IC66	*B2	IC500	E2	IC819	A4	Q122	*C1	Q803	*A4	R16	*E4
C207	*B1	C297	*C2	C387	C2	C477	D2	C601	*E2	C821	D4	C934	*D3	C1127	B3	C1217	*B3	CL1000	E2	IC68	*C4	IC501	D2	IC820	A4	Q123	*C2	Q804	B3	R17	*E4
C208	*B2	C298	*C1	C388	*C2	C478	D2	C602	*E2	C822	*D4	C935	C3	C1128	B3	C1218	*B4	CL1001	E2	IC69	B2	IC502	D2	IC821	A4	Q124	*C2	Q805	A3	R18	*E4
C209	*B1	C299	*C1	C389	C1	C479	D1	C603	*E2	C823	*E4	C936	D3	C1129	*B4	C1219	*A3	CL1002	E2	IC70	B2	IC503	E1	IC822	A4	Q125	C2	Q806	*A3	R19	*D4
C210	*B1	C300	C2	C390	*C1	C480	D2	C604	*E3	C824	*D4	C937	C3	C1130	*B3	C1220	*A3	CL1003	E2	IC71	*A2	IC504	E2	IC823	A3	Q126	C1	Q807	*A3	R20	*D4
C211	B2	C301	C2	C391	C1	C481	D2	C605	D3	C825	*B4	C938	D3	C1131	*B3	C1221	*A4	CL1004	E2	IC100	*B2	IC506	D2	IC824	*B3	Q127	C1	Q808	A3	R21	*D4
C212	B1	C302	C1	C392	*C1	C482	D1	C606	*D2	C826	C4	C939	D3	C1132	B4	C1222	B4	CL1005	E2	IC101	B2	IC507	E2	IC825	B3	Q128	C2	Q809	*A3	R22	*D4
C213	B1	C303	C1	C393	*C2	C483	D2	C607	*E2	C827	*C4	C940	D3	C1133	*B4	C1301	B4			IC102	B1	IC508	E2	IC826	*B4	Q129	C2	Q810	*A3	R23	*D4
C214	B2	C304	C1	C394	D2	C484	D1	C608	E2	C828	*D4	C1001	C3	C1134	*B3	C1302	B4	CN3	B1	IC103	B1	IC511	E2	IC827	*A3	Q130	C1	Q811	A3	R24	*D4
C215	B1	C305	C1	C395	*C1	C485	D1	C609	E2	C829	*D4	C1002	C3	C1135	*B3	C1303	B4	CN4	A1	IC104	*B2	IC519	E2	IC828	*A3	Q131	C2	Q812	B3	R25	*D4
C216	B1	C306	C2	C396	D1	C486	D2	C610	E2	C830	D4	C1003	C3	C1136	*B4	C1304	*D4	CN5	A3	IC105	*B1	IC521	D1	IC829	*B3	Q132	C2	Q813	A3	R26	*D4
C217	*B2	C307	C2	C397	*C1	C487	D1	C611	D2	C831	*D4	C1004	C3	C1137	*B3	C1305	D4	CN6	C3	IC106	*B1	IC526	E1	IC830	B3	Q133	C1	Q814	*A4	R27	*D4
C218	B2	C308	C1	C398	D1	C488	D1	C612	D2	C832	*D4	C1005	C3	C1138	*B4	C1306	D4	CN7	E2	IC107	D1	IC529	E1	IC831	*B3	Q134	*D2	Q816	A3	R28	*D4
C219	B1	C309	*C2	C399	D2	C489	D1	C613	D2	C833	*D4	C1006	C3	C1139	*B4	C1307	*C4	CN104	D4	IC108	D1	IC530	D1	IC832	A3	Q135	*D1	Q819	A3	R29	*D4
C220	B1	C310	*C1	C400	D2	C490	D2	C614	E2	C834	D4	C1007	C3	C1140	*B3	C1308	*C4	CN105	A2	IC109	*B1	IC531	E1	IC834	A3	Q136	*D1	Q820	*A3	R30	*D4
C221	*B1	C311	*C1	C401	D1	C491	D2	C615	*E3	C835	C4	C1008	C3	C1141	*B2	C1309	*B4			IC110	*B2	IC532	E1	IC835	*B3	Q137	D2	Q821	*A3	R31	*D4
C222	*B1	C312	*C2	C402	*D2	C492	D2	C616	*D2	C836	C4	C1009	C3	C1142	*B3	C1310	*B4	D1	*C4	IC111	*B1	IC537	E1	IC836	A3	Q138	D1	Q822	*B4	R32	*D4
C223	*B2	C313	*C2	C403	*D1	C493	D2	C617	*D3	C837	D4	C1010	C3	C1143	*B2	C1311	*B4	D2	*C4	IC112	D2	IC539	*E1	IC846	A4	Q139	D1	Q823	*A4	R33	*D4
C224	*B1	C314	*C1	C404	*D1	C494	D1	C618	D3	C838	D4	C1011	C3	C1144	*B2	C1312	*D4	D100	B2	IC113	*B2	IC542	*E1	IC847	*A4	Q140	D2	Q824	*A4	R34	*D4
C225	*B1	C315	*C2	C405	D2	C495	D1	C619	D4	C839	D4	C1012	C3	C1145	B3	C1313	*D4	D101	*C2	IC114	*B2	IC549	*E1	IC950	B4	Q141	D1	Q825	B2	R35	*D4
C226	*B2	C316	*C2	C406	D1	C496	*D2	C620	E4	C840	C4	C1013	*C3	C1146	B4	C1314	E4	D102	*C1	IC115	*B1	IC550	*E1	IC951	A4	Q142	D1	Q826	B2	R36	*C4
C227	*B2	C317	*C1	C407	D1	C497	*D1	C621	E4	C841	*D4	C1014	*C3	C1147	B4	C1315	B4	D103	*C1	IC118	B2	IC551	*E1	IC952	A1	Q143	*D2	Q827	B2	R37	*C4
C228	*B1	C318	C2	C408	*D2	C498	*D1	C622	E3	C842	*D4	C1015	*C3	C1148	B3	C1316	A4	D600	*E4	IC119	B1	IC552	*E1	IC953	*A1	Q144	*D1	Q828	*B3	R38	*C4
C229	*B1	C319	C2	C409	*D1	C499	B2	C623	E3	C843	*D4	C1016	*C3	C1149	B3	C1317	B4	D601	C4	IC120	B1	IC600	*D4	IC954	A2	Q145	*D1	Q829	*B3	R39	*C4
C230	*B1	C320	C1	C410	*D1	C501	E2	C624	E3	C844	D4	C1017	*C3	C1150	B3	C1318	A4	D602	D4	IC121	*C2	IC601	C4	IC955	B2	Q146	*C2	Q830	*B3	R40	*C4
C231	*B1	C321	*C2	C411	*D2	C502	E2	C625	E3	C845	D4	C1018	*C3	C1151	B4	C1319	E4	D800	*A4	IC122	*C1	IC602	C4	IC956	*E4	Q147	*C1	Q831	*A3	R41	*C4
C232	*B2	C322	*C1	C412	*D1	C503	E2	C626	D3	C846	*C4	C1019	*C3	C1152	*B4	C1320	E4	D801	*A4	IC123	*C1	IC603	*C4	IC957	B4	Q148	*C1	Q832	*A3	R42	*C4
C233	*B1	C323	*C1	C413	*D1	C504	E2	C627	D3	C847	*D4	C1020	*C3	C1153	*B4	C1321	*B4	D802	*B3	IC124	B2	IC604	D4	IC1000	*D3	Q149	*D2	Q833	*A3	R43	*C4
C234	*B2	C324	*C2	C414	*D2	C505	D2	C628	D3	C848	*D4	C1021	B3	C1154	*B4	C1322	*A4	D803	*A3	IC125	B1	IC605	C4	IC1001	*E3	Q150	*D1	Q834	*B3	R44	*C4
C235	*B2	C325	*C1	C415	*D1	C506	D2	C629	D3	C849	*D4	C1022	*C3	C1155	*B4	C1323	E4	D804	*A3	IC126	B1	IC606	*C4	IC1002	*D3	Q151	*D1	Q835	*B4	R45	*C4
C236	B2	C326	*C1	C416	*D1	C507	D2	C630	D3	C850	C4	C1023	B3	C1156	*B4	C1324	B4	D805	*B3	IC127	C2	IC607	*C4	IC1003	D3	Q152	*D2	Q836	*B3	R46	A2
C237	B1	C327	C2	C417	*D2	C508	E2	C631	D4	C851	*D4	C1024	*C3	C1157	B4	C1325	A4	D806	*A3	IC128	C1	IC608	C4	IC1004	D3	Q153	*D1	Q837	*A4	R47	A2
C238	B1	C328	C1	C418	*D1	C509	E2	C632	E4	C852	*D4	C1025	*B3	C1158	*B3	C1326	*B4	D807	*A3	IC129	C1	IC609	C4	IC1006	D2	Q154	*D1	Q838	A4	R48	A2
C239	B2	C329	C1	C419	*D1	C510	D2	C633	E4	C853	*D4	C1026	*B3	C1159	*B3	C1327	*A4	D952	A4	IC130	*C2	IC610	*D4	IC1007	*D3	Q155	*D2	Q839	A4	R49	A2
C240	B2	C330	*C2	C420	*D2	C511	E2	C634	E4	C854	*D4	C1027	B3	C1160	*B3	C1328	*E4	D953	B4	IC131	C1	IC611	*D3	IC1012	*D3	Q156	*D1	Q840	*B3	R50	A2
C241	B1	C331	*C1	C421	*D1	C512	E2	C635	E4	C855	D4	C1028	B3	C1161	A4	C1329	*D4	D954	A4	IC132	C1	IC612	*D4	IC1013	B4	Q157	*D1	Q841	*B3	R51	A2
C242	B1	C332	*C1	C422	*D1	C513	D2	C636	E3	C856	*D4	C1029	*B3	C1162	A4	C1330	*D4	D955	A1	IC133	C2	IC613	D3	IC1014	*D2	Q158	*D2	Q842	*A3	R52	A2
C243	B1	C333	*C2	C423	D2	C514	E2	C637	E3	C857	*D4	C1030	*B3	C1163	B4	C1331	*B4	D956	A1	IC134	*C2	IC614	D3	IC1015	*E2	Q159	*B1	Q951	B4	R53	A2

http://getMANUAL.com

R54	A2	R218	B1	R308	*C1	R398	C1	R488	C2	R578	*D1	R668	*C2	R768	*E1	R1008	E4	R1134	C4	R1224	*D3	R1340	*C3	R1454	*C3	R1587	B4	R1677	A4	R1834	E4	RB607	C3
R55	A2	R219	*B2	R309	*B2	R399	C1	R489	C1	R579	*D2	R669	*C1	R769	*E1	R1009	*D3	R1135	C4	R1225	*D4	R1341	*C3	R1455	B3	R1588	B4	R1678	A4	R1835	*B4	RB608	*D3
R56	A2	R220	*B1	R310	*B2	R400	C2	R490	C1	R580	*D2	R670	*C1	R770	*E1	R1010	*E4	R1136	C4	R1226	*D3	R1342	*C3	R1456	B3	R1589	*B3	R1679	A4	R1836	*A4	RB609	*D3
R57	A2	R221	*B1	R311	*B1	R401	C1	R491	C2	R581	*D1	R671	B2	R771	*E1	R1011	E4	R1137	D4	R1227	D3	R1343	*C3	R1457	B4	R1590	B4	R1680	A4	R1837	E4	RB610	*D3
R58	A2	R222	*B2	R312	*B2	R402	C1	R492	*C2	R582	*D1	R672	B1	R772	*E1	R1012	E4	R1138	*C4	R1228	D4	R1344	*C3	R1501	B3	R1591	B4	R1681	A4	R1838	E4	RB611	*D3
R59	A2	R223	B2	R313	*B2	R403	C1	R493	*C1	R583	*D1	R673	*B2	R773	*E1	R1013	*E4	R1139	*C4	R1229	D4	R1345	*D3	R1502	B3	R1592	B3	R1682	A4	R1839	*B4	RB612	*D3
R60	A2	R224	B1	R314	*B1	R404	C1	R494	*C1	R584	D2	R674	*B1	R774	*E1	R1014	E4	R1140	*C4	R1230	D3	R1346	*D3	R1503	B3	R1593	*B3	R1683	*A3	R1840	*B4	RB614	*D3
R61	A2	R225	B1	R315	*B2	R405	C2	R495	*C2	R585	D2	R675	*B1	R775	*E1	R1015	E4	R1141	*C4	R1231	*D4	R1347	*D3	R1504	B3	R1594	*A3	R1684	*A3	R1841	*A4	RB615	*D3
R62	A2	R226	B2	R316	*B1	R406	C1	R496	*C1	R586	D1	R676	*D2	R776	*E1	R1016	*E4	R1142	*C4	R1232	*D4	R1348	*D3	R1505	B2	R1595	B3	R1685	A4	R1842	*A4	RB616	*D3
R63	A2	R227	B1	R317	*B1	R407	C2	R497	*C1	R587	D1	R677	*D1	R777	*E1	R1017	*E4	R1143	*C4	R1233	*D4	R1349	*D3	R1506	B3	R1596	*A4	R1686	A4	R1843	B4	RB617	*D3
R64	A2	R228	B1	R318	*B2	R408	*C2	R498	D2	R588	D1	R678	*D1	R778	*E1	R1019	*D3	R1144	D4	R1234	*D4	R1350	*D3	R1507	B3	R1597	*A4	R1687	A4	R1844	B4	RB620	*C3
R101	A3	R229	*B2	R319	*B2	R409	C1	R499	D1	R589	D1	R679	C2	R779	*E1	R1020	*D3	R1145	*B4	R1235	D4	R1351	*D3	R1508	B2	R1598	B4	R1688	A4	R1845	A4	RB621	*C3
R102	*A3	R230	*B1	R320	*B1	R410	*C1	R500	D1	R590	*D1	R680	C1	R780	E2	R1022	*E4	R1146	D4	R1236	D4	R1352	*D3	R1509	B3	R1599	B4	R1689	A4	R1846	A4	RB622	*C3
R103	*A2	R231	*B1	R321	*B1	R411	C1	R501	D2	R591	*D2	R681	C1	R781	E2	R1023	*E3	R1147	D4	R1237	D3	R1353	D3	R1510	*B3	R1600	B4	R1690	*A4	R1847	B4	RB623	*C3
R104	*A2	R232	B2	R322	*B1	R412	*C1	R502	D1	R592	D2	R682	*D2	R782	*E1	R1024	*E3	R1148	D4	R1238	*D4	R1354	D3	R1511	B3	R1601	B4	R1691	B4	R1848	B4	RB700	*C2
R105	*A2	R233	B1	R323	*B1	R413	C2	R503	D1	R593	*D1	R683	*D2	R783	*E1	R1025	*E3	R1149	*B4	R1239	D3	R1355	D3	R1512	*B3	R1602	A3	R1692	*A4	R1849	A4	RB701	*C2
R106	A3	R234	B1	R324	C2	R414	C2	R504	D2	R594	D1	R684	*D1	R784	*E1	R1026	*E3	R1150	*D4	R1240	D4	R1356	D3	R1513	B3	R1603	A3	R1693	B3	R1850	A4	RB702	*C2
R107	*A3	R235	*B2	R325	C1	R415	C2	R505	D1	R595	*D1	R685	*D2	R785	*E1	R1027	*E4	R1151	*B4	R1241	D4	R1357	D3	R1514	*B3	R1604	B3	R1694	A4	R1851	B4	RB1016	*D3
R108	A3	R236	*B2	R326	C1	R416	C2	R506	D1	R596	D1	R686	*D2	R786	*E1	R1028	*E3	R1152	B4	R1242	D4	R1358	C3	R1515	*B2	R1605	A3	R1695	A3	R1852	A4	RB1017	D3
R109	A3	R237	B2	R327	C2	R417	C1	R507	C2	R597	*D2	R687	D1	R787	*E1	R1029	*E4	R1153	C4	R1243	D4	R1359	D3	R1516	*B3	R1606	*A3	R1696	B3	R1853	B4	RB1018	D3
R110	A3	R238	*B1	R328	C1	R418	C1	R508	C1	R598	*D1	R688	D1	R788	*E1	R1030	*E4	R1154	*B4	R1244	C4	R1360	D3	R1517	*B3	R1607	B4	R1697	A3	R1854	A4	RB2002	*E4
R111	B3	R239	*B1	R329	C1	R419	C2	R509	C1	R599	*D1	R689	D1	R789	*E1	R1031	*E4	R1155	*D4	R1245	C3	R1361	D3	R1518	B3	R1608	A4	R1698	A4	R1855	B4	RB2003	*D4
R112	A3	R240	B1	R330	C2	R420	C1	R510	*D2	R600	*D2	R690	D1	R790	*E1	R1032	*E4	R1156	*D4	R1246	C3	R1362	D3	R1519	*B3	R1609	*A3	R1699	A4	R1856	B4	RB2004	*D4
R113	A2	R241	*B1	R331	C2	R421	C1	R511	*D1	R601	*D1	R701	D2	R791	*E1	R1033	*E4	R1157	*B4	R1247	C3	R1363	D3	R1520	*B3	R1610	A4	R1700	B3	R1857	A4	RB2005	*D4
R114	B2	R242	*B1	R332	C2	R422	C2	R512	*D1	R602	*D1	R702	E2	R792	*E1	R1034	*E3	R1158	D4	R1248	C3	R1364	D3	R1521	*B3	R1611	B3	R1701	A4	R1858	A4	RB2006	*D4
R115	*A2	R243	*B1	R333	C1	R423	C1	R513	*D2	R603	D2	R703	E2	R793	*E1	R1035	D4	R1159	*D4	R1249	C3	R1365	C3	R1522	*B3	R1612	A3	R1702	A4	R1859	B4	RB2007	*C4
R116	*A2	R244	*C2	R334	C1	R424	C1	R514	D2	R604	D2	R704	D2	R794	*E1	R1036	D4	R1160	*E4	R1250	C3	R1366	D3	R1523	*B3	R1613	A3	R1703	A3	R1860	B4	RB2008	*D4
R117	B2	R245	*C1	R335	C1	R425	C2	R515	D2	R605	D1	R705	D2	R795	*E1	R1037	*E4	R1161	*D4	R1251	*D3	R1367	C3	R1524	*B3	R1614	B3	R1704	B4	R1861	B4	RB2009	*D4
R118	*A2	R246	*C1	R336	C1	R426	C1	R516	*D1	R606	D1	R706	E2	R796	*E1	R1038	*D4	R1162	*D4	R1252	*C3	R1368	D3	R1525	*B2	R1615	A4	R1705	A4	R1862	A4	RB2010	*D4
R119	*A2	R247	*C2	R337	C1	R427	C1	R517	D1	R607	D1	R707	E2	R797	E1	R1039	*E4	R1163	D4	R1253	C4	R1369	D3	R1526	*B3	R1616	A4	R1706	A4	R1863	A4	RB2011	*E4
R120	*A2	R248	*B1	R338	C1	R428	C2	R518	D1	R608	D1	R708	E2	R798	E1	R1040	*E4	R1164	*D4	R1254	*C3	R1370	C3	R1527	*B3	R1617	A3	R1707	A3	R1864	A4		
R121	*A2	R249	*B1	R339	C2	R429	C1	R519	*D1	R609	D2	R709	E2	R799	*E1	R1041	*D3	R1165	*C4	R1255	C4	R1371	C3	R1528	*B3	R1618	A3	R1708	*A3	R1865	A1	RV700	C2
R122	A2	R250	*C1	R340	C2	R430	C1	R520	D1	R610	D1	R710	D2	R800	*E1	R1042	*D3	R1166	*D4	R1256	*C3	R1372	D3	R1529	*B3	R1619	*A4	R1709	A4	R1866	A1	RV801	A4
R123	A2	R251	*C1	R341	C1	R431	*C2	R521	D1	R611	D1	R711	D2	R801	*E1	R1043	*D4	R1167	*D4	R1257	*C3	R1373	C3	R1530	*B3	R1620	A3	R1710	*A3	R1867	A1		
R124	A2	R252	B2	R342	C2	R432	*C2	R522	*D2	R612	*D2	R712	D2	R802	*E1	R1044	*D4	R1168	C4	R1258	*C3	R1374	D3	R1531	*B3	R1621	A3	R1711	A4	R1868	A1	TP1	C2
R125	A2	R253	*B2	R343	C1	R433	*C1	R523	*D1	R613	*D1	R713	E2	R803	*E1	R1045	*E4	R1169	C4	R1259	*C3	R1375	C2	R1532	*B3	R1622	*B4	R1712	A4	R1869	*A2		
R126	A2	R254	*B1	R344	C1	R434	*C2	R524	*D1	R614	*D1	R714	E2	R804	*E1	R1046	*E4	R1170	*D4	R1260	*C3	R1376	C2	R1533	*B3	R1623	A4	R1713	A4	R1870	B1		
R127	B2	R255	*B2	R345	*C2	R435	*C1	R525	C2	R615	*D2	R715	D2	R805	E2	R1048	C4	R1171	*D4	R1261	*C3	R1401	C3	R1534	*B3	R1624	*A4	R1714	A4	R1871	B1		
R128	B2	R256	*B1	R346	*C2	R436	*C1	R526	C2	R616	*D1	R716	D2	R806	E2	R1049	C4	R1172	C4	R1262	*C3	R1402	C3	R1535	*B4	R1625	*B4	R1715	*A4	R1872	B2		
R129	B2	R257	*B1	R347	*C1	R437	*C2	R527	D2	R617	*D1	R717	E2	R807	*E1	R1050	*C3	R1173	*D4	R1263	*C3	R1403	C3	R1536	B4	R1626	*A3	R1716	A3	R1873	*B2		
R130	B2	R258	*B2	R348	*C1	R438	C2	R528	C1	R618	*D2	R718	E2	R901	*D3	R1051	*C3	R1174	*D4	R1264	*C3	R1404	C3	R1537	B3	R1627	A4	R1717	*A4	R1874	B2		
R131	B2	R259	*B1	R349	*C1	R439	*C1	R529	C1	R619	*D1	R719	E2	R902	*D3	R1052	C3	R1175	*D4	R1265	*D3	R1405	C3	R1538	B3	R1628	*A3	R1718	A4	R1875	A2		
R132	*B2	R260	*B2	R350	*C1	R440	C1	R530	D1	R620	*D1	R720	E2	R903	D3	R1053	*E3	R1176	C4	R1266	*D3	R1406	C3	R1539	B3	R1629	A4	R1719	A3	R1876	A2		
R133	B2	R261	*B1	R351	C2	R441	*C1	R531	C1	R621	D2	R721	E2	R904	*E2	R1054	*E4	R1177	*D4	R1267	*D3	R1407	C3	R1540	B3	R1630	*B4	R1720	A3	R1877	*B1		
R134	*B2	R262	*B1	R352	C1	R442	C1	R532	C1	R622	D2	R722	E2	R905	*E2	R1056	*E3	R1178	C4	R1268	*D3	R1408	C3	R1541	B4	R1631	B4	R1721	A3	R1878	A2		
R135	*B2	R263	*B2	R353	C1	R443	C2	R533	D1	R623	D2	R723	D2	R906	*E2	R1057	*E3	R1179	C4	R1269	*D3	R1409	C3	R1542	*B3	R1632	A3	R1722	A3	R1879	*B1		
R136	*B2	R264	*B1	R354	C2	R444	*C2	R534	*C2	R624	*D2	R724	E2	R907	*E2	R1058	*E3	R1180	D4	R1270	*D3	R1410	C3	R1543	*B3	R1633	C4	R1723	*A4	R1880	A2		
R137	*B2	R265	*B1	R355	C1	R445	*C2	R535	*C2	R625	D1	R725	E2	R908	*D3	R1059	*E3	R1181	*D4	R1271	*D3	R1411	*B3	R1544	*B4	R1634	C4	R1724	*A4	R1881	*B1		
R138	*B2	R266	*B2	R356	C1	R446	C1	R536	*C1	R626	D2	R726	E2	R909	*E3	R1060	*E3	R1182	C4	R1272	*D3	R1412	*B3	R1545	B3	R1635	C4	R1725	*A3	R1882	*B1		
R139	*B2	R267	*B1	R357	*C2	R447	*C2	R537	*C1	R627	*D1	R727	E2	R910	*D2	R1061	*E3	R1183	C4	R1273	C4	R1413	C3	R1546	B3	R1636	C4	R1726	A4	R1883	A2		
R140	*B2	R268	*B1	R358	*C2	R448	*C2	R538	*C1	R628	D1	R728	E2	R911	*D2	R1062	*E3	R1184	C4	R1274	D4	R1414	C3	R1547	B4	R1637	*A4	R1727	A3	R1884	A2		
R141	*B2	R269	*B2	R359	*C1	R449	C1	R539	*C1	R629	D1	R729	E2	R912	D2	R1063	*E3	R1185	C4	R1301	C2	R1415	*C3	R1548	*B3	R1638	*A4	R1728	A3	R1885	*A1		
R142	*B2	R270	*B2	R360	*C1	R450	*C1	R540	C2	R630	D1	R730	E2	R913	D2	R1064	*E3	R1186	D4	R1302	C2	R1416	*C3	R1549	C4	R1639	A3	R1729	A3	R1887	B4		
R143	*B2	R271	*B2	R361	*C1	R451	*C1	R541	D2	R631	*D1	R731	E2	R914	D2	R1065	*E3	R1187	D4	R1303	C2	R1417	*B3	R1550	C4	R1640	A3	R1730	A3	R1888	A4		
R144	*B2	R272	C2	R362	*C1	R452	C2	R542	D2	R632	D1	R732	E2	R915	D2	R1066	*E3	R1188	*C4	R1304	C2	R1418	*B3	R1551	C4	R1641	*B3	R1731	*A3	R1889	A1		
R145	*B2	R273	C1	R363	*C2	R453	C1	R543	C1	R633	*D2	R733	E2	R916	D2	R1067	*C3	R1189	*C4	R1305	C2	R1419	C3	R1552	C4	R1642	*A4	R1732	*A3	R1890	A1		
R146	*B2	R274	C1	R364	*C1	R454	C1	R544	D1	R634	*D2	R734	E2	R917	D3	R1068	*C3	R1190	*D4	R1306	*C2	R1420	C3	R1553	C4	R1643	*A4	R1733	A4	R1891	A1		
R147	*B2	R275	B2	R365	*C1	R455	*C2	R545	D1	R635	*D1	R735	E2	R918	D2	R1101	*C4	R1191	*D4	R1307	C2	R1421	*C3	R1554	C4	R1644	A3	R1734	A4				
R148	*B2	R276	B2	R366	*C1	R456	*C1	R546	C1	R636	*D2	R736	E1	R919	*D3	R1102	*B4	R1192	*C4	R1308	D2	R1422	*C3	R1555	B4	R1645	A3	R1801	B4	RB1	*B4		
R149	*B2	R277	B1	R367	*C1	R457	*C1	R547	D1	R637	*D2	R737	E1	R920	*D3	R1103	*D4	R1193	*D4	R1309	C2	R1423	*C3	R1556	B3	R1646	A3	R1802	B4	RB50	*A3		
R150	*B2	R278	B1	R368	*C2	R458	*C2	R548	D1	R638	*D1	R738	D2	R921	*D3	R1104	*D4	R1194	*C4	R1310	*C2	R1424	*C4	R1557	B3	R1647	A3	R1803	B4	RB51	*A3		
R151	*B2	R279	B1	R369	*C2	R459	*C2	R549	D2	R639	*D2	R739	E1	R922	*D3	R1105	*D4	R1195	D4	R1311	C2	R1425	*C3	R1558	*B4	R1648	*B3	R1804	B4	RB52	A2		
R152	*B2	R280	B1	R370	*C2	R460	*C1	R550	D1	R640	*D1	R740	E1	R923	*E3	R1106	*B4	R1196	*D4	R1312	C2	R1426	*C3	R1559	*B3	R1649	*A3	R1805	B4	RB53	A2		
R153	*B2	R281	*B2	R371	*C1	R461	*C1	R551	D1	R641	*D1	R741	E1	R924	*E3	R1107	*E4	R1197	*D4	R1313	*C2	R1427	B3	R1560	*B2	R1650	*A3	R1806	B4	RB54	*A2		
R154	B2	R282	B2	R372	*C1	R462	*C1	R552	*C2	R642	*D2	R742	E1	R925	D3	R1108	C4	R1198	D4	R1314	C2	R1428	B3	R1561	*B4	R1651	*A3	R1807	*D4	RB55	*A2		
R155	*C4	R283	B1	R373	*C1	R463	*C1	R553	*C1	R643	*D2	R743	E1	R926	D3	R1109	C4	R1199	*D4	R1315	D2	R1429	C3	R1562	*B3	R1652	*A4	R1808	*D4	RB56	*B3		
R156	*C4	R284	B1	R374	*C1	R464	*C2	R554	*C1	R644	*D1	R744	E1	R927	D3	R1110	C4	R1200	D4	R1316	D2	R1430	C4	R1563	*B3	R1653	*A4	R1809	A4	RB57	*B2		
R157	*C4	R285	B2	R375	*C2	R465	*C1	R555	D2	R645	*D2	R745	D2	R928	D3	R1111	C4	R1201	D4	R1317	D2	R1431	C3	R1564	*B4	R1654	*A4	R1810	B4	RB58	*B3		
R158	*C4	R286	B1	R376	*C2	R466	*C1	R556	D1	R646	D1	R746	D1	R929	D3	R1112	B4	R1202	C4	R1318	D2	R1432	C4	R1565	*B4	R1655	*A4	R1812	A4	RB59	*B3		
R159	*C4	R287	B1	R377	*C2	R467	*C2	R557	D1	R647	*D1	R747	D1	R930	D3	R1113	*E4	R1203	*C4	R1319	D2	R1433	C3	R1566	*B4	R1656	*A3	R1813	B4	RB60	*A3		
R160	*C4	R288	*B2	R378	*C2	R468	*C2	R558	D2	R648	*D2	R748	E2	R931	D3	R1114	B4	R1204	*D4	R1320	D2	R1434	C3	R1567	*B3	R1657	*A3	R1814	B4	RB61	*A3		
R161	*C4	R289	*B2	R379	*C2	R469	*C1	R559	D1	R649	D1	R749	E2	R932	D3	R1115	B4	R1205	C4	R1321	D2	R1435	C3	R1568	*B3	R1658	A3	R1815	B4	RB62	*A2		
R162	*C4	R290	*B1	R380	C2	R470	*C1	R560	D1	R650	D1	R750	*E1	R933	D3	R1116	*E4	R1206	*D4	R1322	D2	R1436	C3	R1569	*B3	R1659	*A3	R1816	B4	RB63	A3		
R201	*B2	R291	*B1	R381	*C1	R471	*C1	R561	D2	R651	*D2	R751	*E1	R934	D3	R1117	*C4	R1207	*D4	R1323	*D2	R1437	C3	R1570	*B3	R1660	*A4	R1817	A4	RB64	A3		
R202	*B2	R292	*B1	R382	C1	R472	*C1	R562	D2	R652	*D1	R752	*E1	R935	D4	R1118	*C4	R1208	*D4	R1324	*C2	R1438	C3	R1571	*B3	R1661	*A4	R1818	A4	RB65	B3		
R203	*B2	R293	*B1	R383	*C1	R473	*C2	R563	D1	R653	*D1	R753	*E1	R936	E3	R1119	C4	R1209	*C4	R1325	*D2	R1439	*B3	R1572	*B3	R1662	A3	R1819	A4	RB66	B3		
R204	*B1	R294	B2	R384	C1	R474	*C2	R564	*D2	R654	*D2	R754	*E1	R937	E3	R1120	C4	R1210	C4	R1326	*C2	R1440	*B3	R1573	*B3	R1663	*A4	R1820	A4	RB67	B2		
R205	*B1	R295	B1	R385	*C2	R475	*C2	R565	*D2	R655	*D1	R755	*E1	R938	E3	R1121	C4	R1211	*D4	R1327	C2	R1441	*B4	R1574	*B3	R1664	*A4	R1821	B4	RB68	B3		
R206	*B1	R296	B1	R386	*C2	R476	*C1	R566	*D1	R656	*D1	R756	*E1	R939	E4	R1122	C4	R1212	*D4	R1328	*D3	R1442	*B4	R1575	*B4	R1665	A3	R1822	B4	RB69	A2		
R207	*B1	R297	*C2	R387	*C2	R477	*C1	R567	*D2	R657	*D2	R757	*E1	R940	E4	R1123	*B4	R1213	*D4	R1329	D3	R1443	C4	R1576	*B4	R1666	A3	R1823	A4	RB70	A2		
R208	*B1	R298	*C1	R388	*C2	R478	*C1	R568	*D1	R658	D2	R758	*E1	R941	*E2	R1124	*C4	R1214	C4	R1330	D3	R1444	C4	R1577	B4	R1667	A3	R1824	A4	RB71	A3		
R209	*B1	R299	*C1	R389	*C1	R479	*C1	R569	*D1	R659	*D2	R759	*E1	R942	*D3	R1125	*C4	R1215	*D4	R1331	D3	R1445	*C3	R1578	B3	R1668	A4	R1825	E4	RB72	*A2		
R210	*B2	R300	B2	R390	*C1	R480	*C1	R570	*D2	R660	D2	R760	*E1	R943	*D3	R1126	C4	R1216	*D4	R1332	D3	R1446	*B3	R1579	B3	R1669	A4	R1826	E4	RB73	*A2		
R211	*B1	R301	B1	R391	*C1	R481	*C1	R571	*D1	R661	*D2	R761	*E1	R1001	*E4	R1127	C4	R1217	*D4	R1333	D3	R1447	C3	R1580	*B4	R1670	A4	R1827	B4	RB600	D3		
R212	*B1	R302	B1	R392	*C1	R482	C2	R572	*D1	R662	*D2	R762	*E1	R1002	*E4	R1128	C4	R1218	D4	R1334	D3	R1448	C4	R1581	*B4	R1671	A3	R1828	B4	RB601	D3		
R213	B2	R303	*B2	R393	*C1	R483	C2	R573	*D2	R663	*D1	R763	*E1	R1003	C3	R1129	C4	R1219	*D4	R1335	D3	R1449	*B4	R1582	*B4	R1672	*A4	R1829	A4	RB602	D3		
R214	B1	R304	*B1	R394	*C1	R484	C1	R574	*D2	R664	*D1	R764	*E1	R1004	C3	R1130	*D4	R1220	*C4	R1336	D3	R1450	*C3	R1583	*B4	R1673	A3	R1830	A4	RB603	D3		
R215	B1	R305	*B1	R395	C2	R485	C1	R575	*D1	R665	*C1	R765	*E1	R1005	*E4	R1131	*D4	R1221	D4	R1337	*C3	R1451	*C3	R1584	*B4	R1674	A4	R1831	E4	RB604	C3		
R216	B2	R306	*C2	R396	C2	R486	C1	R576	*D2	R666	*C2	R766	*E1	R1006	*E4	R1132	*C4	R1222	D4	R1338	*C3	R1452	*B4	R1585	*B4	R1675	A3	R1832	*B4	RB605	C3		
R217	B1	R307	*C2	R397	C2	R487	C1	R577	*D2	R667	*C1	R767	*E1	R1007	E4	R1133	*C4	R1223	D4	R1339	*C3	R1453	*C4	R1586	B4	R1676	A3	R1833	*A4	RB606	C3		

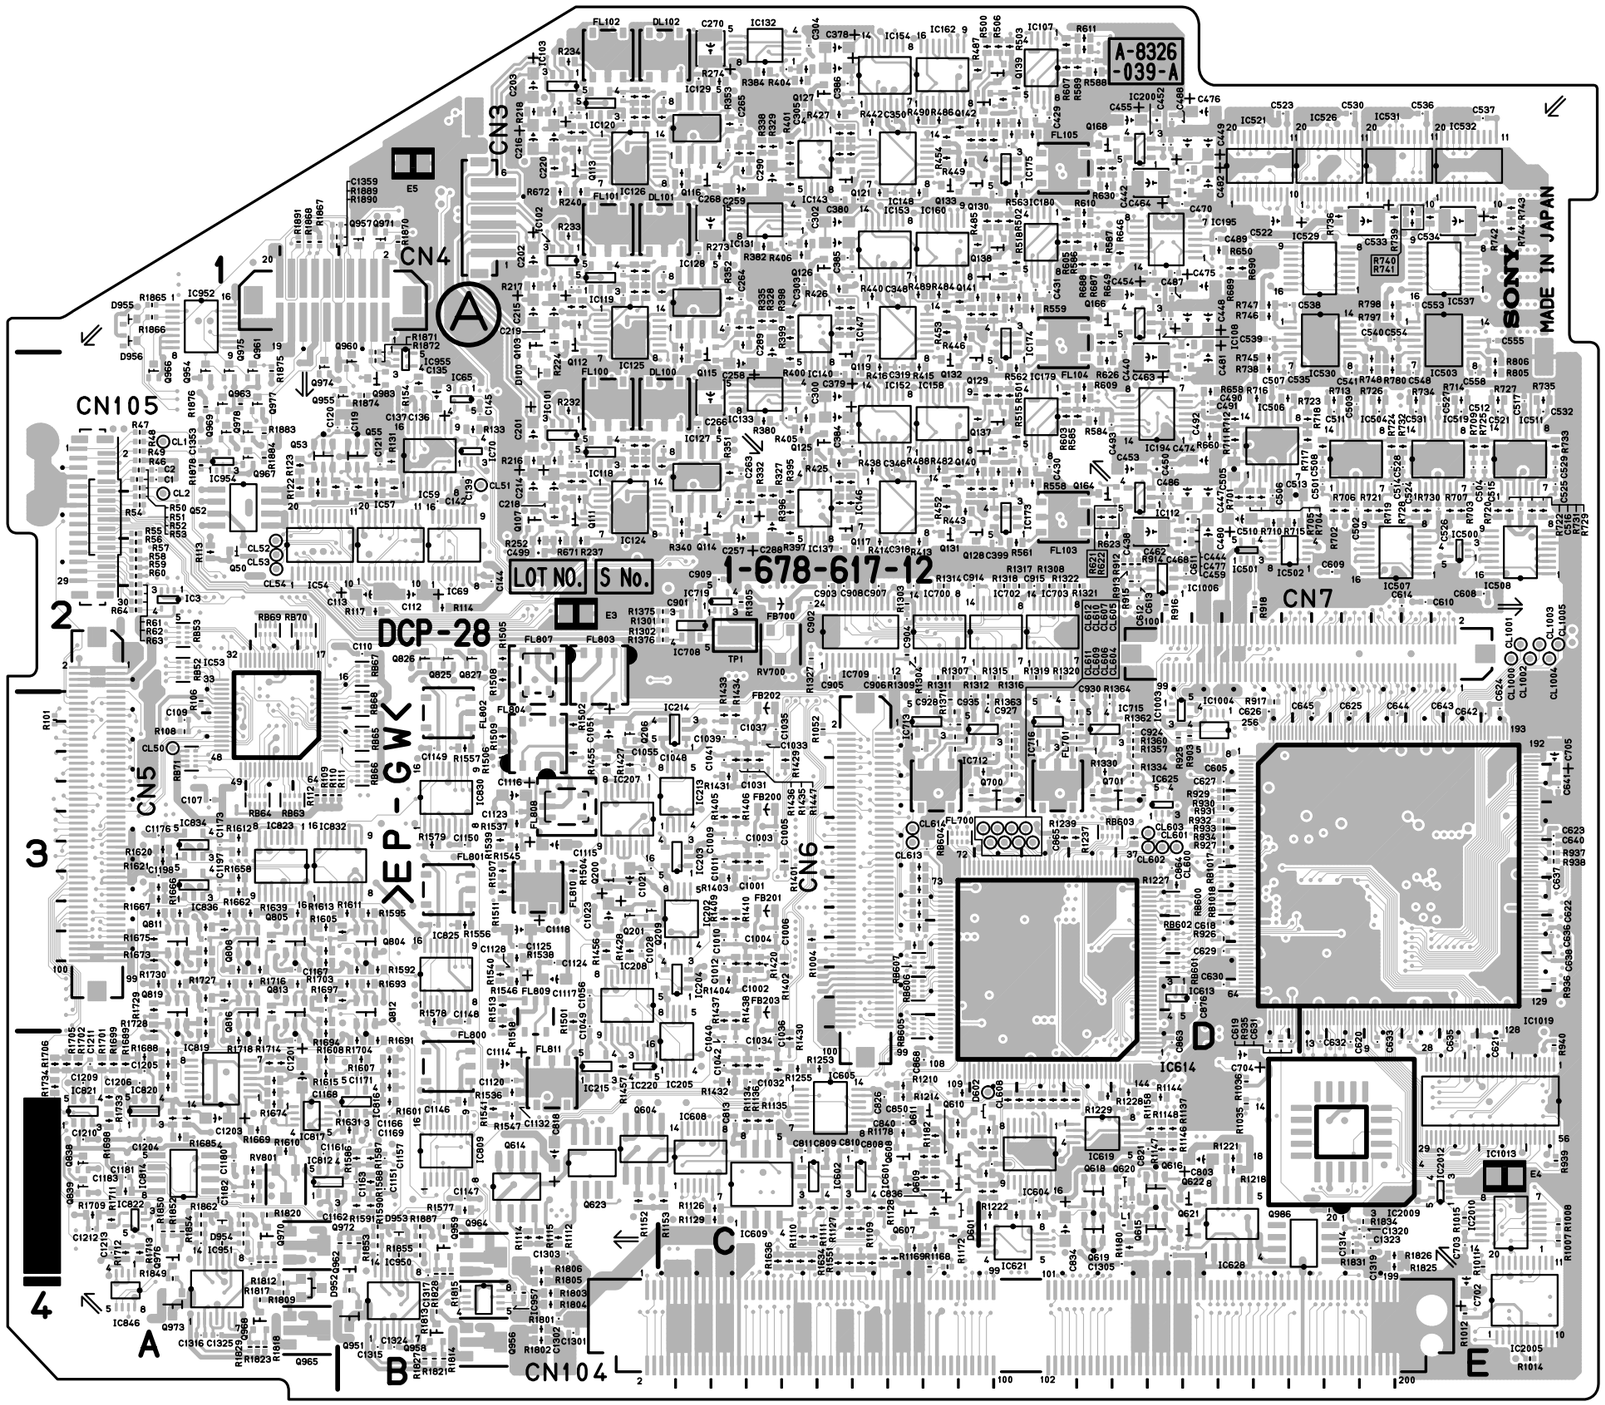

Components location list ; previous page

DCP-28 -A SIDE-
SUFFIX: -12

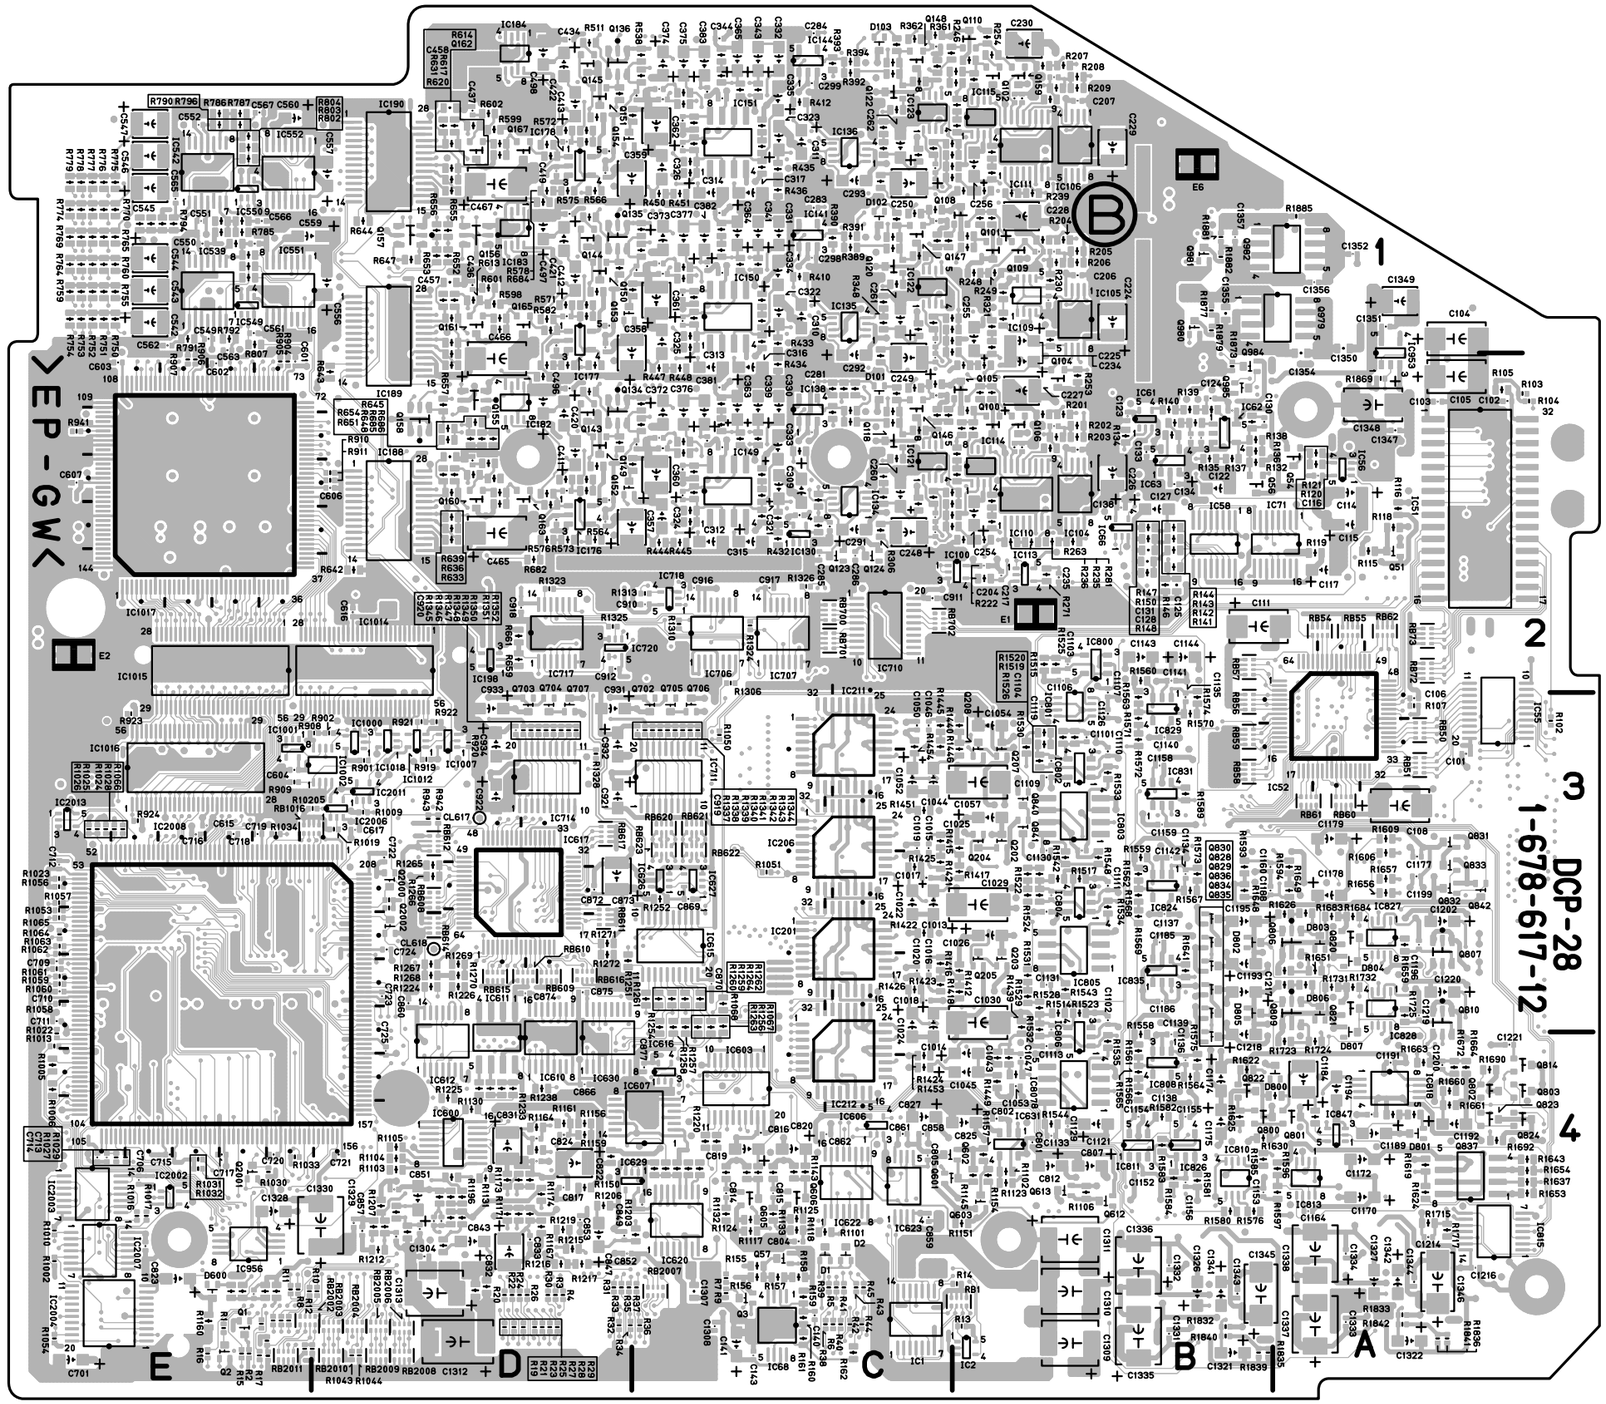

DCP-28 -B SIDE-
SUFFIX: -12

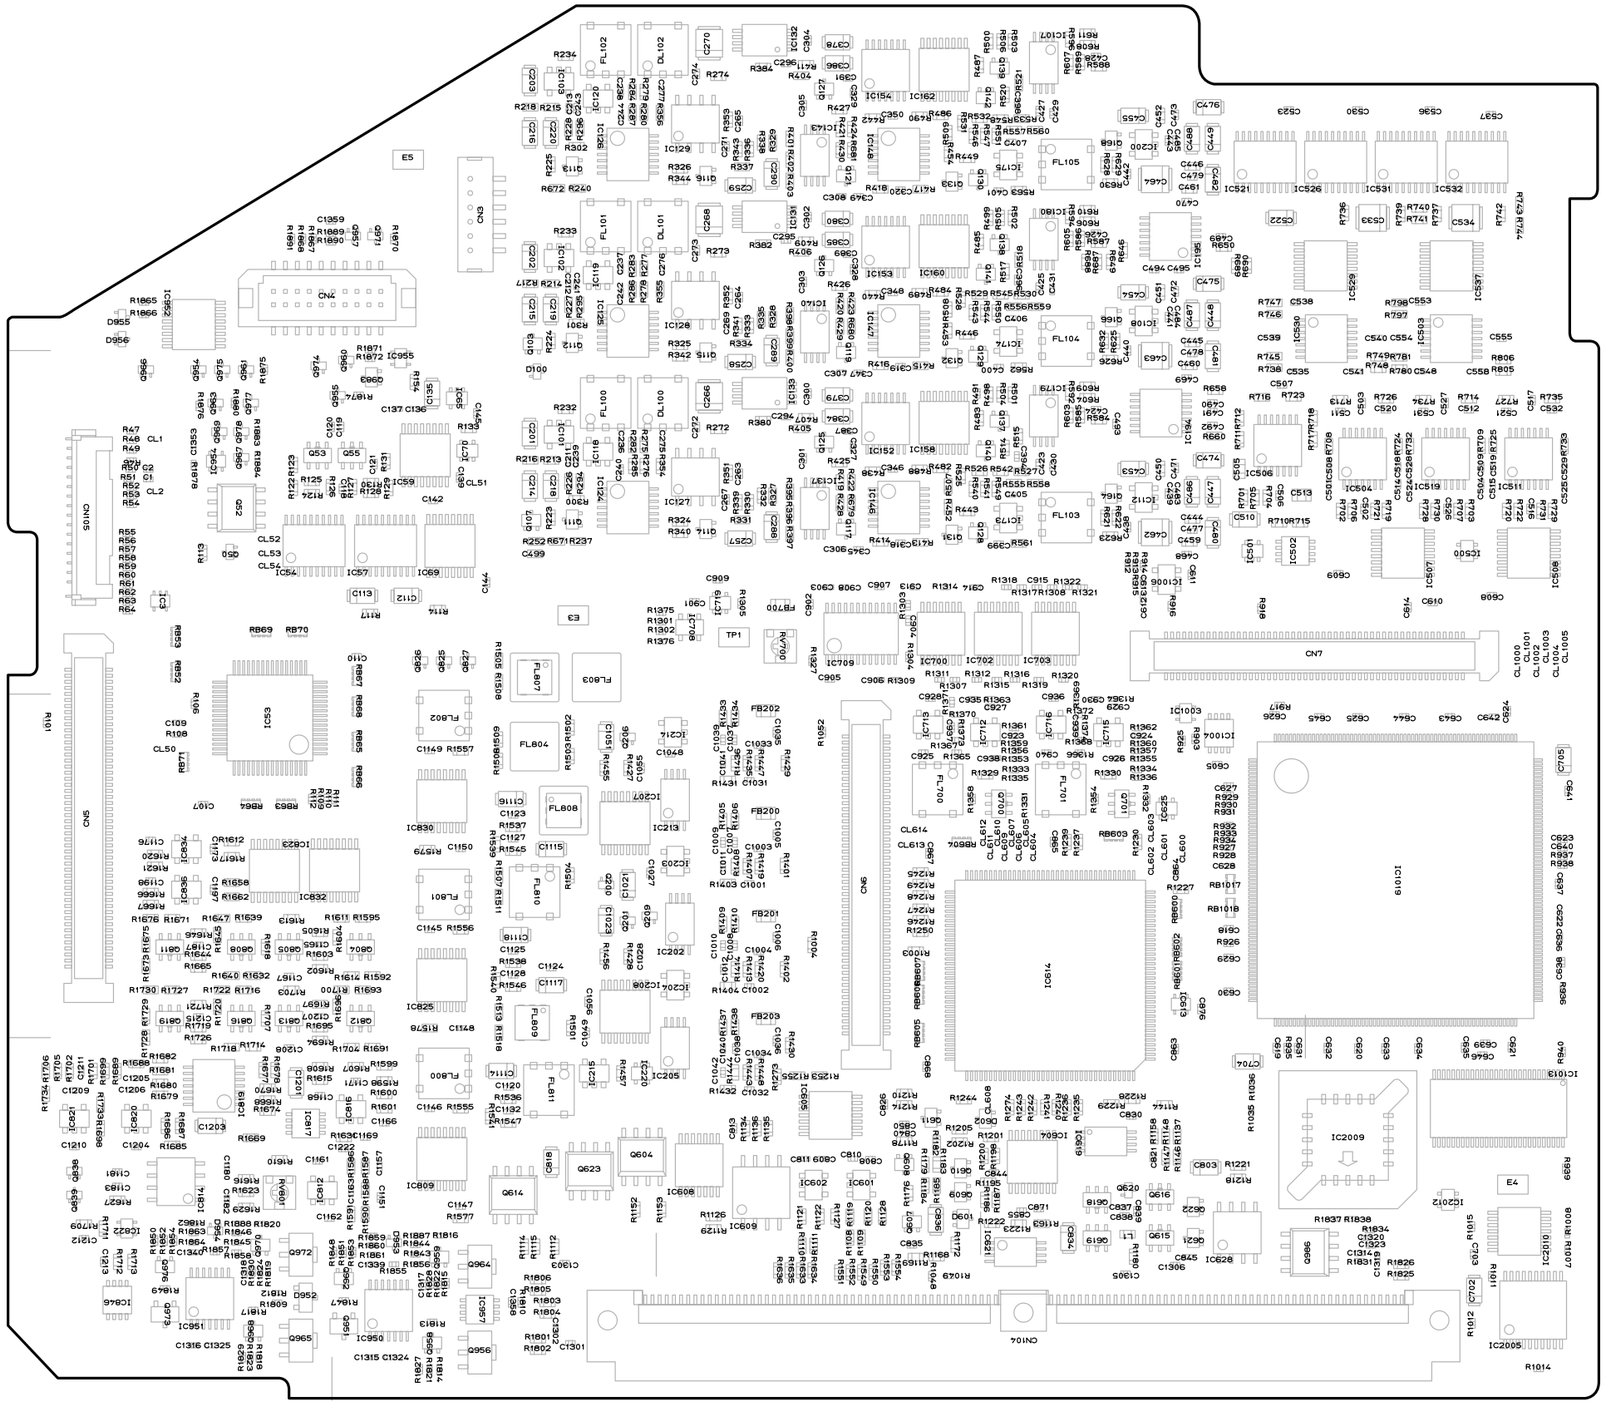

DCP-28 -A SIDE-
SUFFIX: -12

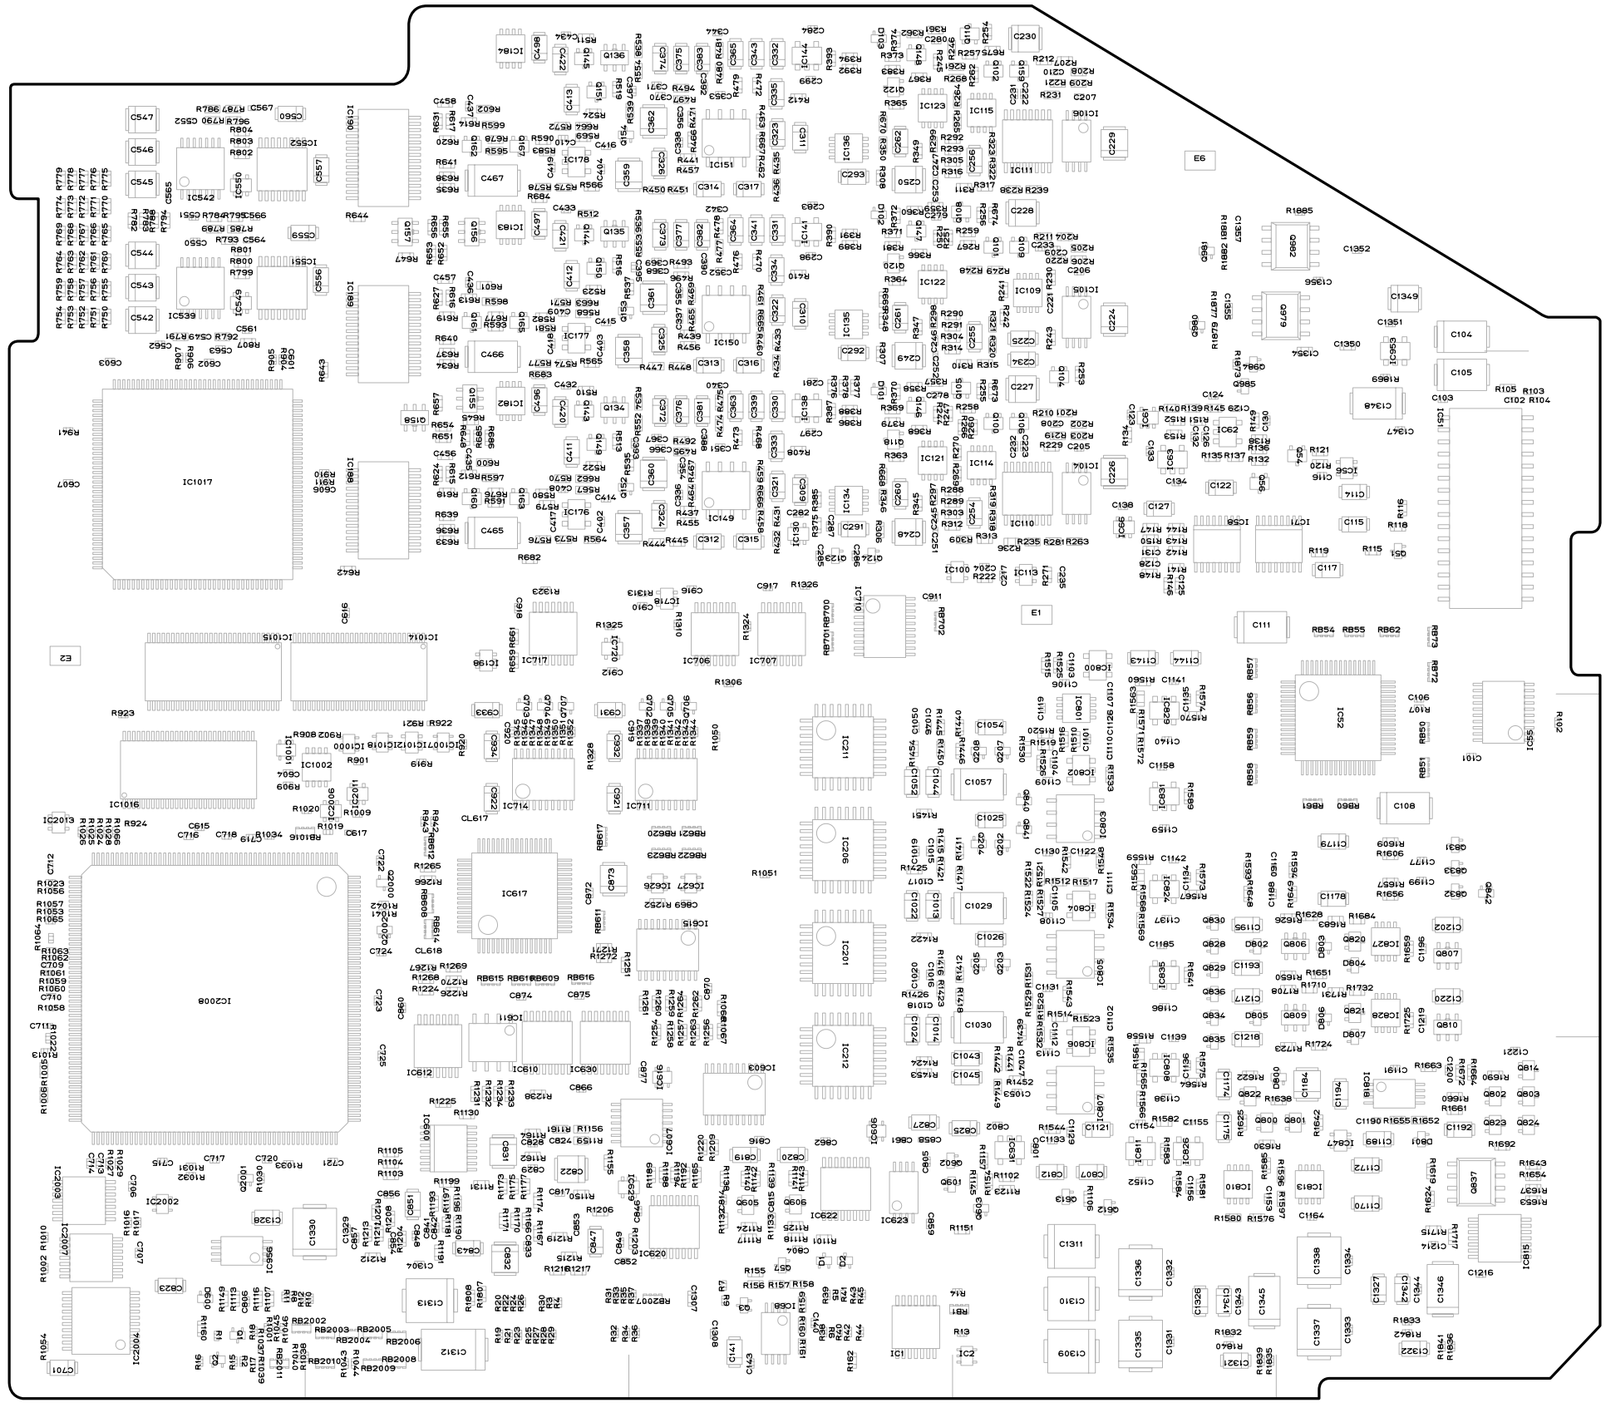

DCP-28 -B SIDE-
SUFFIX: -12



RM-188 -A SIDE-
SUFFIX: -11



RM-188 -B SIDE-
SUFFIX: -11

```
--------------------
IO-202 (1-678-749-12)
--------------------

*:B SIDE

C1      *A1
C2      *A1
C3      *A1
C4      *B1
C5      *B1

CN101    A2
CN102    A1
CN103    B2
CN104    B1
CN105    B1

FL1     *A2
FL2     *A1
FL3     *A1
FL4     *A2
FL5     *B1

R1      *A2
R2      *A1
R3      *A1

SL1     *B1

VDR1     A2
```

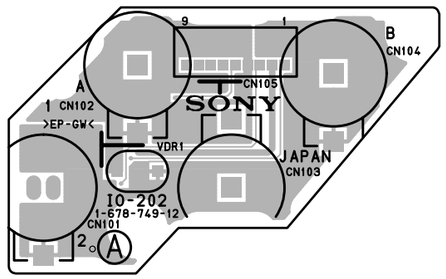

IO-202 -A SIDE-
SUFFIX: -12

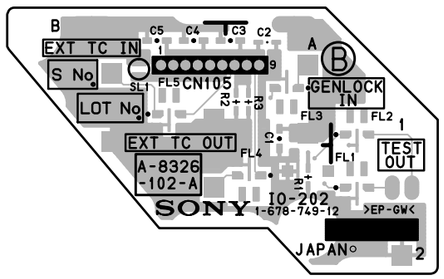

IO-202 -B SIDE-
SUFFIX: -12

DC-110 (1-678-627-12)
---

*:B SIDE

C1	B4	C226	C3	C411	C2	C622	*A1	CL8	*C2	IC421	A3	R2	C4	R204	C4	R294	C2	R437	*A2	R610	C1	R713	*D2
C2	B4	C227	C4	C412	A2	C623	C1	CL200	C4	IC422	A1	R3	C4	R205	B4	R295	C2	R438	*A2	R611	*A1	R714	*D2
C3	A4	C228	C3	C413	A2	C624	*A1	CL201	C3	IC423	A1	R4	*B3	R206	B4	R296	C2	R439	*A2	R612	C1	R715	*D1
C4	C4	C229	C4	C414	A2	C625	*A1	CL600	C1	IC424	A1	R5	C4	R207	B4	R297	C2	R440	*A2	R613	C1	R716	*D1
C5	*C4	C230	C3	C415	*A2	C626	*A1	CL601	C3	IC600	B2	R6	C4	R208	B4	R298	C2	R441	A2	R614	C1	R717	*D1
C6	*C4	C231	C4	C416	*B2	C627	*D1			IC601	C2	R7	*C3	R209	C4	R299	C2	R442	B2	R615	*A1	R718	*D2
C7	C3	C232	C3	C417	B2	C628	C1	CN1	*C1	IC602	B2	R8	*C3	R210	C4	R300	C2	R443	B1	R616	C1	R719	*D1
C8	B2	C233	C3	C418	A2	C629	*A1	CN6	B3	IC603	*A2	R9	*C3	R211	B3	R301	C2	R444	A1	R617	C1	R720	*D1
C9	B3	C234	C4	C419	A1	C630	*D1			IC604	*A1	R10	*C3	R212	B3	R302	C2	R445	A1	R618	A1	R721	*D1
C10	C2	C235	C3	C420	A2	C631	*D1	D200	*C3	IC605	A2	R11	*C3	R213	C4	R303	C2	R446	*A2	R619	C1	R722	*D1
C11	B2	C236	C4	C421	A1	C632	A1	D600	*D1	IC606	*D1	R12	C3	R214	C4	R304	C2	R447	A1	R620	C1	R723	*D1
C12	*B2	C237	C3	C422	*B1	C633	*A1			IC607	C1	R13	C3	R215	C4	R305	C2	R448	A2	R621	C1	R724	*D1
C13	*C3	C238	C4	C423	*B1	C634	B2	E1	*D2	IC608	C1	R14	C3	R216	C3	R306	C2	R449	*A2	R622	C1	R725	*D1
C14	*C3	C239	C3	C424	*B1	C635	B2	E2	*C4	IC609	*A1	R15	C3	R217	C3	R307	C2	R450	A1	R623	*A1	R726	*D1
C15	*C3	C240	C3	C425	A1	C636	A2	E200	*A4	IC610	A1	R16	C3	R218	C3	R308	C2	R451	A1	R624	D1	R727	*D1
C16	B2	C241	C4	C426	B1	C637	*D1	E201	*C1	IC611	D1	R17	C3	R219	C3	R309	C2	R452	A2	R625	D1	R1000	*A2
C20	B2	C242	C4	C427	B1	C638	A2	E400	*B1	IC612	*D1	R18	*C3	R220	C3	R310	C2	R453	A1	R626	*D1	R1001	*A3
C21	B2	C243	C4	C428	*B1	C639	D1			IC616	*A2	R19	*C3	R221	C3	R311	C2	R454	*B1	R627	*D1	R1002	*A3
C22	B2	C244	C4	C429	*B1	C640	A3	FB200	C4	IC617	A3	R20	C3	R222	C4	R312	C2	R455	*B1	R628	A1	R1003	*A3
C23	B4	C245	C3	C430	*B1	C641	B2	FB400	*B1	IC618	A2	R21	B2	R223	C4	R313	C2	R456	*B1	R630	A1	R1004	*A3
C25	B4	C246	C3	C431	*B1	C642	B2	FB401	*B1	IC619	A2	R22	B2	R224	C3	R314	C2	R457	A2	R631	A1	R1005	*A3
C26	*A4	C247	*C3	C432	*B1	C643	*D1	FB402	*B1	IC620	A2	R23	B2	R225	C3	R315	C2	R458	A2	R632	C1	R1006	*A3
C27	A4	C248	*C3	C433	*B1	C644	B2	FB403	B1	IC621	A2	R24	B2	R226	C4	R316	C2	R459	*B1	R633	C1	R1007	*A3
C28	A4	C249	*C3	C434	*B1	C645	B2	FB404	B2	IC622	*A2	R25	B2	R227	C3	R317	C4	R460	B1	R634	A1	R2000	*A2
C29	A3	C250	*C2	C435	*B1	C646	*A3	FB600	A2	IC623	*A2	R26	B2	R228	C4	R318	C4	R461	B1	R635	A4	R2001	*A2
C30	A3	C251	*C2	C436	*B1	C647	A3	FB601	*A1	IC624	*A2	R27	B2	R229	C4	R323	C1	R462	B1	R636	D1	R2002	*A2
C31	B3	C252	*C3	C437	*B1	C648	A2			IC625	*A1	R28	B2	R230	C3	R324	C1	R463	*B1	R637	B2		
C32	B3	C253	C3	C438	*B1	C649	D1	FL200	*C2	IC626	*D1	R29	B2	R231	C4	R325	C1	R464	*B1	R638	B2	RB1	B4
C33	B4	C254	C3	C439	B1	C650	A2	FL201	*C2	IC627	A3	R30	B2	R232	C3	R326	*C2	R465	*B1	R641	A3	RB2	B4
C34	A4	C255	C3	C440	*B1	C651	A2	FL202	*C2	IC629	B2	R31	B2	R233	C4	R327	*C2	R466	*B1	R642	A2	RB3	B4
C35	B4	C256	C3	C441	*B1	C653	B2	FL600	*C1	IC631	*A1	R32	A3	R234	C4	R328	*C2	R467	*B1	R643	A2	RB4	B4
C36	B4	C257	C2	C442	B1	C654	A2			IC632	A2	R33	B4	R235	C4	R329	*C2	R468	*B1	R644	A3	RB5	B3
C37	A4	C258	C2	C443	B1	C655	A2	IC1	B4	IC633	*A3	R34	B4	R236	C4	R330	C1	R469	*B1	R647	A3	RB6	B3
C38	A3	C259	C2	C444	B1	C656	*A3	IC2	B4	IC634	A3	R35	B4	R237	C4	R331	C1	R470	B1	R648	B2	RB7	C3
C39	A4	C260	*C2	C445	*B1	C658	*A2	IC3	B3	IC635	*A2	R36	B4	R238	C4	R332	C1	R471	B1	R649	B2	RB8	C3
C40	A4	C261	*C2	C446	*B1	C659	A3	IC4	C3	IC636	A4	R37	B4	R239	C4	R333	*C2	R472	B1	R650	B2	RB9	B2
C41	A4	C262	*C2	C447	*B1	C660	A2	IC5	C4	IC637	D1	R38	B4	R240	C3	R334	C1	R473	B1	R651	A3	RB10	B3
C42	A3	C263	*C2	C448	*B1	C661	A2	IC6	*C3	IC700	*D1	R39	A3	R241	C3	R335	C1	R474	B1	R652	B2	RB11	*C3
C43	A3	C264	*C2	C449	*B1	C662	*A2	IC7	*B2	IC701	*D1	R40	*B3	R242	C3	R336	C1	R475	C1	R653	B2	RB13	A3
C44	B3	C265	*C2	C450	*B1	C663	*A2	IC8	*C2	IC702	*D1	R41	*B3	R243	C4	R337	*C1	R476	C1	R654	B2	RB14	B3
C45	B3	C266	*C2	C451	*B1	C664	*A2	IC9	C4	IC703	*D1	R42	B3	R244	C3	R338	*C1	R477	*B1	R655	A2	RB15	A3
C46	A3	C267	*C2	C452	*B1	C666	*A2	IC10	*C4	IC704	*D1	R43	B4	R245	C4	R339	*C2	R478	*B1	R656	A3	RB16	B3
C47	B3	C268	D2	C453	B1	C667	*A2	IC11	*C4			R44	B4	R246	C3	R340	C1	R479	*B1	R657	A3	RB17	B3
C48	B4	C269	C2	C454	*B1	C668	*A2	IC12	B2	L200	C2	R45	B4	R247	C3	R341	C1	R480	C1	R658	A3	RB18	B3
C49	B4	C270	C2	C455	*B1	C669	A3	IC13	B2			R46	B4	R248	C3	R342	*C1	R481	C1	R659	A2	RB400	*C2
C50	A4	C271	C2	C456	B1	C670	A3	IC14	B2	Q200	C2	R47	B4	R249	C4	R343	C1	R482	*B1	R660	A2	RB600	C2
C51	B4	C272	C2	C457	C1	C671	*A2	IC15	*C3	Q201	C2	R48	B4	R250	C4	R344	*C1	R483	*B1	R661	*A2	RB601	C2
C52	B4	C273	C2	C458	*B1	C672	*A4	IC19	C3	Q202	C2	R49	B4	R251	C4	R345	*C1	R484	*B1	R662	*A2	RB602	B2
C53	B4	C274	C2	C459	*C1	C700	B3	IC20	B2	Q203	C1	R50	A3	R252	C3	R346	*C1	R485	*B1	R663	*A2	RB603	B2
C54	B4	C275	C2	C460	*B1	C701	B3	IC21	B2	Q204	C1	R51	*B3	R253	C3	R347	B3	R486	*B1	R664	*A2	RB604	B2
C55	B2	C276	C2	C461	*B1	C702	B2	IC23	*B4	Q205	C1	R52	*B3	R254	*C3	R348	C3	R487	C1	R665	*A2		
C56	B2	C277	C2	C462	*B1	C703	B3	IC24	B2	Q206	C1	R53	*B3	R255	C3	R349	C3	R488	*B1	R666	*A2	TP1	*A3
C57	A4	C278	C2	C463	*C1	C704	B3	IC25	B2	Q207	C1	R54	B3	R256	*C3	R350	C3	R489	*B1	R667	*A2	TP200	*C1
C58	A4	C279	C2	C464	B1	C705	*B3	IC26	A4	Q208	C1	R55	B4	R257	C3	R400	C2	R490	C1	R668	*A2	TP201	*C1
C59	A3	C280	*C2	C465	*C1	C706	*B3	IC27	B2	Q209	C1	R56	B4	R258	*C3	R401	C2	R491	C1	R669	*A3	TP202	*C1
C60	A3	C281	*C2	C466	C1	C707	*B2	IC28	B2	Q210	*C1	R57	B4	R259	C3	R402	C2	R492	*C1	R670	A3	TP400	*B1
C61	*A3	C282	*C2	C467	C1	C708	B2	IC29	A4	Q211	*C1	R58	B4	R260	*C3	R403	C2	R493	*C1	R671	*A2	TP600	*C1
C62	*A4	C283	*C2	C468	C1	C709	B3	IC30	B3	Q212	*C1	R59	B4	R261	*C3	R404	C2	R494	*C1	R672	*A2	TP601	*A3
C63	*C4	C284	*C2	C469	C1	C710	*D1	IC31	B4	Q400	B1	R60	B4	R262	*C3	R405	C2	R495	C1	R673	*A2		
C64	*C4	C285	*C2	C470	C1	C711	*D1	IC201	C4	Q401	B1	R61	B4	R263	*C3	R406	A3	R496	C1	R674	C2	X600	A1
C65	B2	C286	*C2	C471	B2	C712	*D2	IC202	*C4	Q402	*B1	R62	A4	R264	*C3	R407	*A2	R497	*C1	R675	*A2	X601	A1
C66	B2	C287	*C2	C472	B2	C713	*D2	IC203	C3	Q403	B1	R63	B3	R265	*C3	R408	A2	R498	*C1	R676	A4	X602	A2
C67	B2	C288	*C2	C473	A2	C714	*D2	IC204	C2	Q404	*B1	R64	B3	R266	C3	R409	*A2	R499	C1	R677	D1		
C68	A4	C289	*C2	C474	A1	C715	*D1	IC205	C2	Q405	*C1	R65	B3	R267	C3	R410	B1	R500	*C1	R678	D1		
C69	B3	C290	*C2	C475	A1	C716	*D2	IC206	C2	Q406	*B1	R66	B3	R268	C3	R411	*B2	R501	B2	R679	D1		
C201	C4	C291	*C2	C476	A1	C717	*D1	IC207	C2	Q407	C1	R67	B4	R269	*C3	R412	*B2	R502	B2	R680	D1		
C202	C4	C292	*C2	C477	A1	C718	*D1	IC208	C2	Q408	B1	R68	B4	R270	C2	R413	*B2	R503	B2	R681	D1		
C203	C4	C293	*C2	C478	A1	C719	*D2	IC209	C2	Q409	*C1	R69	A4	R271	C2	R414	*B2	R504	B2	R682	D1		
C204	C4	C294	*C2	C600	*C2	C720	*D1	IC210	D1	Q410	B1	R70	B2	R272	C2	R415	*B2	R505	B1	R683	D1		
C205	B4	C295	*C2	C601	*C2	C721	*D1	IC400	C2	Q600	*D1	R71	*A3	R273	C2	R416	*B2	R506	B1	R684	D1		
C206	B4	C296	*C1	C602	C2	C722	*D1	IC401	*A3	Q601	*D1	R72	B2	R274	C2	R417	*B2	R507	B1	R685	D1		
C207	B3	C297	*C1	C603	B2	C723	*D2	IC402	*A3	Q602	*D1	R73	*C4	R275	C2	R418	*B2	R508	A2	R686	D1		
C208	B3	C298	*C1	C604	A2	C724	*D2	IC403	*B2	Q603	C1	R74	A4	R276	C2	R419	*B2	R509	*B1	R687	D1		
C209	C4	C305	*C2	C605	A1	C725	*D2	IC404	A2	Q604	*A1	R94	*C3	R277	C2	R420	*B2	R510	A1	R688	*D1		
C210	B4	C306	*C2	C606	*D1	C726	*D2	IC405	A2	Q605	*A1	R95	B2	R278	C2	R421	*B2	R511	A1	R689	*D1		
C211	B4	C307	*C2	C607	A2	C727	*D1	IC406	*A2	Q607	A2	R96	C3	R279	C2	R422	A2	R512	A1	R691	D1		
C212	B3	C308	*C1	C608	A1	C728	*D2	IC407	A1	Q608	A2	R97	B4	R280	C2	R423	A2	R513	A1	R692	D1		
C213	B3	C309	*C1	C609	*C1	C729	*D2	IC408	A1	Q700	*D2	R98	B4	R281	C2	R424	A2	R514	A1	R695	A2		
C214	C3	C310	D1	C610	C1	C730	*D1	IC409	*A1	Q701	*D2	R99	B4	R282	C2	R425	A2	R515	A2	R700	*D2		
C215	C4	C400	*C2	C611	*C1	C731	*D1	IC410	A1	Q702	*D2	R100	B4	R283	C2	R426	A2	R527	B2	R701	*D2		
C216	C3	C401	A3	C612	C1	C732	*D1	IC411	A1	Q703	*D2	R101	B4	R284	C2	R427	A2	R600	C2	R702	*D2		
C217	C3	C402	*A3	C613	*D1	C733	*D1	IC412	B1	Q704	*D2	R102	B4	R285	C2	R428	A2	R601	C2	R703	*D1		
C218	C3	C403	A3	C614	*A1	C734	*D1	IC413	B1	Q705	*D1	R105	A4	R286	C2	R429	A2	R602	*A2	R705	*D1		
C219	C4	C404	*A3	C615	*C1	C735	*D1	IC414	*B1	Q706	*D2	R106	A3	R287	C2	R430	A2	R603	*A1	R706	*D1		
C220	C3	C405	*A3	C616	*C1	C736	*D1	IC415	*C1	Q707	*D2	R107	*A3	R288	C2	R431	A2	R604	A1	R707	*D2		
C221	C3	C406	B1	C617	A1			IC416	C1	Q708	*D2	R108	B3	R289	C2	R432	A2	R605	*D1	R708	*D2		
C222	C4	C407	C2	C618	*C1	CL4	*C2	IC417	A1	Q709	*D1	R200	C4	R290	C2	R433	A2	R606	*D1	R709	*D2		
C223	C3	C408	*B2	C619	*A1	CL5	*C2	IC418	C1	Q710	*D1	R201	C4	R291	C2	R434	A2	R607	A1	R710	*D1		
C224	C4	C409	*B2	C620	*C1	CL6	*C2	IC419	B1			R202	C4	R292	C2	R435	B2	R608	A1	R711	*D2		
C225	C3	C410	B2	C621	*C1	CL7	*C2	IC420	A2	R1	C4	R203	C4	R293	C2	R436	B2	R609	C1	R712	*D2		

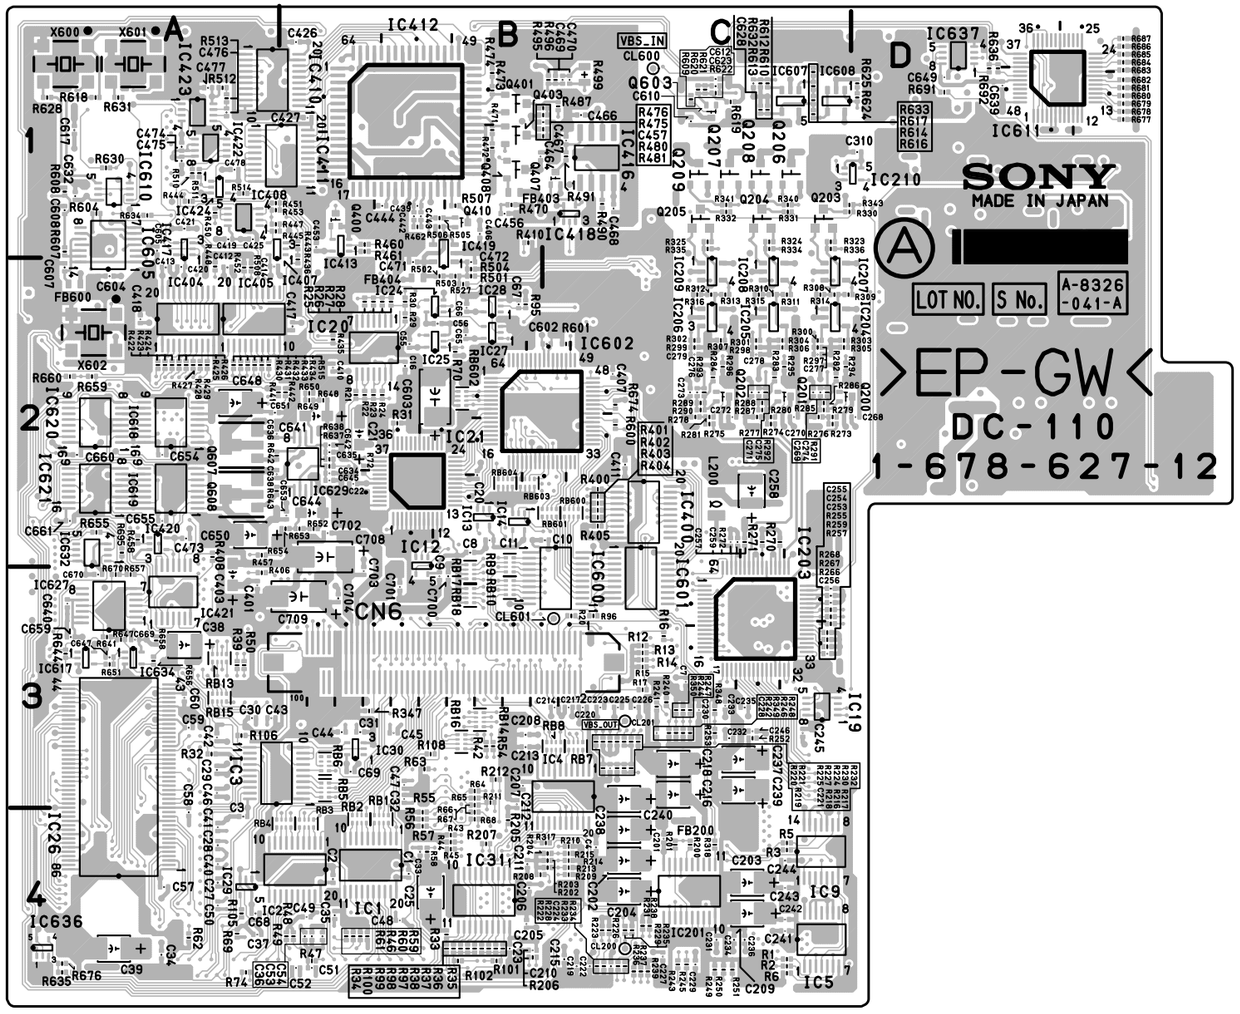

Components location list ; previous page

DC-110 -A SIDE-
SUFFIX: -12

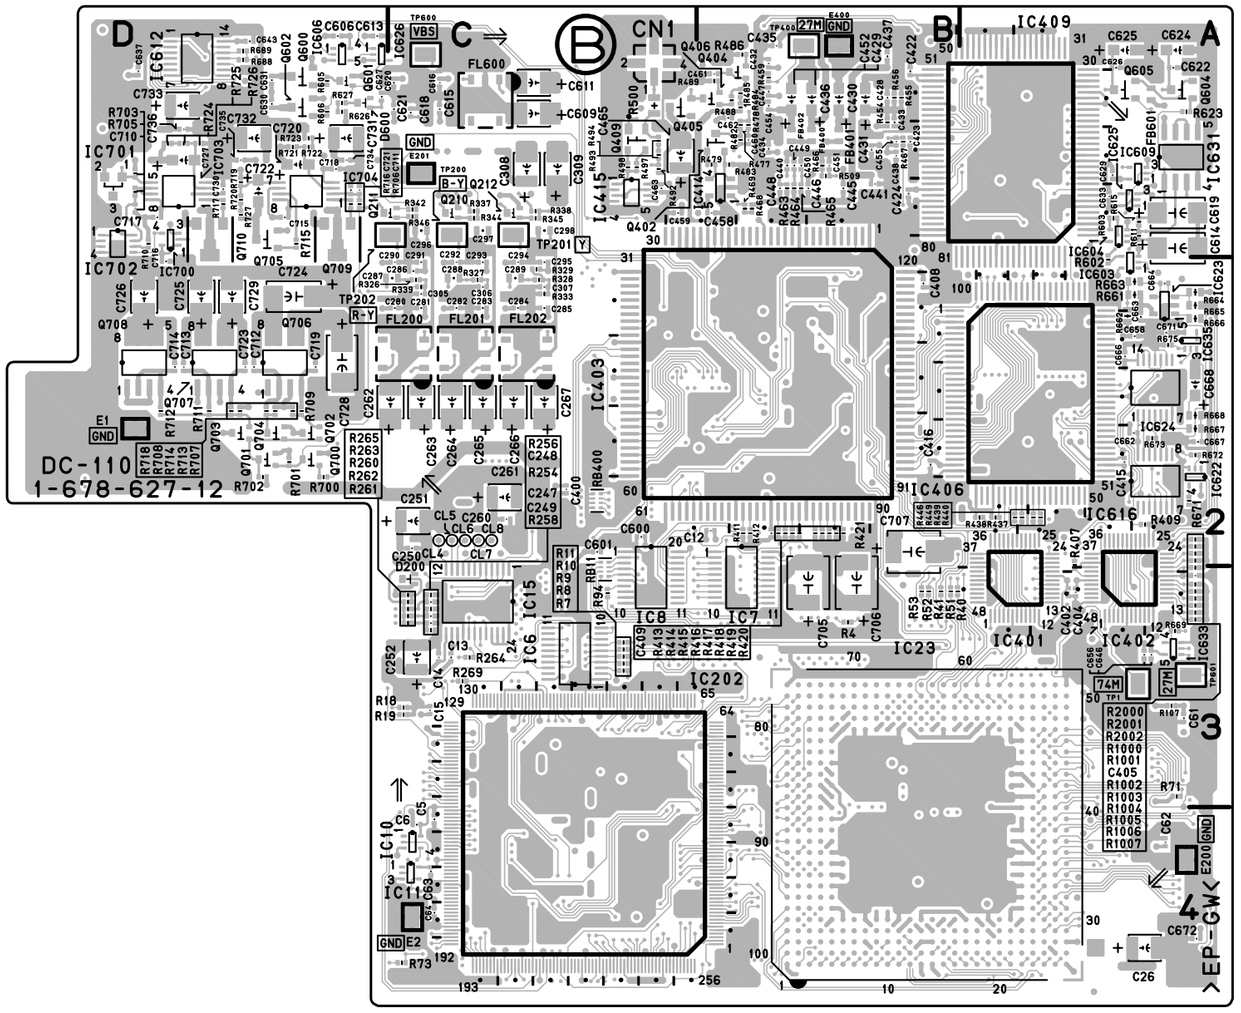

DC-110 -B SIDE-
SUFFIX: -12

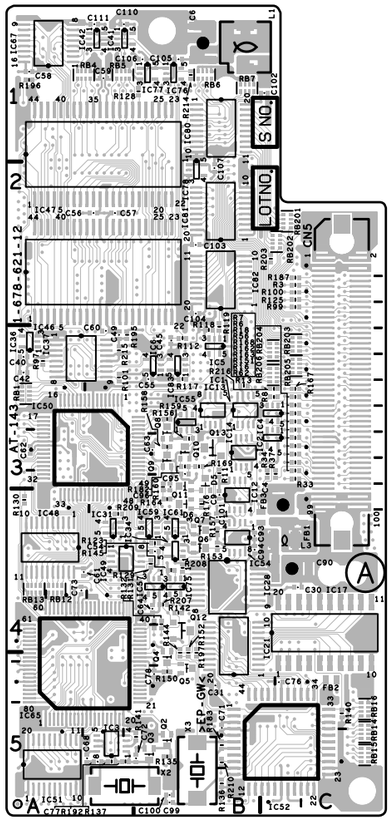

AT-143 -A SIDE-
SUFFIX: -12

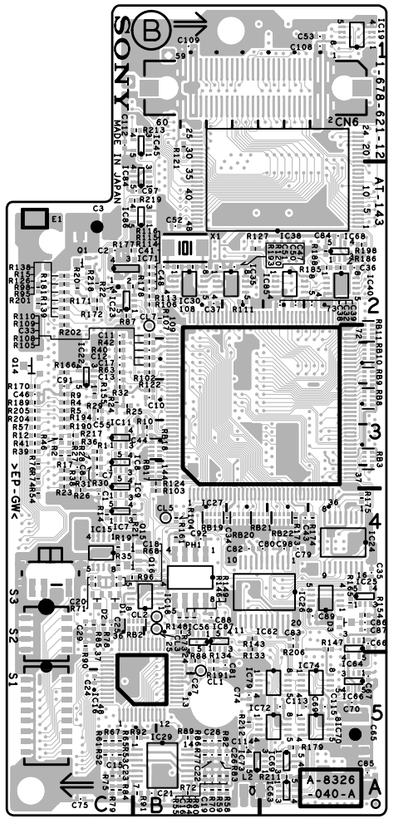

AT-143 -B SIDE-
SUFFIX: -12

AT-143 (1-678-621-12)
---

*:B SIDE

C1	*C4	C35	*A4	C68	A5	C101	B4	FB1	C4	IC34	B4	IC73	*B5	Q12	B4	R28	*C3	R71	*C4	R108	*B3
C2	*C2	C36	*A2	C69	*A5	C102	C1	FB2	C5	IC35	*B2	IC74	*A5	Q13	B3	R29	*C3	R72	*B5	R109	*B3
C3	*C2	C37	*B2	C70	*A5	C103	B2	FB3	C4	IC36	A3	IC75	B4	Q14	*C3	R30	*C3	R73	*B4	R110	*B3
C4	C4	C38	*A2	C71	B5	C104	B2			IC37	A3	IC76	B1	Q15	*B4	R31	*C3	R74	*C3	R111	*B2
C5	*C3	C39	*A2	C72	B5	C105	B1	IC1	B3	IC38	*A2	IC77	B1	Q16	*B4	R32	*C3	R75	*C5	R112	B3
C6	B1	C40	A3	C73	A4	C106	B1	IC2	C3	IC40	*A2	IC78	B2			R33	C3	R76	*C3	R113	*B2
C7	*C3	C41	*B2	C74	*B5	C107	B2	IC3	A5	IC41	A1	IC79	*A5	R1	*C3	R34	C3	R77	*B5	R114	*B2
C8	*C3	C42	A3	C75	*C5	C108	*A1	IC4	C3	IC42	A1	IC80	B1	R2	*C3	R35	*C4	R78	*C4	R115	*B2
C9	B4	C43	*A4	C76	C5	C109	*B1	IC5	B3	IC45	*B1	IC81	B2	R3	C2	R36	*C3	R79	*C5	R116	*B2
C10	*B3	C44	*B3	C77	A5	C110	A1	IC6	B3	IC46	A2	IC82	B2	R4	*C3	R37	C3	R82	*B5	R117	B3
C11	*C3	C45	B3	C78	B5	C111	A1	IC7	*C4	IC47	A2	IC83	B3	R5	*C3	R38	*C3	R83	*B5	R118	B3
C12	*C3	C46	*C3	C79	*A4	C112	*C1	IC8	*C3	IC48	A4	IC84	*B2	R6	C3	R39	*C3	R84	*C5	R119	B3
C13	*C3	C47	*B2	C80	*A4	C113	*A5	IC9	*C3	IC49	A4	IC85	*A2	R7	C3	R40	*C3	R85	*C4	R120	*B2
C15	*C5	C48	*B2	C81	*B5	C114	*B5	IC11	*C3	IC50	A3	IC86	*B2	R8	C3	R41	*C3	R86	*B5	R121	*B1
C16	*B5	C49	A3	C82	*B4	C115	*A5	IC12	B4	IC51	A5	IC87	*B4	R9	*C3	R42	*C3	R87	*C2	R122	*B3
C17	*C3	C50	*B2	C83	*A4			IC13	B3	IC52	C5			R10	*B3	R46	*C3	R88	*B5	R123	B4
C18	*C4	C51	*B2	C84	*A2	CL1	*B5	IC14	B3	IC54	B4	L1	B1	R11	B3	R52	*C5	R89	*B5	R124	*B3
C19	*B5	C52	*B2	C85	*A5	CL2	*B4	IC15	*C4	IC55	B3	L2	*B5	R12	*C3	R53	*C5	R90	*C4	R125	C2
C20	*C4	C53	*A1	C86	*A4	CL3	*B4	IC16	*B5	IC56	*B4	L3	C4	R13	B3	R54	*C4	R91	*B5	R126	*C2
C21	*B5	C54	B4	C87	*A4	CL5	*B4	IC17	C5	IC57	B4			R14	*C4	R55	*B5	R92	*B5	R127	*B2
C22	*B5	C55	B3	C88	*B4	CL7	*B3	IC18	*B4	IC59	B4	PH1	*B4	R15	*C2	R56	C3	R95	*C2	R128	B1
C23	*C5	C56	A2	C89	*A4			IC19	*A1	IC61	B4			R16	C3	R57	*C3	R96	*C4	R129	B4
C24	*C5	C57	A2	C90	C4	CN5	C3	IC21	B5	IC62	*A4	Q1	*C2	R17	*C3	R58	*B5	R97	A3	R130	A4
C25	*C4	C58	A1	C91	*C3	CN6	*B1	IC22	*C3	IC63	*A5	Q2	B5	R18	C3	R59	*B5	R98	*C2	R131	B4
C26	*B5	C59	A1	C92	*B4			IC23	*C2	IC64	*A4	Q3	B5	R19	*C4	R60	*B5	R99	C2	R132	B4
C27	*B5	C60	A3	C93	B4	D1	*C4	IC24	*A4	IC65	A5	Q4	B5	R20	*C2	R61	*C5	R100	C2	R133	*B4
C28	*B5	C61	A4	C94	B4	D2	*C4	IC25	*A4	IC66	*A5	Q5	B5	R21	*B4	R62	C3	R101	A3	R134	*B5
C29	*C4	C62	A3	C95	B3	D3	*A4	IC26	*A4	IC67	A1	Q6	B4	R22	*C2	R63	*C3	R102	*B3	R135	B5
C30	C4	C63	B3	C96	B3	D5	B3	IC27	*A3	IC68	*A2	Q7	B4	R23	*C3	R64	*B5	R103	*B4	R136	B5
C31	B5	C64	B4	C97	*B2	D6	B4	IC28	B4	IC69	*A5	Q8	B3	R24	*C3	R65	*C5	R104	*B4	R137	A5
C32	*A2	C65	*A5	C98	*A4			IC29	*B5	IC70	*A5	Q9	B3	R25	*C3	R67	*C5	R105	*B3	R138	*C2
C33	*B3	C66	*A4	C99	B5	E1	*C2	IC30	*B2	IC71	*C2	Q10	B3	R26	*C4	R68	*C4	R106	*B2	R139	*C2
C34	*B4	C67	*A5	C100	B5			IC31	A4	IC72	*A5	Q11	B3	R27	*C3	R70	*B5	R107	*B2	R140	C5

R141	B5	R174	*A4	R211	*A5	RB202	C2														
R142	B4	R175	*A4	R212	*B5	RB203	C3														
R143	*B4	R176	B4	R213	*B1	RB204	C3														
R144	B5	R177	*C2	R214	B1	RB205	C3														
R145	B4	R178	*B2	R215	A3	RB206	C3														
R146	*B4	R179	*A5	R216	C3																
R147	*A4	R181	*C2	R217	*C3	S1	*C5														
R148	*B4	R182	B3	R218	*C2	S2	*C4														
R149	*B4	R183	B5	R219	*B2	S3	*C4														
R150	B5	R185	*A2																		
R151	C3	R186	*A2	RB1	A3	X1	*B2														
R152	B5	R187	C2	RB2	*B4	X2	A5														
R153	B4	R188	*A2	RB3	*A3	X3	B5														
R154	*A4	R189	*C3	RB4	A1																
R155	*C3	R190	*C3	RB5	A1																
R156	B3	R191	*B5	RB6	B1																
R157	B4	R192	A5	RB7	B1																
R158	B3	R193	*B2	RB8	*A3																
R159	B3	R194	*C3	RB9	*A3																
R160	B3	R195	A3	RB10	*A3																
R161	*B4	R196	A1	RB11	*A3																
R162	C3	R197	B5	RB12	A4																
R163	C3	R198	*A2	RB13	A4																
R164	B4	R201	*C2	RB14	C5																
R165	*A4	R202	*C2	RB15	C5																
R166	*C3	R203	C2	RB16	C5																
R167	C3	R204	*C3	RB17	*B3																
R168	C3	R205	*C3	RB18	*B3																
R169	B3	R206	*A4	RB19	*B4																
R170	*C3	R207	B4	RB20	*B4																
R171	*C2	R208	B4	RB21	*A4																
R172	*C2	R209	A4	RB22	*A4																
R173	*A4	R210	B5	RB201	C2																

http://getMANUAL.com

DVP-18 (1-678-731-13)
---

*:B SIDE

C103	*F5	C302	C3	C513	*B2	C817	E3	CL145	*F5	CL252	*E4	CL389	*D4	CL611	*D2	E963	*A2	IC305	*F3	Q200	E4	R222	*E4	R443	*B3	R827	*D5	RB121	*F6	RB930	C6
C107	*E6	C303	*C4	C514	*B2	C818	*C3	CL146	*F4	CL253	*E4	CL400	*B4	CL612	*D2	E964	C3	IC350	C5	Q201	E4	R223	*E5	R501	*A2	R828	*B3	RB122	*F6	RB931	*A4
C108	*F6	C304	*C4	C515	*B2	C819	*F3	CL147	*F5	CL254	*E4	CL401	*B4	CL613	*D2	E965	*G6	IC351	B5	Q202	E4	R224	*E5	R504	*B1	R829	*C3	RB128	*F6		
C109	*E5	C305	C5	C516	*C2	C821	*C5	CL148	*F5	CL255	*D4	CL402	*B4	CL614	*D2	E966	B6	IC352	*D5	Q203	E5	R225	*E4	R505	*C1	R830	*F5	RB129	*F6	SL101	*E5
C110	*E5	C306	*C4	C517	*B2	C822	*F2	CL149	*F5	CL256	*D4	CL403	*B4	CL615	*D2	E967	*A5	IC353	E3	Q204	D4	R226	*E5	R506	*B1	R831	*D5	RB130	*F6	SL200	D4
C111	*F5	C307	*F3	C518	*B2	C823	*C2	CL150	*F4	CL257	*D4	CL404	*B4	CL616	*D2			IC400	B4	Q400	A5	R227	*E5	R507	*B1	R832	*B3	RB131	*F3		
C114	*E5	C308	*B3	C519	*B2	C900	*A6	CL151	*F5	CL258	*D4	CL405	*B4	CL617	*D2	FB960	*D6	IC401	*B3	Q401	A5	R228	D4	R508	*C2	R833	*C3	RB132	*F3	X200	A3
C120	*G6	C309	*C3	C520	*B2	C901	*B5	CL152	*F5	CL259	*D5	CL406	*B4	CL618	*D2	FB961	*D6	IC402	*A4	Q402	A5	R229	*D4	R509	*C2	R834	*G5	RB133	*F3	X201	E4
C121	*F6	C310	*D4	C521	*B3	C902	*A5	CL153	*F5	CL260	*D5	CL407	*B4	CL619	*D2	FB962	*C6	IC403	*C4	Q403	A5	R230	*D4	R510	*B2	R835	F3	RB134	*F3	X202	E5
C122	*F6	C311	*D4	C522	*C2	C903	*B6	CL154	*F5	CL261	*D4	CL408	*B4	CL620	*D2	FB963	*C6	IC404	*C5	Q500	*C1	R231	*D4	R511	*B3	R900	A6	RB135	*G3	X400	A5
C130	*G3	C312	*C4	C523	*B3	C904	*A5	CL155	*F5	CL262	*D4	CL409	*B4	CL621	*D2	FB964	*C6	IC405	*C4	Q930	C6	R232	D4	R512	*B2	R901	B5	RB136	*F3	X401	A5
C131	*F3	C313	*C4	C524	*C3	C905	*A5	CL156	*F5	CL300	*D3	CL410	*B4	CL622	*D2	FB965	C6	IC406	A5	Q931	*C6	R233	D4	R513	*B2	R902	A6	RB150	G5	X402	A5
C132	F3	C314	*C4	C600	*E2	C930	*C5	CL157	*F5	CL301	*D3	CL411	*B4	CL623	*D2	FB966	D6	IC407	*B3	Q950	F1	R234	D4	R514	*B2	R903	A5	RB151	G5	X403	A5
C140	F5	C315	*D4	C601	*E2	C931	B5	CL158	*F5	CL302	*C3	CL412	*B4	CL624	*D2	FB967	C6	IC408	B5	Q951	*G1	R235	D4	R515	*B2	R904	A6	RB152	*G5		
C141	*F5	C316	*C4	C602	E3	C932	*C2	CL159	*F5	CL303	*C3	CL413	*B4	CL625	*D2			IC409	A5	Q952	F1	R236	E4	R516	*C1	R905	A5	RB153	*G5		
C142	F5	C317	*D4	C603	*E2	C933	E4	CL160	*F5	CL304	*C3	CL414	*B4	CL626	*C3	FL960	*D6	IC410	A5	Q953	*G1	R237	E4	R601	E3	R906	A5	RB154	*G5		
C150	*F5	C318	*D4	C604	*E3	C934	*E2	CL161	*F5	CL305	*C3	CL415	*B4	CL627	*C2	FL961	*D6	IC411	A5	Q954	G1	R238	E4	R602	*D3	R907	B5	RB160	*F4		
C151	*G5	C319	*D3	C605	*D3	C935	*F1	CL162	*F5	CL306	*C4	CL416	*B4	CL628	*C3	FL962	*D6	IC500	B2	Q960	G4	R239	E4	R603	*D3	R908	*D6	RB161	G4		
C152	G5	C320	*D4	C606	*D2	C936	C6	CL163	*G5	CL307	*C3	CL417	*B5	CL629	*D2	FL963	*D6	IC501	A3	Q961	C3	R240	E4	R604	E3	R909	*D6	RB200	*D5		
C160	F4	C321	*C4	C607	*D2	C937	*E2	CL164	*G5	CL308	*C3	CL418	*A4	CL630	*D2	FL964	*C6	IC502	A2	Q962	B5	R241	E4	R605	*D3	R910	A6	RB201	D5		
C161	*F4	C322	*C4	C608	*D2	C938	A5	CL165	*G5	CL309	*C4	CL419	*B4	CL631	*D2	FL965	C6	IC503	C2	Q963	C1	R244	E4	R606	*D3	R911	A6	RB202	D5		
C162	*F4	C323	*C4	C609	*D2	C939	A5	CL166	*G5	CL310	*C3	CL420	*B4	CL650	*C1	FL966	D6	IC504	C2	Q964	B6	R247	E4	R607	*D3	R912	A5	RB300	*C4		
C163	*F4	C324	*C4	C610	*D3	C950	G1	CL167	*G5	CL311	*C4	CL421	*B4	CL651	*D2	FL967	D6	IC505	C2	Q965	C1	R248	E4	R608	*D3	R917	A6	RB301	*C4		
C164	*F4	C325	*C4	C611	*D3	C951	G1	CL168	*G5	CL312	*C4	CL422	*B4	CL652	*D2			IC506	C2	Q966	G4	R249	E4	R609	*D3	R918	A6	RB302	*D3		
C165	*F5	C326	*D4	C612	*D2	C952	G1	CL169	*G5	CL313	*C4	CL423	*B4	CL653	*D1	IC101	E6	IC507	C1	Q967	*B6	R250	E4	R610	*C3	R930	*F3	RB303	*C3		
C166	*F5	C350	*D5	C613	*D2	C960	*A6	CL170	*G5	CL314	*C4	CL424	*B4	CL654	*D1	IC102	F5	IC508	C2	Q968	C3	R251	E4	R611	*C3	R931	*F1	RB304	*C3		
C167	*F4	C351	B5	C614	*D2	C961	*A6	CL171	*G5	CL315	*C4	CL425	*B4	CL655	*D1	IC103	E5	IC509	C2	Q969	B5	R252	E4	R612	*D3	R932	*C6	RB305	*E3		
C168	*F5	C352	*C5	C615	*D2	C962	G4	CL172	*G5	CL316	*C4	CL426	*B4	CL656	*D1	IC104	E6	IC600	D3	Q970	C1	R253	E4	R613	*C3	R933	*C5	RB306	*E3		
C169	*F4	C353	*B6	C616	*D3	C963	C3	CL173	*G5	CL317	*C4	CL500	*B2	CL657	*D1	IC105	*F6	IC601	E3	Q971	G3	R254	E4	R614	*C2	R934	B5	RB307	*F3		
C170	*F4	C354	*C5	C617	*D3	C964	B5	CL174	*G5	CL318	*C4	CL501	*B2	CL658	*D1	IC120	G5	IC650	D2	Q972	*C3	R255	E5	R615	*D2	R935	*C2	RB308	*F3		
C171	*F4	C355	*C5	C618	*D3	C965	C1	CL175	*G5	CL319	*C4	CL502	*A2	CL659	*D1	IC121	F5	IC651	E2	Q973	B5	R256	D4	R616	*C3	R936	E4	RB350	*C6		
C172	*F4	C356	*E3	C619	*C2	C966	B6	CL176	*F5	CL320	*C4	CL503	*B2	CL660	*D1	IC122	F5	IC700	*F2	Q974	A6	R257	D4	R617	*C3	R937	*C5	RB351	*C6		
C173	*F4	C357	*D5	C620	*D3	C967	*A6	CL177	*F5	CL321	*C4	CL504	*B2	CL661	*D1	IC130	*F3	IC701	E3	Q975	*C1	R258	D4	R618	*E2	R938	B5	RB352	*D5		
C174	*F4	C358	*D5	C621	*D3	C968	*A6	CL178	*F5	CL322	*C3	CL505	*B2	CL662	*D1	IC131	*F3	IC800	D5			R259	E6	R619	*D2	R939	*C2	RB353	*C4		
C175	*F5	C359	*D5	C650	*E1	C969	C1	CL179	*F5	CL323	*D3	CL506	*B2	CL663	*D1	IC132	*G3	IC801	B6	R102	*E5	R260	E6	R620	*D2	R940	F4	RB354	*C4		
C176	G3	C360	*C5	C651	*E2	C970	*C1	CL180	*F5	CL324	*D4	CL507	*A2	CL664	*D1	IC140	F5	IC802	E6	R104	F5	R261	E5	R621	*C3	R941	C6	RB355	*E3		
C200	D4	C361	*D5	C652	*E1	C971	C1	CL181	*F5	CL325	*D4	CL508	*A2	CL665	*D1	IC141	F5	IC805	*E6	R106	*E5	R263	*D3	R651	*D2	R943	E3	RB356	*E3		
C201	E4	C362	*D5	C653	*E1	C972	*C1	CL182	*F5	CL326	*D3	CL509	*C2	CL666	*D1	IC142	F5	IC806	D6	R107	*E6	R264	*D3	R652	*D2	R945	*F1	RB400	*B3		
C202	*D4	C363	*C5	C654	*E2	C973	G3	CL183	*G5	CL327	*D3	CL510	*B2	CL667	*D1	IC150	G5	IC807	*C5	R108	*E6	R265	E4	R653	*D2	R946	*E4	RB401	B5		
C203	D4	C364	*D5	C655	*D1	C974	*C3	CL184	*G5	CL328	*D3	CL511	*B2	CL668	*D1	IC151	*G5	IC808	*C5	R109	*E5	R266	D4	R654	*E2	R947	*E3	RB402	*C3		
C204	*E3	C365	*C5	C656	*D1	C975	B5	CL185	*G4	CL329	*D3	CL512	*B2	CL669	*D1	IC153	*F5	IC809	*C3	R110	*E5	R267	D4	R655	*D2	R950	G1	RB403	*C4		
C205	D4	C366	*C5	C657	*D2	C976	A6	CL186	*G4	CL330	*D3	CL513	*B2	CL670	*D1	IC154	*G6	IC810	*C3	R111	*E5	R268	*E3	R656	*D2	R951	G1	RB404	*C5		
C206	*A3	C367	*C5	C658	*D1	C977	*C1	CL187	*G4	CL331	*D3	CL514	*B2	CL671	*D1	IC160	F4	IC811	B3	R112	*E5	R269	*E3	R657	*D2	R952	G1	RB405	*C5		
C207	D4	C368	*C5	C659	*D1	C978	*D6	CL188	*G4	CL332	*D3	CL515	*C2	CL672	*D1	IC161	*F4	IC812	A4	R113	*F5	R270	*E3	R658	*D2	R953	G1	RB500	*A2		
C208	*D3	C369	*D5	C660	*D2			CL189	*G4	CL333	*D3	CL516	*C2	CL673	*D1	IC162	*F4	IC813	E2	R114	*F5	R271	*E3	R659	*D2	R954	G1	RB501	*A2		
C209	D3	C370	*C5	C661	*D2	CL100	*F6	CL190	*G4	CL334	*D3	CL517	*C2	CL674	*D1	IC163	F4	IC814	E5	R115	*E5	R272	*E2	R660	*C2	R962	G4	RB502	*A2		
C210	E4	C371	*C5	C662	*D1	CL101	*F4	CL191	*G4	CL335	*C4	CL518	*C2	CL675	*D1	IC164	*F5	IC815	E1	R120	F6	R273	E4	R661	*C2	R963	C3	RB503	*A2		
C211	*F3	C372	*C5	C663	*D1	CL102	*F4	CL192	*G4	CL336	*C4	CL519	*C2	CL676	*C2	IC165	*F3	IC816	E3	R131	F3	R274	E4	R662	*D2	R964	B5	RB504	*B2		
C212	*E4	C373	*C5	C664	*D1	CL103	*F4	CL193	*G4	CL337	*C4	CL520	*C2	CL677	*D1	IC166	*F3	IC817	*D6	R140	G5	R275	*D4	R663	*C2	R965	C1	RB505	*B2		
C213	*E5	C374	*D5	C665	*D1	CL104	*F4	CL194	*G4	CL338	*D4	CL521	*C2	CL678	*C2	IC167	*F3	IC818	*B3	R141	*G5	R302	*D4	R664	*C1	R966	B6	RB600	*E2		
C214	*E4	C400	A5	C666	*D2	CL105	*F4	CL195	*G4	CL339	*D3	CL522	*C2	CL679	*D1	IC168	*F3	IC819	*C3	R142	*F5	R303	*D4	R665	*D1	R967	*A6	RB601	*E2		
C215	*E5	C401	A5	C667	*D2	CL106	*F4	CL196	*G4	CL350	*D4	CL523	*C2	CL680	*D1	IC200	*E4	IC820	*C3	R150	*G6	R304	*D4	R666	*C2	R968	*A6	RB602	*E2		
C216	*E4	C402	*C4	C668	*D2	CL107	*F4	CL197	*G4	CL351	*D4	CL524	*C2	CL681	*D1	IC201	*A3	IC821	*F5	R151	G5	R305	*D4	R667	*C2	R969	*A6	RB650	*E1		
C217	*E4	C403	A5	C669	*C1	CL108	*F4	CL198	*G5	CL352	*C5	CL525	*C2	CL700	*G2	IC202	*A3	IC822	E1	R152	*E5	R306	*D4	R668	*E1	R970	*A6	RB651	*E1		
C218	E4	C404	*B3	C670	*D1	CL109	*F4	CL199	*G5	CL353	*C4	CL526	*B2	CL800	*B5	IC203	D4	IC823	F3	R153	*F5	R307	*D4	R669	*D1	R971	*A6	RB652	*E1		
C219	*E5	C405	*A4	C671	*D2	CL110	*F4	CL200	*G5	CL354	*C4	CL527	*B2	CL802	*B6	IC204	D4	IC824	*F3	R154	*F5	R308	*D4	R670	*D1	R972	*A6	RB800	*E5		
C220	*E4	C406	*A4	C700	*F2	CL111	*F4	CL201	*G5	CL355	*C5	CL528	*B2	CL803	*D5	IC205	*E4	IC825	*F3	R155	E5	R309	*D4	R671	*C2	R973	*B5	RB801	*E5		
C221	*E5	C407	B4	C701	*E1	CL112	*F5	CL202	*G5	CL356	*C5	CL529	*B2	CL960	*D6	IC206	D4	IC826	*D5	R156	E5	R310	*C4	R700	F1	R974	*B5	RB802	*E6		
C222	*E4	C408	*B4	C702	E2	CL113	*F5	CL203	*G5	CL357	*C5	CL530	*B2	CL961	*D6	IC207	*D4	IC827	*E5	R157	*F5	R311	*C4	R701	F1	R975	F4	RB803	*E6		
C223	*E5	C409	*A4	C703	*F2	CL114	*F5	CL204	*G5	CL358	*C4	CL531	*B2	CL962	*D6	IC208	D3	IC828	D5	R158	E5	R350	*D5	R702	*F2	R976	C3	RB804	E5		
C224	*E4	C410	*B4	C704	*E2	CL115	*F5	CL205	*G4	CL359	*C5	CL532	*C2	CL963	*E6	IC209	E4	IC829	F1	R159	E5	R351	*D5	R703	*F2	R977	*C1	RB805	E5		
C225	*E5	C411	*B4	C705	F2	CL116	*F5	CL206	*G4	CL360	*C5	CL533	*C2	CL964	*E6	IC210	*E3	IC830	*E3	R160	*F4	R352	*D5	R704	*F2	R978	*C1	RB806	*E6		
C226	*D4	C412	*B4	C706	F2	CL117	*F5	CL207	*F4	CL361	*C5	CL534	*B2	CL965	*E6	IC211	E5	IC900	A6	R161	*F4	R353	*D5	R705	*E2	R979	F4	RB807	*B6		
C227	*D4	C413	*B4	C707	*F1	CL118	*F5	CL208	*F4	CL362	*C5	CL535	*B2	CL966	*E6	IC212	E4	IC901	*A5	R162	*F5	R354	*D5	R707	F2	R980	C3	RB808	*B6		
C228	*D4	C414	*B4	C708	F2	CL119	*F5	CL209	*F4	CL363	*C4	CL536	*B2	CL967	*E6	IC213	E5	IC902	*B5	R163	*F4	R355	*D5	R708	F2	R981	*C1	RB809	B5		
C229	*D5	C415	*B4	C709	*F1	CL120	*F5	CL210	*F4	CL364	*C5	CL537	*C2	CL968	*E6	IC214	E5	IC903	A6	R165	*F5	R356	*D5	R709	F2	R982	*C1	RB810	B6		
C230	E5	C416	*B4	C710	*F2	CL121	*F5	CL211	*F4	CL365	*C5	CL538	*C2	CL969	*E6	IC215	B6	IC904	A5	R166	G3	R357	*D5	R710	F2	R983	*B5	RB811	B5		
C231	*D4	C417	*B4	C711	F2	CL122	*F5	CL212	*F4	CL366	*C5	CL539	*B2	CL970	*E6	IC217	*D3	IC905	A6	R167	G3	R358	*C5	R800	*D6	R984	*B5	RB812	B5		
C232	D5	C418	*B4	C712	F2	CL123	*F5	CL230	*E4	CL367	*C5	CL540	*B2	CL971	*E6	IC218	E4	IC930	*F3	R200	D4	R359	*C5	R801	B5	R985	*C1	RB813	A6		
C233	E5	C419	*A4	C713	*F3	CL124	*F5	CL231	*E5	CL368	*C5	CL541	*B2	CL972	*E6	IC219	E4	IC931	F1	R201	D4	R400	*B3	R802	B6	R986	*C1	RB814	A6		
C234	D4	C420	*B4	C714	E3	CL125	*F4	CL232	*E5	CL369	*C4	CL542	*B2	CL973	*F6	IC220	E4	IC932	C6	R202	D4	R401	*B3	R803	*E5	R987	*C1	RB815	B5		
C235	D4	C421	A5	C715	F2	CL126	*F4	CL233	*E4	CL370	*C5	CL543	*C2	CL974	*F6	IC221	*C6	IC933	*C5	R203	*E3	R402	*B3	R806	*C5	R988	*C1	RB816	B5		
C236	E4	C422	A5	C716	F2	CL127	*F4	CL234	*E4	CL371	*C5	CL544	*C2	CL975	*F6	IC222	D4	IC934	B5	R204	*E3	R403	*C4	R807	*C5	R989	*C1	RB817	B5		
C237	E4	C423	A5	C800	*D5	CL128	*F4	CL235	*E4	CL372	*C4	CL545	*C2	CL976	*F6	IC223	D4	IC935	*C1	R205	D4	R404	A5	R808	*B3	R990	*C1	RB818	C3		
C238	*B6	C424	A5	C801	B6	CL129	*F4	CL236	*E4	CL373	*D5	CL546	*C2	CL977	*A3	IC224	E5	IC936	E4	R206	D4	R405	A5	R809	*B3	R991	G3	RB819	C3		
C239	*D3	C425	A5	C802	B5	CL130	*F4	CL237	*E4	CL374	*D5	CL547	*C2	CL978	*A3	IC225	*E6	IC937	*E3	R207	E4	R406	*C4	R810	*A5	R992	G3	RB820	A4		
C240	E4	C426	A5	C803	*E6	CL131	*F4	CL238	*E4	CL375	*D5	CL548	*C2	CL979	*D6	IC226	E6	IC938	F1	R208	*A3	R407	*A4	R811	*A5	R993	*C3	RB821	A4		
C241	E4	C500	*B3	C804	D5	CL132	*F4	CL239	*E4	CL376	*D5	CL549	*C2	CL980	*D6	IC227	E5	IC939	*C2	R209	*A3	R408	*A4	R812	F2	R994	*C3	RB822	F2		
C242	E4	C501	*A2	C805	*E5	CL133	*F4	CL240	*E4	CL377	*D4	CL550	*C2	CL981	*D6	IC228	D6	IC940	*E3	R210	E4	R409	*A4	R813	F2	R995	B5	RB823	F2		
C243	E4	C502	*A2	C806	*A4	CL134	*F4	CL241	*E4	CL378	*D4	CL600	*C2	CL982	*D6	IC229	B6	IC950	F1	R211	E3	R410	B4	R814	E5	R996	B5	RB824	F4		
C244	E4	C503	*B2	C807	*B3	CL135	*F4	CL242	*E4	CL379	*D5	CL601	*D3			IC230	*B6	IC960	A6	R212	D3	R411	*B4	R815	E5	R997	A6	RB825	E4		
C245	E5	C504	*B2	C808	F2	CL136	*F4	CL243	*E4	CL380	*D5	CL602	*D3	CN101	E4	IC231	B6	IC961	C1	R213	D4	R412	*B5	R818	*B3	R998	A6	RB826	F1		
C246	E4	C505	*A2	C809	E5	CL137	*G4	CL244	*E4	CL381	*D4	CL603	*D2	CN102	A4	IC232	*B6	IC962	*C1	R214	*D4	R413	*B5	R819	*A5			RB827	F1		
C247	*E5	C506	*B1	C810	F1	CL138	*G4	CL245	*E4	CL382	*D4	CL604	*D2	CN103	E6	IC233	E5	IC963	G3	R215	D3	R414	*A4	R820	F2	RB100	*G5	RB828	E3		
C248	D4	C507	*C2	C811	F3	CL139	*G4	CL246	*E4	CL383	*D5	CL605	*D2	CN104	G2	IC234	D4	IC964	*C3	R216	*D3	R415	A5	R821	E4	RB101	*F5	RB829	E3		
C249	*C6	C508	*C3	C812	*C3	CL140	*G4	CL247	*E4	CL384	*D5	CL606	*D2	CN500	*B1	IC300	C4	IC965	B5	R217	D3	R438	*B5	R822	*B3	RB102	*F5	RB830	F2		
C250	*D5	C509	*C2	C813	*B3	CL141	*G4	CL248	*E4	CL385	*C5	CL607	*D2			IC301	B4	IC966	A6	R218	D3	R439	*B5	R823	*A5	RB103	*F5	RB831	F2		
C251	E4	C510	*B2	C814	*D5	CL142	*F4	CL249	*E4	CL386	*C5	CL608	*D2	E960	D5	IC302	D5	IC967	*C1	R219	D3	R440	*A5	R824	F2	RB104	*F5	RB832	F3		
C300	D5	C511	*B2	C815	*F5	CL143	*F4	CL250	*E4	CL387	*C5	CL609	*D2	E961	*E1	IC303	*D4			R220	E5	R441	*A5	R825	E4	RB105	*F5	RB833	F3		
C301	*D4	C512	*B2	C816	F1	CL144	*F5	CL251	*E4	CL388	*D5	CL610	*D2	E962	C1	IC304	E3	Q101	*F5	R221	*E4	R442	*B3	R826	F3	RB120	*G6	RB900	C6		

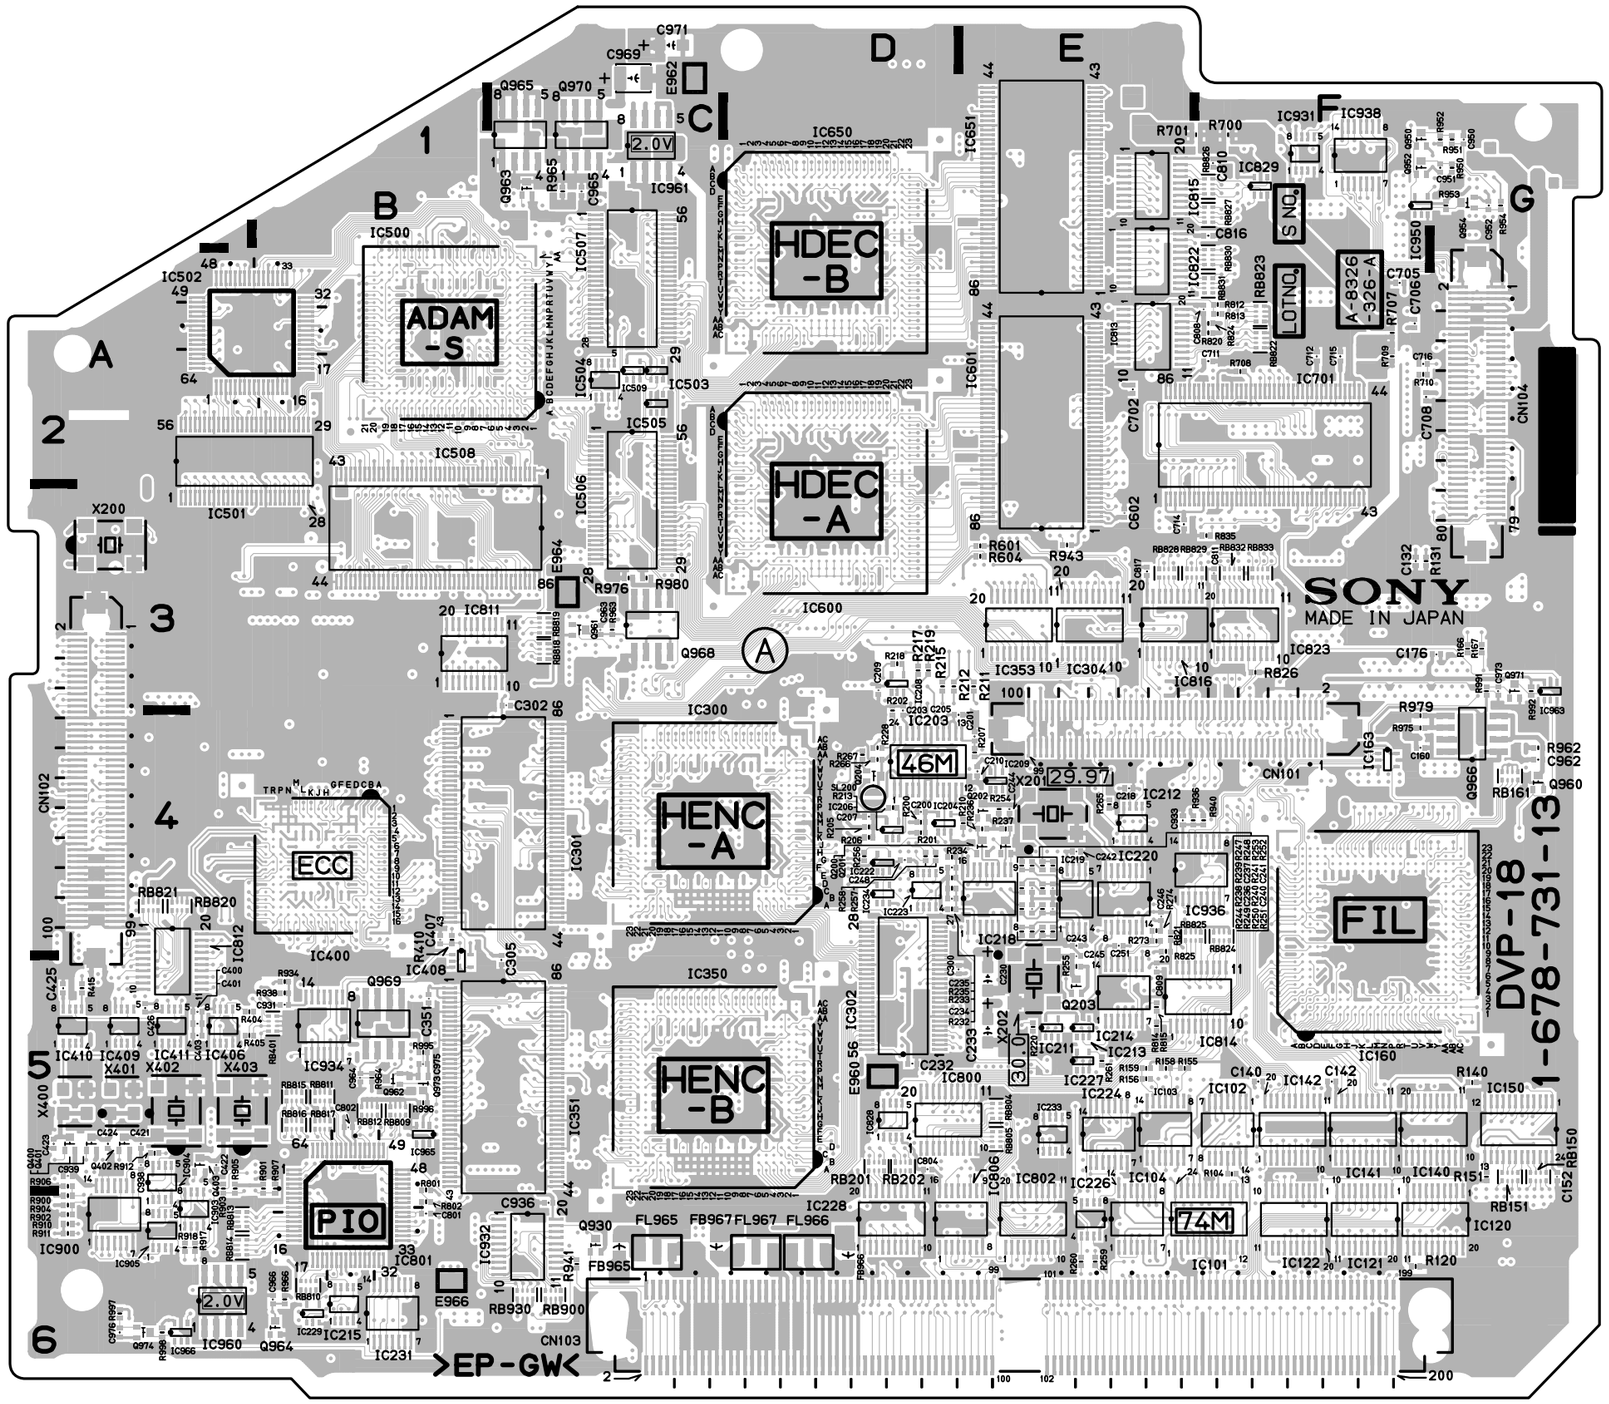

Components location list ; previous page

DVP-18 -A SIDE-
SUFFIX: -13

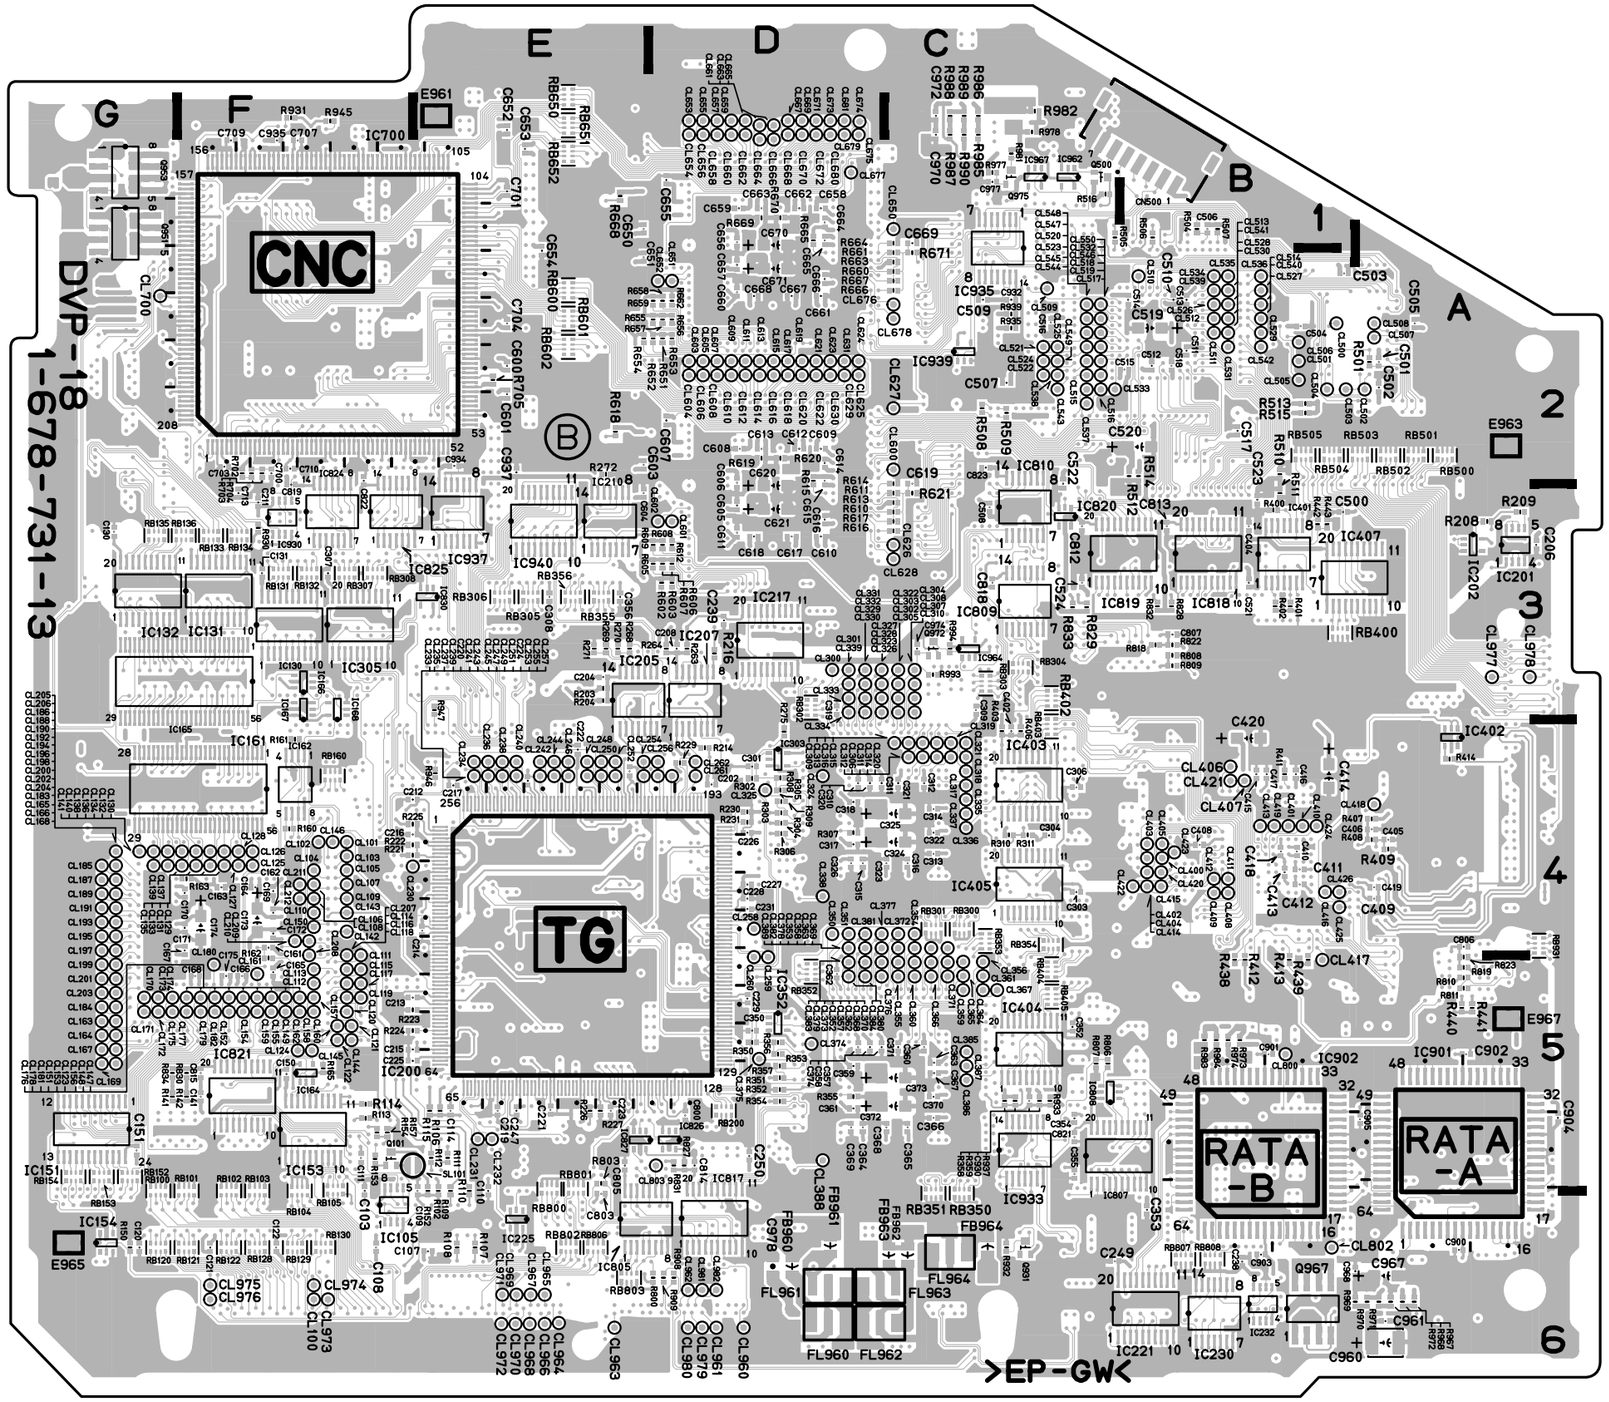

DVP-18 -B SIDE-
SUFFIX: -13

DVP-18 (1-678-731-12)
---

*:B SIDE

C103	*F5	C302	C3	C513	*B2	C817	E3	CL145	*F5	CL252	*E4	CL389	*D4	CL611	*D2	E963	*A2	IC305	*F3	Q200	E4	R222	*E4	R443	*B3	R827	*D5	RB121	*F6	RB930	C6
C107	*E6	C303	*C4	C514	*B2	C818	*C3	CL146	*F4	CL253	*E4	CL400	*B4	CL612	*D2	E964	C3	IC350	C5	Q201	E4	R223	*E5	R501	*A2	R828	*B3	RB122	*F6	RB931	*A4
C108	*F6	C304	*C4	C515	*B2	C819	*F3	CL147	*F5	CL254	*E4	CL401	*B4	CL613	*D2	E965	*G6	IC351	B5	Q202	E4	R224	*E5	R504	*B1	R829	*C3	RB128	*F6		
C109	*E5	C305	C5	C516	*C2	C821	*C5	CL148	*F5	CL255	*D4	CL402	*B4	CL614	*D2	E966	B6	IC352	*D5	Q203	E5	R225	*E4	R505	*C1	R830	*F5	RB129	*F6	SL101	*E5
C110	*E5	C306	*C4	C517	*B2	C822	*F2	CL149	*F5	CL256	*D4	CL403	*B4	CL615	*D2	E967	*A5	IC353	E3	Q204	D4	R226	*E5	R506	*B1	R831	*D5	RB130	*F6	SL200	D4
C111	*F5	C307	*F3	C518	*B2	C823	*C2	CL150	*F4	CL257	*D4	CL404	*B4	CL616	*D2			IC400	B4	Q400	A5	R227	*E5	R507	*B1	R832	*B3	RB131	*F3		
C114	*E5	C308	*B3	C519	*B2	C900	*A6	CL151	*F5	CL258	*D4	CL405	*B4	CL617	*D2	FB960	*D6	IC401	*B3	Q401	A5	R228	D4	R508	*C2	R833	*C3	RB132	*F3	X200	A3
C120	*G6	C309	*C3	C520	*B2	C901	*B5	CL152	*F5	CL259	*D5	CL406	*B4	CL618	*D2	FB961	*D6	IC402	*A4	Q402	A5	R229	*D4	R509	*C2	R834	*G5	RB133	*F3	X201	E4
C121	*F6	C310	*D4	C521	*B3	C902	*A5	CL153	*F5	CL260	*D5	CL407	*B4	CL619	*D2	FB962	*C6	IC403	*C4	Q403	A5	R230	*D4	R510	*B2	R835	F3	RB134	*F3	X202	E5
C122	*F6	C311	*D4	C522	*C2	C903	*B6	CL154	*F5	CL261	*D4	CL408	*B4	CL620	*D2	FB963	*C6	IC404	*C5	Q500	*C1	R231	*D4	R511	*B3	R900	A6	RB135	*G3	X400	A5
C130	*G3	C312	*C4	C523	*B3	C904	*A5	CL155	*F5	CL262	*D4	CL409	*B4	CL621	*D2	FB964	*C6	IC405	*C4	Q930	C6	R232	D4	R512	*B2	R901	B5	RB136	*F3	X401	A5
C131	*F3	C313	*C4	C524	*C3	C905	*A5	CL156	*F5	CL300	*D3	CL410	*B4	CL622	*D2	FB965	C6	IC406	A5	Q931	*C6	R233	D4	R513	*B2	R902	A6	RB150	G5	X402	A5
C132	F3	C314	*C4	C600	*E2	C930	*C5	CL157	*F5	CL301	*D3	CL411	*B4	CL623	*D2	FB966	D6	IC407	*B3	Q950	F1	R234	D4	R514	*B2	R903	A5	RB151	G5	X403	A5
C140	F5	C315	*D4	C601	*E2	C931	B5	CL158	*F5	CL302	*C3	CL412	*B4	CL624	*D2	FB967	C6	IC408	B5	Q951	*G1	R235	D4	R515	*B2	R904	A6	RB152	*G5		
C141	*F5	C316	*C4	C602	E3	C932	*C2	CL159	*F5	CL303	*C3	CL413	*B4	CL625	*D2			IC409	A5	Q952	F1	R236	E4	R516	*C1	R905	A5	RB153	*G5		
C142	F5	C317	*D4	C603	*E2	C933	E4	CL160	*F5	CL304	*C3	CL414	*B4	CL626	*C3	FL960	*D6	IC410	A5	Q953	*G1	R237	E4	R601	E3	R906	A5	RB154	*G5		
C150	*F5	C318	*D4	C604	*E3	C934	*E2	CL161	*F5	CL305	*C3	CL415	*B4	CL627	*C2	FL961	*D6	IC411	A5	Q954	G1	R238	E4	R602	*D3	R907	B5	RB160	*F4		
C151	*G5	C319	*D3	C605	*D3	C935	*F1	CL162	*F5	CL306	*C4	CL416	*B4	CL628	*C3	FL962	*D6	IC500	B2	Q960	G4	R239	E4	R603	*D3	R908	*D6	RB161	G4		
C152	G5	C320	*D4	C606	*D2	C936	C6	CL163	*G5	CL307	*C3	CL417	*B5	CL629	*D2	FL963	*D6	IC501	A3	Q961	C3	R240	E4	R604	E3	R909	*D6	RB200	*D5		
C160	F4	C321	*C4	C607	*D2	C937	*E2	CL164	*G5	CL308	*C3	CL418	*A4	CL630	*D2	FL964	*C6	IC502	A2	Q962	B5	R241	E4	R605	*D3	R910	A6	RB201	D5		
C161	*F4	C322	*C4	C608	*D2	C938	A5	CL165	*G5	CL309	*C4	CL419	*B4	CL631	*D2	FL965	C6	IC503	C2	Q963	C1	R244	E4	R606	*D3	R911	A6	RB202	D5		
C162	*F4	C323	*C4	C609	*D2	C939	A5	CL166	*G5	CL310	*C3	CL420	*B4	CL650	*C1	FL966	D6	IC504	C2	Q964	B6	R247	E4	R607	*D3	R912	A5	RB300	*C4		
C163	*F4	C324	*C4	C610	*D3	C950	G1	CL167	*G5	CL311	*C4	CL421	*B4	CL651	*D2	FL967	D6	IC505	C2	Q965	C1	R248	E4	R608	*D3	R917	A6	RB301	*C4		
C164	*F4	C325	*C4	C611	*D3	C951	G1	CL168	*G5	CL312	*C4	CL422	*B4	CL652	*D2			IC506	C2	Q966	G4	R249	E4	R609	*D3	R918	A6	RB302	*D3		
C165	*F5	C326	*D4	C612	*D2	C952	G1	CL169	*G5	CL313	*C4	CL423	*B4	CL653	*D1	IC101	E6	IC507	C1	Q967	*B6	R250	E4	R610	*C3	R930	*F3	RB303	*C3		
C166	*F5	C350	*D5	C613	*D2	C960	*A6	CL170	*G5	CL314	*C4	CL424	*B4	CL654	*D1	IC102	F5	IC508	C2	Q968	C3	R251	E4	R611	*C3	R931	*F1	RB304	*C3		
C167	*F4	C351	B5	C614	*D2	C961	*A6	CL171	*G5	CL315	*C4	CL425	*B4	CL655	*D1	IC103	E5	IC509	C2	Q969	B5	R252	E4	R612	*D3	R932	*C6	RB305	*E3		
C168	*F5	C352	*C5	C615	*D2	C962	G4	CL172	*G5	CL316	*C4	CL426	*B4	CL656	*D1	IC104	E6	IC600	D3	Q970	C1	R253	E4	R613	*C3	R933	*C5	RB306	*E3		
C169	*F4	C353	*B6	C616	*D3	C963	C3	CL173	*G5	CL317	*C4	CL500	*B2	CL657	*D1	IC105	*F6	IC601	E3	Q971	G3	R254	E4	R614	*C2	R934	B5	RB307	*F3		
C170	*F4	C354	*C5	C617	*D3	C964	B5	CL174	*G5	CL318	*C4	CL501	*B2	CL658	*D1	IC120	G5	IC650	D2	Q972	*C3	R255	E5	R615	*D2	R935	*C2	RB308	*F3		
C171	*F4	C355	*C5	C618	*D3	C965	C1	CL175	*G5	CL319	*C4	CL502	*A2	CL659	*D1	IC121	F5	IC651	E2	Q973	B5	R256	D4	R616	*C3	R936	E4	RB350	*C6		
C172	*F4	C356	*E3	C619	*C2	C966	B6	CL176	*F5	CL320	*C4	CL503	*B2	CL660	*D1	IC122	F5	IC700	*F2	Q974	A6	R257	D4	R617	*C3	R937	*C5	RB351	*C6		
C173	*F4	C357	*D5	C620	*D3	C967	*A6	CL177	*F5	CL321	*C4	CL504	*B2	CL661	*D1	IC130	*F3	IC701	E3	Q975	*C1	R258	D4	R618	*E2	R938	B5	RB352	*C5		
C174	*F4	C358	*D5	C621	*D3	C968	*A6	CL178	*F5	CL322	*C3	CL505	*B2	CL662	*D1	IC131	*F3	IC800	D5			R259	E6	R619	*D2	R939	*C2	RB353	*C4		
C175	*F5	C359	*D5	C650	*E1	C969	C1	CL179	*F5	CL323	*D3	CL506	*B2	CL663	*D1	IC132	*G3	IC801	B6	R102	*E5	R260	E6	R620	*D2	R940	F4	RB354	*C4		
C176	G3	C360	*C5	C651	*E2	C970	*C1	CL180	*F5	CL324	*D4	CL507	*A2	CL664	*D1	IC140	F5	IC802	E6	R104	F5	R261	E5	R621	*C3	R941	C6	RB355	*E3		
C200	D4	C361	*D5	C652	*E1	C971	C1	CL181	*F5	CL325	*D4	CL508	*A2	CL665	*D1	IC141	F5	IC805	*E6	R106	*E5	R263	*D3	R651	*D2	R943	E3	RB356	*E3		
C201	E4	C362	*D5	C653	*E1	C972	*C1	CL182	*F5	CL326	*D3	CL509	*C2	CL666	*D1	IC142	F5	IC806	D6	R107	*E6	R264	*D3	R652	*D2	R945	*F1	RB400	*B3		
C202	*D4	C363	*C5	C654	*E2	C973	G3	CL183	*G5	CL327	*D3	CL510	*B2	CL667	*D1	IC150	G5	IC807	*C5	R108	*E6	R265	E4	R653	*D2	R946	*E4	RB401	B5		
C203	D4	C364	*D5	C655	*D1	C974	*C3	CL184	*G5	CL328	*D3	CL511	*B2	CL668	*D1	IC151	*G5	IC808	*C5	R109	*E5	R266	D4	R654	*E2	R947	*E3	RB402	*C3		
C204	*E3	C365	*C5	C656	*D1	C975	B5	CL185	*G4	CL329	*D3	CL512	*B2	CL669	*D1	IC153	*F5	IC809	*C3	R110	*E5	R267	D4	R655	*D2	R950	G1	RB403	*C4		
C205	D4	C366	*C5	C657	*D2	C976	A6	CL186	*G4	CL330	*D3	CL513	*B2	CL670	*D1	IC154	*G6	IC810	*C3	R111	*E5	R268	*E3	R656	*D2	R951	G1	RB404	*C5		
C206	*A3	C367	*C5	C658	*D1	C977	*C1	CL187	*G4	CL331	*D3	CL514	*B2	CL671	*D1	IC160	F4	IC811	B3	R112	*E5	R269	*E3	R657	*D2	R952	G1	RB405	*C5		
C207	D4	C368	*C5	C659	*D1	C978	*D6	CL188	*G4	CL332	*D3	CL515	*C2	CL672	*D1	IC161	*F4	IC812	A4	R113	*F5	R270	*E3	R658	*D2	R953	G1	RB500	*A2		
C208	*D3	C369	*D5	C660	*D2			CL189	*G4	CL333	*D3	CL516	*C2	CL673	*D1	IC162	*F4	IC813	E2	R114	*F5	R271	*E3	R659	*D2	R954	G1	RB501	*A2		
C209	D3	C370	*C5	C661	*D2	CL100	*F6	CL190	*G4	CL334	*D3	CL517	*C2	CL674	*D1	IC163	F4	IC814	E5	R115	*E5	R272	*E2	R660	*C2	R962	G4	RB502	*A2		
C210	E4	C371	*C5	C662	*D1	CL101	*F4	CL191	*G4	CL335	*C4	CL518	*C2	CL675	*D1	IC164	*F5	IC815	E1	R120	F6	R273	E4	R661	*C2	R963	C3	RB503	*A2		
C211	*F3	C372	*C5	C663	*D1	CL102	*F4	CL192	*G4	CL336	*C4	CL519	*C2	CL676	*C2	IC165	*F3	IC816	E3	R131	F3	R274	E4	R662	*D2	R964	B5	RB504	*B2		
C212	*E4	C373	*C5	C664	*D1	CL103	*F4	CL193	*G4	CL337	*C4	CL520	*C2	CL677	*D1	IC166	*F3	IC817	*D6	R140	G5	R275	*D4	R663	*C2	R965	C1	RB505	*B2		
C213	*E5	C374	*D5	C665	*D1	CL104	*F4	CL194	*G4	CL338	*D4	CL521	*C2	CL678	*C2	IC167	*F3	IC818	*B3	R141	*G5	R302	*D4	R664	*C1	R966	B6	RB600	*E2		
C214	*E4	C400	A5	C666	*D2	CL105	*F4	CL195	*G4	CL339	*D3	CL522	*C2	CL679	*D1	IC168	*F3	IC819	*C3	R142	*F5	R303	*D4	R665	*D1	R967	*A6	RB601	*E2		
C215	*E5	C401	A5	C667	*D2	CL106	*F4	CL196	*G4	CL350	*D4	CL523	*C2	CL680	*D1	IC200	*E4	IC820	*C3	R150	*G6	R304	*D4	R666	*C2	R968	*A6	RB602	*E2		
C216	*E4	C402	*C4	C668	*D2	CL107	*F4	CL197	*G4	CL351	*D4	CL524	*C2	CL681	*D1	IC201	*A3	IC821	*F5	R151	G5	R305	*D4	R667	*C2	R969	*A6	RB650	*E1		
C217	*E4	C403	A5	C669	*C1	CL108	*F4	CL198	*G5	CL352	*C5	CL525	*C2	CL700	*G2	IC202	*A3	IC822	E1	R152	*E5	R306	*D4	R668	*E1	R970	*A6	RB651	*E1		
C218	E4	C404	*B3	C670	*D1	CL109	*F4	CL199	*G5	CL353	*C4	CL526	*B2	CL800	*B5	IC203	D4	IC823	F3	R153	*F5	R307	*D4	R669	*D1	R971	*A6	RB652	*E1		
C219	*E5	C405	*A4	C671	*D2	CL110	*F4	CL200	*G5	CL354	*C4	CL527	*B2	CL802	*B6	IC204	D4	IC824	*F3	R154	*F5	R308	*D4	R670	*D1	R972	*A6	RB800	*E5		
C220	*E4	C406	*A4	C700	*F2	CL111	*F4	CL201	*G5	CL355	*C5	CL528	*B2	CL803	*D5	IC205	*E4	IC825	*F3	R155	E5	R309	*D4	R671	*C2	R973	*B5	RB801	*E5		
C221	*E5	C407	B4	C701	*E1	CL112	*F5	CL202	*G5	CL356	*C5	CL529	*B2	CL960	*D6	IC206	D4	IC826	*D5	R156	E5	R310	*C4	R700	F1	R974	*B5	RB802	*E6		
C222	*E4	C408	*B4	C702	E2	CL113	*F5	CL203	*G5	CL357	*C5	CL530	*B2	CL961	*D6	IC207	*D4	IC827	*E5	R157	*F5	R311	*C4	R701	F1	R975	F4	RB803	*E6		
C223	*E5	C409	*A4	C703	*F2	CL114	*F5	CL204	*G5	CL358	*C4	CL531	*B2	CL962	*D6	IC208	D3	IC828	D5	R158	E5	R350	*D5	R702	*F2	R976	C3	RB804	E5		
C224	*E4	C410	*B4	C704	*E2	CL115	*F5	CL205	*G4	CL359	*C5	CL532	*C2	CL963	*E6	IC209	E4	IC829	F1	R159	E5	R351	*D5	R703	*F2	R977	*C1	RB805	E5		
C225	*E5	C411	*B4	C705	F2	CL116	*F5	CL206	*G4	CL360	*C5	CL533	*C2	CL964	*E6	IC210	*E3	IC830	*E3	R160	*F4	R352	*D5	R704	*F2	R978	*C1	RB806	*E6		
C226	*D4	C412	*B4	C706	F2	CL117	*F5	CL207	*F4	CL361	*C5	CL534	*B2	CL965	*E6	IC211	E5	IC900	A6	R161	*F4	R353	*D5	R705	*E2	R979	F4	RB807	*B6		
C227	*D4	C413	*B4	C707	*F1	CL118	*F5	CL208	*F4	CL362	*C5	CL535	*B2	CL966	*E6	IC212	E4	IC901	*A5	R162	*F5	R354	*D5	R707	F2	R980	C3	RB808	*B6		
C228	*D4	C414	*B4	C708	F2	CL119	*F5	CL209	*F4	CL363	*C4	CL536	*B2	CL967	*E6	IC213	E5	IC902	*B5	R163	*F4	R355	*D5	R708	F2	R981	*C1	RB809	B5		
C229	*D5	C415	*B4	C709	*F1	CL120	*F5	CL210	*F4	CL364	*C5	CL537	*C2	CL968	*E6	IC214	E5	IC903	A6	R165	*F5	R356	*D5	R709	F2	R982	*C1	RB810	B6		
C230	E5	C416	*B4	C710	*F2	CL121	*F5	CL211	*F4	CL365	*C5	CL538	*C2	CL969	*E6	IC215	B6	IC904	A5	R166	G3	R357	*D5	R710	F2	R983	*B5	RB811	B5		
C231	*D4	C417	*B4	C711	F2	CL122	*F5	CL212	*F4	CL366	*C5	CL539	*B2	CL970	*E6	IC217	*D3	IC905	A6	R167	G3	R358	*C5	R800	*D6	R984	*B5	RB812	B5		
C232	D5	C418	*B4	C712	F2	CL123	*F5	CL230	*E4	CL367	*C5	CL540	*B2	CL971	*E6	IC218	E4	IC930	*F3	R200	D4	R359	*C5	R801	B5	R985	*C1	RB813	A6		
C233	E5	C419	*A4	C713	*F3	CL124	*F5	CL231	*E5	CL368	*C5	CL541	*B2	CL972	*E6	IC219	E4	IC931	F1	R201	D4	R400	*B3	R802	B6	R986	*C1	RB814	A6		
C234	D4	C420	*B4	C714	E3	CL125	*F4	CL232	*E5	CL369	*C4	CL542	*B2	CL973	*F6	IC220	E4	IC932	C6	R202	D4	R401	*B3	R803	*E5	R987	*C1	RB815	B5		
C235	D4	C421	A5	C715	F2	CL126	*F4	CL233	*E4	CL370	*C5	CL543	*C2	CL974	*F6	IC221	*C6	IC933	*C5	R203	*E3	R402	*B3	R806	*C5	R988	*C1	RB816	B5		
C236	E4	C422	A5	C716	F2	CL127	*F4	CL234	*E4	CL371	*C5	CL544	*C2	CL975	*F6	IC222	D4	IC934	B5	R204	*E3	R403	*C4	R807	*C5	R989	*C1	RB817	B5		
C237	E4	C423	A5	C800	*D5	CL128	*F4	CL235	*E4	CL372	*C4	CL545	*C2	CL976	*F6	IC223	D4	IC935	*C1	R205	D4	R404	A5	R808	*B3	R990	*C1	RB818	C3		
C238	*B6	C424	A5	C801	B6	CL129	*F4	CL236	*E4	CL373	*D5	CL546	*C2	CL977	*A3	IC224	E5	IC936	E4	R206	D4	R405	A5	R809	*B3	R991	G3	RB819	C3		
C239	*D3	C425	A5	C802	B5	CL130	*F4	CL237	*E4	CL374	*D5	CL547	*C2	CL978	*A3	IC225	*E6	IC937	*E3	R207	E4	R406	*C4	R810	*A5	R992	G3	RB820	A4		
C240	E4	C426	A5	C803	*E6	CL131	*F4	CL238	*E4	CL375	*D5	CL548	*C2	CL979	*D6	IC226	E6	IC938	F1	R208	*A3	R407	*A4	R811	*A5	R993	*C3	RB821	A4		
C241	E4	C500	*B3	C804	D5	CL132	*F4	CL239	*E4	CL376	*D5	CL549	*C2	CL980	*D6	IC227	E5	IC939	*C2	R209	*A3	R408	*A4	R812	F2	R994	*C3	RB822	F2		
C242	E4	C501	*A2	C805	*E5	CL133	*F4	CL240	*E4	CL377	*D4	CL550	*C2	CL981	*D6	IC228	D6	IC940	*E3	R210	E4	R409	*A4	R813	F2	R995	B5	RB823	F2		
C243	E4	C502	*A2	C806	*A4	CL134	*F4	CL241	*E4	CL378	*D4	CL600	*C2	CL982	*D6	IC229	B6	IC950	F1	R211	E3	R410	B4	R814	E5	R996	B5	RB824	F4		
C244	E4	C503	*B2	C807	*B3	CL135	*F4	CL242	*E4	CL379	*D5	CL601	*D3			IC230	*B6	IC960	A6	R212	D3	R411	*B4	R815	E5	R997	A6	RB825	E4		
C245	E5	C504	*B2	C808	F2	CL136	*F4	CL243	*E4	CL380	*D5	CL602	*D3	CN101	E4	IC231	B6	IC961	C1	R213	D4	R412	*B5	R818	*B3	R998	A6	RB826	F1		
C246	E4	C505	*A2	C809	E5	CL137	*G4	CL244	*E4	CL381	*D4	CL603	*D2	CN102	A4	IC232	*B6	IC962	*C1	R214	*D4	R413	*B5	R819	*A5			RB827	F1		
C247	*E5	C506	*B1	C810	F1	CL138	*G4	CL245	*E4	CL382	*D4	CL604	*D2	CN103	E6	IC233	E5	IC963	G3	R215	D3	R414	*A4	R820	F2	RB100	*G5	RB828	E3		
C248	D4	C507	*C2	C811	F3	CL139	*G4	CL246	*E4	CL383	*D5	CL605	*D2	CN104	G2	IC234	D4	IC964	*C3	R216	*D3	R415	A5	R821	E4	RB101	*F5	RB829	E3		
C249	*C6	C508	*C3	C812	*C3	CL140	*G4	CL247	*E4	CL384	*D5	CL606	*D2	CN500	*B1	IC300	C4	IC965	B5	R217	D3	R438	*B5	R822	*B3	RB102	*F5	RB830	F2		
C250	*D5	C509	*C2	C813	*B3	CL141	*G4	CL248	*E4	CL385	*C5	CL607	*D2			IC301	B4	IC966	A6	R218	D3	R439	*B5	R823	*A5	RB103	*F5	RB831	F2		
C251	E4	C510	*B2	C814	*D5	CL142	*F4	CL249	*E4	CL386	*C5	CL608	*D2	E960	D5	IC302	D5	IC967	*C1	R219	D3	R440	*A5	R824	F2	RB104	*F5	RB832	F3		
C300	D5	C511	*B2	C815	*F5	CL143	*F4	CL250	*E4	CL387	*C5	CL609	*D2	E961	*E1	IC303	*D4			R220	E5	R441	*A5	R825	E4	RB105	*F5	RB833	F3		
C301	*D4	C512	*B2	C816	F1	CL144	*F5	CL251	*E4	CL388	*D5	CL610	*D2	E962	C1	IC304	E3	Q101	*F5	R221	*E4	R442	*B3	R826	F3	RB120	*G6	RB900	C6		

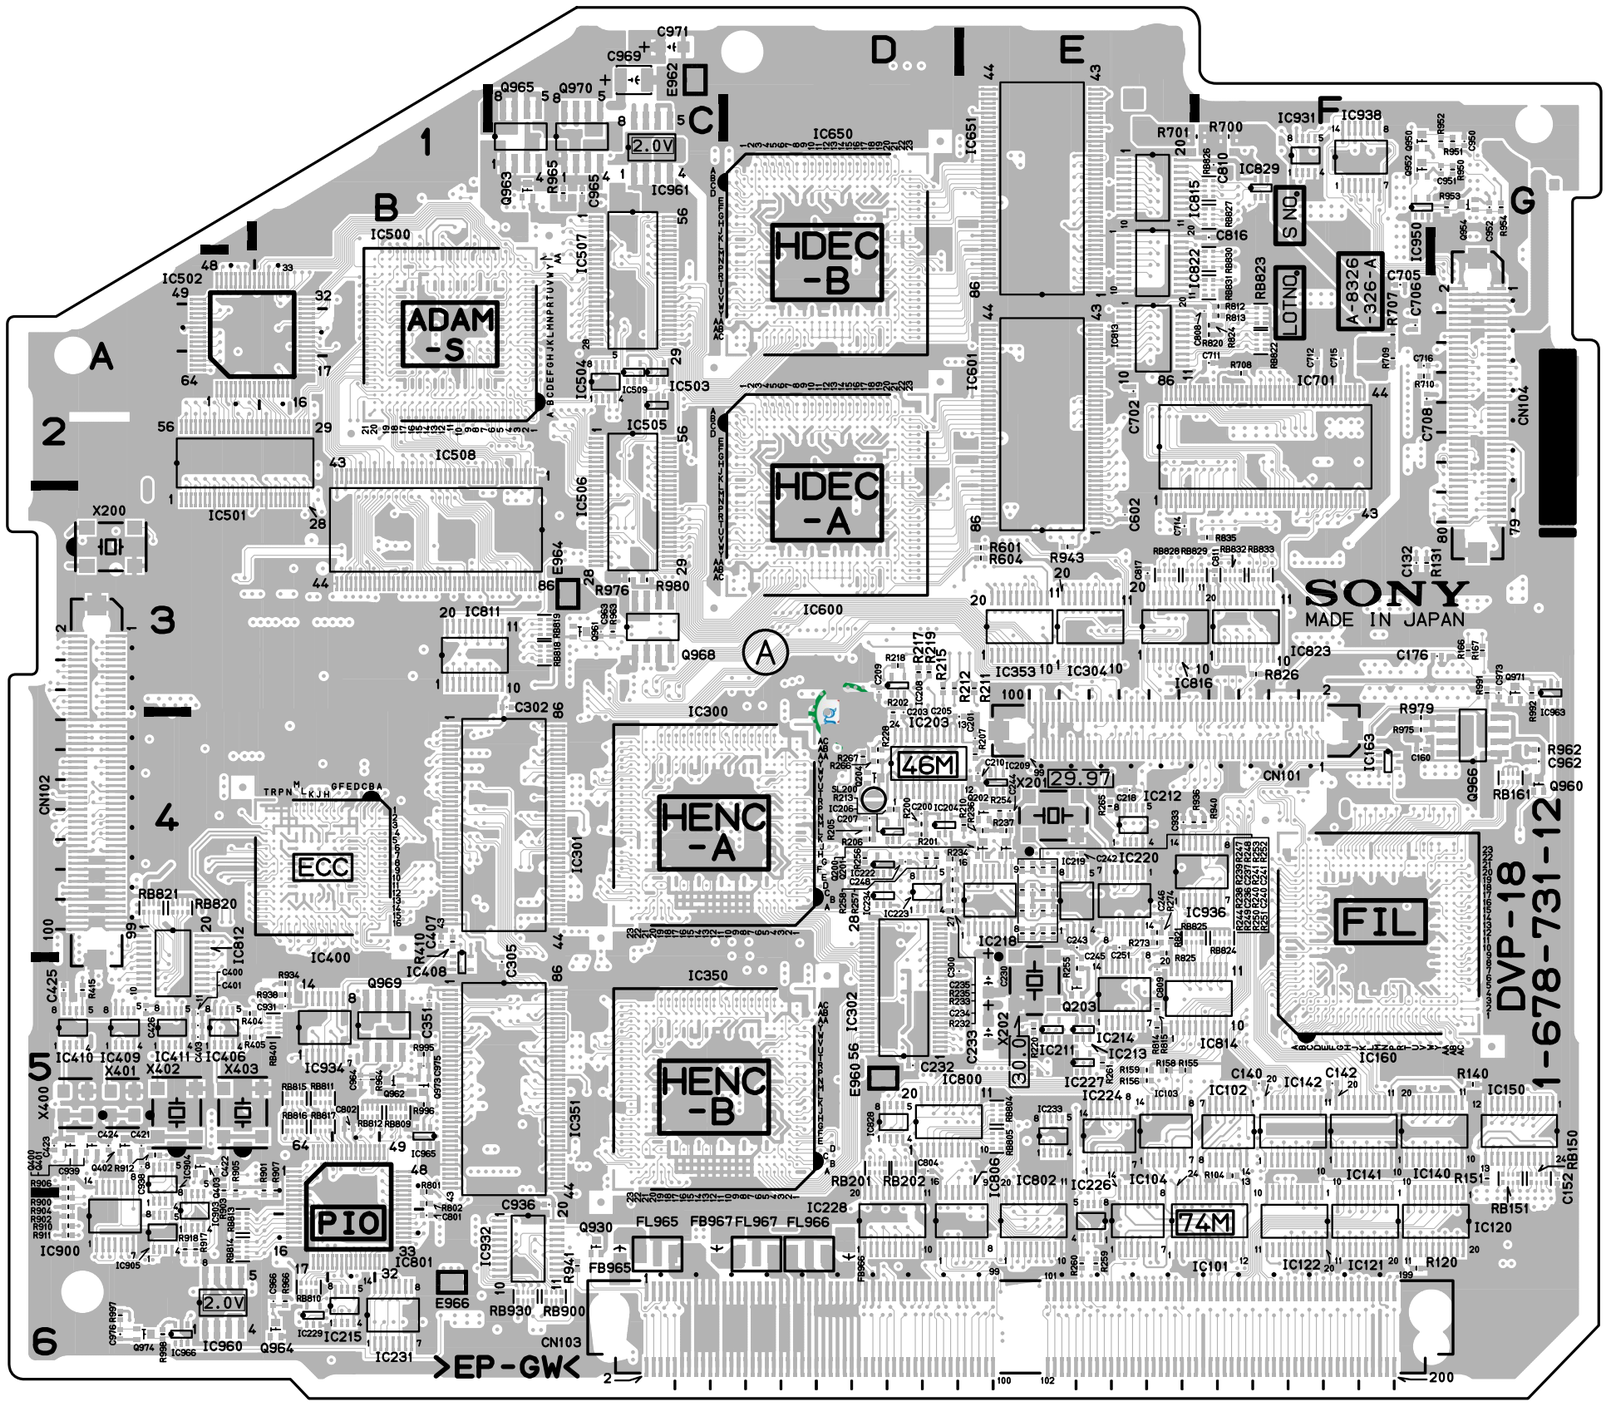

Components location list ; previous page

DVP-18 -A SIDE-
SUFFIX: -12

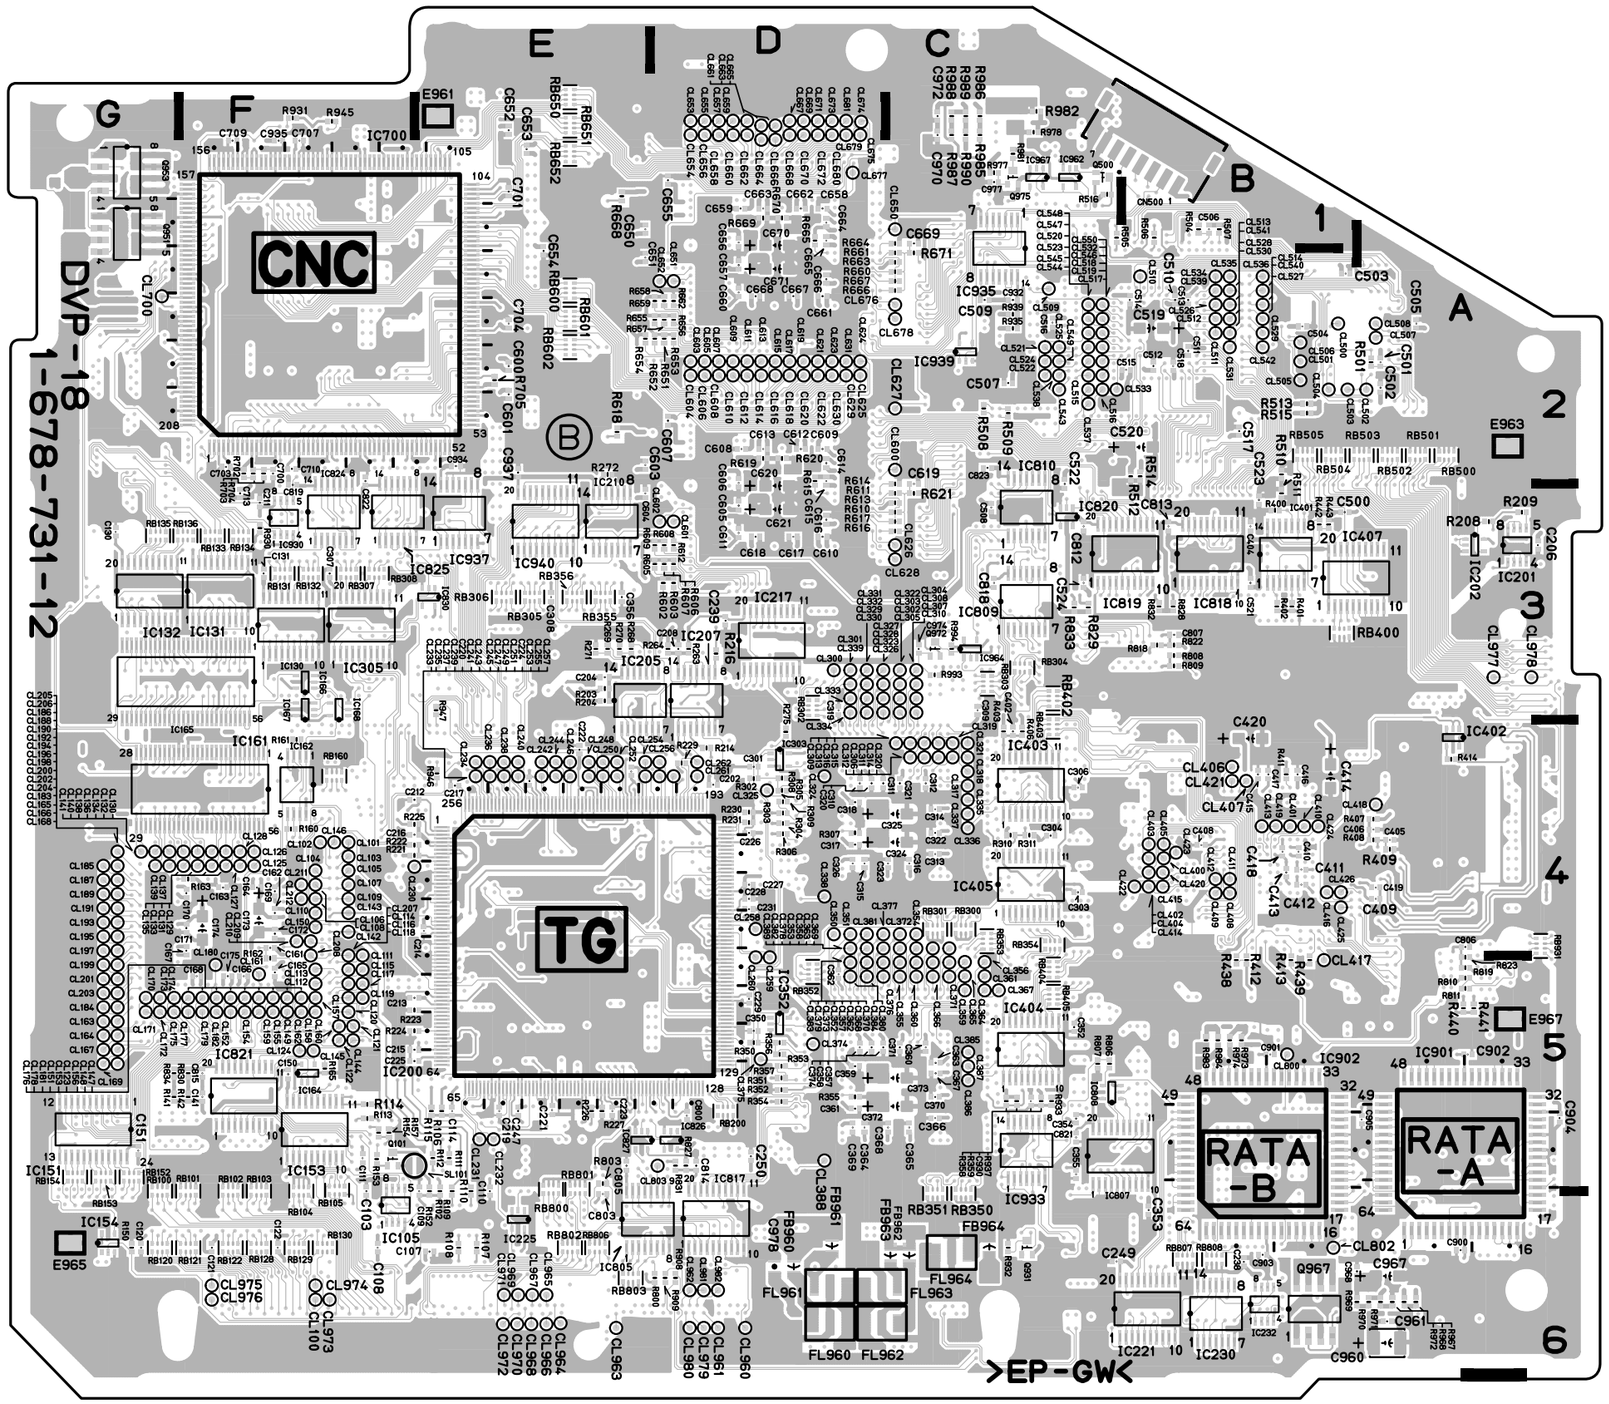

DVP-18 -B SIDE-
SUFFIX: -12

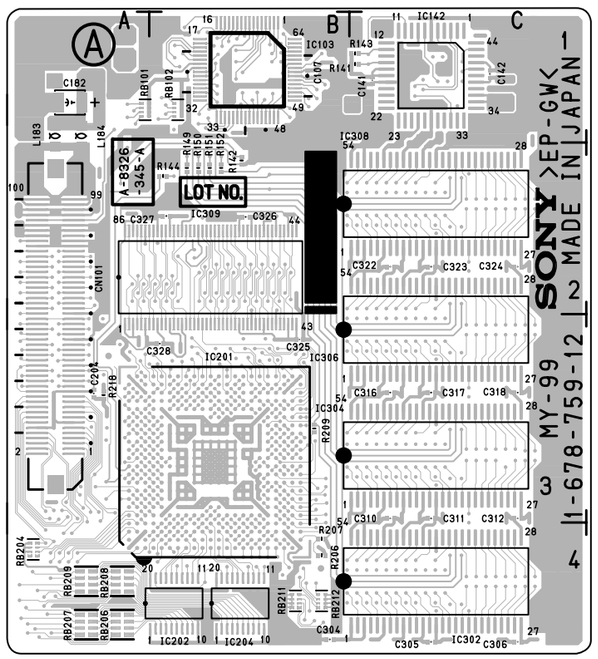

MY-99 -A SIDE-

SUFFIX: -12

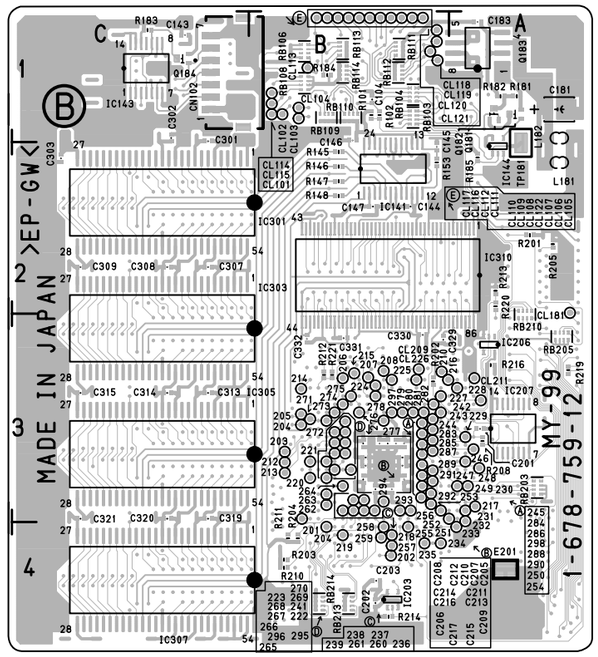

MY-99 -B SIDE-

SUFFIX: -12

MY-99 (1-678-759-12)
---

*:B SIDE

C104	*B1	C311	C3	IC301	*C2	R184	*B1	RB208	A4
C107	B1	C312	C3	IC302	C4	R185	*A2	RB209	A4
C141	C1	C313	*C3	IC303	*C3	R201	*A2	RB210	*A3
C142	C1	C314	*C3	IC304	C3	R202	*B3	RB211	B4
C143	*C1	C315	*C3	IC305	*C3	R203	*B4	RB212	B4
C144	*B2	C316	C3	IC306	C3	R204	*B4	RB213	*B4
C145	*B2	C317	C3	IC307	*C4	R205	*A2	RB214	*B4
C146	*B1	C318	C3	IC308	C2	R206	B4		
C147	*B2	C319	*C3	IC309	A3	R207	B4	TP181	*A2
C181	*A1	C320	*C3	IC310	*A2	R208	*A3		
C182	A1	C321	*C3			R209	B3		
C183	*A1	C322	C2	L181	*A2	R210	*B4		
C201	*A3	C323	C2	L182	*A1	R211	*B4		
C202	*B4	C324	C2	L183	A1	R212	*B3		
C203	*B4	C325	B3	L184	A1	R213	*A2		
C204	A3	C326	B2			R214	*B4		
C205	*B3	C327	B2	Q181	*A1	R216	*A3		
C206	*B3	C328	B3	Q182	*A1	R218	A3		
C207	*B3	C329	*B3	Q183	*A1	R219	*A3		
C208	*B3	C330	*B3	Q184	*C1	R220	*A2		
C209	*B3	C331	*B3			R221	*B3		
C210	*B3	C332	*B3	R101	*B1				
C211	*B3			R102	*B1	RB101	A1		
C212	*B3	CN101	A3	R141	C1	RB102	B1		
C213	*B3	CN102	*C1	R142	B2	RB103	*B1		
C214	*B3			R143	C1	RB104	*B1		
C215	*B3	E201	*A4	R144	B2	RB106	*B1		
C216	*B3			R145	*B2	RB108	*B1		
C217	*B3	IC103	B1	R146	*B2	RB109	*B1		
C301	*C1	IC141	*B2	R147	*B2	RB110	*B1		
C302	*C1	IC142	C1	R148	*B2	RB111	*B1		
C303	*C2	IC143	*C1	R149	B2	RB112	*B1		
C304	B4	IC144	*A2	R150	B2	RB113	*B1		
C305	C4	IC201	B3	R151	B2	RB114	*B1		
C306	C4	IC202	B4	R152	B2	RB203	*A3		
C307	*C2	IC203	*B4	R153	*B2	RB204	A4		
C308	*C2	IC204	B4	R181	*A1	RB205	*A3		
C309	*C2	IC206	*A3	R182	*A1	RB206	A4		
C310	C3	IC207	*A3	R183	*C1	RB207	A4		

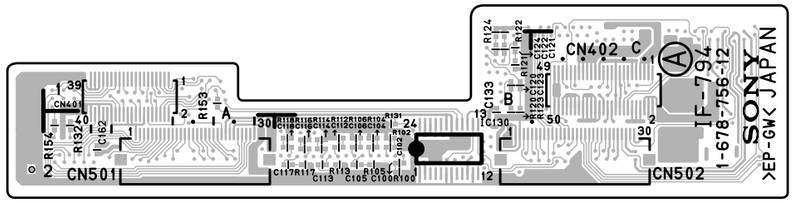

IF-794 -A SIDE-
SUFFIX: -12

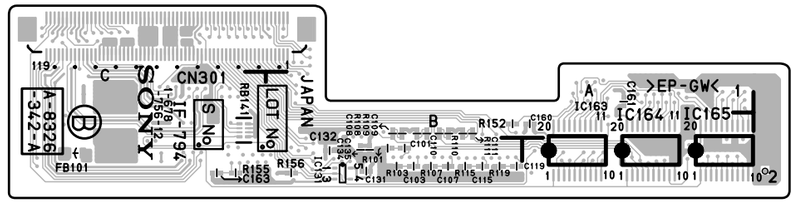

IF-794 -B SIDE-
SUFFIX: -12

IF-794 (1-678-756-12)
---

*:B SIDE

C100	B2	C123	B1	IC164	*A2	R120	B2
C101	*B2	C124	B1	IC165	*A2	R121	B1
C102	B2	C131	*B2			R122	B1
C103	*B2	C132	*B2	R100	B2	R123	B2
C104	B2	C133	B2	R101	*B2	R124	B1
C105	B2	C134	*B2	R102	B2	R131	B2
C106	B2	C135	*B2	R103	*B2	R132	A2
C107	*B2	C160	*A2	R104	B2	R152	*B2
C108	*B2	C161	*A1	R105	B2	R153	A1
C109	*B2	C162	A2	R106	B2	R154	A2
C110	*B2	C163	*C2	R107	*B2	R155	*C2
C111	*B2			R108	*B2	R156	*B2
C112	B2	CN301	*C1	R109	*B2		
C113	B2	CN401	A1	R110	*B2	RB141	*C2
C114	B2	CN402	C1	R111	*B2		
C115	*B2	CN501	A2	R112	B2		
C116	B2	CN502	C2	R113	B2		
C117	B2			R114	B2		
C118	B2	FB101	*C2	R115	*B2		
C119	*B2			R116	B2		
C120	B1	IC130	B2	R117	B2		
C121	B1	IC131	*B2	R118	B2		
C122	B1	IC163	*A2	R119	*B2		

HN-277 (1-678-757-11)

CN112	A2
CN201	B1
CN203	B1

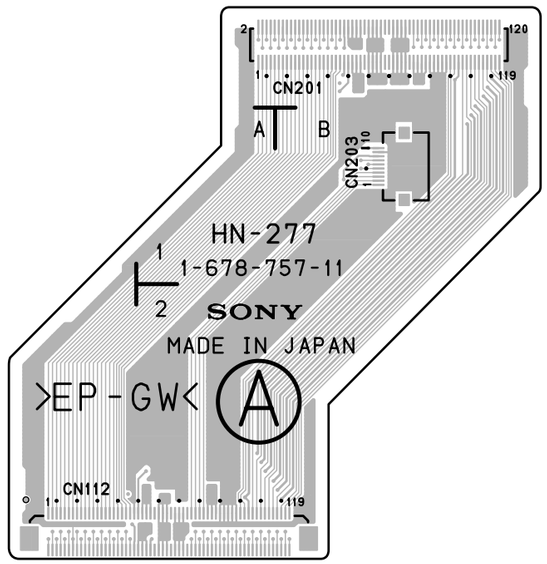

HN-277 -A SIDE-
SUFFIX: -11

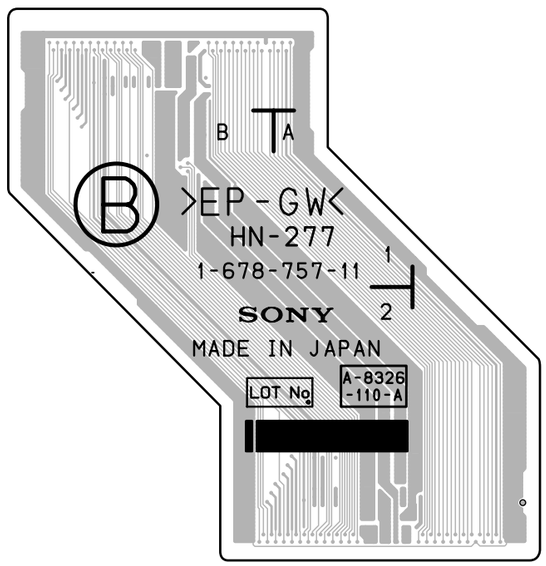

HN-277 -B SIDE-
SUFFIX: -11

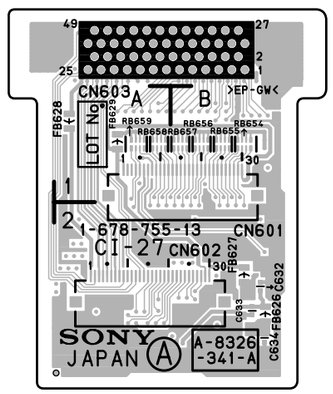

CI-27 -A SIDE-
SUFFIX: -13

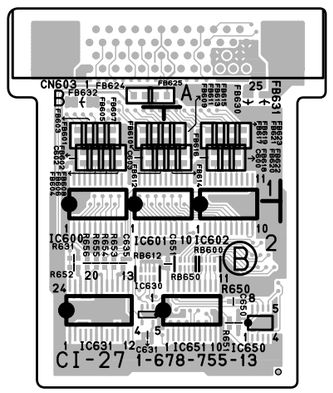

CI-27 -B SIDE-
SUFFIX: -13

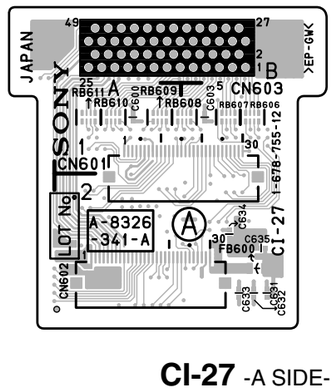

CI-27 -A SIDE-
SUFFIX: -12

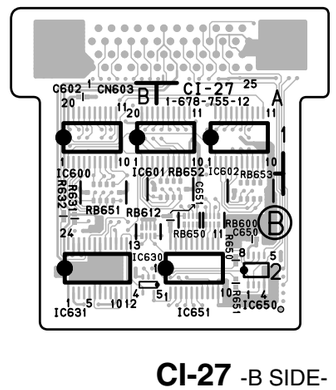

CI-27 -B SIDE-
SUFFIX: -12

CI-27 (1-678-755-13)
---

*:B SIDE

C600	*A1	FB608	*B1	FB630	*A1	RB612	*B2
C602	*B1	FB609	*B1	FB631	*A1	RB650	*A2
C603	*B1	FB610	*B1	FB632	*B1	RB654	B1
C631	*B2	FB611	*B1			RB655	B1
C632	B2	FB612	*B1	IC600	*B2	RB656	B1
C633	B2	FB613	*A1	IC601	*B2	RB657	B1
C634	B2	FB614	*A1	IC602	*A2	RB658	A1
C635	*B2	FB615	*A1	IC630	*B2	RB659	A1
C650	*A2	FB616	*A1	IC631	*B2		
C651	*A2	FB617	*A1	IC650	*A2		
		FB618	*A1	IC651	*A2		
CN601	B1	FB619	*A1				
CN602	A2	FB620	*A1	R631	*B2		
CN603	*A1	FB621	*A1	R650	*A2		
		FB622	*A1	R651	*A2		
FB601	*B1	FB623	*A1	R652	*B2		
FB602	*B1	FB624	*B1	R653	*B2		
FB603	*B1	FB625	*B1	R654	*B2		
FB604	*B1	FB626	B2	R655	*B2		
FB605	*B1	FB627	B2	R656	*B2		
FB606	*B1	FB628	A1				
FB607	*B1	FB629	A1	RB600	*A2		

CI-27 (1-678-755-12)
---

*:B SIDE

C600	A1	IC650	*A2
C602	*B1	IC651	*A2
C603	B1		
C631	B2	R631	*B2
C632	B2	R632	*B2
C633	B2	R650	*A2
C634	B2	R651	*A2
C635	B2		
C650	*A2	RB600	*A2
C651	*A2	RB606	B1
		RB607	B1
CN601	B2	RB608	B1
CN602	A2	RB609	A1
CN603	*A1	RB610	A1
		RB611	A1
FB600	B2	RB612	*B2
		RB650	*A2
IC600	*B1	RB651	*B2
IC601	*B1	RB652	*A2
IC602	*A1	RB653	*A2
IC630	*B2		
IC631	*B2		

http://getMANUAL.com

CCM-45 (1-678-743-13)
---

*:B SIDE

C101	*A4	L103	A2
C102	*A3	L104	A2
C103	*A3	L105	*B2
C104	*A3	L106	*B4
C105	*B3	L107	*B2
C106	*A3	L108	*B4
C107	*A2	L109	B2
C108	*B2		
C109	*B2	Q101	*B2
C110	*B2	Q102	B4
C117	*B3	Q103	*B3
C118	*B2	Q104	B4
C119	B3	Q106	*B4
C120	B3		
C121	A2	R101	*A3
C122	A3	R102	*A3
C123	B2	R103	*A3
C125	A2	R104	*B2
C126	A2	R105	*B2
C127	A2	R106	A3
C128	A2	R107	B3
C129	A1	R108	B3
C130	B2	R109	B4
C131	B3	R110	A2
C132	A1	R111	A4
C133	A2	R113	A4
C134	A2	R114	*B3
		R115	*B4
CL101	B3	R116	*B2
CL102	A4	R117	*B4
CL103	B2	R119	A2
CL104	B2	R120	*B2
CL105	A4	R121	B2
CL106	A3	R122	*B3
CL107	B3	R123	*B2
CL108	B3	R124	*B2
CL109	A3	R125	B1
		R126	A4
CN1	A3		
CN2	A4	RB101	A3

IC101	*A3	TP101	A2
IC102	B3	TP102	A2
		TP103	A4
L101	*B3		
L102	*B2	X101	*A4

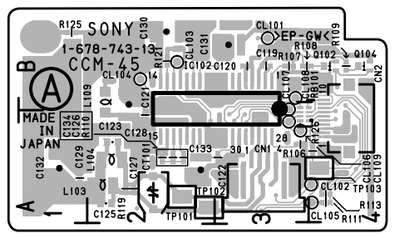

CCM-45 -A SIDE-
SUFFIX: -13

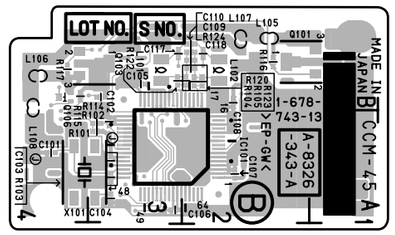

CCM-45 -B SIDE-
SUFFIX: -13

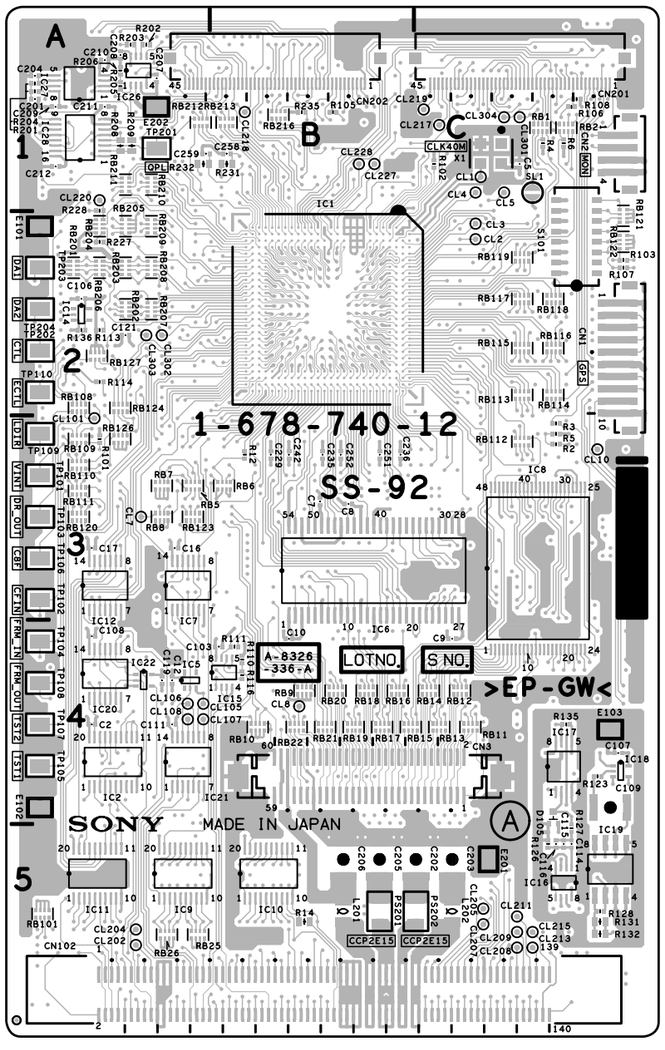

Components previous list ; previous page

SS-92 -A SIDE-
SUFFIX: -12

SS-92 (1-678-740-12)
---

*:B SIDE

C1	*C1	C245	*B1	E103	C4
C2	A4	C246	*B1	E201	C5
C3	*A4	C247	*C2	E202	A1
C4	*C1	C248	*C2		
C5	C1	C249	*C2	IC1	B2
C6	*C1	C250	*C2	IC2	A4
C7	B3	C251	B3	IC3	*A4
C8	B3	C252	B3	IC4	*C2
C9	C4	C253	*A2	IC5	A4
C10	B4	C254	*A2	IC6	B3
C11	*C3	C257	*C1	IC7	A3
C12	A4	C258	B1	IC8	C4
C13	*A5	C259	A1	IC9	A5
C14	*B5	C260	*A2	IC10	B5
C15	*A5	C261	*A2	IC11	A5
C16	A3	C262	*C1	IC12	A3
C17	A3			IC13	*C4
C18	*C2	CL1	C1	IC14	A2
C19	*C1	CL2	C2	IC15	B4
C20	*B4	CL3	C2	IC16	C5
C21	*C4	CL4	C1	IC17	C4
C22	*B4	CL5	C1	IC18	C4
C23	*B4	CL7	A3	IC19	C5
C101	*C4	CL8	B4	IC20	A4
C102	*C4	CL9	*C2	IC21	A4
C103	B4	CL10	C3	IC22	A4
C104	*C3	CL101	A3	IC23	*A2
C105	*C3	CL102	*B1	IC24	*C1
C106	A2	CL103	*C3	IC25	*C1
C107	C4	CL104	*C3	IC26	A1
C108	A4	CL105	A4	IC27	A1
C109	C4	CL106	A4	IC28	A1
C110	*C5	CL107	A4	IC29	*B1
C111	A4	CL108	A4	IC30	*B1
C112	*C5	CL201	*A5	IC31	*B1
C113	*C5	CL202	A5	IC32	*A3
C114	C5	CL203	*A5	IC33	*B4
C115	C5	CL204	A5		
C116	C5	CL205	C5	L201	B5
C117	*C5	CL206	*C5	L202	C5
C118	*C5	CL207	C5		
C119	A4	CL208	C5	PS201	B5
C120	*C4	CL209	C5	PS202	C5
C121	A2	CL210	*C5		
C122	*C4	CL211	C5	Q1	*C2
C123	*A3	CL212	*C5	Q2	*C2
C201	A1	CL213	C5		
C202	C5	CL214	*C5	R1	*C2
C203	C5	CL215	C5	R2	C3
C204	A1	CL216	*C5	R3	C3
C205	B5	CL217	C1	R4	C1
C206	B5	CL218	B1	R5	C3
C207	A1	CL219	C1	R6	C1
C208	A1	CL220	A1	R7	*A4
C209	A1	CL221	*B1	R8	*C1
C210	A1	CL222	*B1	R9	*C1
C211	A1	CL223	*B1	R10	*C1
C212	A1	CL224	*B1	R11	*C1
C213	*B1	CL225	*B1	R12	B3
C214	*B1	CL226	*B1	R13	*B3
C215	*B1	CL227	B1	R14	B5
C216	*B1	CL228	B1	R15	*C2
C217	*A1	CL301	C1	R16	*C2
C218	*B1	CL302	A2	R17	*C2
C219	*B1	CL303	A2	R18	*A3
C220	*B1	CL304	C1	R25	*B3
C221	*C1			R26	*B3
C222	*B1	CN1	C2	R101	A3
C223	*B1	CN2	C1	R102	C1
C224	*A2	CN3	B4	R103	C2
C225	*B1	CN102	B5	R104	*A4
C226	*A2	CN201	C1	R105	B1
C227	*A2	CN202	B1	R106	C1
C228	*B1			R107	C2
C229	B3	D1	*C1	R108	C1
C230	*B1	D101	*C5	R110	B4
C231	*B1	D102	*C5	R111	B4
C232	*C2	D103	*C5	R112	*C3
C233	*C2	D104	*C5	R113	A2
C234	*C2	D105	C4	R114	A2
C235	B3	D106	*C4	R115	*C3
C236	B3	D201	*C1	R116	B4
C237	*A2	D202	*B1	R117	*C5
C238	*A2	D203	*B1	R118	*C5
C239	*A2	D204	*B1	R119	*C4
C240	*A3	D205	*C1	R120	*C5
C241	*B3	D206	*B1	R121	*C5
C242	B3			R122	*C4
C243	*A1	E101	A2	R123	C4
C244	*B1	E102	A4	R124	*C5

R125	*C5	RB108	A2
R126	C5	RB109	A3
R127	C5	RB110	A3
R128	C5	RB111	A3
R129	*C4	RB112	C3
R130	*C4	RB113	C2
R131	C5	RB114	C2
R132	C5	RB115	C2
R133	*C4	RB116	C2
R134	*C4	RB117	C2
R135	C4	RB118	C2
R136	A2	RB119	C2
R137	*C3	RB120	A3
R201	A1	RB121	C2
R202	A1	RB122	C2
R203	A1	RB123	A3
R204	A1	RB124	A2
R205	A1	RB125	*A4
R206	A1	RB126	A3
R207	*A1	RB127	A2
R208	A1	RB201	A2
R209	A1	RB202	A2
R210	*A1	RB203	A2
R211	*A1	RB204	A2
R212	*A1	RB205	A2
R213	*A1	RB206	A2
R214	*A1	RB207	A2
R215	*A1	RB208	A2
R216	*B1	RB209	A2
R217	*B1	RB210	A1
R218	*B1	RB211	A1
R219	*A1	RB212	A1
R220	*B1	RB213	B1
R221	*B1	RB214	*C1
R222	*B1	RB215	*C1
R223	*C1	RB216	B1
R224	*B1		
R225	*B1	S101	C2
R226	*B1		
R227	A2	SL1	C1
R228	A1		
R229	*A2	TP101	A3
R230	*A2	TP102	A3
R231	B1	TP103	A3
R232	A1	TP104	A4
R233	*A2	TP105	A4
R234	*A2	TP106	A3
R235	B1	TP107	A4
R236	*A1	TP108	A4
R237	*A1	TP109	A3
R238	*A1	TP110	A2
R239	*A1	TP201	A1
		TP202	A2
RB1	C1	TP203	A2
RB2	C1	TP204	A2
RB3	*C2		
RB4	*A4	X1	C1
RB5	A3		
RB6	B3		
RB7	A3		
RB8	A3		
RB9	B4		
RB10	B4		
RB11	C4		
RB12	C4		
RB13	C4		
RB14	C4		
RB15	B4		
RB16	B4		
RB17	B4		
RB18	B4		
RB19	B4		
RB20	B4		
RB21	B4		
RB22	B4		
RB23	*A5		
RB24	*A5		
RB25	A5		
RB26	A5		
RB27	*A5		
RB28	*A5		
RB29	*B5		
RB30	*B5		
RB101	A5		
RB102	*C2		
RB103	*C2		
RB104	*C2		
RB105	*C2		
RB106	*C2		
RB107	*C2		

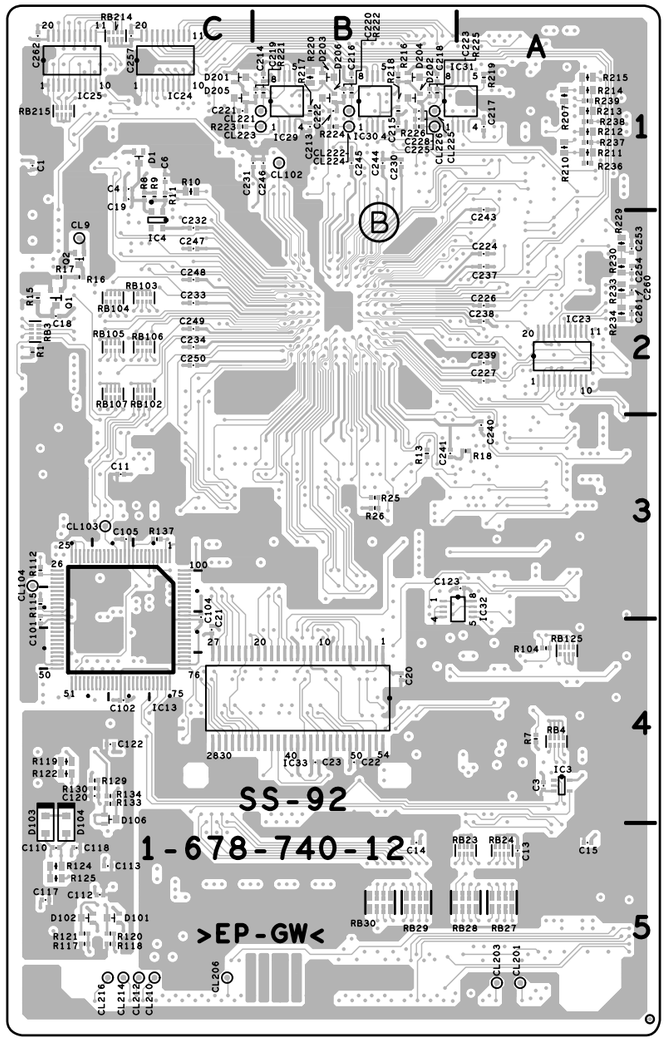

SS-92 -B SIDE-
SUFFIX: -12

MDC-13 (1-678-737-13)
---

*:B SIDE

C101	E2	C619	C5	CN201	G1	PH305	*F2	R201	F3	R415	G4	R682	C2
C102	E2	C620	C5	CN202	F1	PH306	*F5	R202	F3	R416	G3	R683	D6
C103	E2	C621	*C6	CN501	*A6	PH307	*H4	R203	F2	R417	G3	R684	D6
C104	E2	C622	C5	CN502	B5			R204	F2	R501	B2	R685	D1
C105	E2	C623	D6	CN503	D3	Q101	E2	R205	C5	R502	B2	R686	C2
C106	E2	C624	C6	CN504	D1	Q102	C2	R206	C5	R503	G1	R687	B2
C107	E2	C625	D5	CN505	*A2	Q103	D3	R207	D5	R504	F1	R688	D1
C108	E2	C626	D5	CN506	*C6	Q104	D3	R208	D5	R505	G1	R689	D6
C109	C2	C627	*D6	CN507	*A2	Q105	D3	R209	D5	R506	G1	R690	D1
C110	D2	C628	E6	CN508	*C6	Q106	D4	R212	C5	R507	B2	R691	A2
C111	D2	C629	D6	CN509	*C1	Q107	D4	R213	C4	R601	E5	R692	E5
C112	D2	C630	E6	CN510	*A2	Q301	E5	R214	E2	R602	E5	R693	B2
C113	C2	C631	D6	CN511	*G1	Q302	E5	R215	E2	R603	H3	R694	E5
C114	D3	C632	E6	CN512	*D3	Q303	E5	R216	E2	R604	E5	R695	D1
C115	D2	C633	E6	CN901	*E6	Q304	E5	R217	E2	R605	G3	R696	D1
C116	D3	C634	E6	CN902	*B6	Q305	F5	R218	E2	R606	E5	R697	D1
C117	D3	C635	E6	CN903	*B6	Q306	F2	R219	E2	R607	G2	R698	F5
C118	D3	C637	C1			Q307	H4	R220	E3	R608	G2	R699	F5
C119	D3	C638	C1	D101	C2	Q401	G5	R221	E2	R609	E6	R700	C1
C120	D3	C639	C1	D102	D2	Q402	C2	R222	F2	R610	E6	R701	E1
C121	D3	C640	D5	D103	D3	Q403	D2	R223	E3	R611	E5	R702	G1
C122	D3	C641	D5	D401	E1	Q404	F4	R224	E2	R612	H3	R703	G1
C123	C2	C642	C1	D402	*C2	Q405	D2	R225	E3	R613	E5	R704	E6
C124	E2	C643	C1	D403	*C2	Q406	G4	R226	E3	R614	E5	R705	D5
C201	C5	C644	D6	D404	*C2	Q407	C2	R227	E2	R615	G3	R706	D6
C202	F3	C645	D6	D601	G3	Q408	G4	R228	F2	R616	E5	R707	E6
C203	F2	C646	D1	D602	E6	Q409	H1	R229	F2	R617	E5	R708	D6
C204	F3	C647	D1	D604	E1	Q410	H1	R232	F2	R618	H3	R709	D1
C205	F2	C648	D1	D605	E1	Q501	A2	R233	F2	R619	D6	R710	D1
C206	C5	C649	D1			Q502	A2	R234	F3	R620	E5	R711	D5
C207	C4	C650	D6	E201	G1	Q503	B2	R235	F3	R621	D5	R712	C2
C208	C5	C651	D1	E301	F1	Q601	E5	R236	F2	R622	D6	R713	C2
C209	E2	C652	D6	E501	C5	Q602	E5	R237	F2	R623	E6	R714	C2
C210	E2	C653	C2	E502	C4	Q603	D5	R238	F2	R624	D5	R715	D5
C211	E2	C654	D1	E601	E5	Q604	H3	R239	F3	R625	E4	R716	D5
C212	E2	C655	C2			Q605	E4	R240	F2	R626	E4		
C213	E2	C656	C2	IC101	E2	Q606	E6	R241	F2	R627	E6	RB201	F2
C214	E2	C657	D1	IC102	D3	Q607	E6	R243	F2	R628	E4	RB301	H2
C215	F2	C658	D1	IC106	C1	Q608	E5	R246	B1	R629	E6	RB302	E5
C216	E3	C659	C2	IC107	E2	Q609	D5	R247	B1	R630	E6	RB401	G2
C217	E2	C660	D6	IC201	C5	Q610	D5	R250	E3	R631	E6	RB402	D2
C218	E2	C661	D1	IC202	E3	Q611	E6	R251	E2	R632	E6	RB501	F1
C219	F2	C662	D6	IC203	F3	Q612	E6	R301	E6	R633	C5	RB502	G1
C220	F2	C663	D5	IC204	F3	Q613	E6	R302	E5	R634	D5	RB503	G2
C221	F2	C664	B2	IC205	F2	Q614	E6	R307	G2	R635	D5		
C222	B1	C665	D1	IC206	B2	Q615	D1	R308	G2	R636	D5	RV401	*C2
C223	F1	C666	D1	IC301	F2	Q616	D1	R309	G2	R637	E6	RV602	*D6
C224	B2	C667	C2	IC302	D4	Q617	D6	R310	G2	R638	E6	RV603	*D6
C225	B2	C668	C2	IC303	G3	Q618	D6	R311	G2	R639	D6	RV604	*D6
C301	C1	C669	D5	IC304	D4	Q619	C2	R312	G2	R640	D6	RV605	*D6
C302	D3	C670	D5	IC305	H2	Q620	C2	R313	G3	R641	D6		
C303	C6	C671	B2	IC401	G4	Q621	C2	R314	G3	R642	D6	S301	*E3
C304	G2	C672	B2	IC402	F5	Q622	C2	R315	G2	R643	E6	S302	*F3
C305	G2	C673	E1	IC403	G2	Q623	C2	R316	G2	R644	D6	S303	*E4
C306	F2	C674	D1	IC501	F2	Q624	B2	R317	G3	R645	D6	S304	*E4
C307	D4	C675	F5	IC502	G2	Q625	E1	R318	G2	R646	E6	S305	*E3
C308	D4	C676	E5	IC601	C1	Q626	E4	R319	D4	R647	E6	S308	*E3
C309	D4	C677	E5	IC602	C2	Q627	E1	R320	G3	R648	D6	S401	*C2
C310	D4	C678	D5	IC603	D1	Q628	E1	R321	G2	R649	E6	S402	*C2
C311	H2	C679	D6	IC604	D5			R322	D4	R650	E6	S403	*C2
C401	G5	C680	D6	IC605	E5	R101	C5	R323	D4	R651	E6		
C402	C6	C681	E4	IC606	G3	R102	C5	R324	E2	R652	E6	SL101	E2
C403	F5	C682	C2	IC607	D6	R103	E2	R325	H4	R653	E6	SL102	D2
C404	C6	C683	E5	IC608	E6	R104	E2	R326	H4	R654	E6	SL103	E4
C405	G1	C684	D5	IC609	G3	R105	E2	R327	E5	R656	C1		
C406	C2			IC610	D6	R106	E2	R328	E2	R657	D1	T601	D6
C407	E6	CL1	E3	IC612	D5	R107	E2	R329	H2	R658	C1	T602	B2
C501	B2	CL2	E3	IC613	E5	R108	E3	R330	H2	R659	D6		
C502	D4	CL3	E3	IC614	C1	R109	E3	R331	G2	R660	D6	TP101	G1
C503	F5	CL301	H1	IC616	D1	R110	E2	R332	G3	R661	D6	TP102	H1
C504	F5	CL302	H1	IC617	D1	R111	E2	R333	G2	R662	C1	TP201	F1
C507	A2	CL303	G1			R112	E2	R334	G2	R663	D6	TP202	F1
C508	F1	CL304	G1	L101	D2	R113	E2	R335	E2	R664	D1	TP203	G1
C509	G2	CL305	F2	L102	D2	R114	E2	R336	E2	R665	D6	TP204	G1
C602	F5	CL306	F2	L401	F5	R115	C2	R337	E5	R666	D6	TP301	F1
C604	G3	CL307	G2	L402	C6	R116	D2	R338	H4	R667	C2	TP302	H1
C605	G2	CL308	G1	L403	C6	R117	C2	R401	F4	R668	C2	TP601	E5
C606	G2	CL501	D4	L501	D4	R118	C2	R402	G5	R669	D1	TP602	D6
C607	E6	CL502	E5	L502	E5	R119	C2	R403	G5	R670	C2	TP603	D6
C608	E5	CL503	F4	L503	E4	R120	C2	R404	G4	R671	D6	TP604	D6
C609	E5	CL504	D5	L602	F5	R121	D2	R405	F5	R672	D1	TP605	E6
C610	G3	CL505	D4	L603	D5	R122	D3	R406	F5	R673	D1	TP606	C1
C611	D5	CL506	D4	L604	C2	R123	D4	R407	F5	R674	D1		
C612	D6	CL509	G2			R124	D4	R408	F5	R675	D6		
C613	G3	CL510	G2	LV601	C6	R125	D3	R409	F5	R676	D6		
C614	D5	CL511	F1			R126	D3	R410	G3	R677	C2		
C615	E6	CL512	F2	PH301	*E6	R127	D3	R411	G3	R678	C2		
C616	E5	CL513	G1	PH302	*E5	R128	E2	R412	G3	R679	D2		
C617	E6			PH303	*D6	R129	C5	R413	G2	R680	D1		
C618	E5	CN101	D4	PH304	*E6	R130	D3	R414	G2	R681	C2		

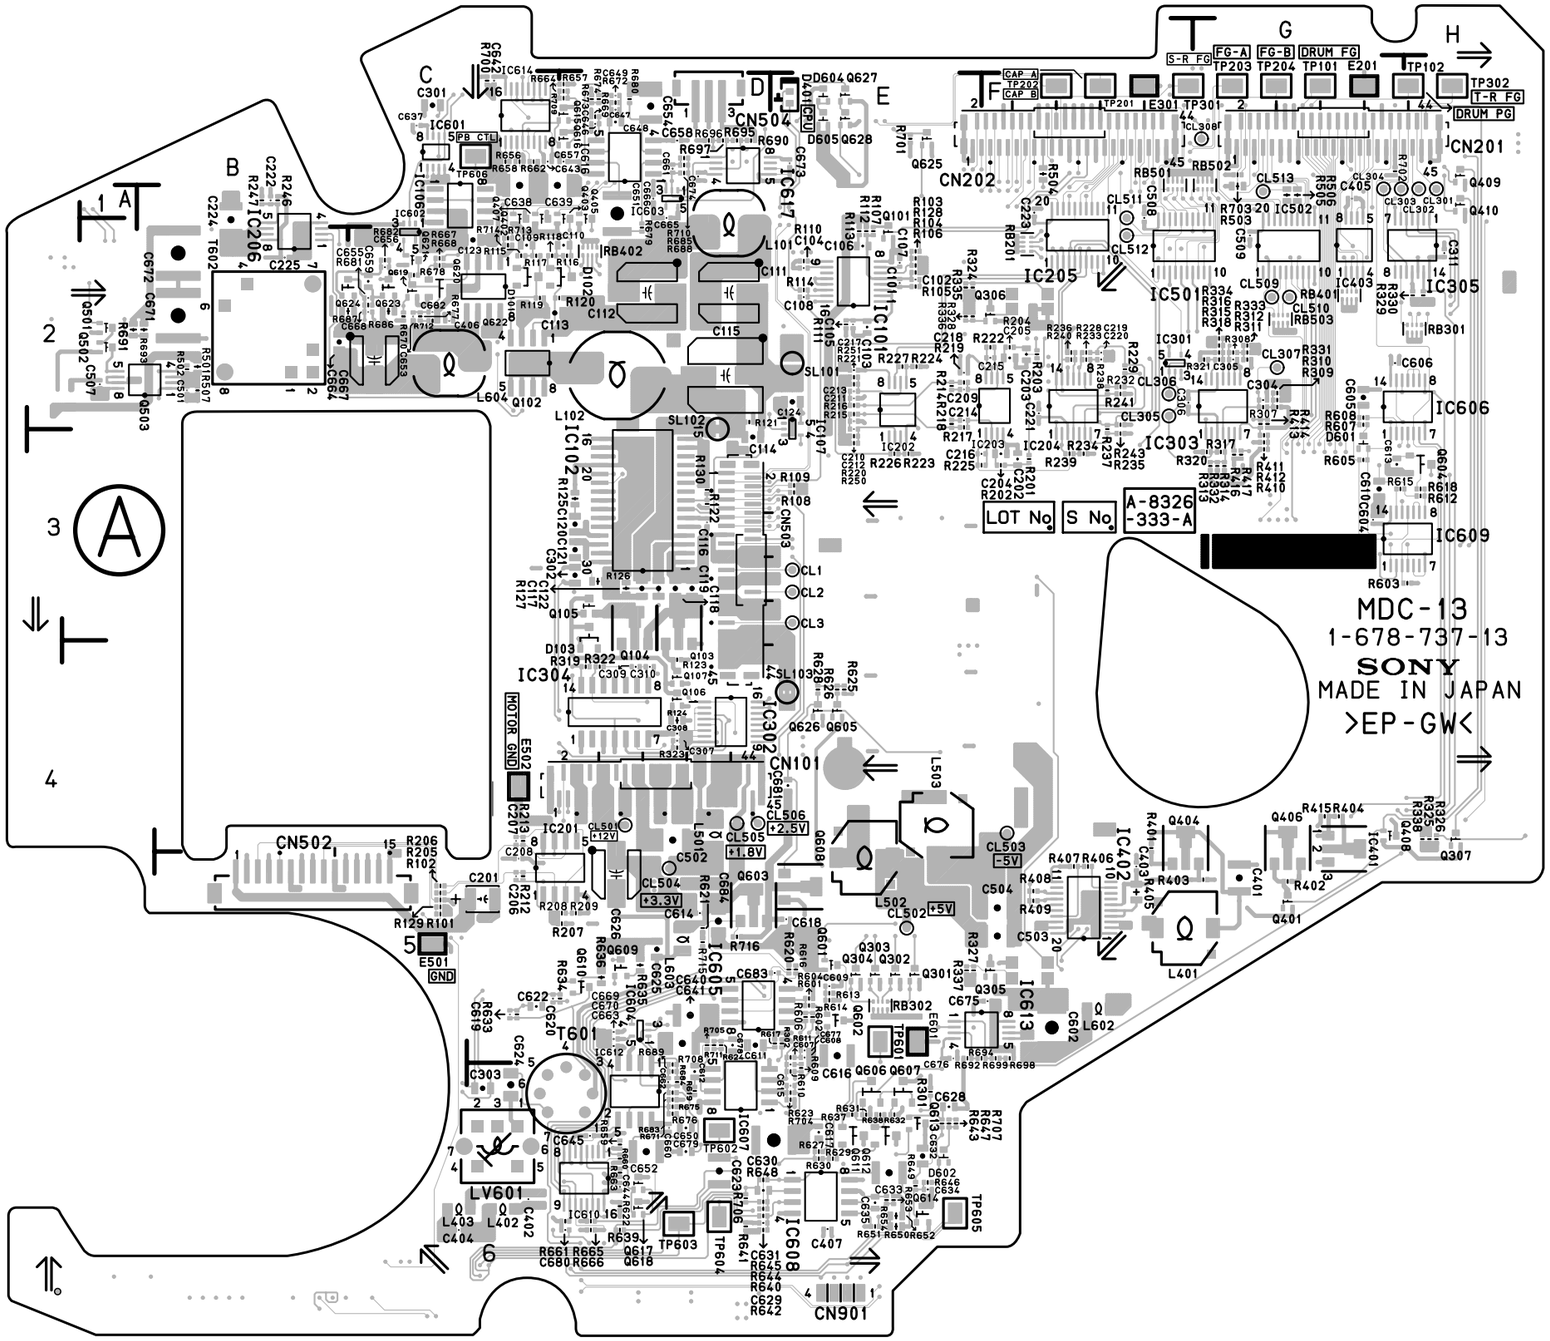

Components location list ; previous page

MDC-13 -A SIDE-
SUFFIX: -13

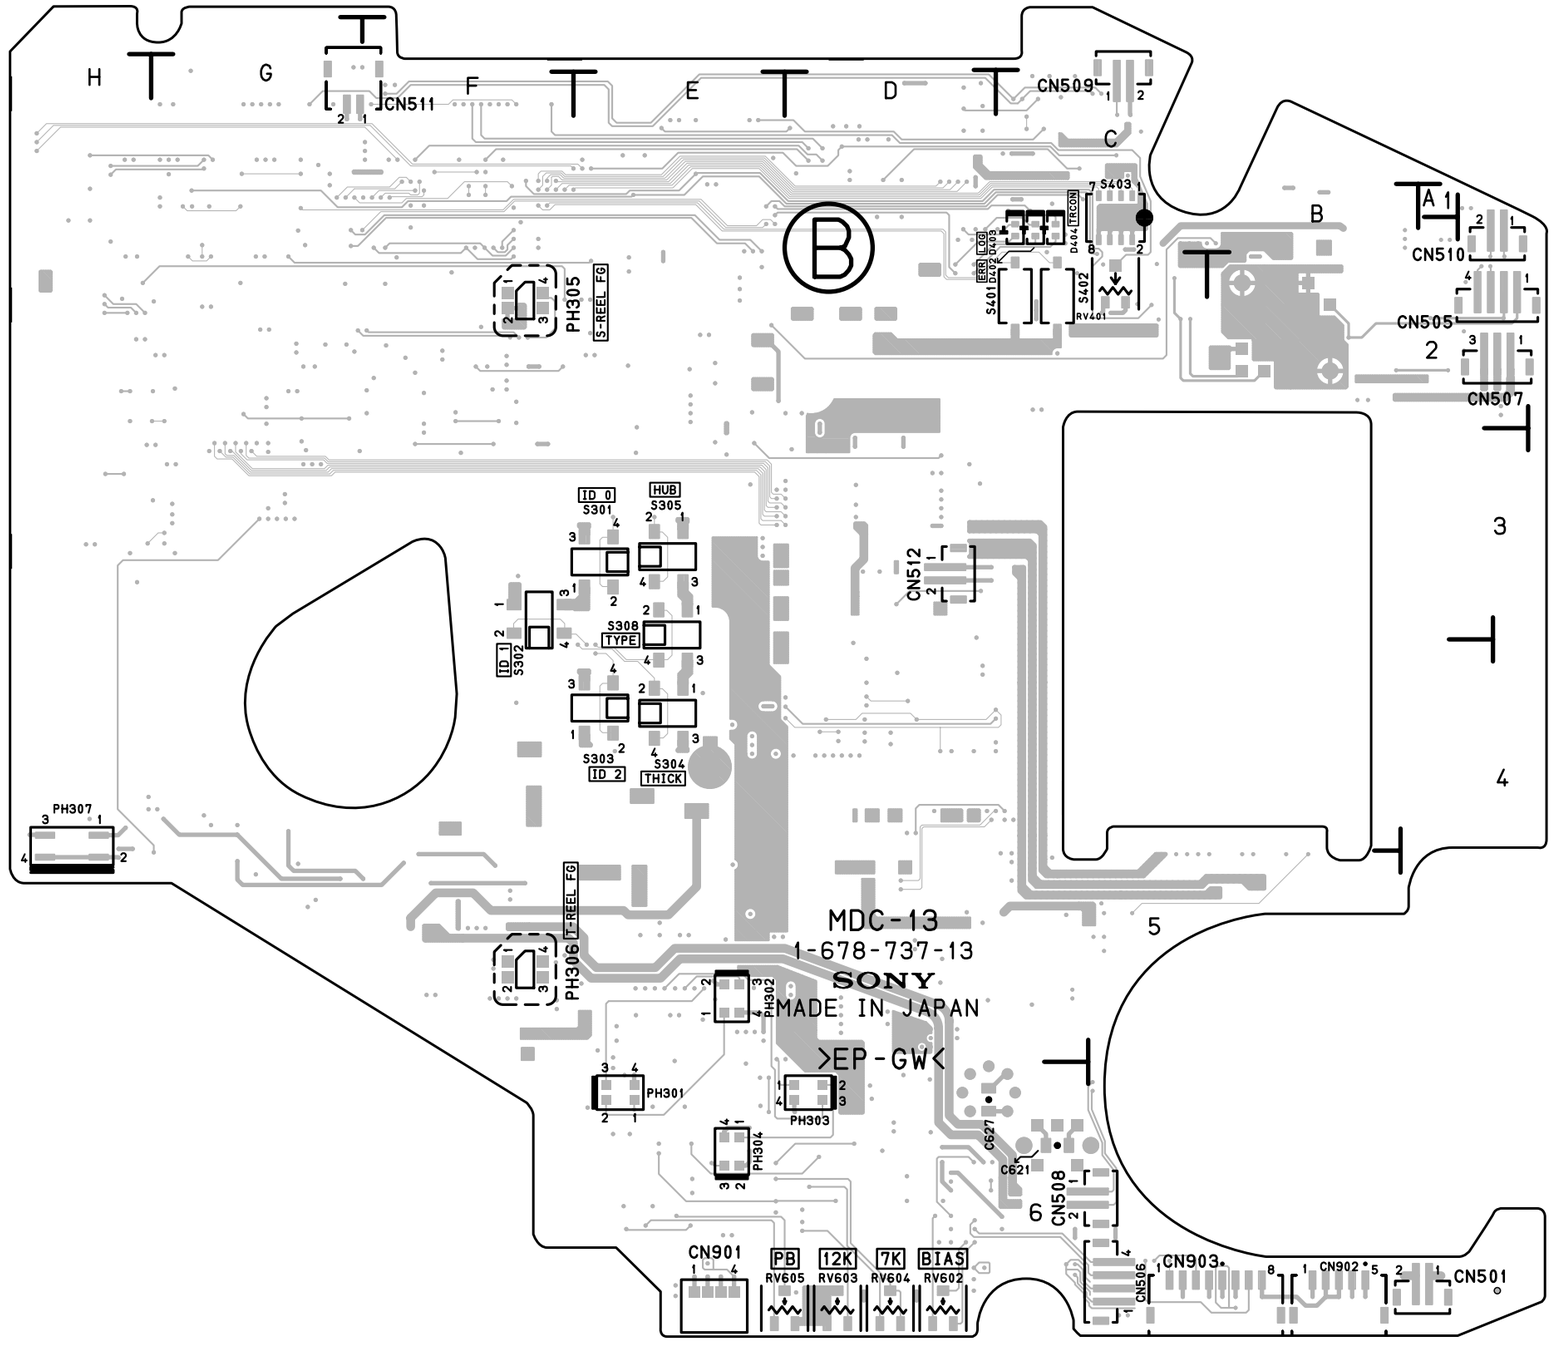

MDC-13 -B SIDE-
SUFFIX: -13

MDC-13 (1-678-737-12)
---

*:B SIDE

C101	E2	C619	C5	CN501	*A6	PH307	*H4	R203	F2	R417	G3	R684	D6
C102	E2	C620	C5	CN502	B5			R204	F2	R501	B2	R685	D1
C103	E2	C621	*C6	CN503	D3	Q101	E2	R205	C5	R502	B2	R686	C2
C104	E2	C622	C5	CN504	D1	Q102	C2	R206	C5	R503	G1	R687	B2
C105	E2	C623	D6	CN505	*A2	Q103	D3	R207	D5	R504	F1	R688	D1
C106	E2	C624	C6	CN506	*C6	Q104	D3	R208	D5	R505	G1	R689	D6
C107	E2	C625	D5	CN507	*A2	Q105	D3	R209	D5	R506	G1	R690	D1
C108	E2	C626	D5	CN508	*C6	Q106	D4	R212	C5	R507	B2	R691	A2
C109	C2	C627	*D6	CN509	*C1	Q107	D4	R213	C4	R601	E5	R692	E5
C110	D2	C628	E6	CN510	*A2	Q301	E5	R214	E2	R602	E5	R693	B2
C111	D2	C629	D6	CN511	*G1	Q302	E5	R215	E2	R603	H3	R694	E5
C112	D2	C630	E6	CN512	*D3	Q303	E5	R216	E2	R604	E5	R695	D1
C113	C2	C631	D6	CN901	*E6	Q304	E5	R217	E2	R605	G3	R696	D1
C114	D3	C632	E6	CN902	*B6	Q305	F5	R218	E2	R606	E5	R697	D1
C115	D2	C633	E6	CN903	*B6	Q306	F2	R219	E2	R607	G2	R698	F5
C116	D3	C634	E6			Q307	H4	R220	E3	R608	G2	R699	F5
C117	D3	C635	E6	D101	C2	Q401	G5	R221	E2	R609	E6	R700	C1
C118	D3	C637	C1	D102	D2	Q402	C2	R222	F2	R610	E6	R701	E1
C119	D3	C638	C1	D103	D3	Q403	D2	R223	E3	R611	E5	R702	G1
C120	D3	C639	C1	D401	E1	Q404	F4	R224	E2	R612	H3	R703	G1
C121	D3	C640	D5	D402	*C2	Q405	D2	R225	E3	R613	E5	R704	E6
C122	D3	C641	D5	D403	*C2	Q406	G4	R226	E3	R614	E5	R705	D5
C123	C2	C642	C1	D404	*C2	Q407	C2	R227	E2	R615	G3	R706	D6
C124	E2	C643	C1	D601	G3	Q408	G4	R228	F2	R616	E5	R707	E6
C201	C5	C644	D6	D602	E6	Q409	H1	R229	F2	R617	E5	R708	D6
C202	F3	C645	D6	D604	E1	Q410	H1	R232	F2	R618	H3	R709	D1
C203	F2	C646	D1	D605	E1	Q501	A2	R233	F2	R619	D6	R710	D1
C204	F3	C647	D1			Q502	A2	R234	F3	R620	E5	R711	D5
C205	F2	C648	D1	E201	G1	Q503	B2	R235	F3	R621	D5	R712	C2
C206	C5	C649	D1	E301	F1	Q601	E5	R236	F2	R622	D6	R713	C2
C207	C4	C650	D6	E501	C5	Q602	E5	R237	F2	R623	E6	R714	C2
C208	C5	C651	D1	E502	C4	Q603	D5	R238	F2	R624	D5	R715	D5
C209	E2	C652	D6	E601	E5	Q604	H3	R239	F3	R625	E5		
C210	E2	C653	C2			Q605	E5	R240	F2	R626	E5	RB201	F2
C211	E2	C654	D1	IC101	E2	Q606	E6	R241	F2	R627	E6	RB301	H2
C212	E2	C655	C2	IC102	D3	Q607	E6	R243	F2	R628	E5	RB302	E5
C213	E2	C656	C2	IC106	C1	Q608	E5	R246	B1	R629	E6	RB401	G2
C214	E2	C657	D1	IC107	E2	Q609	D5	R247	B1	R630	E6	RB402	D2
C215	F2	C658	D1	IC201	C5	Q610	D5	R250	E3	R631	E6	RB501	F1
C216	E3	C659	C2	IC202	E3	Q611	E6	R251	E2	R632	E6	RB502	G1
C217	E2	C660	D6	IC203	F3	Q612	E6	R301	E6	R633	C5	RB503	G2
C218	E2	C661	D1	IC204	F3	Q613	E6	R302	E5	R634	D5		
C219	F2	C662	D6	IC205	F2	Q614	E6	R307	G2	R635	D5	RV401	*C2
C220	F2	C663	D5	IC206	B2	Q615	D1	R308	G2	R636	D5	RV602	*D6
C221	F2	C664	B2	IC301	F2	Q616	D1	R309	G2	R637	E6	RV603	*D6
C222	B1	C665	D1	IC302	D4	Q617	D6	R310	G2	R638	E6	RV604	*D6
C223	F1	C666	D1	IC303	G3	Q618	D6	R311	G2	R639	D6	RV605	*D6
C224	B2	C667	C2	IC304	D4	Q619	C2	R312	G2	R640	D6		
C225	B2	C668	C2	IC305	H2	Q620	C2	R313	G3	R641	D6	S301	*E3
C301	C1	C669	D5	IC401	G4	Q621	C2	R314	G3	R642	D6	S302	*F3
C302	D3	C670	D5	IC402	F5	Q622	C2	R315	G2	R643	E6	S303	*E4
C303	C6	C671	B2	IC403	G2	Q623	C2	R316	G2	R644	D6	S304	*E4
C304	G2	C672	B2	IC501	F2	Q624	B2	R317	G3	R645	D6	S305	*E3
C305	G2	C673	E1	IC502	G2	Q625	E1	R318	G2	R646	E6	S308	*E3
C306	F2	C674	D1	IC601	C1	Q626	E4	R319	D4	R647	E6	S401	*C2
C307	D4	C675	F5	IC602	C2	Q627	E1	R320	G3	R648	D6	S402	*C2
C308	D4	C676	E5	IC603	D1	Q628	E1	R321	G2	R649	E6	S403	*C2
C309	D4	C677	E5	IC604	D5			R322	D4	R650	E6		
C310	D4	C678	D5	IC605	E5	R101	C5	R323	D4	R651	E6	SL101	E2
C311	H2	C679	D6	IC606	G3	R102	C5	R324	E2	R652	E6	SL102	D2
C401	G5	C680	D6	IC607	D6	R103	E2	R325	H4	R653	E6	SL103	E4
C402	C6	C681	E4	IC608	E6	R104	E2	R326	H4	R654	E6		
C403	F5	C682	C2	IC609	G3	R105	E2	R327	E5	R656	C1	T601	D6
C404	C6			IC610	D6	R106	E2	R328	E2	R657	D1	T602	B2
C405	G1	CL1	E3	IC612	D5	R107	E2	R329	H2	R658	C1		
C406	C2	CL2	E3	IC613	E5	R108	E3	R330	H2	R659	D6	TP101	G1
C407	E6	CL3	E3	IC614	C1	R109	E3	R331	G2	R660	D6	TP102	H1
C501	B2	CL301	H1	IC616	D1	R110	E2	R332	G3	R661	D6	TP201	F1
C502	D4	CL302	H1	IC617	D1	R111	E2	R333	G2	R662	C1	TP202	F1
C503	F5	CL303	G1			R112	E2	R334	G2	R663	D6	TP203	G1
C504	F5	CL304	G1	L101	D2	R113	E2	R335	E2	R664	D1	TP204	G1
C507	A2	CL305	F2	L102	D2	R114	E2	R336	E2	R665	D6	TP301	F1
C508	F1	CL306	F2	L401	F5	R115	C2	R337	E5	R666	D6	TP302	H1
C509	G2	CL307	G2	L402	C6	R116	D2	R338	H4	R667	C2	TP601	E5
C602	F5	CL308	G1	L403	C6	R117	C2	R401	F4	R668	C2	TP602	D6
C604	G3	CL501	D4	L501	D4	R118	C2	R402	G5	R669	D1	TP603	D6
C605	G2	CL502	E5	L502	E5	R119	C2	R403	G5	R670	C2	TP604	D6
C606	G2	CL503	F4	L503	E4	R120	C2	R404	G4	R671	D6	TP605	E6
C607	E6	CL504	D5	L602	F5	R121	D2	R405	F5	R672	D1	TP606	C1
C608	E5	CL505	D4	L603	D5	R122	D3	R406	F5	R673	D1		
C609	E5	CL506	D4	L604	C2	R123	D4	R407	F5	R674	D1		
C610	G3	CL509	G2			R124	D4	R408	F5	R675	D6		
C611	D5	CL510	G2	LV601	C6	R125	D3	R409	F5	R676	D6		
C612	D6	CL511	F1			R126	D3	R410	G3	R677	C2		
C613	G3	CL512	F2	PH301	*E6	R127	D3	R411	G3	R678	C2		
C614	D5	CL513	G1	PH302	*E5	R128	E2	R412	G3	R679	D2		
C615	E6			PH303	*D6	R129	C5	R413	G2	R680	D1		
C616	E5	CN101	D4	PH304	*E6	R130	D3	R414	G2	R681	C2		
C617	E6	CN201	G1	PH305	*F2	R201	F3	R415	G4	R682	C2		
C618	D5	CN202	F1	PH306	*F5	R202	F3	R416	G3	R683	D6		

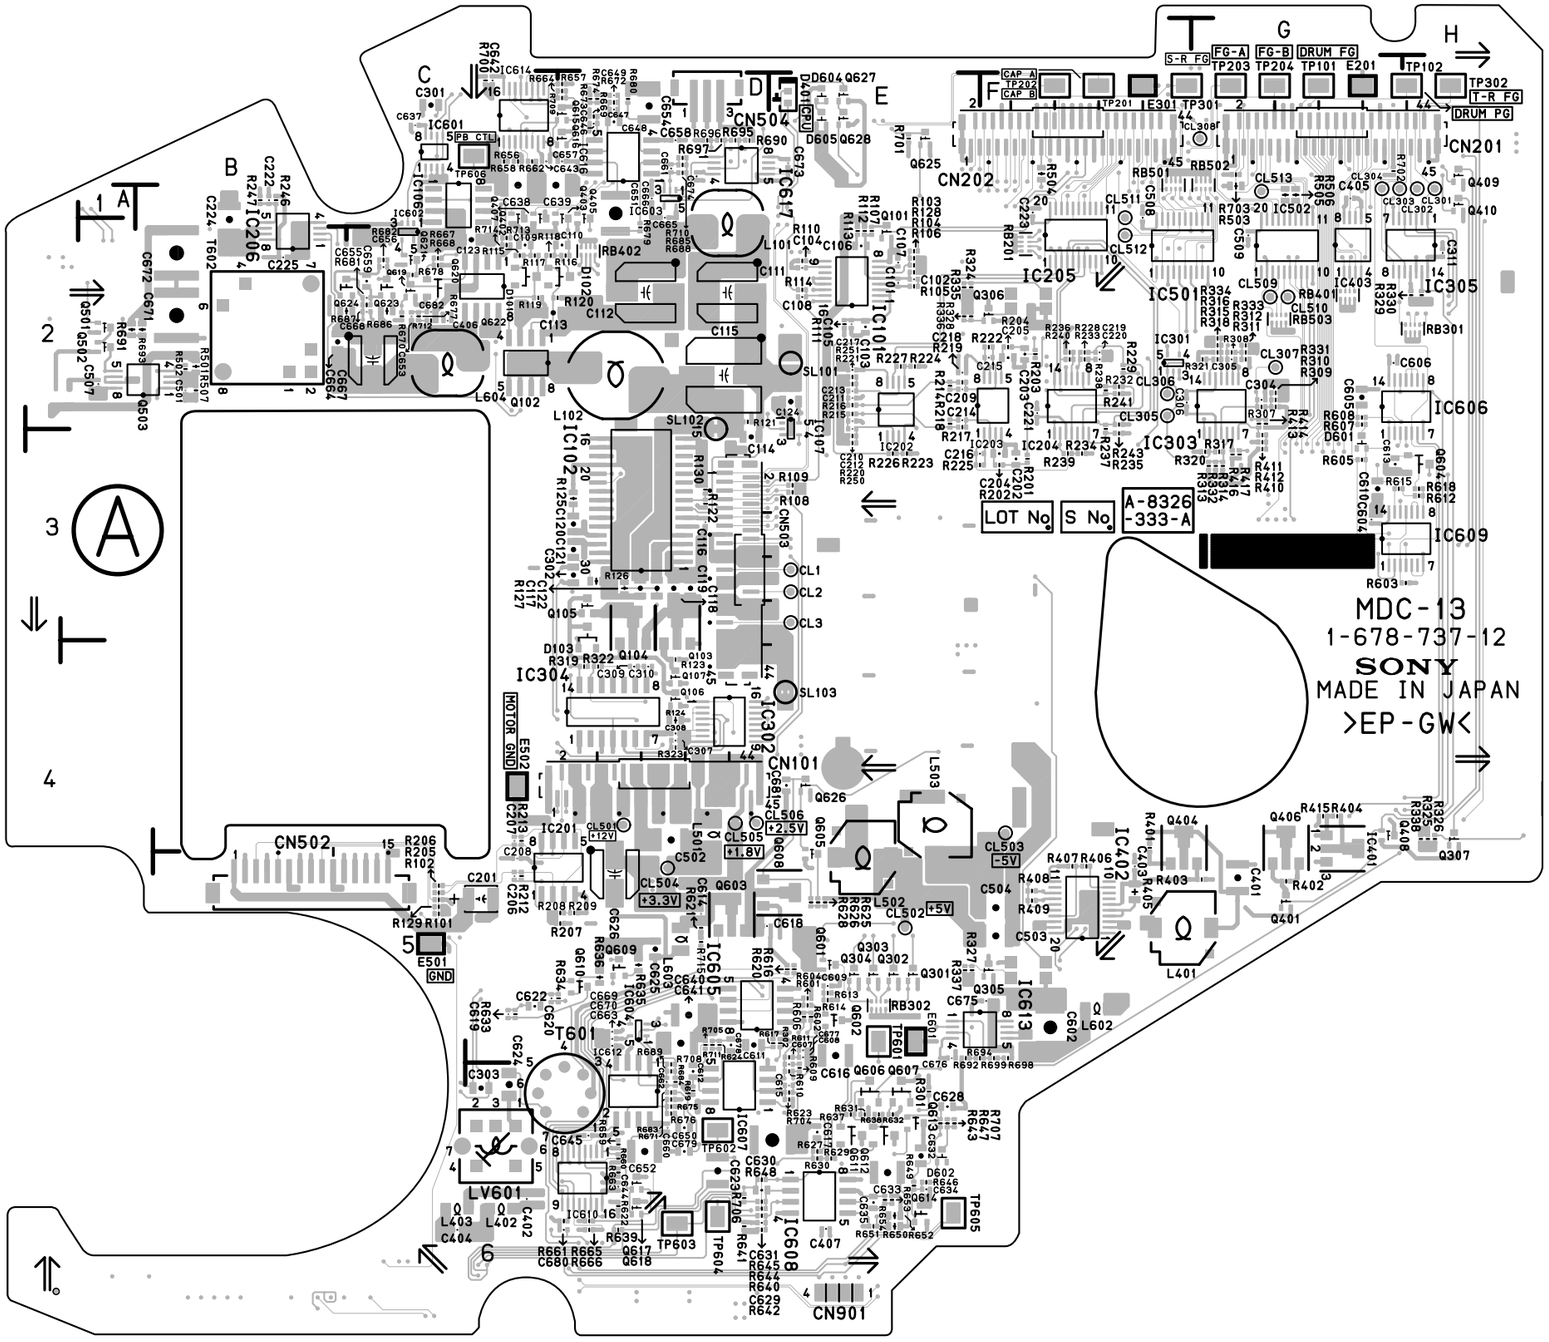

Components location list ; previous page

MDC-13 -A SIDE-
SUFFIX: -12

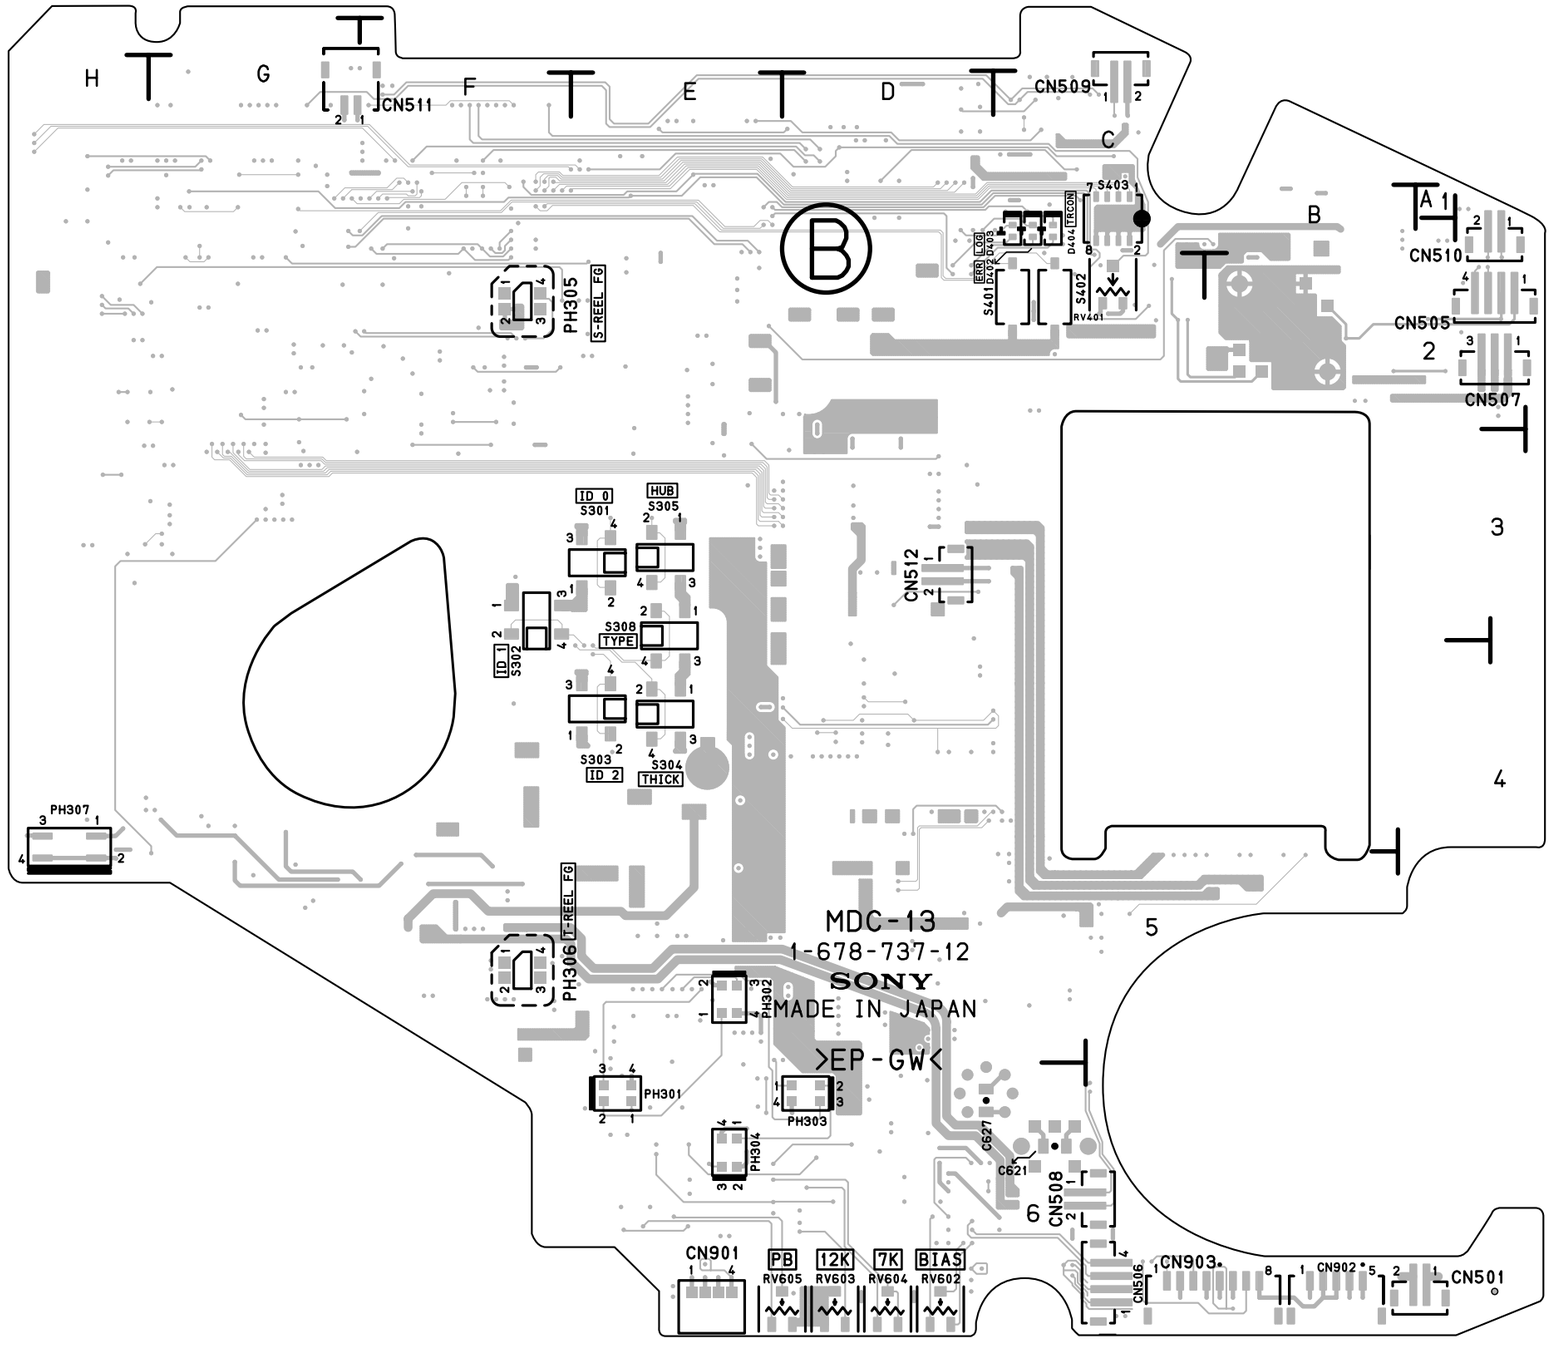

MDC-13 -B SIDE-
SUFFIX: -12

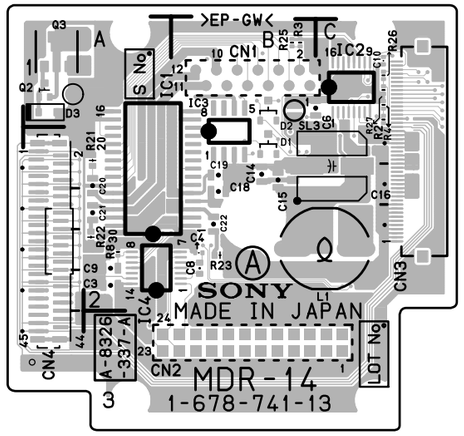

MDR-14 -A SIDE-
SUFFIX: -13

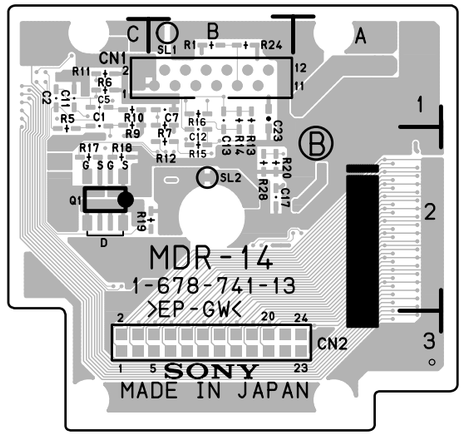

MDR-14 -B SIDE-
SUFFIX: -13

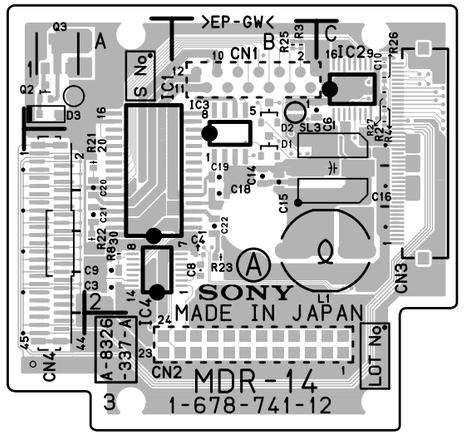

MDR-14 -A SIDE-
SUFFIX: -12

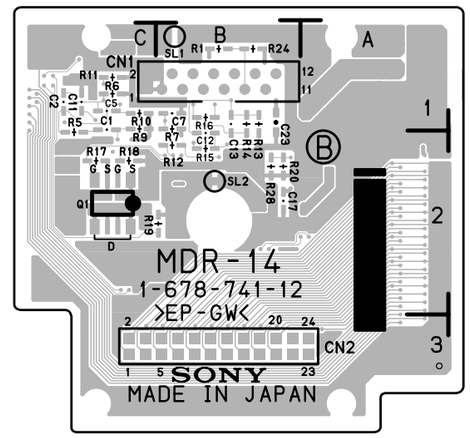

MDR-14 -B SIDE-
SUFFIX: -12

```
---------------------
MDR-14 (1-678-741-13)
---------------------

*:B SIDE

C1      *C1     CN1     *B1     R4      C1      R27     C1
C2      *C1     CN2     *B3     R5      *C2     R28     *B2
C3      A2      CN3     C2      R6      *C1
C4      B2      CN4     A2      R7      *B1     SL1     *B1
C5      *C1                     R8      A2      SL2     *B2
C6      B1      D1      B2      R9      *C1     SL3     B1
C7      *B1     D2      B1      R10     *C1
C8      B2      D3      A1      R11     *C1
C9      A2                      R12     *B2
C10     C1      IC1     B2      R13     *B1
C11     *C1     IC2     C1      R14     *B1
C12     *B2     IC3     B2      R15     *B2
C13     *B1     IC4     B2      R16     *B1
C14     B2                      R17     *C2
C15     B2      L1      C2      R18     *C2
C16     C2                      R19     *B2
C17     *B2     Q1      *C2     R20     *B2
C18     B2      Q2      A1      R21     A2
C19     B2      Q3      A1      R22     A2
C20     A2                      R23     B2
C21     A2      R1      *B1     R24     *B1
C22     B2      R2      C1      R25     B1
C23     *B1     R3      B1      R26     C1
```

```
---------------------
MDR-14 (1-678-741-12)
---------------------

*:B SIDE

C1      *C1     CN1     *B1     R4      C1      R27     C1
C2      *C1     CN2     *B3     R5      *C2     R28     *B2
C3      A2      CN3     C2      R6      *C1
C4      B2      CN4     A2      R7      *B1     SL1     *B1
C5      *C1                     R8      A2      SL2     *B2
C6      B1      D1      B2      R9      *C1     SL3     B1
C7      *B1     D2      B1      R10     *C1
C8      B2      D3      A1      R11     *C1
C9      A2                      R12     *B2
C10     C1      IC1     B2      R13     *B1
C11     *C1     IC2     C1      R14     *B1
C12     *B2     IC3     B2      R15     *B2
C13     *B1     IC4     B2      R16     *B1
C14     B2                      R17     *C2
C15     B2      L1      C2      R18     *C2
C16     C2                      R19     *B2
C17     *B2     Q1      *C2     R20     *B2
C18     B2      Q2      A1      R21     A2
C19     B2      Q3      A1      R22     A2
C20     A2                      R23     B2
C21     A2      R1      *B1     R24     *B1
C22     B2      R2      C1      R25     B1
C23     *B1     R3      B1      R26     C1
```



SE-613 -A SIDE-
SUFFIX: -11



SE-613 -B SIDE-
SUFFIX: -11

http://getMANUAL.com

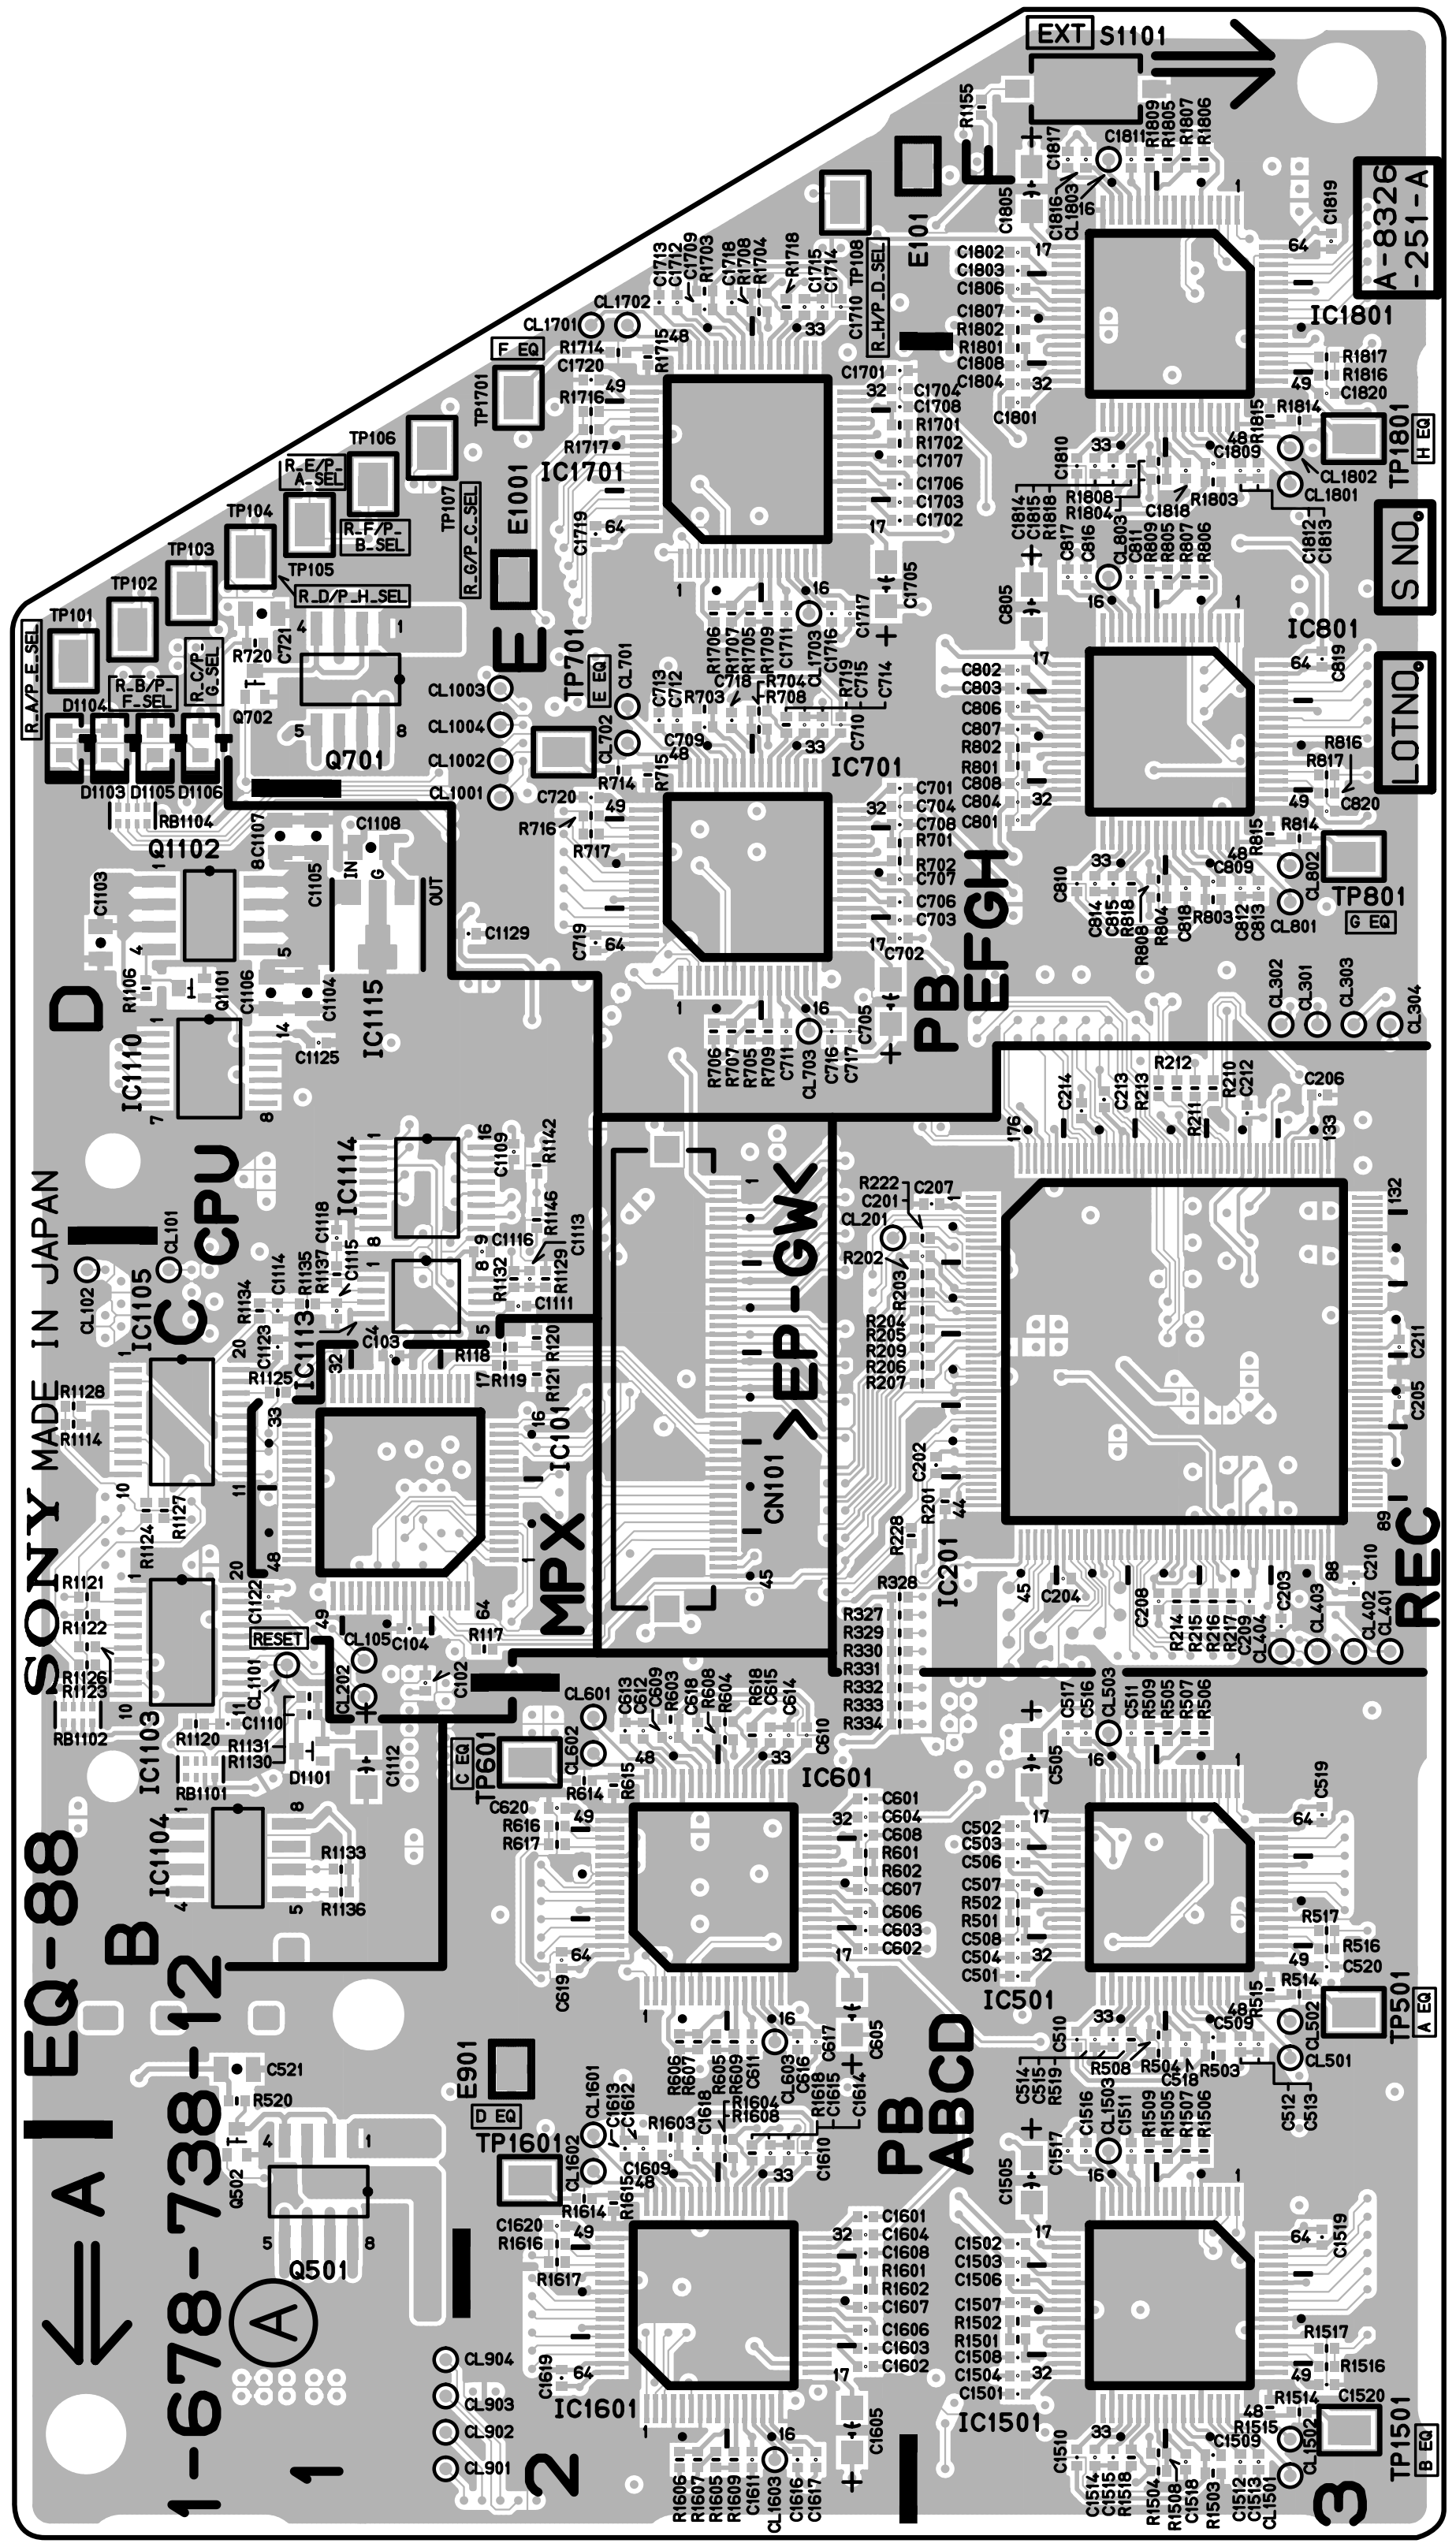

Components location list ; next page

EQ-88 -A SIDE-
SUFFIX: -12

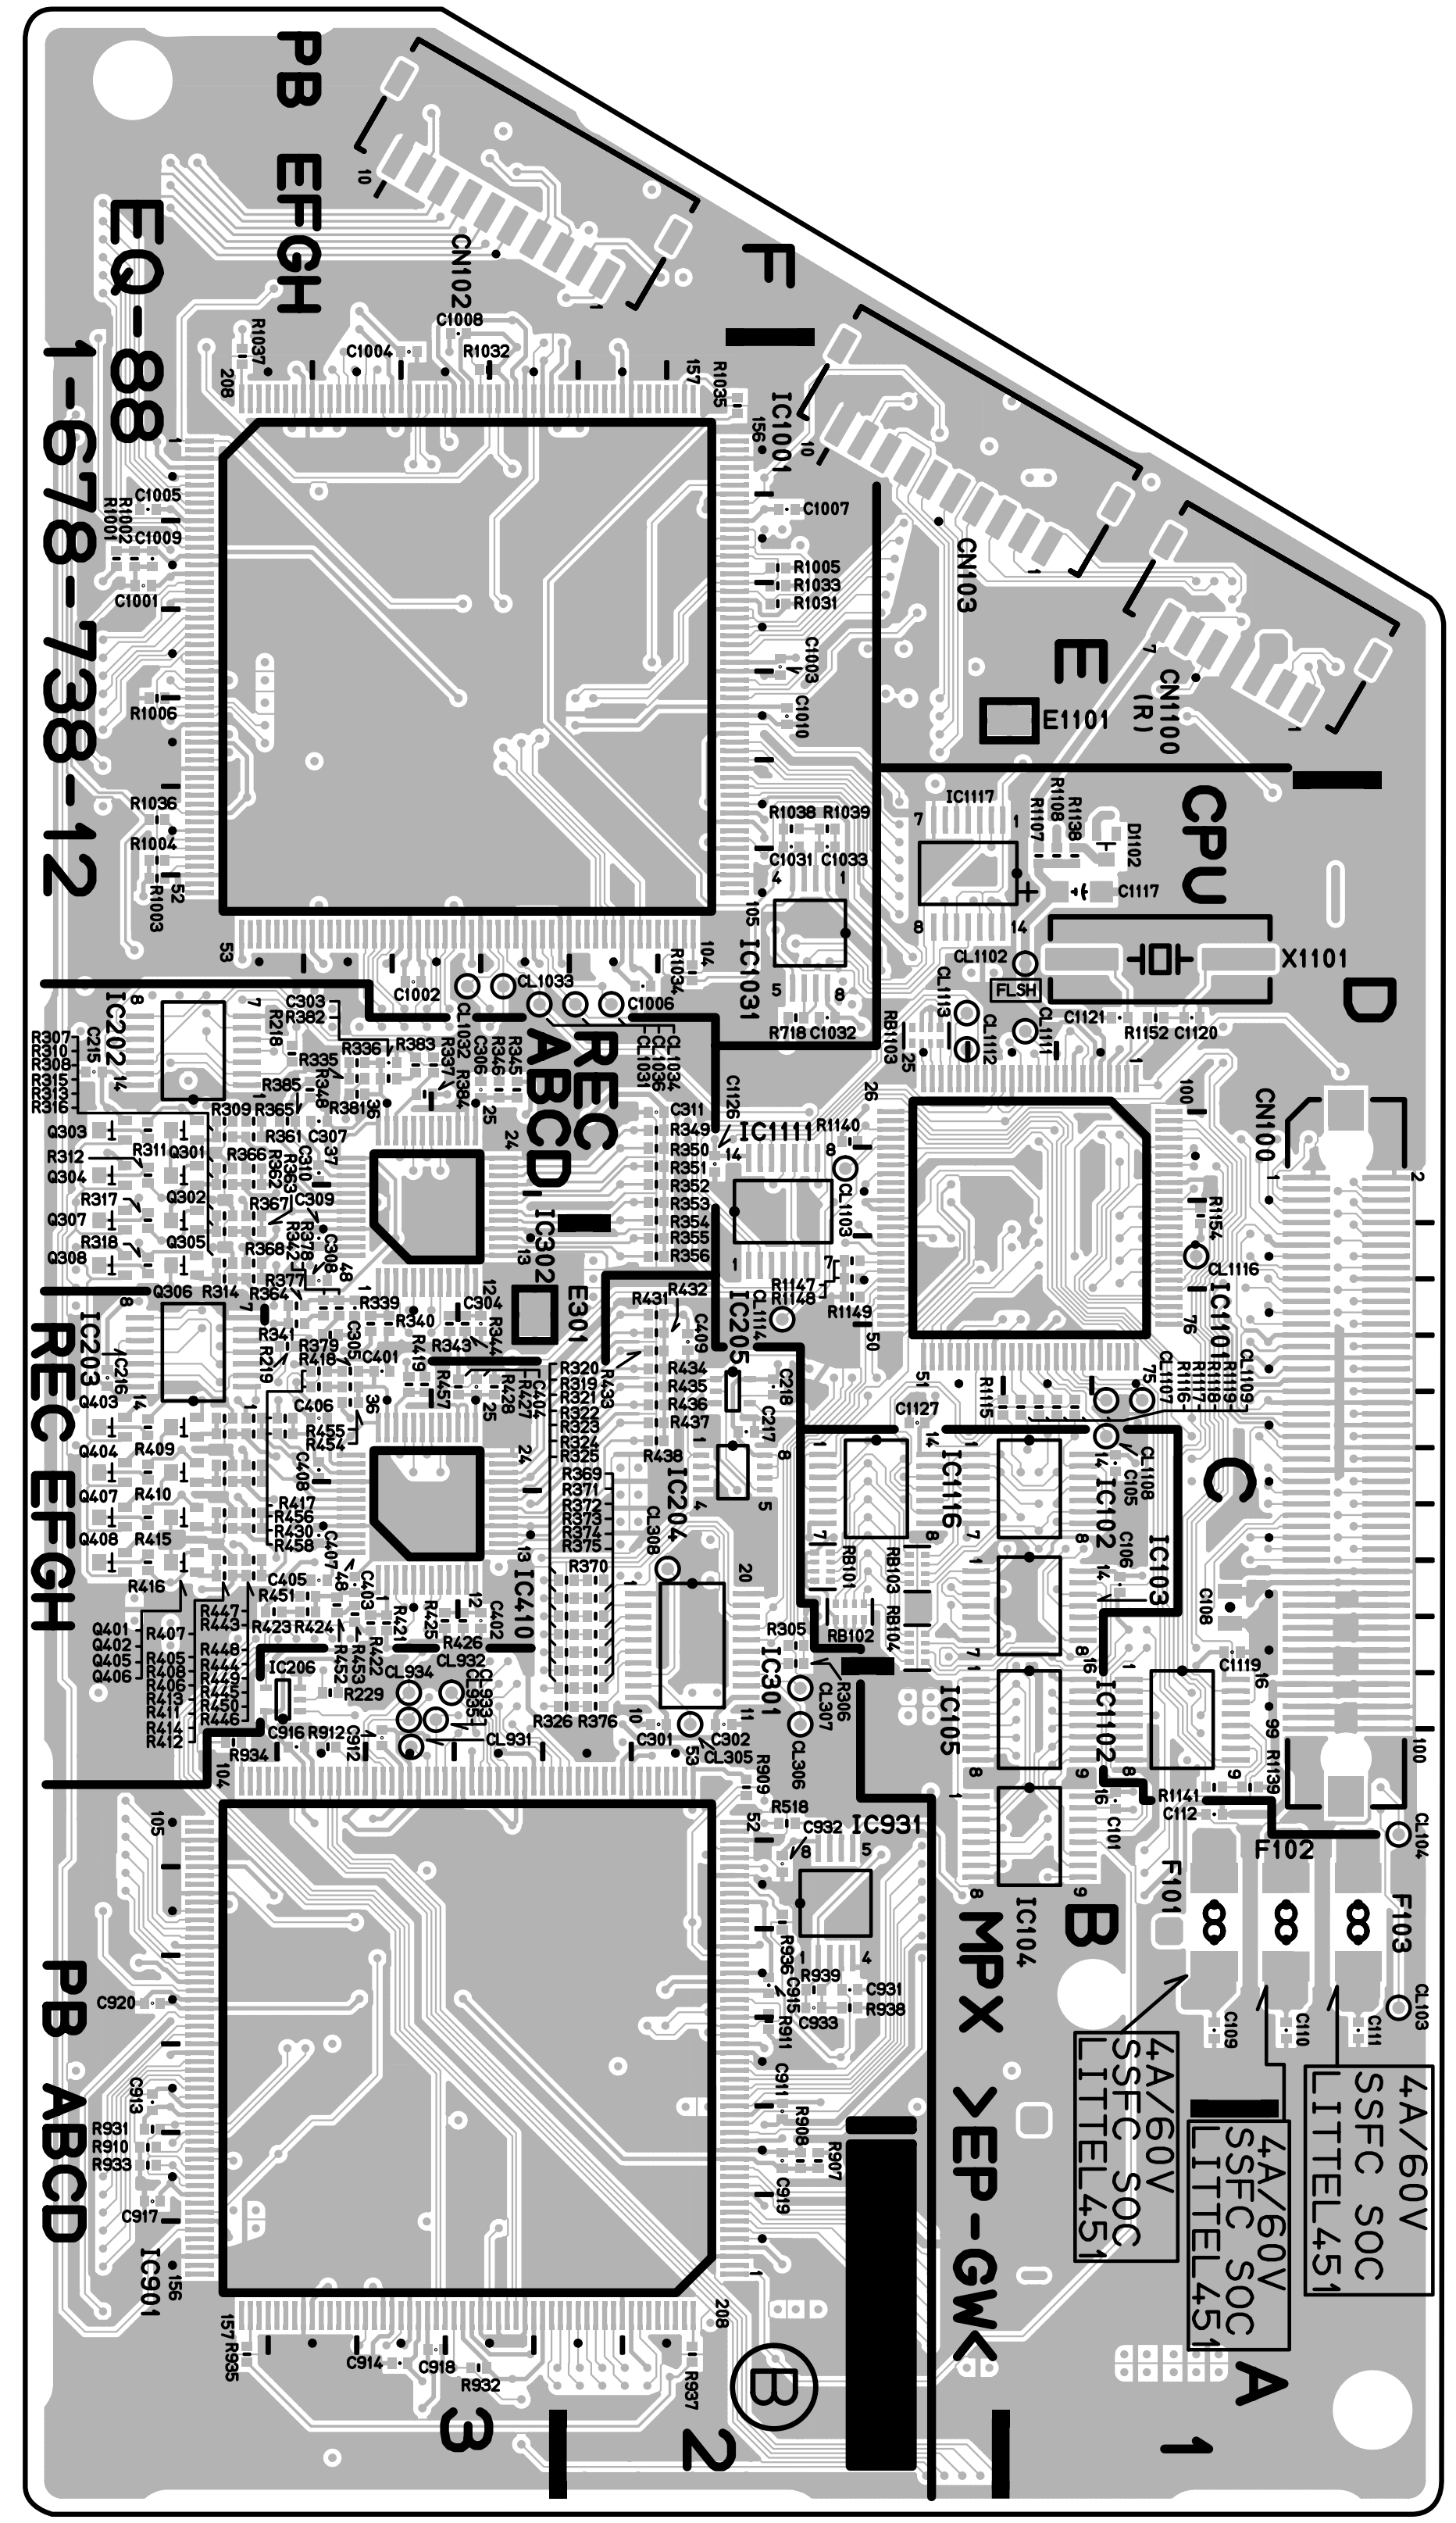

EQ-88 -B SIDE-
SUFFIX: -12

EQ-88 (1-678-738-12)
---

*:B SIDE

C101	*B1	C614	B2	C1112	B1	C1808	E3	CL1801	E3	Q502	A1	R362	*D3	R517	B3	R1116	*C1	R1808	E3
C102	B1	C615	B2	C1113	C2	C1809	E3	CL1802	E3	Q701	E1	R363	*C3	R518	*B2	R1117	*C1	R1809	F3
C103	C1	C616	B2	C1114	C1	C1810	E3	CL1803	F3	Q702	E1	R364	*C3	R519	B3	R1118	*C1	R1814	E3
C104	C1	C617	B2	C1115	C1	C1811	F3			Q1101	D1	R365	*D3	R520	B1	R1119	*C1	R1815	E3
C105	*C1	C618	B2	C1116	C2	C1812	E3	CN100	*C1	Q1102	D1	R366	*D3	R601	B2	R1120	B1	R1816	E3
C106	*C1	C619	B2	C1117	*D1	C1813	E3	CN101	C2			R367	*D3	R602	B2	R1121	C1	R1817	E3
C108	*C1	C620	B2	C1118	C1	C1814	E3	CN102	*F3	R117	C2	R368	*C3	R603	B2	R1122	C1	R1818	E3
C109	*B1	C701	D2	C1119	*C1	C1815	E3	CN103	*E2	R118	C2	R369	*C2	R604	B2	R1123	C1		
C110	*B1	C702	D2	C1120	*D1	C1816	F3	CN1100	*E1	R119	C2	R370	*C2	R605	B2	R1124	C1	RB101	*C2
C111	*B1	C703	D2	C1121	*D1	C1817	F3			R120	C2	R371	*C2	R606	B2	R1125	C1	RB102	*C2
C112	*B1	C704	D2	C1122	C1	C1818	E3	D1101	B1	R121	C2	R372	*C2	R607	B2	R1126	C1	RB103	*C2
C201	C3	C705	D2	C1123	C1	C1819	F3	D1102	*D1	R201	C3	R373	*C2	R608	B2	R1127	C1	RB104	*C2
C202	C3	C706	D2	C1125	D1	C1820	E3	D1103	E1	R202	C3	R374	*B2	R609	B2	R1128	C1	RB1101	B1
C203	C3	C707	D2	C1126	*D2			D1104	E1	R203	C3	R375	*B2	R614	B2	R1129	C2	RB1102	B1
C204	C3	C708	D2	C1127	*C2	CL101	C1	D1105	E1	R204	C3	R376	*B2	R615	B2	R1130	B1	RB1103	*D2
C205	C3	C709	E2	C1129	D2	CL102	C1	D1106	E1	R205	C3	R377	*C3	R616	B2	R1131	B1	RB1104	D1
C206	D3	C710	E2	C1501	A3	CL103	*B1			R206	C3	R378	*C3	R617	B2	R1132	C2		
C207	D3	C711	D2	C1502	A3	CL104	*B1	E101	F3	R207	C3	R379	*C3	R618	B2	R1133	B1	S1101	F3
C208	C3	C712	E2	C1503	A3	CL105	C1	E301	*C3	R209	C3	R381	*D3	R701	D2	R1134	C1		
C209	C3	C713	E2	C1504	A3	CL201	C2	E901	B2	R210	D3	R382	*D3	R702	D2	R1135	C1	TP101	E1
C210	C3	C714	E2	C1505	A3	CL202	B1	E1001	E2	R211	D3	R383	*D3	R703	E2	R1136	B1	TP102	E1
C211	C3	C715	E2	C1506	A3	CL301	D3	E1101	*E1	R212	D3	R384	*D3	R704	E2	R1137	C1	TP103	E1
C212	D3	C716	D2	C1507	A3	CL302	D3			R213	D3	R385	*D3	R705	D2	R1138	*D1	TP104	E1
C213	D3	C717	D2	C1508	A3	CL303	D3	F101	*B1	R214	C3	R405	*C3	R706	D2	R1139	*B1	TP105	E1
C214	D3	C718	E2	C1509	A3	CL304	D3	F102	*B1	R215	C3	R406	*C3	R707	D2	R1140	*D2	TP106	E1
C215	*D3	C719	D2	C1510	A3	CL305	*B2	F103	*B1	R216	C3	R407	*C3	R708	E2	R1141	*B1	TP107	E1
C216	*C3	C720	D2	C1511	A3	CL306	*B2			R217	C3	R408	*C3	R709	D2	R1142	D2	TP108	F2
C217	*C2	C721	E1	C1512	A3	CL307	*B2	IC101	C1	R218	*D3	R409	*C3	R714	E2	R1146	D2	TP501	B3
C218	*C2	C801	D3	C1513	A3	CL308	*C2	IC102	*C2	R219	*C3	R410	*C3	R715	E2	R1147	*C2	TP601	B2
C301	*B2	C802	E3	C1514	A3	CL401	C3	IC103	*C2	R222	C3	R411	*C3	R716	D2	R1148	*C2	TP701	E2
C302	*B2	C803	E3	C1515	A3	CL402	C3	IC104	*B2	R228	C3	R412	*C3	R717	D2	R1149	*C2	TP801	D3
C303	*D3	C804	D3	C1516	A3	CL403	C3	IC105	*B2	R229	*B3	R413	*C3	R718	*D2	R1152	*D1	TP1501	A3
C304	*C3	C805	E3	C1517	A3	CL404	C3	IC201	C3	R305	*C2	R414	*C3	R719	E2	R1154	*D1	TP1601	A2
C305	*C3	C806	E3	C1518	A3	CL501	B3	IC202	*D3	R306	*C2	R415	*C3	R720	E1	R1155	F3	TP1701	E2
C306	*D3	C807	E3	C1519	A3	CL502	B3	IC203	*C3	R307	*D3	R416	*C3	R801	E3	R1501	A3	TP1801	E3
C307	*D3	C808	E3	C1520	A3	CL503	B3	IC204	*C2	R308	*D3	R417	*C3	R802	E3	R1502	A3		
C308	*C3	C809	D3	C1601	A2	CL601	B2	IC205	*C2	R309	*D3	R418	*C3	R803	D3	R1503	A3	X1101	*D1
C309	*C3	C810	D3	C1602	A2	CL602	B2	IC206	*B3	R310	*D3	R419	*C3	R804	D3	R1504	A3		
C310	*D3	C811	E3	C1603	A2	CL603	B2	IC301	*C2	R311	*D3	R421	*C3	R805	E3	R1505	A3		
C311	*D2	C812	D3	C1604	A2	CL701	E2	IC302	*D3	R312	*D3	R422	*C3	R806	E3	R1506	A3		
C401	*C3	C813	D3	C1605	A2	CL702	E2	IC410	*C3	R313	*C3	R423	*C3	R807	E3	R1507	A3		
C402	*C3	C814	D3	C1606	A2	CL703	D2	IC501	B3	R314	*C3	R424	*C3	R808	D3	R1508	A3		
C403	*C3	C815	D3	C1607	A2	CL801	D3	IC601	B2	R315	*D3	R425	*C3	R809	E3	R1509	A3		
C404	*C3	C816	E3	C1608	A2	CL802	D3	IC701	D2	R316	*C3	R426	*C3	R814	D3	R1514	A3		
C405	*C3	C817	E3	C1609	A2	CL803	E3	IC801	E3	R317	*D3	R427	*C3	R815	D3	R1515	A3		
C406	*C3	C818	D3	C1610	A2	CL901	A1	IC901	*B3	R318	*C3	R428	*C3	R816	D3	R1516	A3		
C407	*C3	C819	E3	C1611	A2	CL902	A1	IC931	*B2	R319	*C2	R430	*C3	R817	E3	R1517	A3		
C408	*C3	C820	D3	C1612	A2	CL903	A1	IC1001	*E3	R320	*C2	R431	*C2	R818	D3	R1518	A3		
C409	*C2	C911	*A2	C1613	A2	CL904	A1	IC1031	*D2	R321	*C2	R432	*C2	R907	*A2	R1601	A2		
C501	B3	C912	*B3	C1614	A2	CL931	*B3	IC1101	*D1	R322	*C2	R433	*C2	R908	*A2	R1602	A2		
C502	B3	C913	*B3	C1615	A2	CL932	*B3	IC1102	*B1	R323	*C2	R434	*C2	R909	*B2	R1603	A2		
C503	B3	C914	*A3	C1616	A2	CL933	*B3	IC1103	C1	R324	*B2	R435	*C2	R910	*A3	R1604	A2		
C504	B3	C915	*B2	C1617	A2	CL934	*B3	IC1104	B1	R325	*B2	R436	*C2	R911	*B2	R1605	A2		
C505	B3	C916	*B3	C1618	A2	CL935	*B3	IC1105	C1	R326	*B2	R437	*C2	R912	*B3	R1606	A2		
C506	B3	C917	*A3	C1619	A2	CL1001	D2	IC1110	D1	R327	C2	R438	*C2	R931	*A3	R1607	A2		
C507	B3	C918	*A3	C1620	A2	CL1002	E2	IC1111	*C2	R328	C2	R443	*C3	R932	*A3	R1608	A2		
C508	B3	C919	*A2	C1701	E2	CL1003	E2	IC1113	C1	R329	C2	R444	*C3	R933	*A3	R1609	A2		
C509	B3	C920	*B3	C1702	E2	CL1004	E2	IC1114	D1	R330	C2	R445	*C3	R934	*B3	R1614	A2		
C510	B3	C931	*B2	C1703	E2	CL1031	*D3	IC1115	D1	R331	C2	R446	*C3	R935	*A3	R1615	A2		
C511	B3	C932	*B2	C1704	E2	CL1032	*D3	IC1116	*C2	R332	B2	R447	*C3	R936	*B2	R1616	A2		
C512	B3	C933	*B2	C1705	E2	CL1033	*D3	IC1117	*D1	R333	B2	R448	*C3	R937	*A2	R1617	A2		
C513	B3	C1001	*E3	C1706	E2	CL1034	*D2	IC1501	A3	R334	B2	R449	*C3	R938	*B2	R1618	A2		
C514	B3	C1002	*D3	C1707	E2	CL1036	*D2	IC1601	A2	R335	*D3	R450	*C3	R939	*B2	R1701	E2		
C515	B3	C1003	*E2	C1708	E2	CL1101	C1	IC1701	E2	R336	*D3	R451	*C3	R1001	*E3	R1702	E2		
C516	B3	C1004	*E3	C1709	F2	CL1102	*D1	IC1801	F3	R337	*D3	R452	*C3	R1002	*E3	R1703	F2		
C517	B3	C1005	*E3	C1710	F2	CL1103	*D2			R339	*C3	R453	*C3	R1003	*D3	R1704	F2		
C518	B3	C1006	*D2	C1711	E2	CL1107	*C1	Q301	*D3	R340	*C3	R454	*C3	R1004	*D3	R1705	E2		
C519	B3	C1007	*E2	C1712	F2	CL1108	*C1	Q302	*D3	R341	*C3	R455	*C3	R1005	*E2	R1706	E2		
C520	B3	C1008	*F3	C1713	F2	CL1109	*C1	Q303	*D3	R342	*C3	R456	*C3	R1006	*E3	R1707	E2		
C521	B1	C1009	*E3	C1714	F2	CL1111	*D1	Q304	*D3	R343	*C3	R457	*C3	R1031	*E2	R1708	F2		
C601	B2	C1010	*E2	C1715	F2	CL1112	*D2	Q305	*D3	R344	*C3	R458	*C3	R1032	*E3	R1709	E2		
C602	B2	C1031	*D2	C1716	E2	CL1113	*D2	Q306	*C3	R345	*D3	R501	B3	R1033	*E2	R1714	E2		
C603	B2	C1032	*D2	C1717	E2	CL1114	*C2	Q307	*D3	R346	*D3	R502	B3	R1034	*D2	R1715	E2		
C604	B2	C1033	*D2	C1718	F2	CL1116	*C1	Q308	*C3	R348	*D3	R503	B3	R1035	*E2	R1716	E2		
C605	B2	C1103	D1	C1719	E2	CL1501	A3	Q401	*C3	R349	*D2	R504	B3	R1036	*D3	R1717	E2		
C606	B2	C1104	D1	C1720	E2	CL1502	A3	Q402	*C3	R350	*D2	R505	B3	R1037	*E3	R1718	F2		
C607	B2	C1105	D1	C1801	E3	CL1503	A3	Q403	*C3	R351	*D2	R506	B3	R1038	*D2	R1801	E3		
C608	B2	C1106	D1	C1802	F3	CL1601	A2	Q404	*C3	R352	*D2	R507	B3	R1039	*D2	R1802	F3		
C609	B2	C1107	D1	C1803	F3	CL1602	A2	Q405	*C3	R353	*D2	R508	B3	R1106	D1	R1803	E3		
C610	B2	C1108	D1	C1804	E3	CL1603	A2	Q406	*C3	R354	*D2	R509	B3	R1107	*D1	R1804	E3		
C611	B2	C1109	D2	C1805	F3	CL1701	F2	Q407	*C3	R355	*C2	R514	B3	R1108	*D1	R1805	F3		
C612	B2	C1110	B1	C1806	F3	CL1702	F2	Q408	*C3	R356	*C2	R515	B3	R1114	C1	R1806	F3		
C613	B2	C1111	C2	C1807	F3	CL1703	E2	Q501	A1	R361	*D3	R516	B3	R1115	*C1	R1807	F3		

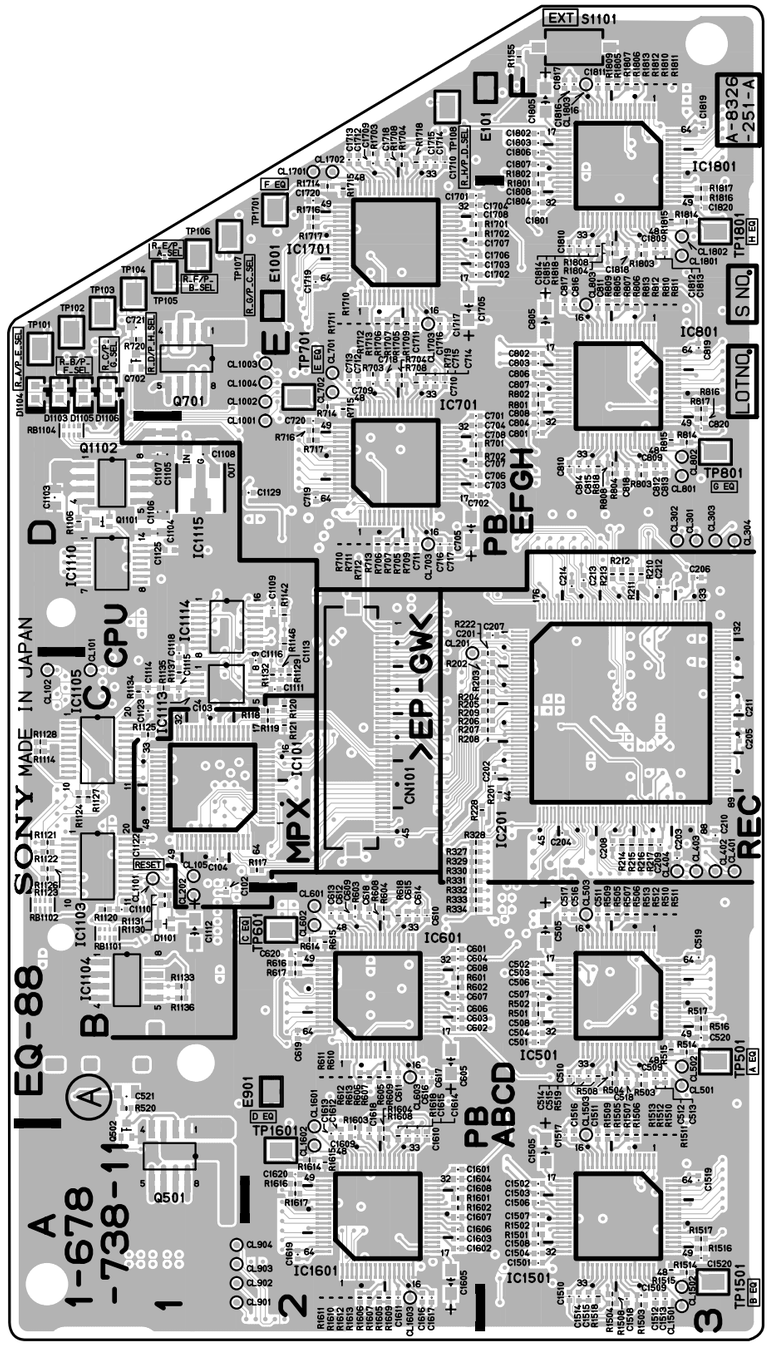

Components location list ; next page

EQ-88 -A SIDE-
SUFFIX: -11

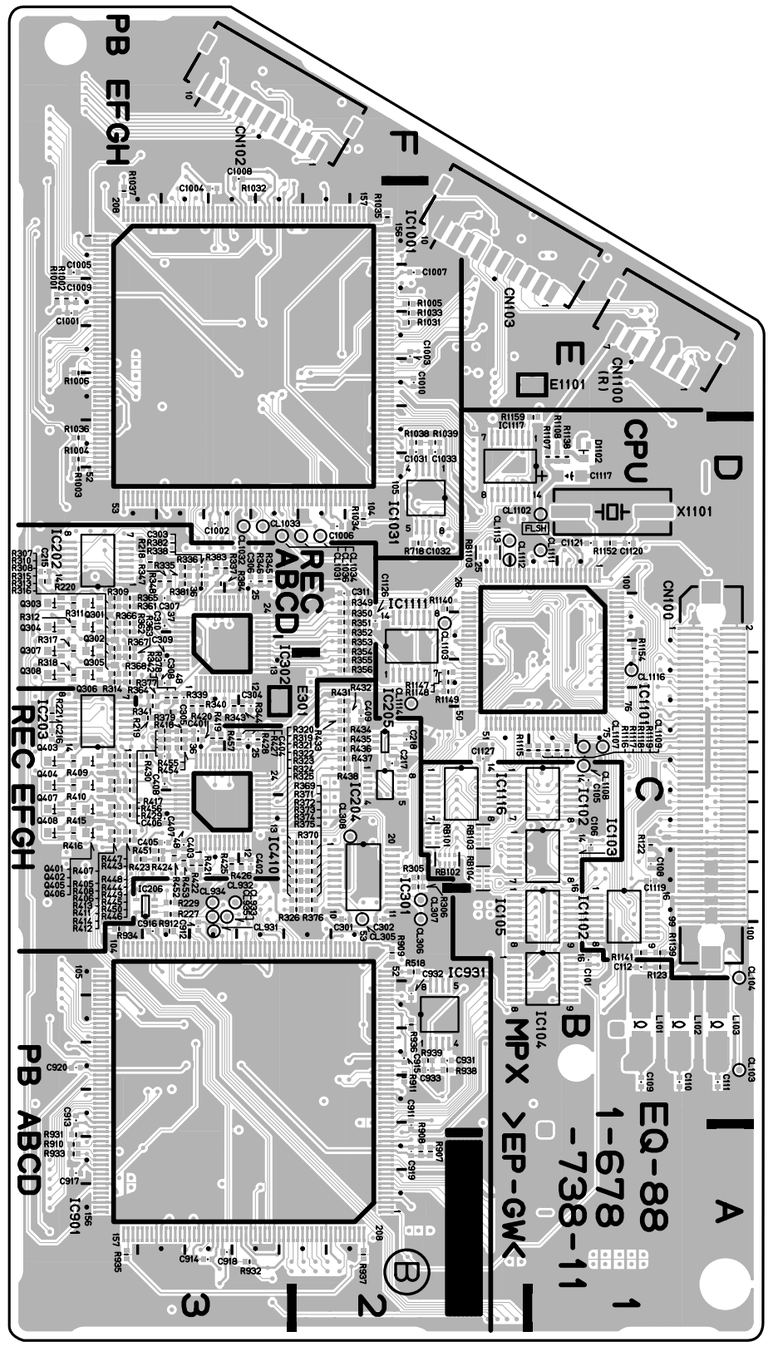

EQ-88 -B SIDE-
SUFFIX: -11

EQ-88 (1-678-738-11)
---

*:B SIDE

C101	*B1	C614	B2	C1112	B1	C1808	E3	CL1801	E3	Q502	A1	R350	*D2	R505	B3	R936	*B2	R1607	A2
C102	B1	C615	B2	C1113	C2	C1809	E3	CL1802	E3	Q701	E1	R351	*D2	R506	B3	R937	*A2	R1608	A2
C103	C1	C616	B2	C1114	C1	C1810	E3	CL1803	F3	Q702	E1	R352	*D2	R507	B3	R938	*B2	R1609	A2
C104	C1	C617	B2	C1115	C1	C1811	F3			Q1101	D1	R353	*D2	R508	B3	R939	*B2	R1610	A2
C105	*C1	C618	B2	C1116	C2	C1812	E3	CN100	*C1	Q1102	D1	R354	*D2	R509	B3	R1001	*E3	R1611	A2
C106	*C1	C619	B2	C1117	*D1	C1813	E3	CN101	C2			R355	*C2	R510	B3	R1002	*E3	R1612	A2
C108	*C1	C620	B2	C1118	C1	C1814	E3	CN102	*F3	R117	C2	R356	*C2	R511	B3	R1003	*D3	R1613	A2
C109	*B1	C701	D2	C1119	*C1	C1815	E3	CN103	*E2	R118	C2	R361	*D3	R512	B3	R1004	*D3	R1614	A2
C110	*B1	C702	D2	C1120	*D1	C1816	F3	CN1100	*E1	R119	C2	R362	*D3	R513	B3	R1005	*E2	R1615	A2
C111	*B1	C703	D2	C1121	*D1	C1817	F3			R120	C2	R363	*C3	R514	B3	R1006	*E3	R1616	A2
C112	*B1	C704	D2	C1122	C1	C1818	E3	D1101	B1	R121	C2	R364	*C3	R515	B3	R1031	*E2	R1617	A2
C201	C3	C705	D2	C1123	C1	C1819	F3	D1102	*D1	R122	*C1	R365	*D3	R516	B3	R1032	*E3	R1618	A2
C202	C3	C706	D2	C1125	D1	C1820	E3	D1103	E1	R123	*B1	R366	*D3	R517	B3	R1033	*E2	R1701	E2
C203	C3	C707	D2	C1126	*D2			D1104	E1	R201	C3	R367	*D3	R518	*B2	R1034	*D2	R1702	E2
C204	C3	C708	D2	C1127	*C2	CL101	C1	D1105	E1	R202	C3	R368	*C3	R519	B3	R1035	*E2	R1703	F2
C205	C3	C709	E2	C1129	D2	CL102	C1	D1106	E1	R203	C3	R369	*C2	R520	B1	R1036	*D3	R1704	F2
C206	D3	C710	E2	C1501	A3	CL103	*B1			R204	C3	R370	*C2	R601	B2	R1037	*E3	R1705	E2
C207	D3	C711	D2	C1502	A3	CL104	*B1	E101	F3	R205	C3	R371	*C2	R602	B2	R1038	*D2	R1706	E2
C208	C3	C712	E2	C1503	A3	CL105	C1	E301	*C3	R206	C3	R372	*C2	R603	B2	R1039	*D2	R1707	E2
C209	C3	C713	E2	C1504	A3	CL201	C2	E901	B2	R207	C3	R373	*C2	R604	B2	R1106	D1	R1708	F2
C210	C3	C714	E2	C1505	A3	CL202	B1	E1001	E2	R208	C3	R374	*B2	R605	B2	R1107	*D1	R1709	E2
C211	C3	C715	E2	C1506	A3	CL301	D3	E1101	*E1	R209	C3	R375	*B2	R606	B2	R1108	*D1	R1710	E2
C212	D3	C716	D2	C1507	A3	CL302	D3			R210	D3	R376	*B2	R607	B2	R1114	C1	R1711	E2
C213	D3	C717	D2	C1508	A3	CL303	D3	IC101	C1	R211	D3	R377	*C3	R608	B2	R1115	*C1	R1712	E2
C214	D3	C718	E2	C1509	A3	CL304	D3	IC102	*C2	R212	D3	R378	*C3	R609	B2	R1116	*C1	R1713	E2
C215	*D3	C719	D2	C1510	A3	CL305	*B2	IC103	*C2	R213	D3	R379	*C3	R610	B2	R1117	*C1	R1714	E2
C216	*C3	C720	D2	C1511	A3	CL306	*B2	IC104	*B2	R214	C3	R381	*D3	R611	B2	R1118	*C1	R1715	E2
C217	*C2	C721	E1	C1512	A3	CL307	*B2	IC105	*B2	R215	C3	R382	*D3	R612	B2	R1119	*C1	R1716	E2
C218	*C2	C801	D3	C1513	A3	CL308	*C2	IC201	C3	R216	C3	R383	*D3	R613	B2	R1120	B1	R1717	E2
C301	*B2	C802	E3	C1514	A3	CL401	C3	IC202	*D3	R217	C3	R384	*D3	R614	B2	R1121	C1	R1718	F2
C302	*B2	C803	E3	C1515	A3	CL402	C3	IC203	*C3	R218	*D3	R405	*C3	R615	B2	R1122	C1	R1801	E3
C303	*D3	C804	D3	C1516	A3	CL403	C3	IC204	*C2	R219	*C3	R406	*C3	R616	B2	R1123	C1	R1802	F3
C304	*C3	C805	E3	C1517	A3	CL404	C3	IC205	*C2	R220	*D3	R407	*C3	R617	B2	R1124	C1	R1803	E3
C305	*C3	C806	E3	C1518	A3	CL501	B3	IC206	*B3	R221	*C3	R408	*C3	R618	B2	R1125	C1	R1804	E3
C306	*D3	C807	E3	C1519	A3	CL502	B3	IC301	*C2	R222	C3	R409	*C3	R701	D2	R1126	C1	R1805	F3
C307	*D3	C808	E3	C1520	A3	CL503	B3	IC302	*D3	R227	*B3	R410	*C3	R702	D2	R1127	C1	R1806	F3
C308	*C3	C809	D3	C1601	A2	CL601	B2	IC410	*C3	R228	C3	R411	*C3	R703	E2	R1128	C1	R1807	F3
C309	*C3	C810	D3	C1602	A2	CL602	B2	IC501	B3	R229	*B3	R412	*C3	R704	E2	R1129	C2	R1808	E3
C310	*D3	C811	E3	C1603	A2	CL603	B2	IC601	B2	R305	*C2	R413	*C3	R705	D2	R1130	B1	R1809	F3
C311	*D2	C812	D3	C1604	A2	CL701	E2	IC701	D2	R306	*C2	R414	*C3	R706	D2	R1131	B1	R1810	F3
C401	*C3	C813	D3	C1605	A2	CL702	E2	IC801	E3	R307	*D3	R415	*C3	R707	D2	R1132	C2	R1811	F3
C402	*C3	C814	D3	C1606	A2	CL703	D2	IC901	*B3	R308	*D3	R416	*C3	R708	E2	R1133	B1	R1812	F3
C403	*C3	C815	D3	C1607	A2	CL801	D3	IC931	*B2	R309	*D3	R417	*C3	R709	D2	R1134	C1	R1813	F3
C404	*C3	C816	E3	C1608	A2	CL802	D3	IC1001	*E3	R310	*D3	R418	*C3	R710	D2	R1135	C1	R1814	E3
C405	*C3	C817	E3	C1609	A2	CL803	E3	IC1031	*D2	R311	*D3	R419	*C3	R711	D2	R1136	B1	R1815	E3
C406	*C3	C818	D3	C1610	A2	CL901	A1	IC1101	*D1	R312	*D3	R420	*C3	R712	D2	R1137	C1	R1816	E3
C407	*C3	C819	E3	C1611	A2	CL902	A1	IC1102	*B1	R313	*C3	R421	*C3	R713	D2	R1138	*D1	R1817	E3
C408	*C3	C820	D3	C1612	A2	CL903	A1	IC1103	C1	R314	*C3	R422	*C3	R714	E2	R1139	*B1	R1818	E3
C409	*C2	C911	*A2	C1613	A2	CL904	A1	IC1104	B1	R315	*D3	R423	*C3	R715	E2	R1140	*D2		
C501	B3	C912	*B3	C1614	A2	CL931	*B3	IC1105	C1	R316	*C3	R424	*C3	R716	D2	R1141	*B1	RB101	*C2
C502	B3	C913	*B3	C1615	A2	CL932	*B3	IC1110	D1	R317	*D3	R425	*C3	R717	D2	R1142	D2	RB102	*C2
C503	B3	C914	*A3	C1616	A2	CL933	*B3	IC1111	*C2	R318	*C3	R426	*C3	R718	*D2	R1146	D2	RB103	*C2
C504	B3	C915	*B2	C1617	A2	CL934	*B3	IC1113	C1	R319	*C2	R427	*C3	R719	E2	R1147	*C2	RB104	*C2
C505	B3	C916	*B3	C1618	A2	CL935	*B3	IC1114	D1	R320	*C2	R428	*C3	R720	E1	R1148	*C2	RB1101	B1
C506	B3	C917	*A3	C1619	A2	CL1001	D2	IC1115	D1	R321	*C2	R429	*C3	R801	E3	R1149	*C2	RB1102	B1
C507	B3	C918	*A3	C1620	A2	CL1002	E2	IC1116	*C2	R322	*C2	R430	*C3	R802	E3	R1152	*D1	RB1103	*D2
C508	B3	C919	*A2	C1701	E2	CL1003	E2	IC1117	*D1	R323	*C2	R431	*C2	R803	D3	R1154	*D1	RB1104	D1
C509	B3	C920	*B3	C1702	E2	CL1004	E2	IC1501	A3	R324	*B2	R432	*C2	R804	D3	R1155	F3		
C510	B3	C931	*B2	C1703	E2	CL1031	*D3	IC1601	A2	R325	*B2	R433	*C2	R805	E3	R1159	*D1	S1101	F3
C511	B3	C932	*B2	C1704	E2	CL1032	*D3	IC1701	E2	R326	*B2	R434	*C2	R806	E3	R1501	A3		
C512	B3	C933	*B2	C1705	E2	CL1033	*D3	IC1801	F3	R327	C2	R435	*C2	R807	E3	R1502	A3	TP101	E1
C513	B3	C1001	*E3	C1706	E2	CL1034	*D2			R328	C2	R436	*C2	R808	D3	R1503	A3	TP102	E1
C514	B3	C1002	*D3	C1707	E2	CL1036	*D2	L101	*B1	R329	C2	R437	*C2	R809	E3	R1504	A3	TP103	E1
C515	B3	C1003	*E2	C1708	E2	CL1101	C1	L102	*B1	R330	C2	R438	*C2	R810	E3	R1505	A3	TP104	E1
C516	B3	C1004	*E3	C1709	F2	CL1102	*D1	L103	*B1	R331	C2	R443	*C3	R811	E3	R1506	A3	TP105	E1
C517	B3	C1005	*E3	C1710	F2	CL1103	*D2			R332	B2	R444	*C3	R812	E3	R1507	A3	TP106	E1
C518	B3	C1006	*D2	C1711	E2	CL1107	*C1	Q301	*D3	R333	B2	R445	*C3	R813	E3	R1508	A3	TP107	E1
C519	B3	C1007	*E2	C1712	F2	CL1108	*C1	Q302	*D3	R334	B2	R446	*C3	R814	D3	R1509	A3	TP108	F2
C520	B3	C1008	*F3	C1713	F2	CL1109	*C1	Q303	*D3	R335	*D3	R447	*C3	R815	D3	R1510	A3	TP501	B3
C521	B1	C1009	*E3	C1714	F2	CL1111	*D1	Q304	*D3	R336	*D3	R448	*C3	R816	D3	R1511	A3	TP601	B2
C601	B2	C1010	*E2	C1715	F2	CL1112	*D2	Q305	*D3	R337	*D3	R449	*C3	R817	E3	R1512	A3	TP701	E2
C602	B2	C1031	*D2	C1716	E2	CL1113	*D2	Q306	*C3	R338	*D3	R450	*C3	R818	D3	R1513	A3	TP801	D3
C603	B2	C1032	*D2	C1717	E2	CL1114	*C2	Q307	*D3	R339	*C3	R451	*C3	R907	*A2	R1514	A3	TP1501	A3
C604	B2	C1033	*D2	C1718	F2	CL1116	*C1	Q308	*C3	R340	*C3	R452	*C3	R908	*A2	R1515	A3	TP1601	A2
C605	B2	C1103	D1	C1719	E2	CL1501	A3	Q401	*C3	R341	*C3	R453	*C3	R909	*B2	R1516	A3	TP1701	E2
C606	B2	C1104	D1	C1720	E2	CL1502	A3	Q402	*C3	R342	*C3	R454	*C3	R910	*A3	R1517	A3	TP1801	E3
C607	B2	C1105	D1	C1801	E3	CL1503	A3	Q403	*C3	R343	*C3	R455	*C3	R911	*B2	R1518	A3		
C608	B2	C1106	D1	C1802	F3	CL1601	A2	Q404	*C3	R344	*C3	R456	*C3	R912	*B3	R1601	A2	X1101	*D1
C609	B2	C1107	D1	C1803	F3	CL1602	A2	Q405	*C3	R345	*D3	R457	*C3	R931	*A3	R1602	A2		
C610	B2	C1108	D1	C1804	E3	CL1603	A2	Q406	*C3	R346	*D3	R501	B3	R932	*A3	R1603	A2		
C611	B2	C1109	D2	C1805	F3	CL1701	F2	Q407	*C3	R347	*D3	R502	B3	R933	*A3	R1604	A2		
C612	B2	C1110	B1	C1806	F3	CL1702	F2	Q408	*C3	R348	*D3	R503	B3	R934	*B3	R1605	A2		
C613	B2	C1111	C2	C1807	F3	CL1703	E2	Q501	A1	R349	*D2	R504	B3	R935	*A3	R1606	A2		

FP-121 (1-678-732-13)
---

*:B SIDE

C1	*F5	C142	*D3	C406	D5	C571	*B4	C816	*D1	E502	*F3	IC814	*E2	Q619	A3	R72	G4	R169	*D2	R291	*G4	R435	*D4	R536	*B3	R627	*A5	R721	*A5	R934	*D3		
C2	*F5	C143	*E4	C407	*D4	C572	*B4	C817	F6			IC815	C1	Q620	*C2	R73	G4	R170	*C5	R292	*B5	R436	*D4	R537	*B3	R628	*B5	R722	*A5	R936	*F1	S1	E5
C4	C5	C144	*E4	C408	*D4	C573	*A4	C818	F6	FB601	C4	IC817	*E6	Q621	A3	R74	*G4	R171	C5	R293	*B5	R437	*D4	R538	*B3	R629	*A5	R723	*A5	R937	*F1	S2	F5
C5	D5	C145	E4	C409	*D4	C574	*B4	C819	G6	FB602	B4	IC819	*C1	Q622	*A3	R75	*G4	R172	C5	R294	E4	R438	*C4	R539	*B3	R630	*B5	R724	*A5	R938	*E1	S3	G4
C7	F5	C146	D4	C410	*D4	C575	*A4	C820	*D1	FB603	C4	IC820	D1	Q623	*A4	R76	*G5	R173	*C5	R295	G4	R439	*D4	R540	*B3	R631	*A5	R725	*A5	R939	*E6	S4	G5
C8	*F5	C150	*C5	C411	D4	C576	B4	C821	*D1	FB701	A4	IC821	D2	Q624	B4	R77	*G5	R174	*F4	R296	*D4	R440	*C4	R541	*B2	R632	*B5	R726	*A5	R940	*F2	S101	E4
C10	D5	C151	*F4	C412	*C4	C577	A4	C822	*F2	FB702	A4	IC822	D1	Q625	C4	R78	*F4	R175	*F4	R297	*C3	R441	*D5	R542	*B3	R633	*B5	R727	*A5	R941	*E6	S102	*E3
C11	*F5	C152	*F4	C413	*C5	C578	B4	C823	*F1	FB703	A4	IC823	D2	Q626	*B5	R79	*G4	R176	F4	R301	C4	R442	*D4	R543	*B3	R634	*B5	R728	*A5	R942	*E6	S201	F4
C12	*F5	C153	*F4	C414	D5	C579	A4	C824	*E2			IC824	C2	Q701	B5	R80	*F4	R177	F4	R302	C4	R443	*C5	R544	*B3	R635	*B5	R729	*A5	R943	*E6	S202	*F3
C13	D5	C154	D3	C415	C4	C580	*B5	C825	G2	IC1	F5	IC825	A2	Q702	A5	R81	*F5	R178	F4	R303	C5	R444	*D5	R545	*B3	R636	*B5	R730	*A5	R944	*E6	S501	*A4
C14	C5	C155	D3	C416	D4	C581	*B5	C826	G2	IC2	C5	IC826	C2	Q703	*B5	R82	*F5	R179	*F4	R304	C5	R445	*D5	R546	*B3	R637	*A5	R731	*A5	R945	A2	S502	*A3
C15	C5	C156	D3	C417	D4	C582	B4	C827	*F2	IC5	C5	IC830	*C2	Q704	*B5	R83	*F5	R180	E4	R318	C5	R446	*D4	R547	*B3	R638	*B5	R732	*A5	R946	A2	S503	E5
C19	F5	C157	*B5	C418	*C4	C583	B4	C828	*E2	IC6	C5	IC831	*C2	Q705	A4	R84	E5	R181	D3	R319	*C5	R447	*C5	R548	*B3	R639	*A5	R733	A4	R947	A2	S504	*B4
C20	F5	C201	F3	C419	D4	C584	A5	C829	*E2	IC7	B5	IC832	C1	Q706	A4	R85	C5	R182	*D4	R320	*C4	R448	*D5	R549	*B2	R640	*B5	R734	A4	R948	*F1	S505	*A4
C29	C5	C202	*F3	C420	C4	C585	B4	C830	*F1	IC8	C5	IC841	G5	Q708	D4	R86	C5	R183	D4	R321	*C4	R449	*D4	R550	*B3	R641	*A5	R735	A4	R949	*F1	S801	E1
C30	C5	C203	*F3	C421	C4	C586	B5	C831	*F2	IC11	*E5	IC842	*E6	Q709	D4	R87	D5	R184	*B5	R327	*C5	R450	*D4	R551	*B3	R642	*B5	R736	*A5	R955	*F2	S802	E4
C31	C6	C204	*F3	C422	D4	C587	B4	C832	*E6	IC12	F5	IC843	*F6	Q802	E5	R88	D5	R185	B5	R340	C5	R451	*D5	R552	*B3	R643	*A5	R737	D4	R956	C1	S803	D5
C32	C6	C205	*F4	C423	D4	C588	A5	C833	*E6	IC13	F5			Q803	*E6	R89	*G5	R186	B5	R342	*C5	R452	*D4	R553	*B3	R644	*B5	R738	D4	R957	C1	S804	D4
C33	E5	C206	F4	C424	D4	C589	B4	C834	*E6	IC14	*F4	L701	B6	Q804	*D2	R90	*F5	R187	*B5	R359	*C4	R453	*C4	R554	B3	R645	*B5	R739	*A5	R959	C1	S805	D1
C34	E5	C207	F4	C425	C4	C590	B5	C835	*E6	IC15	*G5	L702	B6	Q806	*D2	R91	*E4	R203	*F3	R360	*C4	R454	D5	R555	B3	R646	*A4	R740	D4	R961	C1	S806	E1
C39	*E5	C208	G4	C426	C4	C591	B4	C836	*F1	IC16	G3	L703	A6	Q807	*D2	R92	*E4	R204	F4	R361	*C4	R455	C4	R556	B3	R647	*B4	R742	D4	R963	C1	S807	E3
C40	*E5	C209	*G4	C427	C5	C594	*B4	C837	*E6	IC17	B5	L704	A6	Q808	*D2	R93	*G4	R205	F4	R362	*C4	R456	D4	R557	*B4	R648	*A4	R750	*A5	R964	C1	S808	D3
C43	*E4	C210	*G4	C428	*C5	C596	*B4	C838	*F1	IC101	E4	L705	A6	Q812	E5	R94	*G4	R206	*F3	R363	*C5	R457	D4	R558	*B4	R649	*B4	R751	*B5	R974	F6	S810	F1
C44	E5	C211	*G3	C429	*C5	C597	*A4	C839	C2	IC102	E3	L706	A6	Q813	D6	R95	*F5	R207	F4	R364	*C4	R458	D4	R559	C4	R650	*B5	R752	*B4	R975	F5	S814	*E1
C46	*F5	C212	*G3	C430	C5	C598	A4	C840	*E2	IC103	*F4	L801	D6	Q814	*D5	R96	*F5	R208	*F4	R365	*C4	R459	D4	R560	*A4	R651	*A4	R753	*B5	R976	D5		
C47	*F5	C213	*G3	C431	*D5	C599	*B3	C841	*G2	IC104	*E4	L802	D6	Q815	D5	R97	*F4	R209	F4	R366	*C4	R460	D4	R561	*A4	R652	*B4	R754	*B4	R978	*F2	THP1	*E5
C48	F4	C214	*G3	C432	C5	C600	*B4	C842	*G6	IC105	D4			Q816	D5	R98	*E3	R210	F4	R367	*C4	R461	D4	R562	B4	R653	*A5	R760	A4	R979	*F2	THP2	*F5
C49	F4	C215	*F3	C433	D5	C601	A3	C843	E6	IC106	C3	ND801	E2	Q817	*E6	R99	*F3	R213	*G4	R368	*C4	R462	C4	R563	*A3	R654	*A4	R761	A4	R981	*D2		
C50	*F5	C216	D3	C501	*D2	C602	C3	C844	*E2	IC107	D2			Q818	*C2	R103	*E3	R214	*F4	R369	*C4	R463	C4	R564	A3	R655	*B4	R762	*A5	R982	*E2	TP1	*E4
C51	*F5	C217	*D3	C502	*D2	C603	C3	C845	*E2	IC108	*F4	Q102	*F3	Q819	E5	R104	F4	R215	*G4	R370	*C4	R464	D4	R565	A3	R656	*B4	R801	*G2	R983	*G6	TP2	*G4
C52	*F5	C218	*D3	C503	*C2	C604	C3	C999	C6	IC109	D3	Q103	*E4	Q820	*C1	R105	F4	R216	*G4	R371	*C4	R465	D4	R566	*A3	R657	*B4	R802	*D2	R988	*D5	TP3	*F4
C53	*F5	C219	*D3	C504	*C3	C605	C2	C1000	E6	IC160	C5	Q104	*E3	Q821	E6	R106	*E3	R217	F4	R372	*C4	R466	D4	R567	C4	R658	*A5	R803	E6	R989	*D5	TP4	*F4
C54	*F5	C220	D3	C505	*B3	C606	*C3	C1001	E5	IC201	G4	Q105	*E3			R107	F4	R218	*F4	R373	*C4	R467	D4	R568	*A3	R659	*B5	R804	E6	R990	*D5	TP5	*C5
C57	*F4	C221	*D3	C506	*C3	C607	*A3	C1002	*F6	IC202	F3	Q109	E3	R1	B6	R108	*E4	R219	*F4	R374	*C4	R468	D4	R569	B4	R660	*A4	R806	*F2	R991	*D5	TP6	*D5
C61	G3	C222	*D3	C507	*C3	C608	*A3	C1003	*F6	IC203	*F4	Q110	E3	R2	C6	R109	F4	R220	*G4	R375	*C4	R469	C4	R570	*C4	R661	*B4	R807	E6	R992	F6	TP101	*D3
C62	*F4	C223	*D3	C508	*C3	C609	*A2			IC204	*G4	Q111	*D3	R3	C6	R110	F4	R221	*F4	R376	*C5	R473	D5	R571	*C4	R662	*B5	R808	D6	R995	*F2	TP102	*B3
C63	*F5	C224	*D3	C509	*C3	C610	*A2	CN105	*A6	IC205	D3	Q112	*D3	R4	B6	R113	*E4	R222	*G4	R377	*C4	R475	C5	R572	*B4	R663	*B5	R809	*G1	R996	D6	TP201	*C3
C64	B5	C225	*C3	C510	B2	C611	*A2	CN106	*C6	IC206	B2	Q114	E4	R5	C6	R114	*E4	R223	*G4	R378	*C5	R477	D5	R573	*B4	R664	C4	R810	E5	R997	D6	TP202	*B3
C65	B5	C226	C3	C511	B2	C612	*B2	CN107	*D6	IC301	C5	Q115	E4	R6	C6	R115	*E4	R224	*G4	R379	*C5	R480	C4	R574	B4	R665	*B5	R811	*E6	R998	D6	TP302	*C5
C66	E4	C227	C3	C512	C3	C613	*B4	CN201	*A3	IC302	*C5	Q116	E4	R7	B6	R116	*E4	R225	*G3	R380	*C5	R481	D5	R575	A4	R666	B5	R812	F6	R999	*D2	TP401	*D5
C67	*E4	C228	B2	C513	*C3	C614	*B5	CN202	*A4	IC303	*C4	Q117	F4	R8	C6	R117	*F4	R226	*F4	R381	*C4	R482	*C5	R576	*C4	R667	B4	R813	F6	R1001	G5	TP501	*B5
C68	G4	C251	*F4	C514	B3	C615	*B2	CN203	*A4	IC304	C4	Q150	C5	R9	C6	R118	*E4	R227	*G3	R382	*C5	R483	*C5	R577	*B4	R668	*C4	R814	F6	R1002	E5	TP502	*B4
C69	*G4	C254	D3	C515	B3	C616	*B2	CN204	*A5	IC305	C4	Q151	B5	R10	B6	R119	*E4	R228	*G3	R383	*C5	R484	*C5	R578	B4	R669	*C2	R815	G6	R1003	E5	TP801	*E6
C70	*G4	C255	*D4	C516	C3	C617	*B5	CN205	*F6	IC402	*D5	Q202	*F3	R11	B6	R120	*E4	R229	*F3	R384	*C5	R485	*C5	R579	A4	R670	B4	R816	*E2	R1004	E6	TP802	*E1
C71	G5	C256	*C3	C517	*C3	C618	*C5	CN206	*G2	IC403	*D4	Q203	*F4	R12	C6	R121	*E4	R230	F3	R385	*C4	R486	*C5	R580	B4	R671	*B4	R817	*B6	R1005	E6	TP803	*F2
C72	*G5	C305	C5	C518	*B3	C619	*B5	CN207	*C2	IC404	D4	Q204	*F3	R13	*F5	R122	*E4	R231	*F3	R386	*C5	R487	*C5	R581	A4	R672	*B4	R818	*D2	R1006	E5	TP804	*G1
C73	G5	C307	*C5	C519	*B3	C620	B5	CN208	*G2	IC405	*C5	Q205	*F3	R14	*F5	R123	*E4	R232	*F3	R387	*C4	R488	*D5	R582	B4	R673	*C2	R819	*D2	R1007	*C1	TP805	*E1
C74	G5	C308	C5	C520	*B3	C621	*B2	CN303	*A6	IC501	D2	Q209	F3	R15	*F5	R124	*E4	R233	*F3	R388	*C4	R489	*C5	R583	A4	R674	*B4	R820	*E2	R1008	*E1	TP806	*G1
C75	C5	C309	*C5	C521	*C3	C622	*B2			IC503	C3	Q210	F3	R16	*F5	R125	*E3	R234	*F3	R389	C4	R490	*D5	R584	B4	R675	B4	R821	*E2	R1009	D5	TP807	*F1
C76	C5	C318	C5	C522	*B2	C623	*C4	CT801	*D1	IC504	B3	Q211	*D3	R17	C5	R126	*E4	R235	*F3	R390	D5	R491	*D5	R585	A4	R676	*B4	R822	*E2	R1010	*E1	TP808	*F1
C101	E3	C319	*C4	C523	*C2	C624	C4			IC505	B3	Q217	F4	R18	C5	R127	*E3	R236	F3	R391	D5	R492	*D5	R586	B4	R677	A3	R824	*D1	R1011	*E1	TP809	*F1
C102	*E3	C320	*C4	C524	*A3	C625	B4	D101	*E4	IC506	B3	Q310	*C5	R19	D5	R128	*E3	R237	F3	R392	D5	R493	*C5	R587	B4	R678	A3	R825	*D2	R1012	*A6	TP810	*C1
C103	*E3	C321	*C4	C525	*A3	C626	C4	D102	*C3	IC507	B3	Q312	*C4	R20	D5	R129	*E3	R238	F3	R393	C4	R494	C4	R588	B4	R679	*A3	R827	*G2	R1013	F6	TP811	*C2
C104	*E3	C322	*C4	C526	*B3	C627	B4	D103	*C3	IC508	*B4	Q313	*C4	R21	*F5	R130	E3	R239	F3	R394	C4	R495	D5	R589	A4	R680	*A4	R828	E5	R1014	*G1	TP812	*E2
C105	F4	C323	C4	C527	*B3	C628	C4	D201	*G4	IC510	B3	Q316	*C4	R22	*F5	R131	*E3	R240	F3	R395	C4	R496	*C5	R590	*B4	R681	*A3	R829	*E6	R1015	*F6	TP813	*D1
C106	F4	C324	*C4	C528	B3	C629	B5	D302	*C4	IC512	B4	Q319	*C5	R23	C5	R132	*E3	R241	*F4	R396	C4	R497	*D5	R591	B4	R682	*A4	R830	*F2			TP814	*G2
C107	F4	C325	*C5	C529	B3	C701	A6	D303	*C3	IC513	*B4	Q320	*C5	R24	D5	R133	*E3	R242	F4	R397	C4	R498	*C4	R592	A4	R683	*A3	R832	*E2	RB1	G2	TP815	*G2
C108	E4	C326	C5	C530	B3	C702	A6	D304	*C3	IC514	B5	Q321	D5	R25	*F5	R134	*E3	R243	*D3	R398	C4	R499	*D4	R593	*C5	R684	*A4	R833	*D2	RB701	A5	TP816	*E2
C109	*E4	C327	C4	C531	B3	C703	B6	D401	*D4	IC515	B4	Q322	C4	R26	D5	R135	*E3	R244	*D3	R399	C4	R501	*A3	R594	*C5	R685	*A3	R834	*F1	RB702	A5	TP817	*E2
C110	*E4	C328	C4	C532	*B3	C704	A6	D501	*B4	IC516	*A4	Q324	*D5	R27	E5	R136	E3	R245	*D3	R400	C4	R502	*D2	R595	*B4	R686	*A4	R835	*E2	RB703	A5		
C111	*E3	C329	*C4	C533	*B3	C705	B6	D502	*A4	IC517	B5	Q325	*E5	R28	*F5	R137	E3	R246	*D3	R401	C4	R503	*D3	R596	*A4	R687	*B3	R836	*F2	RB704	A5	X801	D1
C112	*E3	C330	C4	C534	B3	C706	A5	D701	B6	IC518	C4	Q326	E5	R29	C5	R138	E3	R247	*D3	R402	C4	R504	*B3	R597	B4	R688	*B4	R842	*F1	RB801	*F1	X802	G2
C113	*E3	C331	C4	C535	*B3	C707	A5	D702	A5	IC519	C5	Q401	*D5	R35	E5	R139	E3	R248	*D3	R403	C4	R505	*C2	R598	*B4	R689	B5	R844	*D2	RB802	*F1		
C114	*E3	C332	C4	C538	B3	C708	*B5	D703	A5	IC520	B4	Q402	*D4	R36	*E4	R140	E3	R249	*D3	R404	C4	R507	B4	R599	*B4	R690	*B4	R845	*D1	RB803	*F2		
C115	*E3	C333	C4	C539	B3	C709	*A5	D704	*B5	IC521	C2	Q403	*D4	R37	*E4	R141	*E4	R250	*D3	R405	C4	R509	*C3	R600	*B4	R691	B4	R858	*F1	RB804	*F2		
C116	D3	C334	C4	C540	B3	C710	B5	D705	*B5	IC522	*A2	Q405	*D4	R38	*E4	R142	E4	R251	*D3	R406	C4	R510	*C3	R601	*A4	R692	C4	R859	*E2	RB805	*E2		
C117	*D3	C335	C4	C541	B3	C711	*B5	D706	*B5	IC523	*A2	Q408	*D5	R39	*E4	R143	*D3	R252	*D3	R407	C4	R511	*C3	R602	*B4	R693	C5	R860	*G1	RB806	*F2		
C118	*D3	C336	C4	C544	*A3	C712	B5	D707	*B5	IC524	*A2	Q409	*D5	R40	*E4	R144	*D3	R253	C3	R409	*C3	R512	*C3	R603	*A4	R694	*B5	R861	*E2	RB807	*E1		
C119	D4	C337	C3	C545	A3	C713	A5	D708	D4	IC525	*B2	Q410	D4	R41	*E5	R145	*D3	R254	C3	R410	D3	R513	*C3	R604	*B4	R695	*B2	R862	*E2	RB808	*E1		
C120	*D3	C338	*C3	C548	B4	C714	B5	D801	*F2	IC526	*B2	Q411	*C5	R42	*E5	R146	*D3	R255	C3	R411	D3	R514	*C3	R605	*B4	R696	B5	R863	*F1	RB809	*E1		
C121	*D4	C339	C3	C549	A4	C715	A5	D803	*D1	IC527	*B2	Q412	*D5	R43	*E5	R147	*D3	R256	C3	R412	*D5	R515	*C3	R606	*A4	R697	B5	R864	*F2	RB810	*F2		
C122	D4	C340	*C3	C550	*C4	C718	A5	D804	F6	IC528	*B2	Q501	*A3	R44	*E5	R148	*D3	R257	C3	R413	*E5	R516	*B3	R607	*A4	R699	*B5	R865	*F1	RB811	*G2		
C123	*D3	C341	C4	C551	*C4	C719	A5	D805	*B5	IC529	*B2	Q502	*A3	R45	F5	R149	*D3	R263	E4	R414	*E5	R517	*B3	R608	*B4	R701	A6	R866	*E2	RB812	*G2		
C124	*C3	C342	C4	C552	*B4	C720	A6	D806	F6	IC701	A5	Q503	*B3	R46	F5	R150	*D3	R265	F4	R415	*D5	R518	*A3	R609	*A4	R702	B6	R871	*F1	RB813	*G2		
C125	C3	C343	*C3	C553	B4	C721	A4	D807	F6	IC702	*A5	Q504	*B3	R47	*F5	R151	*D3	R274	*F4	R416	D3	R519	*B3	R610	*B4	R703	*B5	R872	*E1				
C126	C3	C344	*C3	C554	A4	C722	A6	D808	G6	IC703	A5	Q505	*B3	R48	*F5	R152	*D3	R275	*F4	R417	*D5	R520	*B3	R611	*A4	R704	*B5	R891	*F1	RV2	E3		
C127	C3	C345	*C3	C555	B4	C723	*A5	D809	F5	IC704	A5	Q506	*B3	R51	*F5	R153	*D4	R276	F4	R418	*D4	R521	*A3	R612	*B4	R705	*B5	R892	*F1	RV3	F3		
C128	*C3	C346	*C3	C556	A4	C801	E6	D810	*D2	IC705	A4	Q507	B4	R52	*F5	R154	*D3	R277	F4	R419	*C4	R522	*A3	R613	*A4	R706	*A5	R898	*F1	RV10	*E4		
C129	C3	C347	*C3	C557	*B4	C802	D5	D811	*F1	IC707	*A5	Q508	A4	R53	*F5	R155	*D3	R278	F4	R420	*D5	R523	*A3	R614	B4	R707	*B5	R908	*F2	RV11	*F5		
C130	*C3	C348	*C3	C558	B4	C803	D6	D812	*D2	IC801	*F2	Q509	*B4	R54	*F5	R156	C3	R279	*F4	R421	D5	R524	*C3	R615	A4	R708	*B5	R912	*G1	RV12	*E4		
C131	C3	C349	*C3	C559	B4	C804	*F2	D813	*D1	IC802	E6	Q510	*A4	R55	*F5	R157	C3	R280	F4	R423	*D5	R525	*C3	R616	*B4	R709	*A5	R921	*E2	RV13	*F5		
C132	C3	C350	D3	C560	B4	C805	E6	D814	*G1	IC803	E6	Q511	*B4	R56	*F5	R158	C3	R281	D3	R425	*D4	R526	B3	R617	*A4	R710	*A5	R924	*E1	RV20	*F4		
C133	*C3	C351	D3	C561	*A4	C806	F6	D815	G1	IC804	F6	Q512	*A4	R57	*F5	R159	C3	R282	*D3	R426	*C4	R527	B3	R618	*A4	R711	*A5	R925	*E1	RV22	*G4		
C134	*C3	C352	*D5	C562	A4	C807	D6	D816	D6	IC805	F6	Q516	*B5	R61	*F4	R160	C3	R283	D3	R427	*D4	R528	B3	R619	*A5	R712	*A4	R926	*E3	RV23	*F5		
C135	*C3	C353	*E5	C563	B4	C808	E6	D817	E6	IC806	F6	Q517	*A5	R62	E5	R162	*C3	R284	F4	R428	*D4	R529	B3	R620	*B4	R713	*A4	R927	*E3	RV150	*B5		
C136	*C3	C354	E5	C564	B4	C809	E5	D818	*F2	IC807	F6	Q518	*B5	R63	*F5	R163	*D2	R285	F4	R429	*D5	R530	B3	R621	*B5	R714	*A4	R928	*D5	RV151	*D4		
C137	*C3	C355	D5	C565	*B4	C810	*E6	D819	*E6	IC808	G6	Q519	*B5	R65	*E4	R164	*D2	R286	F4	R430	*D4	R531	B3	R622	*B4	R715	*A4	R929	*D5	RV152	*D3		
C138	*C3	C402	D5	C566	*B4	C811	E5	D820	E5	IC809	*D1	Q520	*B5	R67	E4	R165	D4	R287	*E4	R431	*C4	R532	*B3	R623	*A4	R717	*A5	R930	*D4	RV153	*B5		
C139	*C3	C403	*D5	C568	*B4	C812	*F6	D821	*G1	IC811	*E2	Q521	*A5	R68	E4	R166	E4	R288	*E4	R432	*D4	R533	*B3	R624	*A5	R718	*A6	R931	*D4	RV501	*B3		
C140	*D2	C404	D5	C569	*A4	C813	F6			IC812	*D2	Q522	*C2	R69	G5	R167	E4	R289	F4	R433	*C4	R534	B3	R625	*B5	R719	*A5	R932	*D1	RV502	*B3		
C141	*D2	C405	*D5	C570	*B4	C814	F6	E501	*C6	IC813	*D1	Q525	B5	R70	*F4	R168	E4	R290	*F4	R434	*C4	R535	B3	R626	*B5	R720	*A5	R933	E3	RV503	*C4		

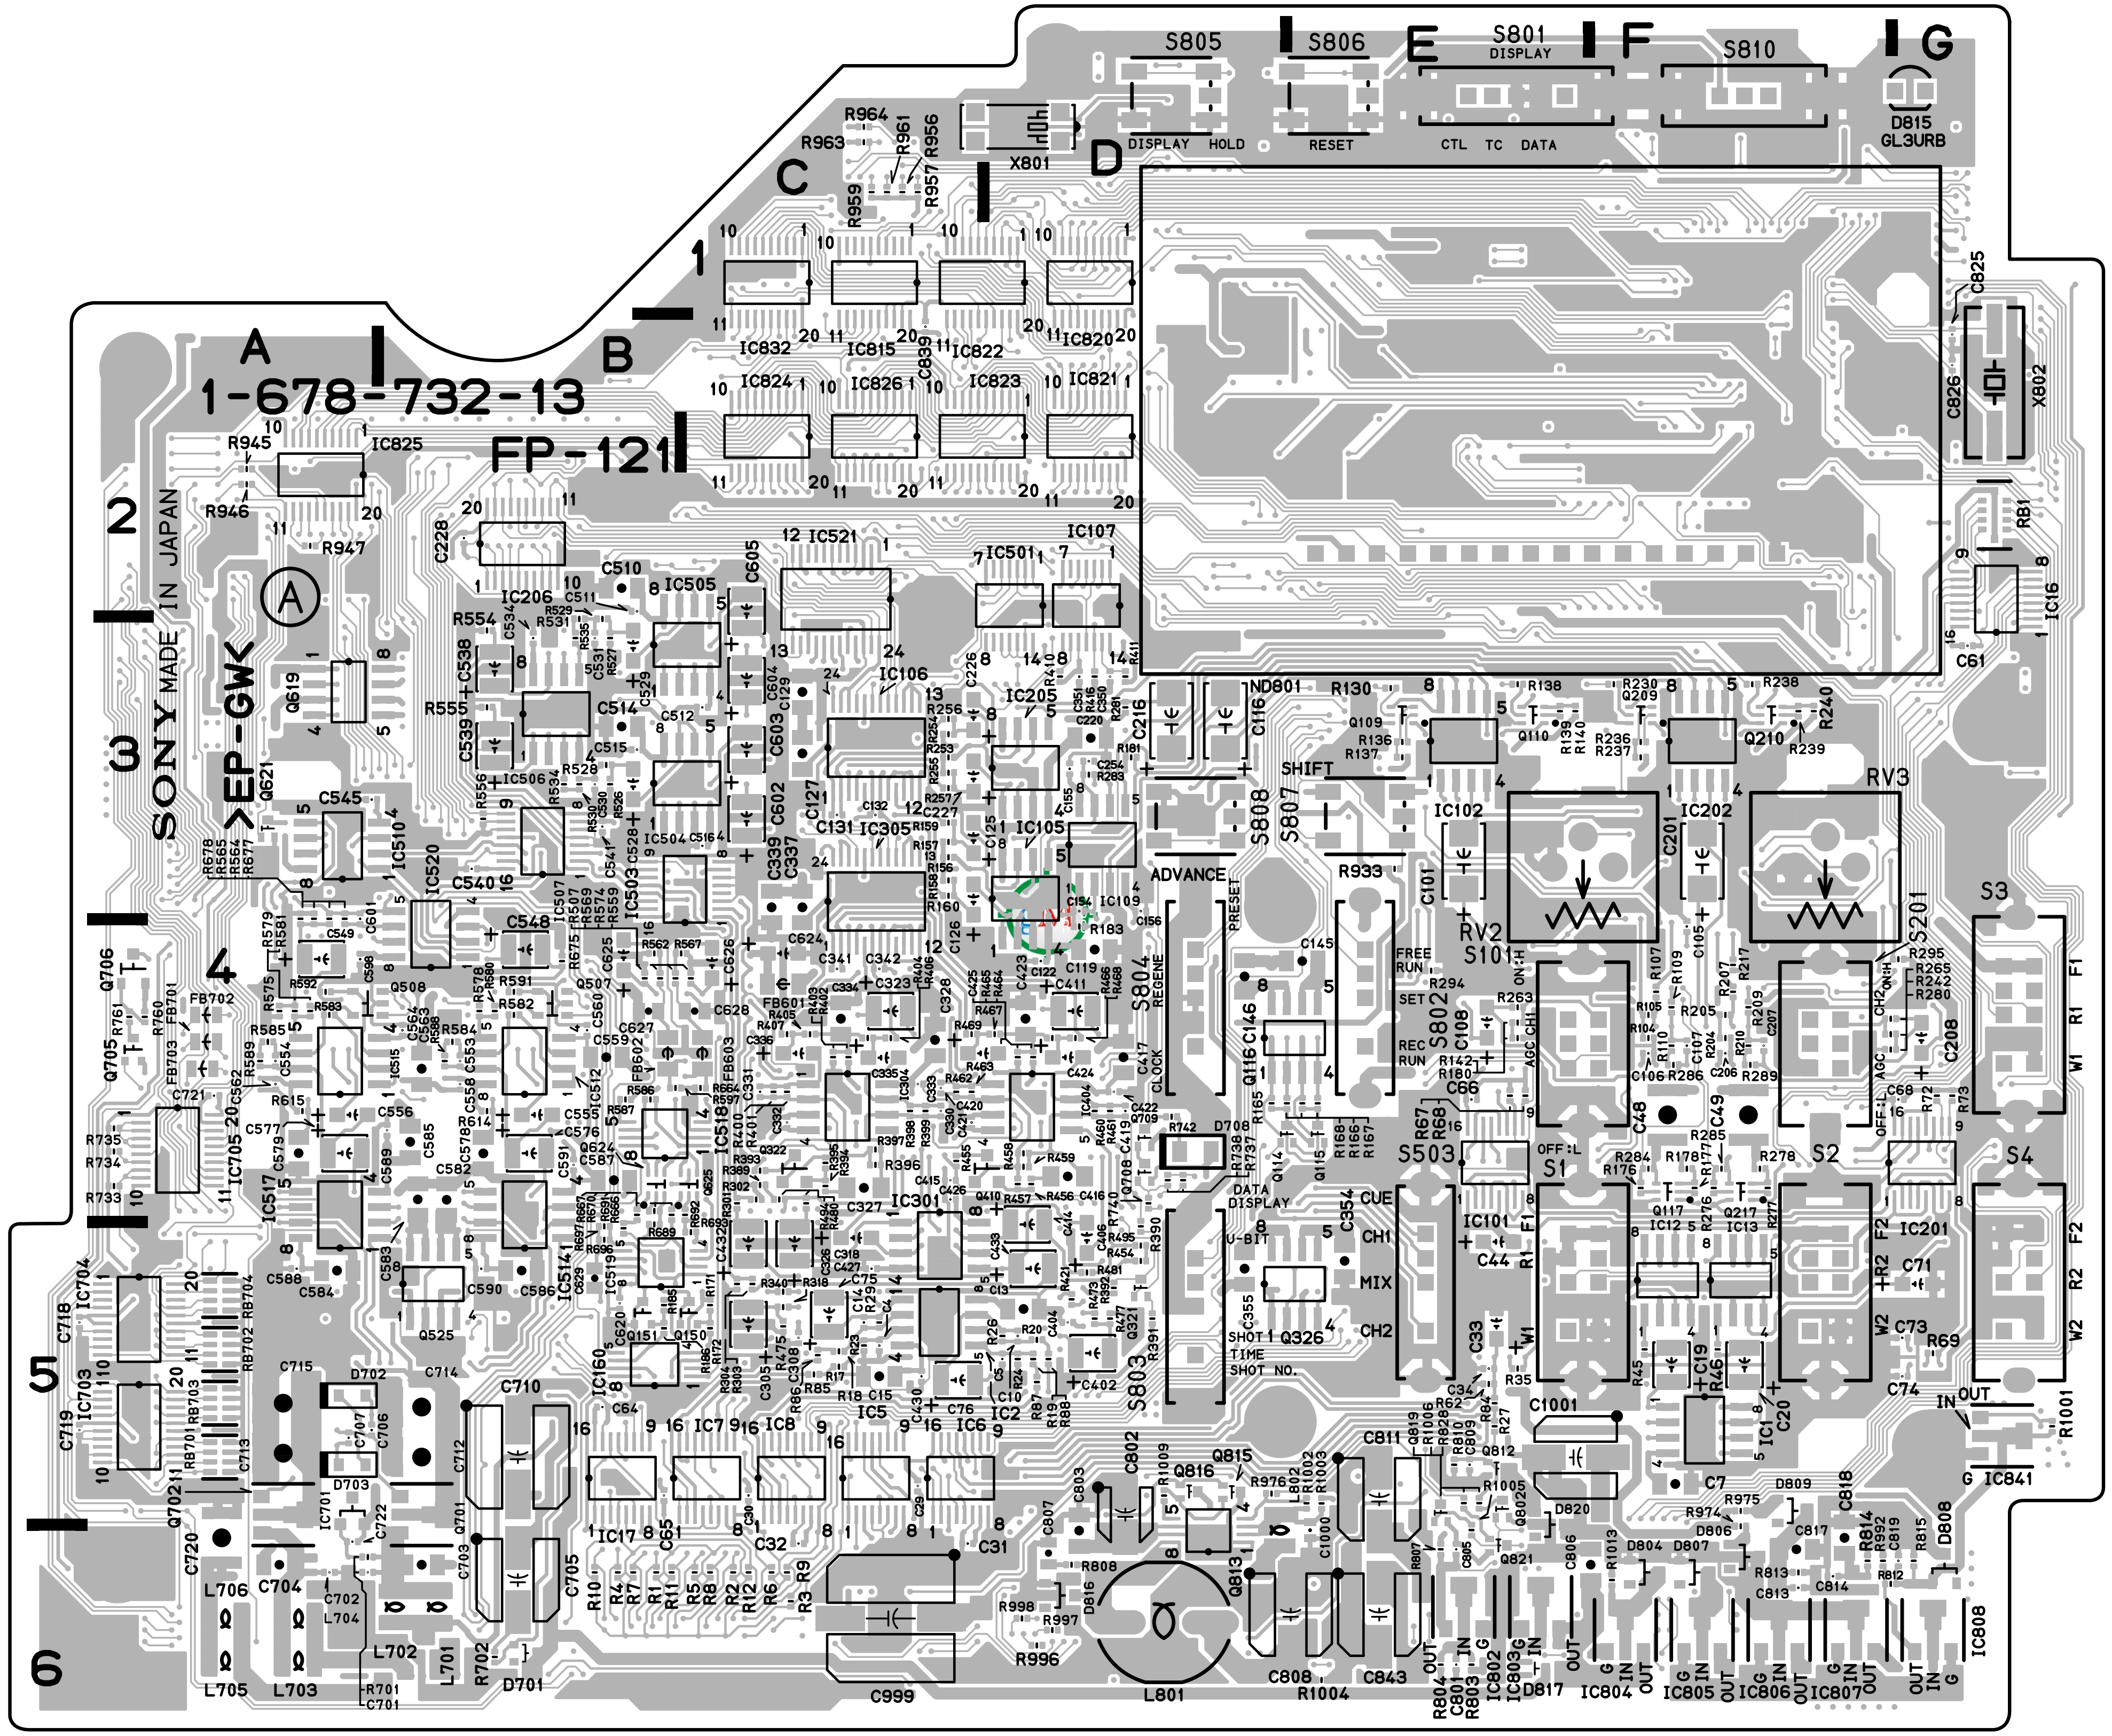

Components location list ; previous page

FP-121 -A SIDE-

SUFFIX: -13

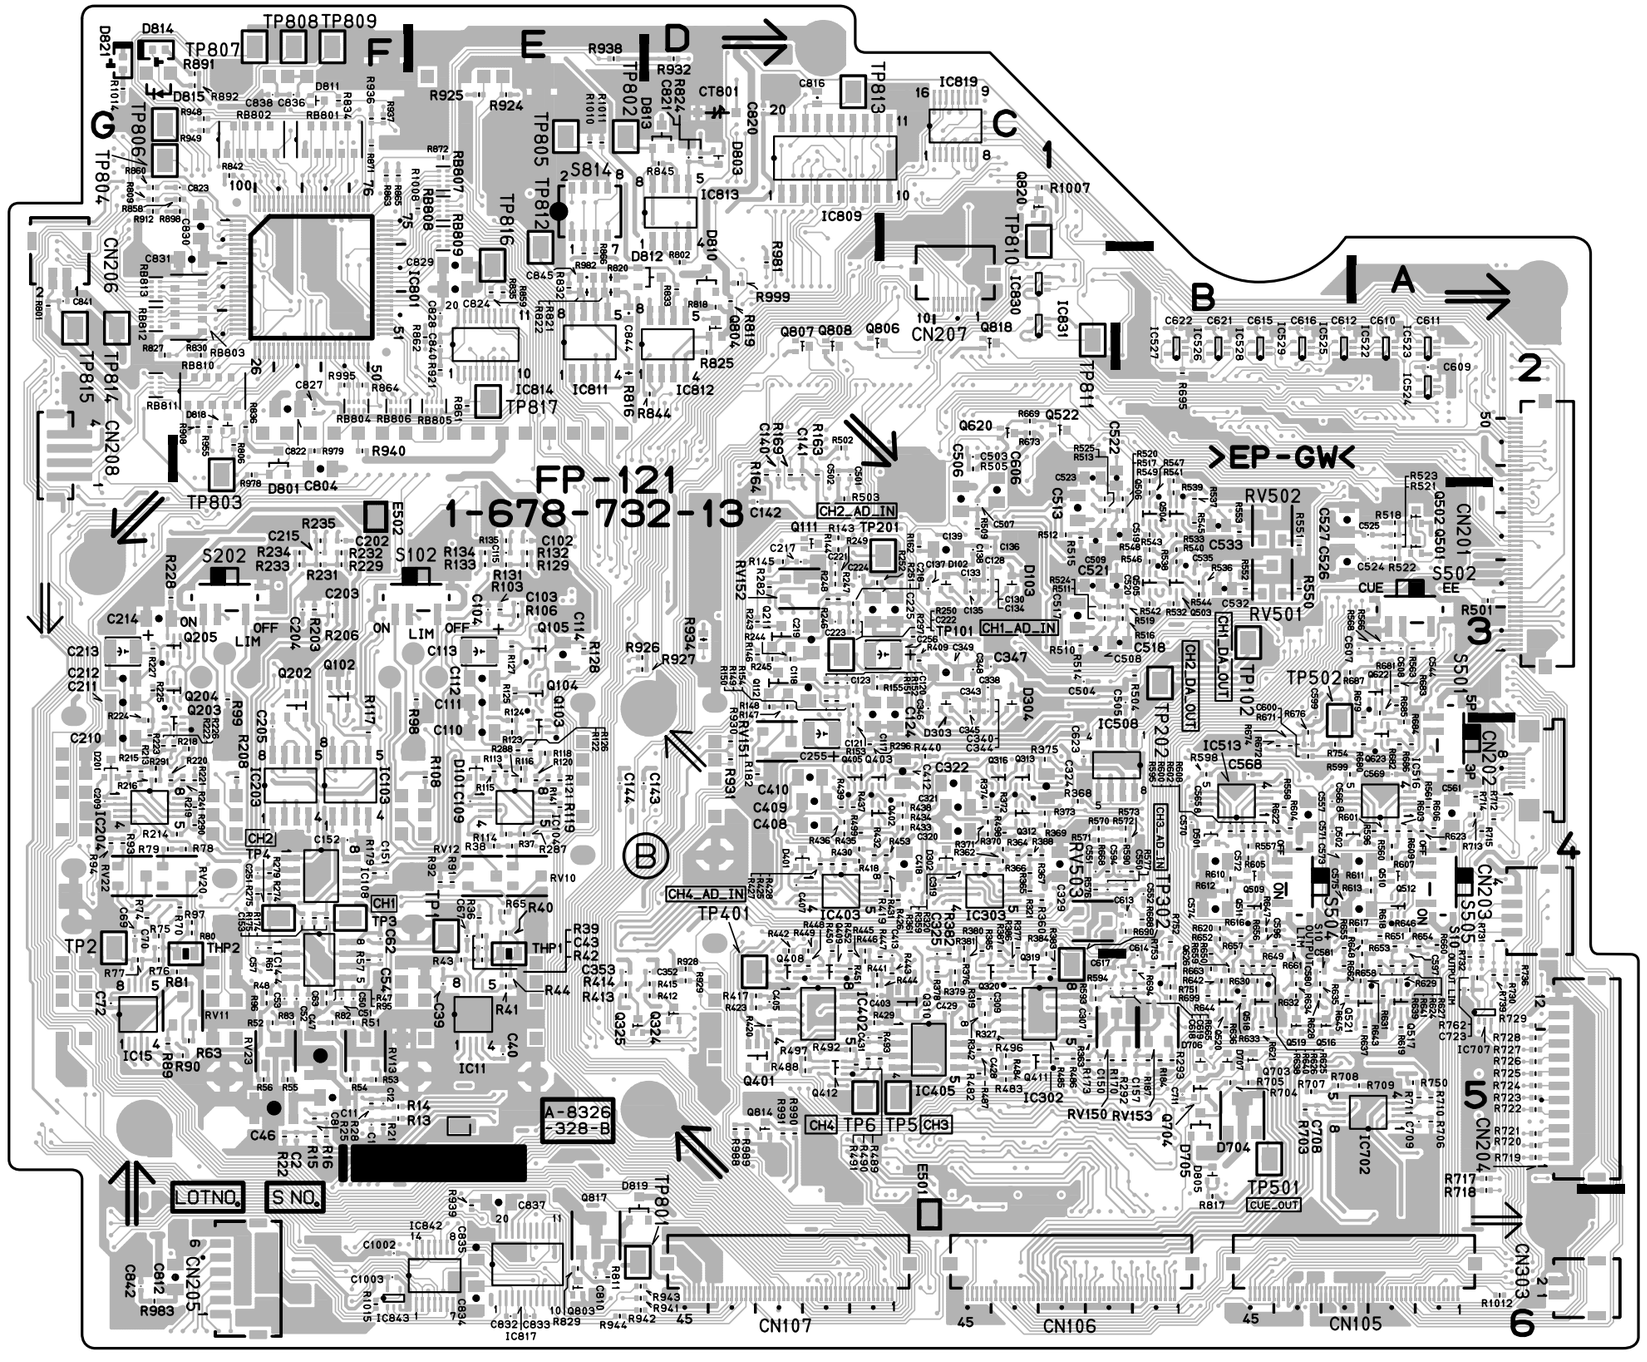

FP-121 -B SIDE-
SUFFIX: -13

FP-121 (1-678-732-12)
---

*:B SIDE

C1	*F5	C142	*D3	C406	D5	C571	*B4	C816	*D1	FB603	C4	IC820	D1	Q625	C4	R78	*F4	R177	F4	R319	*C5	R447	*C5	R550	*B3	R641	*A5	R735	A4	R949	*F1	S501	*A4
C2	*F5	C143	*E4	C407	*D4	C572	*B4	C817	F6	FB701	A4	IC821	D2	Q626	*B5	R79	*G4	R178	F4	R320	*C4	R448	*D5	R551	*B3	R642	*B5	R736	*A5	R955	*F2	S502	*A3
C4	C5	C144	*E4	C408	*D4	C573	*A4	C818	F6	FB702	A4	IC822	D1	Q701	B5	R80	*F4	R179	*F4	R321	*C4	R449	*D4	R552	*B3	R643	*A5	R737	D4	R956	C1	S503	E5
C5	D5	C145	E4	C409	*D4	C574	*B4	C819	G6	FB703	A4	IC823	D2	Q702	A5	R81	*F5	R180	E4	R327	*C5	R450	*D4	R553	*B3	R644	*B5	R738	D4	R957	C1	S504	*B4
C7	F5	C146	D4	C410	*D4	C575	*A4	C820	*D1			IC824	C2	Q703	*B5	R82	*F5	R181	D3	R340	C5	R451	*D5	R554	B3	R645	*B5	R739	*A5	R959	C1	S505	*A4
C8	*F5	C150	*C5	C411	D4	C576	B4	C821	*D1	IC1	F5	IC825	A2	Q704	*B5	R83	*F5	R182	*D4	R342	*C5	R452	*D4	R555	B3	R646	*A4	R740	D4	R961	C1	S801	E1
C10	D5	C151	*F4	C412	*C4	C577	A4	C822	*F2	IC2	C5	IC826	C2	Q705	A4	R84	E5	R183	D4	R359	*C4	R453	*C4	R556	B3	R647	*B4	R742	D4	R963	C1	S802	E4
C11	*F5	C152	*F4	C413	*C5	C578	B4	C823	*F1	IC5	C5	IC830	*C2	Q706	A4	R85	C5	R184	*B5	R360	*C4	R454	D5	R557	*B4	R648	*A4	R750	*A5	R964	C1	S803	D5
C12	*F5	C153	*F4	C414	D5	C579	A4	C824	*E2	IC6	C5	IC831	*C2	Q708	D4	R86	C5	R185	B5	R361	*C4	R455	C4	R558	*B4	R649	*B4	R751	*B5	R965	*E6	S804	D4
C13	D5	C154	D3	C415	C4	C580	*B5	C825	G2	IC7	B5	IC832	C1	Q709	D4	R87	D5	R186	B5	R362	*C4	R456	D4	R559	C4	R650	*B5	R752	*B4	R966	*E6	S805	D1
C14	C5	C155	D3	C416	D4	C581	*B5	C826	G2	IC8	C5	IC841	G5	Q802	E5	R88	D5	R187	*B5	R363	*C5	R457	D4	R560	*A4	R651	*A4	R753	*B5	R967	*E6	S806	E1
C15	C5	C156	D3	C417	D4	C582	B4	C827	*F2	IC11	*E5			Q803	*E6	R89	*G5	R203	*F3	R364	*C4	R458	D4	R561	*A4	R652	*B4	R760	A4	R968	*E6	S807	E3
C19	F5	C157	*B5	C418	*C4	C583	B4	C828	*E2	IC12	F5	L701	B6	Q804	*D2	R90	*F5	R204	F4	R365	*C4	R459	D4	R562	B4	R653	*A5	R761	A4	R969	*D6	S808	D3
C20	F5	C201	F3	C419	D4	C584	A5	C829	*E2	IC13	F5	L702	B6	Q806	*D2	R91	*E4	R205	F4	R366	*C4	R460	D4	R563	*A3	R654	*A4	R762	*A5	R970	*E6	S810	F1
C29	C5	C202	*F3	C420	C4	C585	B4	C830	*F1	IC14	*F4	L703	A6	Q807	*D2	R92	*E4	R206	*F3	R367	*C4	R461	D4	R564	A3	R655	*B4	R801	*G2	R971	*D6	S814	*E1
C30	C5	C203	*F3	C421	C4	C586	B5	C831	*F2	IC15	*G5	L704	A6	Q808	*D2	R93	*G4	R207	F4	R368	*C4	R462	C4	R565	A3	R656	*B4	R802	*D2	R972	*E6		
C31	C6	C204	*F3	C422	D4	C587	B4	C832	*E6	IC16	G3	L705	A6	Q812	E5	R94	*G4	R208	*F4	R369	*C4	R463	C4	R566	*A3	R657	*B4	R803	E6	R974	F6	THP1	*E5
C32	C6	C205	*F4	C423	D4	C588	A5	C833	*E6	IC17	B5	L706	A6	Q813	D6	R95	*F5	R209	F4	R370	*C4	R464	D4	R567	C4	R658	*A5	R804	E6	R975	F6	THP2	*F5
C33	E5	C206	F4	C424	D4	C589	B4	C834	*E6	IC101	E4	L801	D6	Q814	*D5	R96	*F5	R210	F4	R371	*C4	R465	D4	R568	*A3	R659	*B5	R806	*F2	R976	D5		
C34	E5	C207	F4	C425	C4	C590	B5	C835	*E6	IC102	E3	L802	D6	Q815	D5	R97	*F4	R213	*G4	R372	*C4	R466	D4	R569	B4	R660	*A4	R807	E6	R978	*F2	TP1	*E4
C39	*E5	C208	G4	C426	C4	C591	B4	C836	*F1	IC103	*F4			Q816	D5	R103	*E3	R214	*F4	R373	*C4	R467	D4	R570	*C4	R661	*B4	R808	D6	R979	*F2	TP2	*G4
C40	*E5	C209	*G4	C427	C5	C594	*B4	C837	*E6	IC104	*E4	ND801	E2	Q817	*E6	R104	F4	R215	*G4	R374	*C4	R468	D4	R571	*C4	R662	*B5	R809	*G1	R981	*D2	TP3	*F4
C43	*E4	C210	*G4	C428	*C5	C596	*B4	C838	*F1	IC105	D4			Q818	*C2	R105	F4	R216	*G4	R375	*C4	R469	C4	R572	*B4	R663	*B5	R810	E5	R982	*E2	TP4	*F4
C44	E5	C211	*G3	C429	*C5	C597	*A4	C839	C2	IC106	C3	Q102	*F3	Q819	E5	R106	*E3	R217	F4	R376	*C5	R473	D5	R573	*B4	R664	C4	R811	*E6	R983	*G6	TP5	*C5
C46	*F5	C212	*G3	C430	C5	C598	A4	C840	*E2	IC107	D2	Q103	*E4	Q820	*C1	R107	F4	R218	*F4	R377	*C4	R475	C5	R574	B4	R665	*B5	R812	F6	R988	*D5	TP6	*D5
C47	*F5	C213	*G3	C431	*D5	C599	*B3	C841	*G2	IC108	*F4	Q104	*E3	Q821	E6	R108	*E4	R219	*F4	R378	*C5	R477	D5	R575	A4	R666	B5	R813	F6	R989	*D5	TP101	*D3
C48	F4	C214	*G3	C432	C5	C600	*B4	C842	*G6	IC109	D3	Q105	*E3			R109	F4	R220	*G4	R379	*C5	R480	C4	R576	*C4	R667	B4	R814	F6	R990	*D5	TP102	*B3
C49	F4	C215	*F3	C433	D5	C601	A3	C843	E6	IC160	C5	Q109	E3	R1	B6	R110	F4	R221	*F4	R380	*C5	R481	D5	R577	*B4	R668	*C4	R815	G6	R991	*D5	TP201	*C3
C50	*F5	C216	D3	C501	*D2	C602	C3	C844	*E2	IC201	G4	Q110	E3	R2	C6	R113	*E4	R222	*G4	R381	*C4	R482	*C5	R578	B4	R669	*C2	R816	*E2	R992	F6	TP202	*B3
C51	*F5	C217	*D3	C502	*D2	C603	C3	C845	*E2	IC202	F3	Q111	*D3	R3	C6	R114	*E4	R223	*G4	R382	*C5	R483	*C5	R579	A4	R670	B4	R817	*B6	R993	G6	TP302	*C5
C52	*F5	C218	*D3	C503	*C2	C604	C3	C999	C6	IC203	*F4	Q112	*D3	R4	B6	R115	*E4	R224	*G4	R383	*C5	R484	*C5	R580	B4	R671	*B4	R818	*D2	R995	*F2	TP401	*D5
C53	*F5	C219	*D3	C504	*C3	C605	C2	C1000	E6	IC204	*G4	Q114	E4	R5	C6	R116	*E4	R225	*G3	R384	*C5	R485	*C5	R581	A4	R672	*B4	R819	*D2	R996	D6	TP501	*B5
C54	*F5	C220	D3	C505	*B3	C606	*C3	C1001	E5	IC205	D3	Q115	E4	R6	C6	R117	*F4	R226	*F4	R385	*C4	R486	*C5	R582	B4	R673	*C2	R820	*E2	R997	D6	TP502	*B4
C57	*F4	C221	*D3	C506	*C3	C607	*A3			IC206	B2	Q116	E4	R7	B6	R118	*E4	R227	*G3	R386	*C5	R487	*C5	R583	A4	R674	*B4	R821	*E2	R998	D6	TP801	*E6
C61	G3	C222	*D3	C507	*C3	C608	*A3	CN105	*A6	IC301	C5	Q117	F4	R8	C6	R119	*E4	R228	*G3	R387	*C4	R488	*D5	R584	B4	R675	B4	R822	*E2	R999	*D2	TP802	*E1
C62	*F4	C223	*D3	C508	*C3	C609	*A2	CN106	*C6	IC302	*C5	Q150	C5	R9	C6	R120	*E4	R229	*F3	R388	*C4	R489	*C5	R585	A4	R676	*B4	R824	*D1	R1001	G5	TP803	*F2
C63	*F5	C224	*D3	C509	*C3	C610	*A2	CN107	*D6	IC303	*C4	Q151	B5	R10	B6	R121	*E4	R230	F3	R389	C4	R490	*D5	R586	B4	R677	A3	R825	*D2	R1002	E5	TP804	*G1
C64	B5	C225	*C3	C510	B2	C611	*A2	CN201	*A3	IC304	C4	Q202	*F3	R11	B6	R122	*E4	R231	*F3	R390	D5	R491	*D5	R587	B4	R678	A3	R827	*G2	R1003	E5	TP805	*E1
C65	B5	C226	C3	C511	B2	C612	*B2	CN202	*A4	IC305	C4	Q203	*F4	R12	C6	R123	*E4	R232	*F3	R391	D5	R492	*D5	R588	B4	R679	*A3	R828	E5	R1004	E6	TP806	*G1
C66	E4	C227	C3	C512	C3	C613	*B4	CN203	*A4	IC402	*D5	Q204	*F3	R13	*F5	R124	*E4	R233	*F3	R392	D5	R493	*C5	R589	A4	R680	*A4	R829	*E6	R1005	E5	TP807	*F1
C67	*E4	C228	B2	C513	*C3	C614	*B5	CN204	*A5	IC403	*D4	Q205	*F3	R14	*F5	R125	*E3	R234	*F3	R393	C4	R494	C4	R590	*B4	R681	*A3	R830	*F2	R1006	E5	TP808	*F1
C68	G4	C251	*F4	C514	B3	C615	*B2	CN205	*F6	IC404	D4	Q209	F3	R15	*F5	R126	*E4	R235	*F3	R394	C4	R495	D5	R591	B4	R682	*A4	R832	*E2	R1007	*C1	TP809	*F1
C69	*G4	C254	D3	C515	B3	C616	*B2	CN206	*G2	IC405	*C5	Q210	F3	R16	*F5	R127	*E3	R236	F3	R395	C4	R496	*C5	R592	A4	R683	*A3	R833	*D2	R1008	*E1	TP810	*C1
C70	*G4	C255	*D4	C516	C3	C617	*B5	CN207	*C2	IC501	D2	Q211	*D3	R17	C5	R128	*E3	R237	F3	R396	C4	R497	*D5	R593	*C5	R684	*A4	R834	*F1	R1009	D5	TP811	*C2
C71	G5	C256	*C3	C517	*C3	C618	*C5	CN208	*G2	IC503	C3	Q217	F4	R18	C5	R129	*E3	R238	F3	R397	C4	R501	*A3	R594	*C5	R685	*A3	R835	*E2	R1010	*E1	TP812	*E1
C72	*G5	C305	C5	C518	*B3	C619	*B5	CN303	*A6	IC504	B3	Q310	*C5	R19	D5	R130	E3	R239	F3	R398	C4	R502	*D2	R595	*B4	R686	*A4	R836	*F2	R1011	*E1	TP813	*D1
C73	G5	C307	*C5	C519	*B3	C620	B5			IC505	B3	Q312	*C4	R20	D5	R131	*E3	R240	F3	R399	C4	R503	*D3	R596	*A4	R687	*B3	R842	*F1			TP814	*G2
C74	G5	C308	C5	C520	*B3	C621	*B2	CT801	*D1	IC506	B3	Q313	*C4	R21	*F5	R132	*E3	R241	*F4	R400	C4	R504	*B3	R597	B4	R688	*B4	R844	*D2	RB1	G2	TP815	*G2
C75	C5	C309	*C5	C521	*C3	C622	*B2			IC507	B3	Q316	*C4	R22	*F5	R133	*E3	R242	F4	R401	C4	R505	*C2	R598	*B4	R689	B5	R845	*D1	RB701	A5		
C76	C5	C318	C5	C522	*B2	C623	*C4	D101	*E4	IC508	*B4	Q319	*C5	R23	C5	R134	*E3	R243	*D3	R402	C4	R507	B4	R599	*B4	R690	*B4	R858	*F1	RB702	A5	X801	D1
C101	E3	C319	*C4	C523	*C2	C624	C4	D102	*C3	IC510	B3	Q320	*C5	R24	D5	R135	*E3	R244	*D3	R403	C4	R509	*C3	R600	*B4	R691	B4	R859	*E2	RB703	A5	X802	G2
C102	*E3	C320	*C4	C524	*A3	C625	B4	D103	*C3	IC512	B4	Q321	D5	R25	*F5	R136	E3	R245	*D3	R404	C4	R510	*C3	R601	*A4	R692	C4	R860	*G1	RB704	A5		
C103	*E3	C321	*C4	C525	*A3	C626	C4	D201	*G4	IC513	*B4	Q322	C4	R26	D5	R137	E3	R246	*D3	R405	C4	R511	*C3	R602	*B4	R693	C5	R861	*E2	RB801	*F1		
C104	*E3	C322	*C4	C526	*B3	C627	B4	D302	*C4	IC514	B5	Q324	*D5	R27	E5	R138	E3	R247	*D3	R406	C4	R512	*C3	R603	*A4	R694	*B5	R862	*E2	RB802	*F1		
C105	F4	C323	C4	C527	*B3	C628	C4	D303	*C3	IC515	B4	Q325	*E5	R28	*F5	R139	E3	R248	*D3	R407	C4	R513	*C3	R604	*B4	R695	*B2	R863	*F1	RB803	*F2		
C106	F4	C324	*C4	C528	B3	C629	B5	D304	*C3	IC516	*A4	Q326	E5	R29	C5	R140	E3	R249	*D3	R409	*C3	R514	*C3	R605	*B4	R696	B5	R864	*F2	RB804	*F2		
C107	F4	C325	*C5	C529	B3	C701	A6	D401	*D4	IC517	B5	Q401	*D5	R35	E5	R141	*E4	R250	*D3	R410	D3	R515	*C3	R606	*A4	R697	B5	R865	*F1	RB805	*E2		
C108	E4	C326	C5	C530	B3	C702	A6	D501	*B4	IC518	C4	Q402	*D4	R36	*E4	R142	E4	R251	*D3	R411	D3	R516	*B3	R607	*A4	R699	*B5	R866	*E2	RB806	*F2		
C109	*E4	C327	C4	C531	B3	C703	B6	D502	*A4	IC519	C5	Q403	*D4	R37	*E4	R143	*D3	R252	*D3	R412	*D5	R517	*B3	R608	*B4	R701	A6	R871	*F1	RB807	*E1		
C110	*E4	C328	C4	C532	*B3	C704	A6	D701	B6	IC520	B4	Q405	*D4	R38	*E4	R144	*D3	R253	C3	R413	*E5	R518	*A3	R609	*A4	R702	B6	R872	*E1	RB808	*E1		
C111	*E3	C329	*C4	C533	*B3	C705	B6	D702	A5	IC521	C2	Q408	*D5	R39	*E4	R145	*D3	R254	C3	R414	*E5	R519	*B3	R610	*B4	R703	*B5	R891	*F1	RB809	*E1		
C112	*E3	C330	C4	C534	B3	C706	A5	D703	A5	IC522	*A2	Q409	*D5	R40	*E4	R146	*D3	R255	C3	R415	*D5	R520	*B3	R611	*A4	R704	*B5	R892	*F1	RB810	*F2		
C113	*E3	C331	C4	C535	*B3	C707	A5	D704	*B5	IC523	*A2	Q410	D4	R41	*E5	R147	*D3	R256	C3	R416	D3	R521	*A3	R612	*B4	R705	*B5	R898	*F1	RB811	*G2		
C114	*E3	C332	C4	C538	B3	C708	*B5	D705	*B5	IC524	*A2	Q411	*C5	R42	*E5	R148	*D3	R257	C3	R417	*D5	R522	*A3	R613	*A4	R706	*A5	R908	*F2	RB812	*G2		
C115	*E3	C333	C4	C539	B3	C709	*A5	D706	*B5	IC525	*B2	Q412	*D5	R43	*E5	R149	*D3	R263	E4	R418	*D4	R523	*A3	R614	B4	R707	*B5	R912	*G1	RB813	*G2		
C116	D3	C334	C4	C540	B3	C710	B5	D707	*B5	IC526	*B2	Q501	*A3	R44	*E5	R150	*D3	R265	F4	R419	*C4	R524	*C3	R615	A4	R708	*B5	R921	*E2				
C117	*D3	C335	C4	C541	B3	C711	*B5	D708	D4	IC527	*B2	Q502	*A3	R45	F5	R151	*D3	R274	*F4	R420	*D5	R525	*C3	R616	*B4	R709	*A5	R924	*E1	RV2	E3		
C118	*D3	C336	C4	C544	*A3	C712	B5	D801	*F2	IC528	*B2	Q503	*B3	R46	F5	R152	*D3	R275	*F4	R421	D5	R526	B3	R617	*A4	R710	*A5	R925	*E1	RV3	F3		
C119	D4	C337	C3	C545	A3	C713	A5	D803	*D1	IC529	*B2	Q504	*B3	R47	*F5	R153	*D4	R276	F4	R423	*D5	R527	B3	R618	*A4	R711	*A5	R926	*E3	RV10	*E4		
C120	*D3	C338	*C3	C548	B4	C714	B5	D804	F6	IC701	A5	Q505	*B3	R48	*F5	R154	*D3	R277	F4	R425	*D4	R528	B3	R619	*A5	R712	*A4	R927	*E3	RV11	*F5		
C121	*D4	C339	C3	C549	A4	C715	A5	D805	*B5	IC702	*A5	Q506	*B3	R51	*F5	R155	*D3	R278	F4	R426	*C4	R529	B3	R620	*B4	R713	*A4	R928	*D5	RV12	*E4		
C122	D4	C340	*C3	C550	*C4	C718	A5	D806	F6	IC703	A5	Q507	B4	R52	*F5	R156	C3	R279	*F4	R427	*D4	R530	B3	R621	*B5	R714	*A4	R929	*D5	RV13	*F5		
C123	*D3	C341	C4	C551	*C4	C719	A5	D807	F6	IC704	A5	Q508	A4	R53	*F5	R157	C3	R280	F4	R428	*D4	R531	B3	R622	*B4	R715	*A4	R930	*D4	RV20	*F4		
C124	*C3	C342	C4	C552	*B4	C720	A6	D808	G6	IC705	A4	Q509	*B4	R54	*F5	R158	C3	R281	D3	R429	*D5	R532	*B3	R623	*A4	R717	*A5	R931	*D4	RV22	*G4		
C125	C3	C343	*C3	C553	B4	C721	A4	D809	F6	IC707	*A5	Q510	*A4	R55	*F5	R159	C3	R282	*D3	R430	*D4	R533	*B3	R624	*A5	R718	*A6	R932	*D1	RV23	*F5		
C126	C3	C344	*C3	C554	A4	C722	A6	D810	*D2	IC801	*F2	Q511	*B4	R56	*F5	R160	C3	R283	D3	R431	*C4	R534	B3	R625	*B5	R719	*A5	R933	E3	RV150	*B5		
C127	C3	C345	*C3	C555	B4	C723	*A5	D811	*F1	IC802	E6	Q512	*A4	R57	*F5	R162	*C3	R284	F4	R432	*D4	R535	B3	R626	*B5	R720	*A5	R934	*D3	RV151	*D4		
C128	*C3	C346	*C3	C556	A4	C801	E6	D812	*D2	IC803	E6	Q516	*B5	R61	*F4	R163	*D2	R285	F4	R433	*C4	R536	*B3	R627	*A5	R721	*A5	R935	*D5	RV152	*D3		
C129	C3	C347	*C3	C557	*B4	C802	D5	D813	*D1	IC804	F6	Q517	*A5	R62	E5	R164	*D2	R286	F4	R434	*C4	R537	*B3	R628	*B5	R722	*A5	R936	*F1	RV153	*B5		
C130	*C3	C348	*C3	C558	B4	C803	D6	D814	*G1	IC805	F6	Q518	*B5	R63	*F5	R165	D4	R287	*E4	R435	*D4	R538	*B3	R629	*A5	R723	*A5	R937	*F1	RV501	*B3		
C131	C3	C349	*C3	C559	B4	C804	*F2	D815	G1	IC806	F6	Q519	*B5	R65	*E4	R166	E4	R288	*E4	R436	*D4	R539	*B3	R630	*B5	R724	*A5	R938	*E1	RV502	*B3		
C132	C3	C350	D3	C560	B4	C805	E6	D816	D6	IC807	F6	Q520	*B5	R67	E4	R167	E4	R289	F4	R437	*D4	R540	*B3	R631	*A5	R725	*A5	R939	*E6	RV503	*C4		
C133	*C3	C351	D3	C561	*A4	C806	F6	D817	E6	IC808	G6	Q521	*A5	R68	E4	R168	E4	R290	*F4	R438	*C4	R541	*B2	R632	*B5	R726	*A5	R940	*F2				
C134	*C3	C352	*D5	C562	A4	C807	D6	D818	*F2	IC809	*D1	Q522	*C2	R69	G5	R169	*D2	R291	*G4	R439	*D4	R542	*B3	R633	*B5	R727	*A5	R941	*E6	S1	E5		
C135	*C3	C353	*E5	C563	B4	C808	E6	D819	*E6	IC811	*E2	Q525	B5	R70	*F4	R170	*C5	R292	*B5	R440	*C4	R543	*B3	R634	*B5	R728	*A5	R942	*E6	S2	F5		
C136	*C3	C354	E5	C564	B4	C809	E5	D820	E5	IC812	*D2	Q619	A3	R72	G4	R171	C5	R293	*B5	R441	*D5	R544	*B3	R635	*B5	R729	*A5	R943	*E6	S3	G4		
C137	*C3	C355	D5	C565	*B4	C810	*E6			IC813	*D1	Q620	*C2	R73	G4	R172	C5	R301	C4	R442	*D4	R545	*B3	R636	*B5	R730	*A5	R944	*E6	S4	G5		
C138	*C3	C402	D5	C566	*B4	C811	E5	E501	*C6	IC814	*E2	Q621	A3	R74	*G4	R173	*C5	R302	C4	R443	*C5	R546	*B3	R637	*A5	R731	*A5	R945	A2	S101	E4		
C139	*C3	C403	*D5	C568	*B4	C812	*F6			IC815	C1	Q622	*A3	R75	*G4	R174	*F4	R303	C5	R444	*D5	R547	*B3	R638	*B5	R732	*A5	R946	A2	S102	*E3		
C140	*D2	C404	D5	C569	*A4	C813	F6	FB601	C4	IC817	*E6	Q623	*A4	R76	*G5	R175	*F4	R304	C5	R445	*D5	R548	*B3	R639	*A5	R733	A4	R947	A2	S201	F4		
C141	*D2	C405	*D5	C570	*B4	C814	F6	FB602	B4	IC819	*C1	Q624	B4	R77	*G5	R176	F4	R318	C5	R446	*D4	R549	*B2	R640	*B5	R734	A4	R948	*F1	S202	*F3		

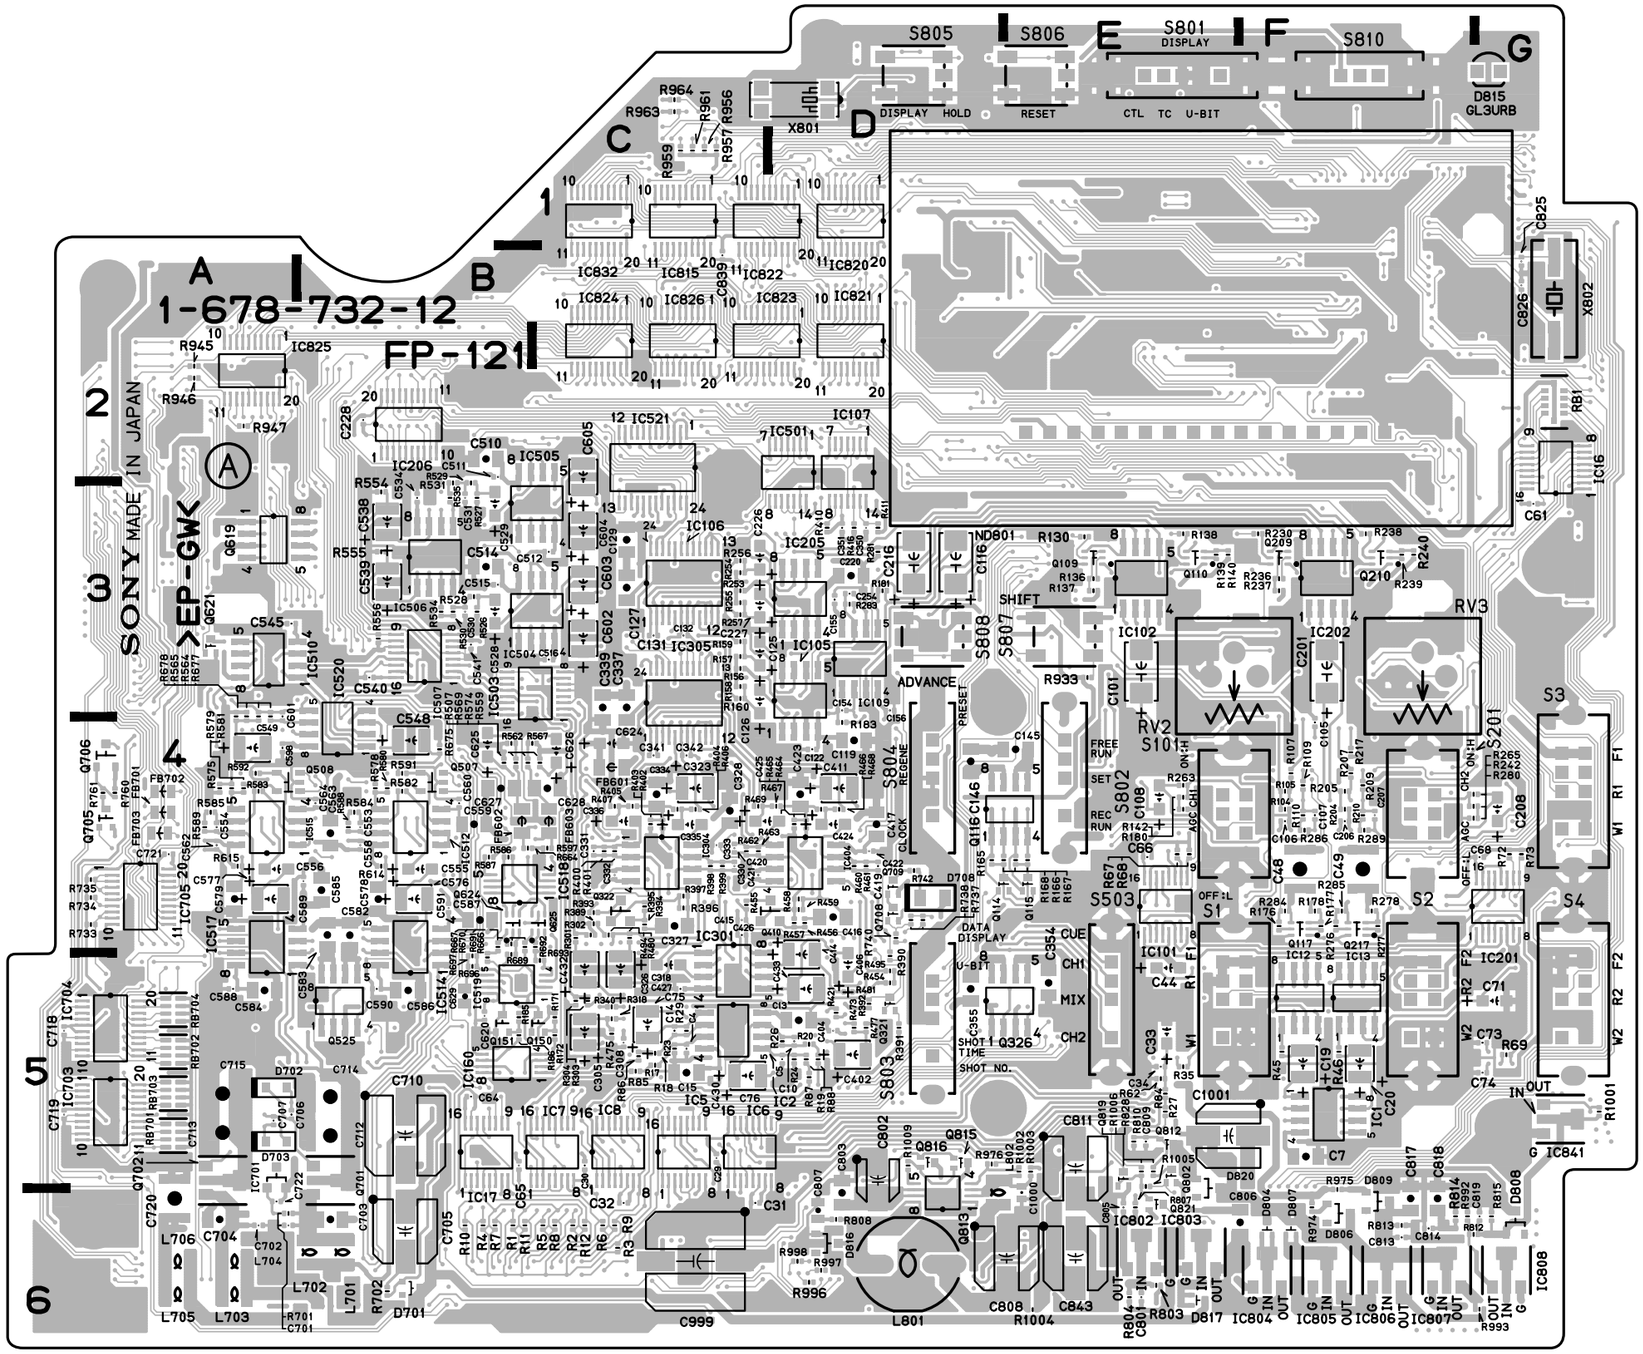
1-678-732-12
FP-121
SONY MADE IN JAPAN
>EP-GWK
S805
S806
S801
DISPLAY
S810
D815
GL3URB
X801
DISPLAY HOLD
RESET
CTL TC U-BIT
IC832
IC815
IC822
IC820
IC824
IC826
IC823
IC821
IC825
IC521
IC501
IC107
IC206
IC505
IC106
IC305
IC105
IC109
IC301
IC102
IC202
IC101
IC201
IC1001
IC841
IC802
IC803
IC804
IC805
IC806
IC807
ADVANCE
PRESET
SHIFT
RV3
RV2
S101
S802
S803
S804
S807
S808
S503
S1
S2
S3
S4
S201
DATA DISPLAY
U-BIT
CUE
CH1
MIX
CH2
SHOT TIME
SHOT NO.
REC RUN
FREE RUN
SET
REGENE
CLOCK
Q326
ND801
L801
L702
L703
L704
L705
L706
D701
D702
D703
D804
D806
D807
D808
D809
D817
D820
C999
C1004
C1000
C808
C843
R1004
R996
R997
R998
R976
R933
R803
R804
C801
R993
C1001
C7
R1001
C74
C73
R69
C71
C61
C825
C826
X802
RB1
IC16
Components location list ; previous page
FP-121 -A SIDE-
SUFFIX: -12

http://getMANUAL.com

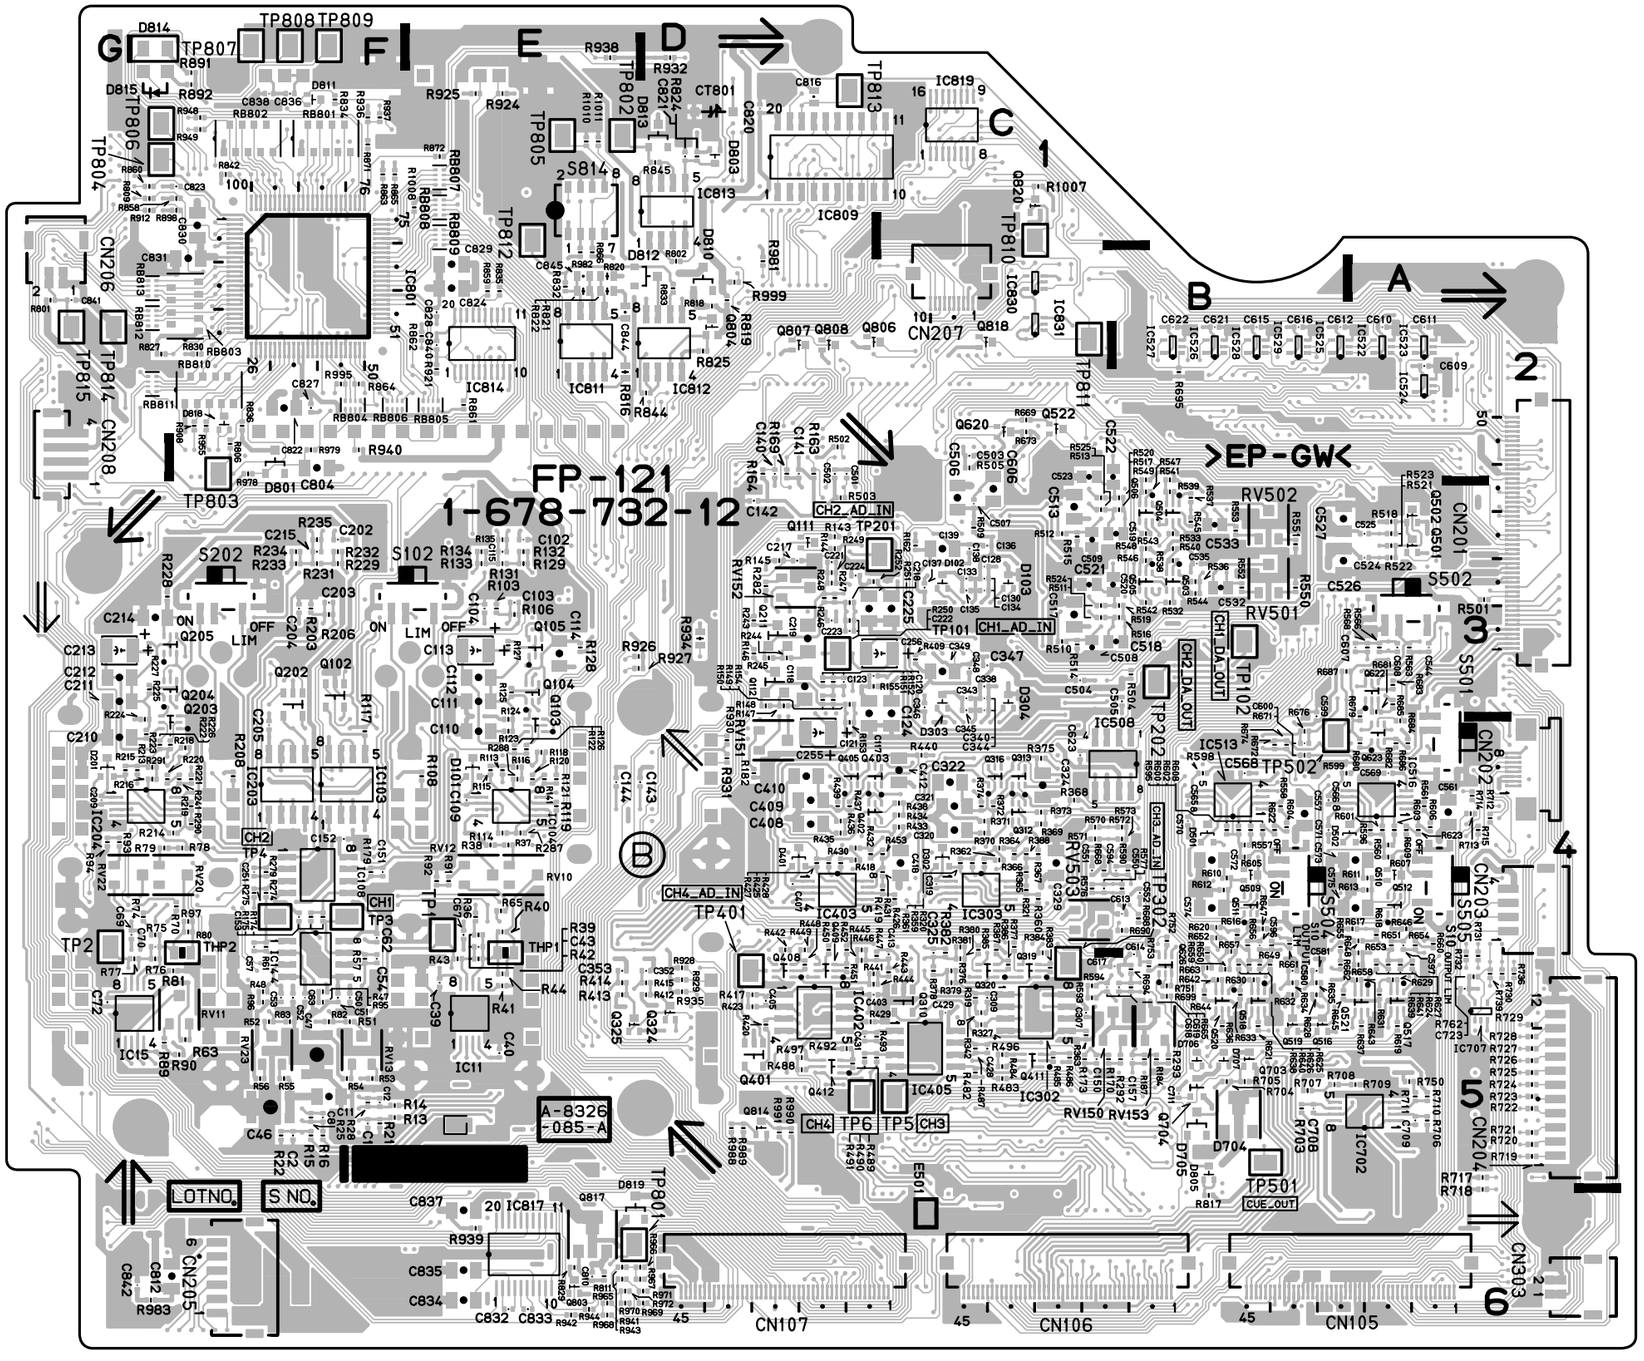

FP-121 -B SIDE-
SUFFIX: -12

IFA-11 (1-678-752-13)
---

*:B SIDE

C101	A1	C201	*A2
C102	A1	C202	*A2
C103	*A1	C203	A2
C104	*A1	C204	A2
C105	A1	C205	*A2
C106	A1	C206	*A2
C107	A1	C207	B2
C108	A2		
C109	*A1	CN120	B2
C110	*A1	CN501	A1
C111	*A2	CN502	A2
C112	*A1	CN503	B2
C113	*A1	CN504	B1
C114	*A2		
C115	*A1	CP201	A2
C116	*A1		
C117	*A1	D101	*A1
C118	B1	D102	*A1
C119	B1	D103	*A1
C120	B1	D104	*A2
C121	B1	D105	B1
C122	*B1	D106	B1
C123	*B1	D108	*A1
C124	*B1	D201	A2
C125	*B1		
C126	*B1	FB101	*A1
C127	*B1	FB102	*A1
C128	B1	FB201	*A1
C129	B1	FB202	*A1
C130	B2		
C131	B2	FL201	A2
C132	B2		
C133	B2	IC101	*A1
C134	*B2	IC102	*A2

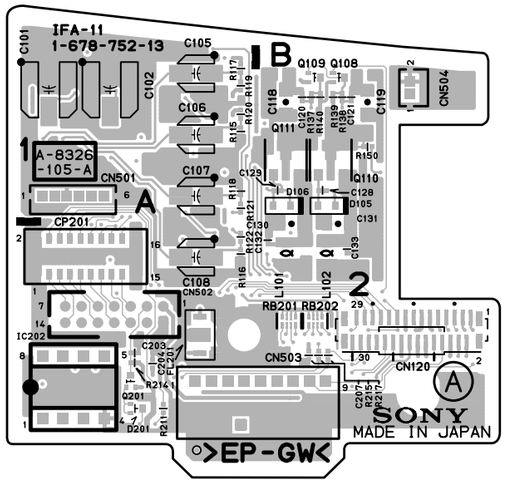

IFA-11 -A SIDE-
SUFFIX: -13

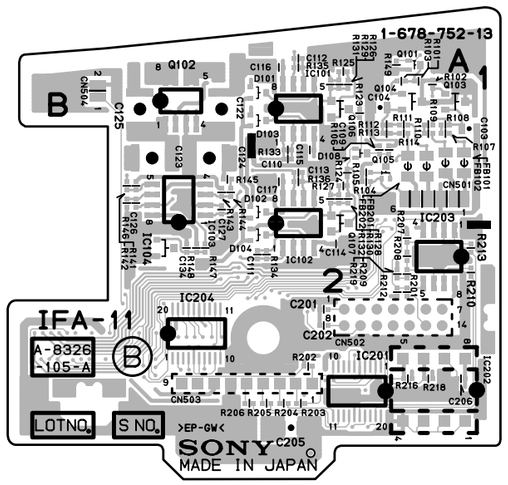

IFA-11 -B SIDE-
SUFFIX: -13

IC103	*B1	R112	*A1	R146	*B1
IC104	*B2	R113	*A1	R147	*B2
IC201	*A2	R114	*A1	R148	*B2
IC202	A2	R115	A1	R149	*A1
IC203	*A2	R116	A2	R150	B1
IC204	*B2	R117	A1	R201	*A2
		R118	A1	R202	*A2
L101	B2	R119	A1	R203	*A2
L102	B2	R120	A1	R204	*A2
		R121	A1	R205	*A2
Q101	*A1	R122	A2	R206	*B2
Q102	*B1	R123	*A1	R207	*A2
Q103	*A1	R124	*A1	R208	*A2
Q104	*A1	R125	*A1	R209	*A2
Q105	*A1	R126	*A1	R210	*A2
Q106	*A1	R127	*A1	R211	A2
Q107	*A1	R128	*A1	R212	*A2
Q108	B1	R129	*A1	R213	*A2
Q109	B1	R130	*A1	R214	A2
Q110	B1	R131	*A1	R215	B2
Q111	B1	R132	*A1	R216	*A2
Q201	A2	R133	*A1	R217	B2
		R134	*A2	R218	*A2
R101	*A1	R135	*A1	R219	*A2
R102	*A1	R136	*A1		
R103	*A1	R137	B1	RB201	B2
R104	*A1	R138	B1	RB202	B2
R105	*A1	R139	B1		
R106	*A1	R140	B1		
R107	*A1	R141	*B1		
R108	*A1	R142	*B1		
R109	*A1	R143	*B1		
R110	*A1	R144	*B1		
R111	*A1	R145	*B1		

IFA-11 (1-678-752-12)
---

*:B SIDE

C101	A1	C201	*A2
C102	A1	C202	*A2
C103	*A1	C203	A2
C104	*A1	C204	A2
C105	A1	C205	*A2
C106	A1	C206	*A2
C107	A1	C207	B2
C108	A2		
C109	*A1	CN120	B2
C110	*A1	CN501	A1
C111	*A2	CN502	A2
C112	*A1	CN503	B2
C113	*A1	CN504	B1
C114	*A2		
C115	*A1	CP201	A2
C116	*A1		
C117	*A1	D101	*A1
C118	B1	D102	*A1
C119	B1	D103	*A1
C120	B1	D104	*A2
C121	B1	D105	B1
C122	*B1	D106	B1
C123	*B1	D108	*A1
C124	*B1	D201	A2
C125	*B1		
C126	*B1	FL201	A2
C127	*B1		
C128	B1	IC101	*A1
C129	B1	IC102	*A2
C130	B2	IC103	*B1
C131	B2	IC104	*B2
C132	B2	IC201	*A2
C133	B2	IC202	A2
C134	*B2	IC203	*A2

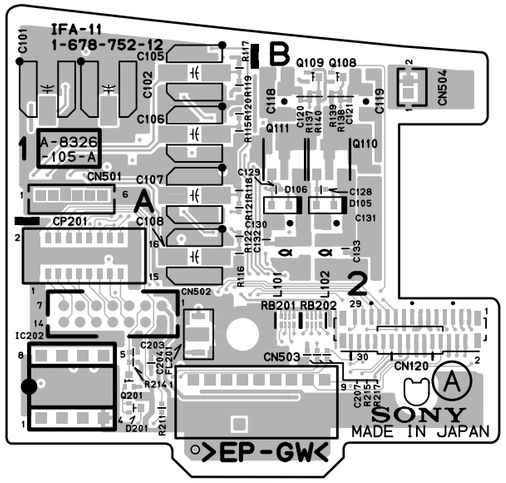

IFA-11 -A SIDE-
SUFFIX: -12

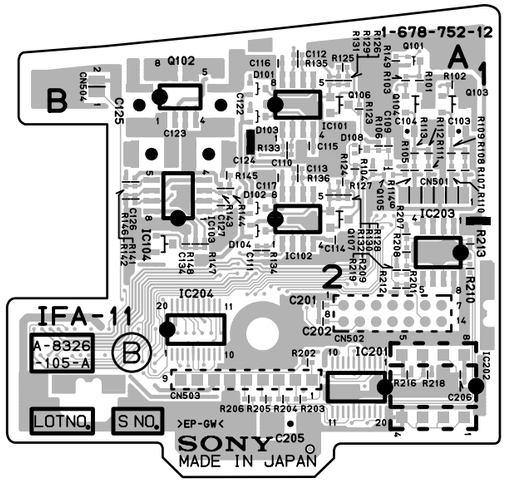

IFA-11 -B SIDE-
SUFFIX: -12

IC204	*B2	R117	A1	R202	*A2
		R118	A1	R203	*A2
L101	B2	R119	A1	R204	*A2
L102	B2	R120	A1	R205	*A2
		R121	A1	R206	*B2
Q101	*A1	R122	A2	R207	*A2
Q102	*B1	R123	*A1	R208	*A2
Q103	*A1	R124	*A1	R209	*A2
Q104	*A1	R125	*A1	R210	*A2
Q105	*A1	R126	*A1	R211	A2
Q106	*A1	R127	*A1	R212	*A2
Q107	*A1	R128	*A1	R213	*A2
Q108	B1	R129	*A1	R214	A2
Q109	B1	R130	*A1	R215	B2
Q110	B1	R131	*A1	R216	*A2
Q111	B1	R132	*A1	R217	B2
Q201	A2	R133	*A1	R218	*A2
		R134	*A2	R219	*A2
R101	*A1	R135	*A1		
R102	*A1	R136	*A1	RB201	B2
R103	*A1	R137	B1	RB202	B2
R104	*A1	R138	B1		
R105	*A1	R139	B1		
R106	*A1	R140	B1		
R107	*A1	R141	*B1		
R108	*A1	R142	*B1		
R109	*A1	R143	*B1		
R110	*A1	R144	*B1		
R111	*A1	R145	*B1		
R112	*A1	R146	*B1		
R113	*A1	R147	*B2		
R114	*A1	R148	*B2		
R115	A1	R149	*A1		
R116	A2	R201	*A2		

MA-103, RX-54, SW-1031

MA-103 (1-678-753-12)
---

*:B SIDE

C1 *A1
C2 *A2
C3 *A1
C4 *A2
C5 *A2
C6 *A2
C7 *A2
C8 *A2

CN1 A2
CN501 B1
CN502 A2

L1 *A1
L2 *A2
L3 *A2
L4 *A2

R1 *B1
R2 *B1

SL1 B2
SL2 B1
SL3 B2
SL4 A2
SL5 A1

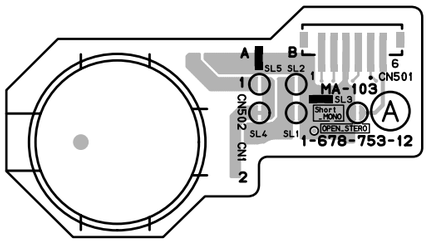

MA-103 -A SIDE-
SUFFIX: -12

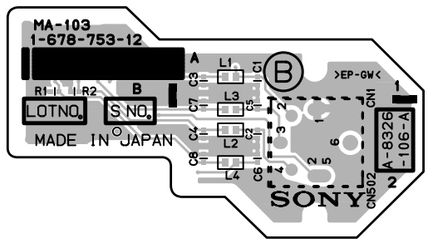

MA-103 -B SIDE-
SUFFIX: -12

RX-54 (1-678-754-11)
---

*:B SIDE

C101 *A2
C102 A2
C103 A2
C104 *A2
C105 *A1
C106 A2

CN10 *B2
CN117 A2

IC101 *A2

R101 B1
R102 B1
R103 B2
R104 A1
R105 B1
R106 A2
R107 A2
R108 *A2
R109 A2
R110 A2
R111 A2
R112 B2
R113 A1
R114 B2

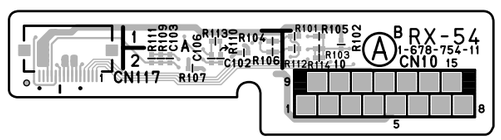

RX-54 -A SIDE-
SUFFIX: -11

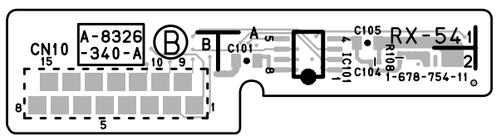

RX-54 -B SIDE-
SUFFIX: -11

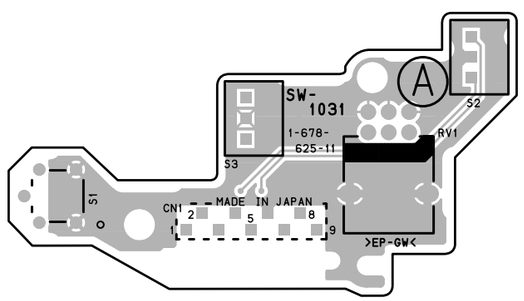

SW-1031 -A SIDE-
SUFFIX: -11

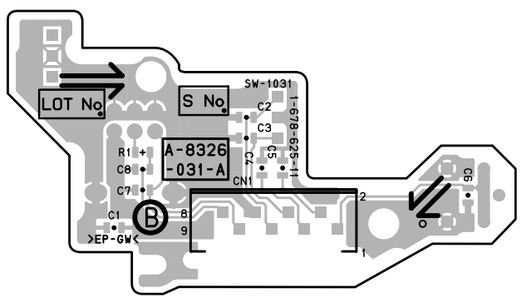

SW-1031 -B SIDE-
SUFFIX: -11

5-36

APR-59 (1-679-771-12)
---

*:B SIDE

C101	*A2	R112	*B2
C102	*B1	R113	*B2
C103	*A2	R114	*B1
C104	*B1	R115	*B1
C105	*B2	R116	*B1
C106	*B2	R117	*A1
C107	*B1	R118	*A1
C108	*B1	R119	*B1
C109	*A1	R120	*B1
C110	B2	R121	*B1
C112	B2	R122	*A2
C113	B1	R123	*A2
C114	A2	R124	*B2
C115	A1	R125	*A2
C116	B2	R126	B2
C117	B2	R127	B2
C118	*A2	R128	*A1
C119	*A3	R129	B2
C120	*B2	R130	B2
C121	B1	R131	*B1
C122	B2	R132	*B2
C123	B3	R133	*C1
C124	*C2	R134	*C1
C125	C3	R135	*C1
C126	*B2	R136	*C1
C127	*C2	R137	B1
C128	*C2	R138	B1
C129	*C2	R139	B3
C130	C1	R140	C2
C131	*C2	R141	B3
C132	*C1	R142	B3
C133	*C2	R143	C2
C134	C2	R144	C2
C135	C2	R145	C2
C136	C2	R146	B3
C137	*C3	R147	C3
C139	*A2	R148	*C2
C140	*B2	R149	*C2
C141	C2	R150	*C2
C142	C2	R151	*C2
C143	C1	R152	*C2
C146	B3	R153	*C2
C147	A3	R154	B1
C148	*C3	R155	*C3
C150	*A2	R156	*C3
		R157	*B3
CN201	*C1	R158	*C3
CN301	*B3	R159	B2
CN302	*B1	R160	B3
CN303	*C3	R161	C2
		R162	A2
E101	*A3	R163	B1
E102	*A3	R164	A1
		R165	*B2
IC101	*B1		
IC102	*A1	RB101	B1
IC103	A2	RB102	B1
IC104	*B3		
IC105	*B2	RV101	C3
IC106	*C2	RV102	C2
IC107	*A2		
IC108	*B2	S102	C1
IC109	C2	S103	A2
IC110	A2	S104	A3
IC111	B2	S105	B3
IC114	*A2	S106	B3
Q101	B3	TP101	*A1
Q102	C3	TP102	*A1
Q103	*B3	TP103	*B1
		TP104	*B1
R101	*C1	TP105	*B2
R102	*B1	TP106	*B2
R103	*B1	TP107	*B2
R104	*B1	TP109	*B2
R105	*B1	TP110	*B2
R106	*C1	TP111	*A2
R107	B1	TP112	*B2
R108	B1	TP113	*B2
R109	B1		
R110	B1		
R111	B1		

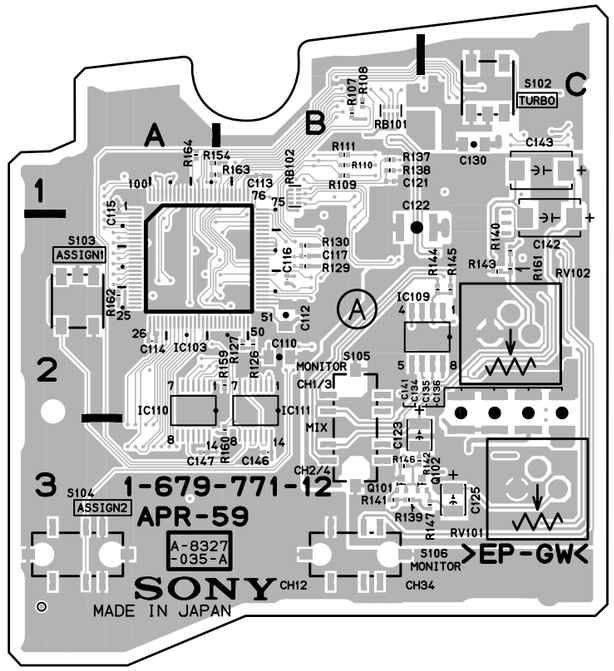

APR-59 -A SIDE-
SUFFIX: -12

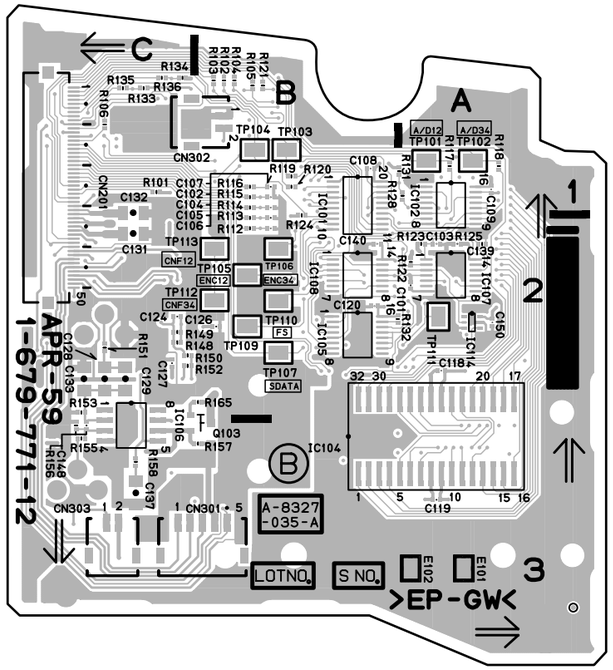

APR-59 -B SIDE-
SUFFIX: -12



HP-103 -A SIDE-
SUFFIX: -11



HP-103 -B SIDE-
SUFFIX: -11

AL-43 (1-678-750-11)
---

*:B SIDE

C101	*A3	R114	*A1
C102	*A2	R115	*A1
C103	*A2	R116	*B1
C104	*A3	R117	*B1
C106	A2	R201	*B3
C108	A2	R202	*B2
C109	*A1	R203	*B3
C110	*B1	R204	*B3
C201	*B3	R205	*B3
C202	*B2	R206	*B3
C203	*B2	R207	*B3
C204	*B3	R208	*B2
C206	B2	R209	*B2
C208	B2	R210	*B2
C209	*B1	R211	*B2
		R212	*B3
CN402	*A3	R213	*B1
CN403	*A1	R214	*B1
		R215	*B1
D101	*A1		
D102	*A1	SL101	B1
D201	A1		
D202	A1		
IC101	A3		
IC201	B3		
Q101	*A1		
Q102	*A1		
Q201	*B1		
Q202	*B1		
R101	*A3		
R102	*A2		
R103	A3		
R104	A3		
R105	*A3		
R106	*A3		
R107	*A3		
R108	*A2		
R109	*A2		
R110	*A2		
R111	*A2		
R112	*A3		
R113	*A1		

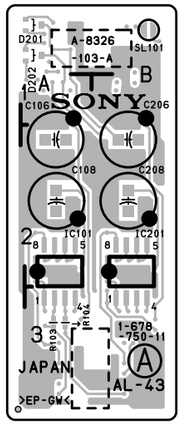

AL-43 -A SIDE-
SUFFIX: -11

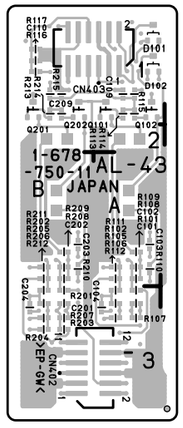

AL-43 -B SIDE-
SUFFIX: -11

AXM-24, BP-33

AXM-24 (1-678-748-12)
---

*:B SIDE

C101	*A2	R113	*A1
C102	*A2	R114	*A2
C103	*A2	R115	*A2
C104	*A2	R117	*B1
C105	*A2	R118	*A1
C106	*A2	R119	*A1
C107	C1	R120	*A1
C108	*C1	R121	*A1
C109	A1	R122	*A1
C110	B1	R123	*A1
C111	*B1	R124	*A1
C112	*A2	R125	*A1
C113	*A2	R126	*A2
C114	*A1	R127	*A2
C115	*C1	R128	*A2
C116	*C1	R129	*B2
C118	*B2	R130	*B2
C201	*B2	R131	*C1
C202	*B2	R132	*B2
C203	*B2	R133	*A1
C204	*B2	R201	*B2
C205	*B2	R202	*B2
C206	*B2	R203	*B2
C207	C1	R204	*B2
C208	*C1	R205	*C1
C209	B1	R206	*B2
C210	B1	R207	*B2
C211	*B1	R208	*B2
C212	*B1	R209	*B2
C213	*B2	R210	*B2
C214	*B1	R211	*B2
C218	*B2	R212	*B1
		R213	*B1
CL1	*A1	R214	*B2
CL2	*A1	R215	*B2
		R216	*B2
CN101	A2	R217	*B1
CN201	B2	R218	*B1
CN300	C2	R219	*B1
CN301	C2	R220	*B1
CN401	C1	R221	*B1
		R222	*B1
D101	*A1	R223	*B1
D102	*A1	R224	*B1
D201	*B1	R225	*B1
D202	*B1	R227	*B2
D301	A2	R228	*B2
D401	B1	R229	*C2
		R230	*B2
FB101	*B2	R231	*C1
FB102	*A2	R232	*B2
FB201	*B2	R233	*B1
FB202	*B2	R301	*C2
		R302	*C2
FL301	*C2	R303	*C2
FL302	*C1	R304	*C2
FL303	*C1	R402	*C1
FL304	*C2	R403	A2
		R404	*B1
IC101	*A1	R405	*A2
IC201	*B1	R406	*A1
		R407	*A2
Q101	*C1	R408	*A1
Q102	*C1		
Q201	*C1	S101	A1
Q202	*C1	S201	B1
Q403	C1		
Q404	A2	SL101	*A2
Q405	A1	SL102	*A2
Q406	A1	SL103	*A2
Q407	A2	SL201	*B2
		SL202	*B2
R101	*A2	SL203	*B2
R102	*A2	SL301	*C2
R103	*A2	SL302	*C2
R104	*B2	SL303	*C2
R105	*C1		
R106	*A2		
R107	*B2		
R108	*A2		
R109	*B2		
R110	*A2		
R111	*B2		
R112	*A1		

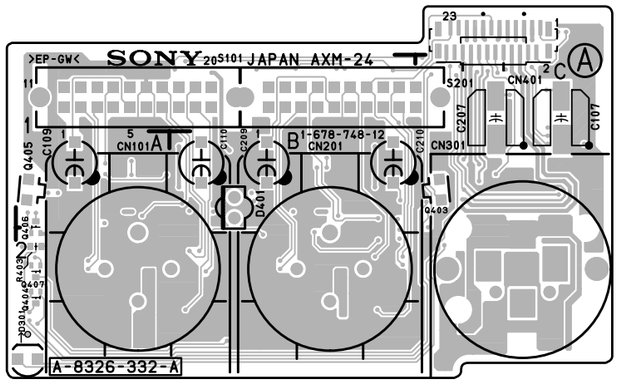

AXM-24 -A SIDE-
SUFFIX: -12

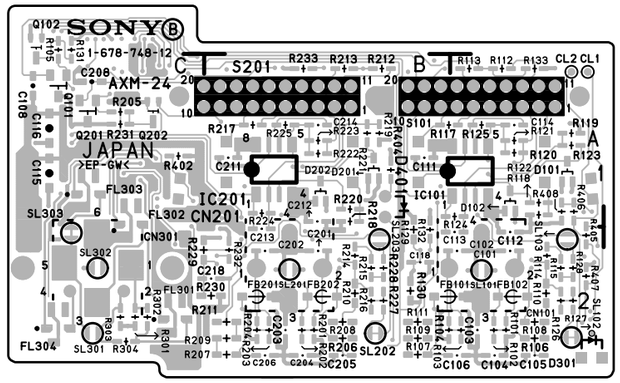

AXM-24 -B SIDE-
SUFFIX: -12

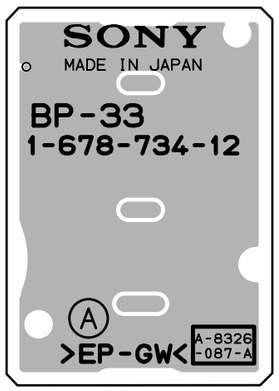

BP-33 -A SIDE-
SUFFIX: -12

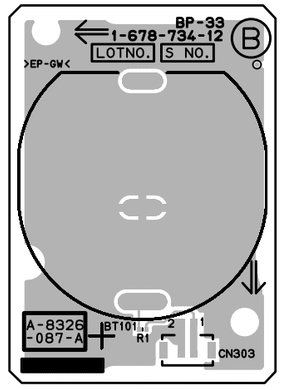

BP-33 -B SIDE-
SUFFIX: -12



HP-104 -A SIDE-
SUFFIX: -11



HP-104 -B SIDE-
SUFFIX: -11

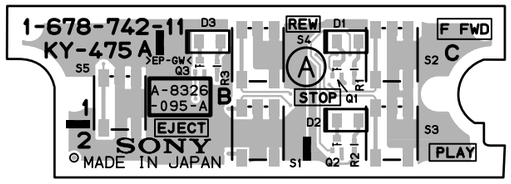

KY-475 -A SIDE-
SUFFIX: -11

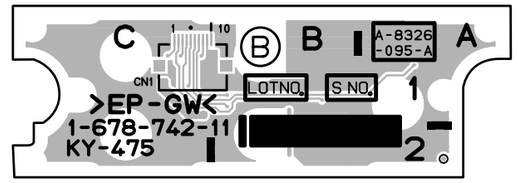

KY-475 -B SIDE-
SUFFIX: -11



LP-114 -A SIDE-
SUFFIX: -11



LP-114 -B SIDE-
SUFFIX: -11

```
--------------------
KY-475 (1-678-742-11)
--------------------

*:B SIDE

CN1     *C1

D1       C1
D2       C1
D3       B1

Q1       C1
Q2       C2
Q3       B1

R1       C1
R2       C2
R3       B1

S1       B2
S2       C1
S3       C2
S4       B1
S5       A1
```



ENC-61 -A SIDE-
SUFFIX: -11



ENC-61 -B SIDE-
SUFFIX: -11

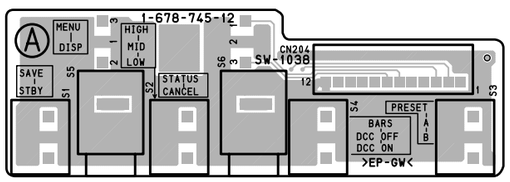

SW-1038 -A SIDE-
SUFFIX: -12

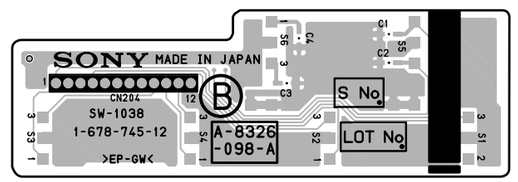

SW-1038 -B SIDE-
SUFFIX: -12

RE-186 (1-678-735-11)
---

*:B SIDE

C101	*B2	D302	*C2	R126	*C3
C102	*B2	D303	*C1	R127	*C2
C103	*A2	D304	*B2	R128	*A4
C104	*B2			R129	*A4
C105	*B3	E1	*B4	R130	*A2
C106	*B3			R131	*A2
C107	*B2	IC101	*B2	R201	*B3
C108	*B3	IC201	*B4	R202	*B4
C109	*B2	IC202	*B3	R203	*B4
C110	*C2	IC301	*B1	R204	*B4
C111	*C2			R205	*A3
C112	*A2	L101	A3	R206	*B3
C113	B3	L102	B2	R207	*B3
C114	B2	L103	A3	R208	*B3
C115	*A3	L104	C3	R209	*B3
C116	*C3	L105	A3	R210	*B3
C117	A3	L106	B2	R211	*B3
C118	B2	L201	B3	R212	*B3
C119	*A4	L202	B3	R213	*B3
C120	A4	L203	C3	R214	*B3
C121	A2	L204	C4	R215	*B3
C201	*B4	L205	B3	R216	*B3
C202	*B4	L206	B4	R217	*B3
C203	*B3	L301	B1	R218	*B4
C204	*B3	L302	A2	R219	*B4
C205	*B3	L303	C1	R220	*B4
C206	*B3	L304	C2	R221	*B3
C207	*B4	L305	C1	R222	*C4
C208	*B4			R223	*C3
C209	*B3	Q101	*A3	R224	*C3
C210	*B4	Q102	*B2	R225	*C4
C211	A2	Q103	*B3	R226	*B4
C212	*A2	Q104	*B2	R227	*C3
C213	*B3	Q105	*A3	R228	*C3
C214	*C3	Q106	*A3	R229	*C4
C215	*C3	Q107	*B2	R230	*C4
C216	*C3	Q108	*B2	R231	*C4
C217	*C4	Q109	*A3	R232	*C4
C218	*B4	Q110	*C3	R233	*C3
C219	B3	Q111	*C2	R234	*C4
C220	B4	Q201	*B3	R235	*B4
C221	*C3	Q202	*B4	R236	*B4
C222	*C4	Q203	*B3	R237	*B4
C223	B3	Q204	*C4	R238	*B4
C224	B4	Q205	*B3	R301	*B1
C225	B4	Q206	*B3	R302	*C2
C226	B4	Q207	*B4	R303	*B2
C301	*B1	Q208	*B4	R304	*B1
C302	*B1	Q209	*C3	R305	*A1
C303	*B1	Q210	*C4	R306	*B1
C304	*B1	Q211	*C3	R307	*B1
C306	*B2	Q212	*C4	R308	*B1
C307	*B1	Q301	*B2	R309	*B1
C308	*B2	Q302	*B1	R310	*B1
C309	B1	Q303	*A2	R311	*B1
C310	*B2	Q304	*A2	R312	*B1
C311	A2	Q305	*A2	R313	*B1
C312	*A2	Q306	*B2	R314	*B1
C313	*A2	Q307	*A2	R316	*A2
C314	*B2	Q308	*B1	R317	*A2
C315	*B2	Q309	*C1	R318	*A2
C316	*B1	Q310	*C1	R319	*B1
C317	*B2	Q311	*C2	R320	*A2
C318	*C1	Q312	*C1	R321	*B1
C319	C1			R322	*B2
C320	*C2	R101	*B2	R323	*A2
C321	B2	R102	*B3	R324	*B2
C322	A2	R103	*B3	R325	*A2
C330	*B2	R104	*B3	R326	*A2
		R105	*A2	R327	*C1
CL100	*A3	R106	*A2	R328	*A2
CL101	*A2	R107	*A2	R329	*A1
CL102	*B2	R108	*B2	R330	*C2
CL103	*B3	R109	*B2	R331	*C1
CL104	*B4	R110	*B2	R332	*C2
CL105	*B1	R111	*B2	R333	*C1
CL106	*B1	R112	*B2	R334	*C2
		R113	*B2	R335	*C1
CN1	A4	R114	*B2	R336	*B1
		R115	*B3	R337	*B1
D101	*C3	R116	*B2	R343	*B4
D102	*C2	R117	*B2	R344	*A4
D103	*A3	R118	*B3	R345	*A2
D104	*A2	R119	*B2	R346	*B1
D201	*C3	R120	*A3	R347	*C2
D202	*B4	R121	*C2	R348	*C3
D203	*C3	R122	*C2	R349	*C4
D204	*B4	R123	*A3	R350	*C2
D205	*A4	R124	*C3	R351	*A2
D301	*A1	R125	*C2	R352	*A2

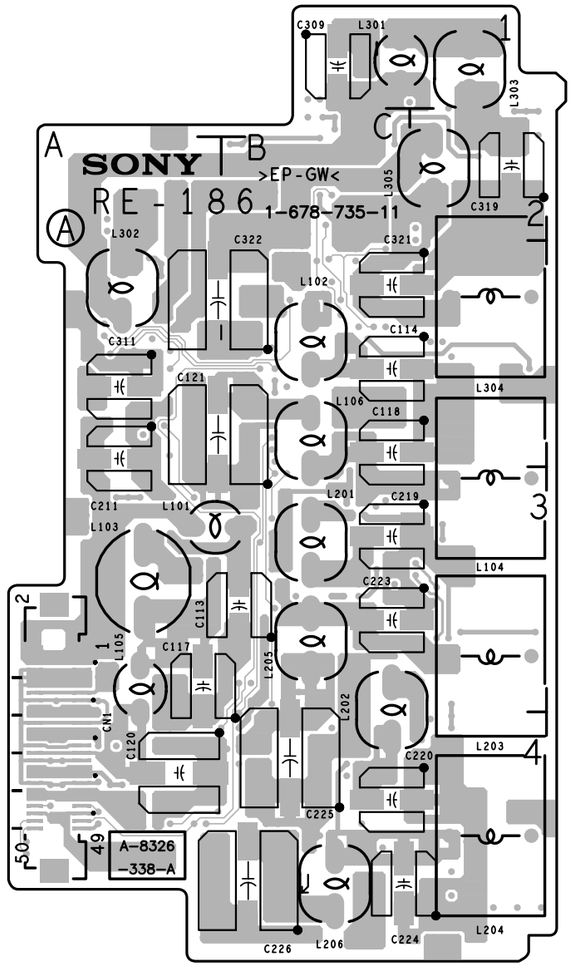

RE-186 -A SIDE-
SUFFIX: -11

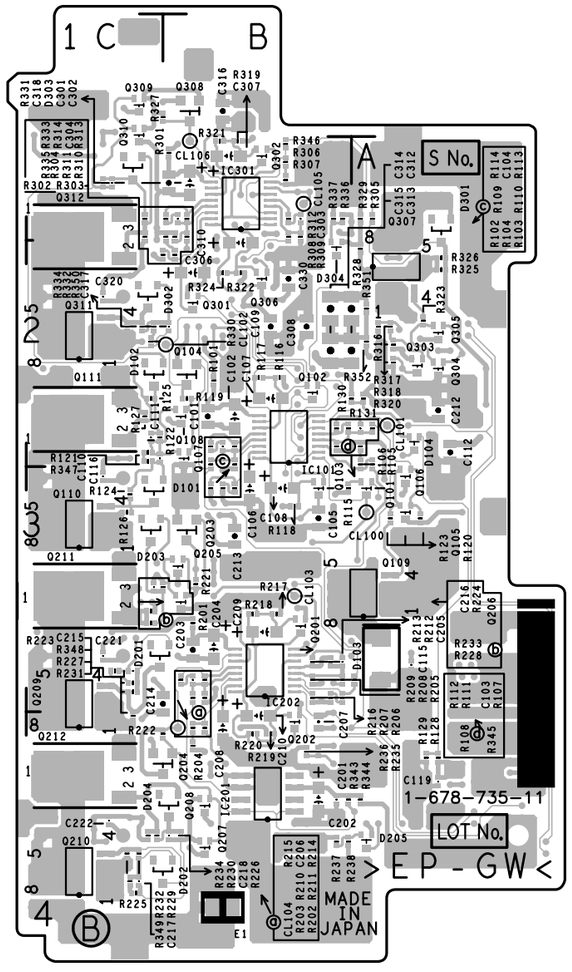

RE-186 -B SIDE-
SUFFIX: -11

RE-187 (1-678-736-11)
---

*:B SIDE

C101	*C2	D109	*B1	R133	*B3
C102	*B2	D110	*B3	R134	*B3
C103	*B3	D111	*B3	R135	*B2
C104	*B3	D112	*C1	R136	*B2
C105	*A1	D113	*C1	R137	*B3
C106	*C2	D114	*A2	R138	*C2
C107	*A3	D115	*B2	R139	*B3
C108	A1			R140	*C2
C109	*B2	E1	*A2	R141	*B3
C110	*B2			R142	*C2
C111	*B2	IC102	*B2	R143	*B3
C112	A2	IC103	*B3	R144	*C2
C113	*A3	IC105	*A2	R145	*B3
C114	*B3	IC106	*B1	R146	*A4
C115	*B2	IC107	*C2	R147	*C3
C116	A2			R148	*C3
C117	*C2	L101	A1	R149	*A3
C118	*A3	L102	A1	R150	*A4
C119	*B2	L103	B2	R151	*C3
C120	*B3	L104	C4	R152	*C3
C121	*B3	L105	B4	R153	*A3
C122	*B2	L106	A4	R154	*A4
C123	*B3	L107	B4	R155	*C3
C124	*C2	L108	C4	R156	*A3
C125	*C3	L109	C4	R157	*C3
C126	*A4	L110	A3	R158	*A4
C127	*B3	L112	C3	R159	*C4
C128	*C3	L113	B1	R160	*C4
C129	*A3	L114	B3	R161	*C4
C130	*A4			R162	*C4
C131	C4	Q101	*A1	R164	*A3
C132	A4	Q102	*A1	R166	*A3
C133	*C4	Q103	*A1	R167	*A3
C134	B4	Q104	*B2	R169	*B3
C135	*B4	Q105	*B3	R170	*B3
C136	*C4	Q106	*B2	R171	*A2
C137	A4	Q107	*B3	R172	*A2
C138	*C4	Q108	*C2	R173	*A2
C139	B3	Q109	*B3	R174	*A2
C140	*A3	Q110	*A4	R175	*A2
C141	B3	Q111	*B3	R176	*A2
C143	A3	Q112	*C3	R177	*A2
C145	*A3	Q113	*A4	R178	*B2
C148	*B3	Q114	*A3	R179	*A2
C149	B3	Q115	*B4	R180	*B1
C150	*B3	Q116	*A4	R181	*B1
C151	*C1	Q117	*B4	R182	*B1
C152	*C2	Q118	*A4	R183	*B1
C153	A2	Q120	*A3	R184	*B1
C154	*C1	Q121	*B3	R185	*C1
C155	*C2	Q122	*B3	R186	*C1
C156	*B3	Q123	*B3	R187	*A1
C157	*B1	Q125	*C3	R188	*A1
C158	*A2	Q126	*A2	R189	*B1
C159	C1	Q127	*B2	R190	*C1
C160	B3	Q128	*B1	R191	*C1
C161	B1	Q129	*C1	R192	*C1
C164	B1	Q130	*B2	R193	*C1
C165	B1	Q131	*A2	R194	*B1
C167	*A1	Q132	*A2	R195	*B1
C168	B1	Q133	*A2	R196	*C1
C169	*C1	Q134	*B2	R197	*C1
C170	*C1			R198	*B2
C171	*B2	R101	*B2	R199	*A2
C172	*C1	R102	*A1	R200	*A2
C173	*C1	R103	*B3	R201	*A2
C174	A2	R104	*B3	R202	*A2
C177	*A2	R105	*B3	R203	*A2
C178	*A2	R106	*B3	R204	*A2
C179	*C1	R107	*A1	R205	*B2
C180	*C1	R108	*C2	R206	*B2
C181	*C1	R109	*A3	R207	*C2
C182	*C1	R110	*A3	R210	*A2
C183	*B2	R111	*C2	R211	*A2
C184	*C2	R112	*C2	R212	*A2
C185	*C1	R113	*C2	R213	*B2
C186	*A1	R114	*A3	R214	*B2
		R115	*A3	R215	*B2
CL100	*B3	R116	*B2	R216	*B2
CL101	*B2	R117	*B2	R217	*B2
CL102	*B2	R118	*B2	R218	*B3
CL103	*A3	R119	*A3	R219	*C2
CL104	*B3	R120	*A3	R220	*C2
		R121	*B2	R221	*A3
CN1	A1	R122	*B2	R222	*B1
		R123	*A3	R223	*C1
D101	*A1	R124	*A3	R224	*C1
D103	*C3	R125	*B2	R225	*C1
D104	*A4	R126	*B2	R226	*C1
D105	*C3	R128	*B2		
D106	*A4	R130	*B2	SL100	*A2
D107	*C4	R131	*A3		
D108	*C1	R132	*A3	T101	B2

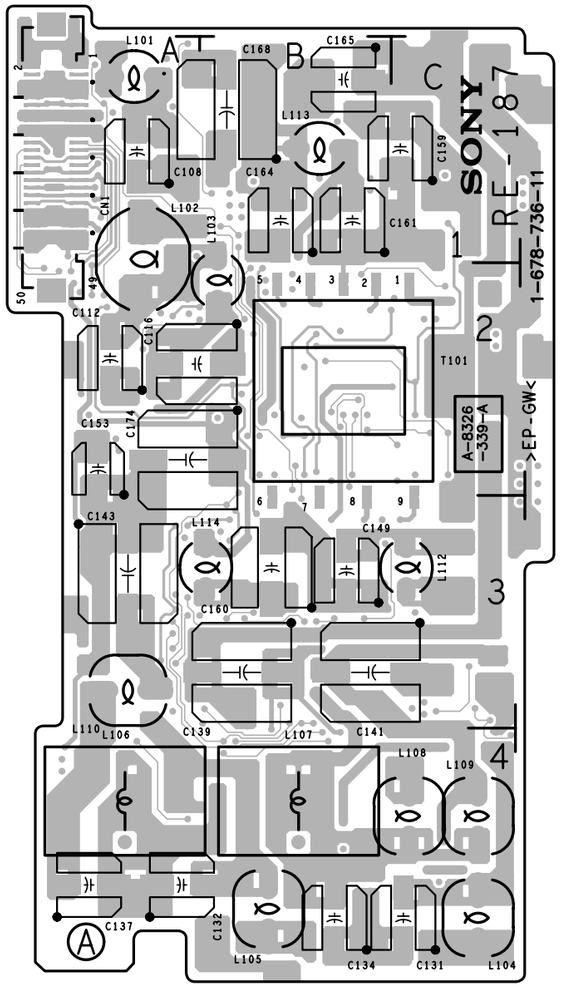

RE-187 -A SIDE-
SUFFIX: -11

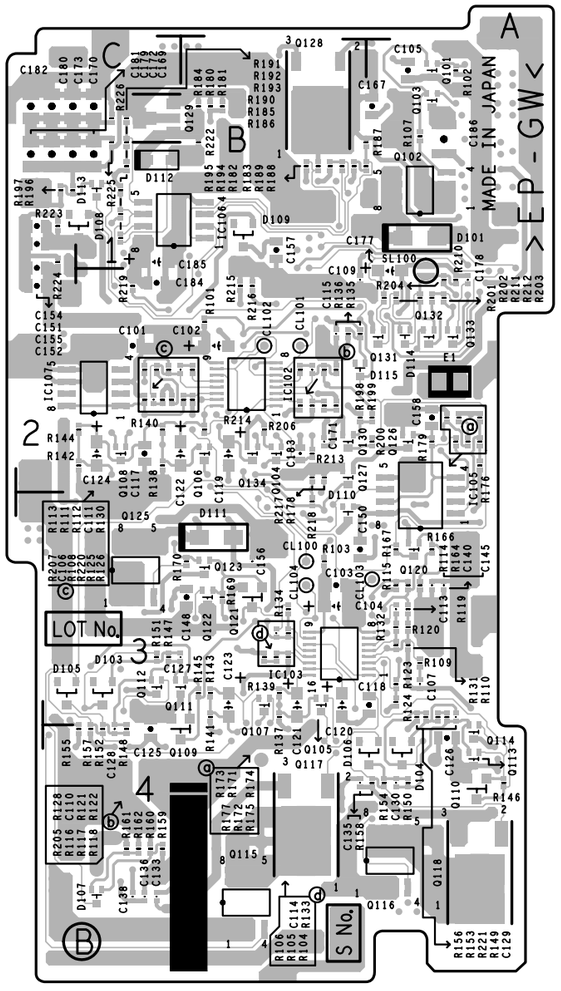

RE-187 -B SIDE-
SUFFIX: -11

http://getMANUAL.com

CNB-15 (1-678-751-13)
---

*:B SIDE

C101	*B1	Q111	B1
C103	*A2	Q112	B1
C104	*A2	Q114	B1
C105	*A2	Q115	B1
C109	*B2	Q116	B1
C110	*B2	Q119	*B2
C111	*B2	Q120	*B1
C112	*B2	Q121	*B1
C114	*B2	Q122	*B1
C116	*A1	Q123	*B1
C117	*B2	Q124	*B1
C118	*B1	Q125	*B1
C119	*B1	Q126	*B1
C120	*B2	Q301	*A3
C121	*B1	Q302	*B2
C122	A2	Q303	*B3
C123	B1	Q304	*B3
C124	A1	Q305	*B3
C125	*B2	Q306	*B3
C126	A2	Q307	*B3
C301	*B3	Q310	*B3
C302	*A3		
C303	*B2	R101	*B2
C304	*B3	R105	*A2
C305	*B3	R106	*A2
C306	*B3	R107	*A2
C307	*B3	R108	*A2
C308	*B3	R109	*A2
C309	*B2	R110	*A2
C310	*A2	R111	*B2
C311	*B2	R112	*A2
C312	*B2	R113	*B2
C313	*B3	R117	*A2
C314	*B3	R119	*A2
C315	*A3	R120	*B2
C316	*A3	R121	*A2
C317	*B3	R124	*A2
C318	*B3	R125	*B1
C319	*A3	R126	*B1
C320	*A3	R127	*B1
C321	*B3	R129	*B1
		R132	*B2
CL101	*B1	R136	*B2
		R137	*B2
CN101	B1	R138	*B2
CN102	*B1	R141	*B1
CN103	*B1	R142	A1
CN104	*A1	R143	A1
CN105	*B2	R145	*A2
CN109	B1	R146	*A2
CN401	A3	R147	A2
CN402	*B3	R148	*B2
CN403	*A3	R149	*B2
		R150	*A2
D101	*B2	R151	*B2
D102	*B2	R152	*B1
D104	*A2	R154	*B1
D105	*A2	R301	*B3
D106	*B1	R302	*B2
D107	B1	R303	*B2
D108	A1	R304	*B2
D201	*B2	R305	*B2
D202	*B2	R306	*B3
D203	*B2	R307	*B2
D204	*B2	R308	*B2
D205	*B2	R309	*B3
D206	*B2	R310	*B3
D301	*B3	R311	*B3
D302	*B3	R312	*B3
		R313	*B3
IC101	*A2	R314	*B3
IC103	*B2	R315	*B3
IC104	*B2	R316	*B3
IC105	*B2	R317	A2
IC106	*B2		
IC107	*A2	SL101	*B1
IC108	*B2		
IC109	*B2	THP1	*A2
IC301	*B3		
IC302	*B3		
L1	*B2		
L301	*B3		
L302	*A3		
Q101	*B2		
Q103	*A2		
Q104	*B1		
Q107	*A2		
Q110	B1		

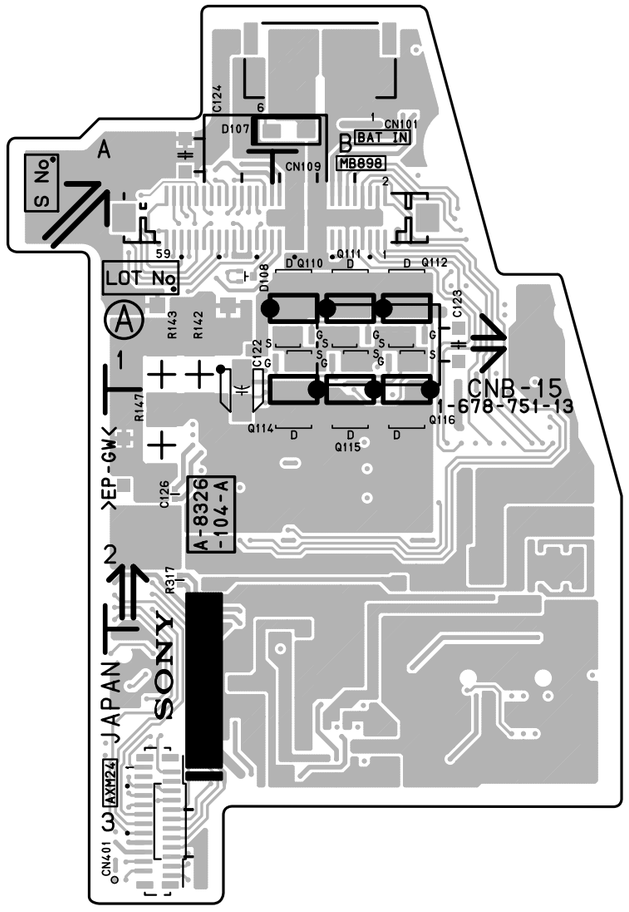

CNB-15 -A SIDE-
SUFFIX: -13

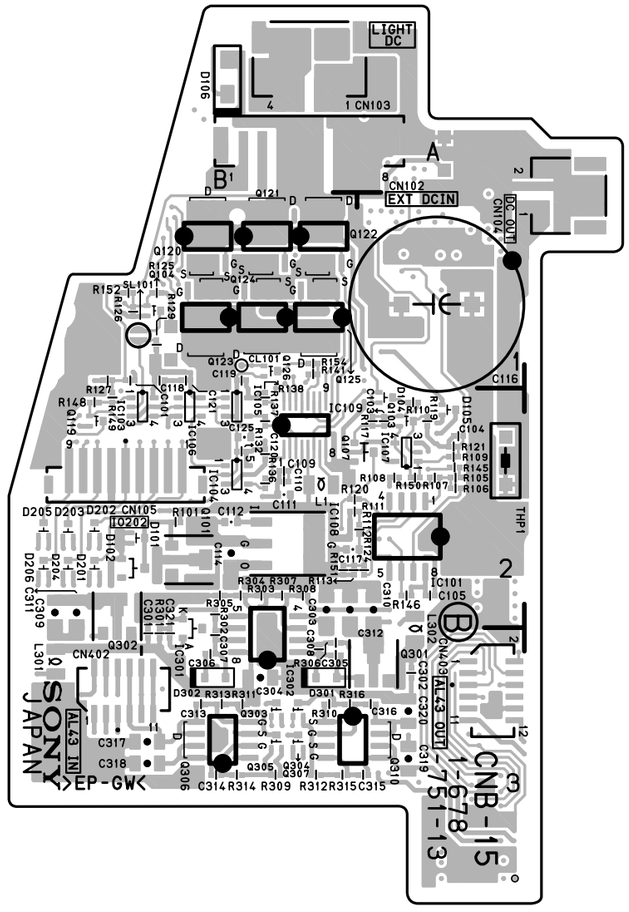

CNB-15 -B SIDE-
SUFFIX: -13

CNB-15 (1-678-751-12)
---

*:B SIDE

C101	*B1	Q112	B1
C103	*A2	Q114	B1
C104	*A2	Q115	B1
C105	*A2	Q116	B1
C108	*B2	Q119	*B2
C109	*B2	Q120	*B1
C110	*B2	Q121	*B1
C111	*B2	Q122	*B1
C112	*B2	Q123	*B1
C114	*B2	Q124	*B1
C116	*A1	Q125	*B1
C117	*B2	Q126	*B1
C118	*B1	Q301	*A3
C119	*B1	Q302	*B2
C120	*B2	Q303	*B3
C121	*B1	Q304	*B3
C122	A2	Q305	*B3
C123	B1	Q306	*B3
C124	A1	Q307	*B3
C125	*B2	Q310	*B3
C301	*B3		
C302	*A3	R101	*B2
C303	*B2	R105	*A2
C304	*B3	R106	*A2
C305	*B3	R107	*A2
C306	*B3	R108	*A2
C307	*B3	R109	*A2
C308	*B3	R110	*A2
C309	*B2	R111	*B2
C310	*A2	R112	*A2
C311	*B2	R113	*B2
C312	*B2	R117	*A2
C313	*B3	R119	*A2
C314	*B3	R120	*B2
C315	*A3	R121	*A2
C316	*A3	R124	*A2
C317	*B3	R125	*B1
C318	*B3	R126	*B1
C319	*A3	R127	*B1
C320	*A3	R129	*B1
C321	*B3	R131	*B2
		R132	*B2
CL101	*B1	R136	*B2
		R137	*B2
CN101	B1	R138	*B2
CN102	*B1	R141	*B1
CN103	*B1	R142	A1
CN104	*A1	R143	A1
CN105	*B2	R145	*A2
CN109	B1	R146	*A2
CN401	A3	R147	A2
CN402	*B3	R148	*B2
CN403	*A3	R149	*B2
		R150	*A2
D101	*B2	R151	*B2
D102	*B2	R152	*B1
D104	*A2	R154	*B1
D105	*A2	R301	*B3
D106	*B1	R302	*B2
D107	B1	R303	*B2
D201	*B2	R304	*B2
D202	*B2	R305	*B2
D203	*B2	R306	*B3
D204	*B2	R307	*B2
D205	*B2	R308	*B2
D206	*B2	R309	*B3
D301	*B3	R310	*B3
D302	*B3	R311	*B3
		R312	*B3
IC101	*A2	R313	*B3
IC103	*B2	R314	*B3
IC104	*B2	R315	*B3
IC105	*B2	R316	*B3
IC106	*B2		
IC107	*A2	SL101	*B1
IC108	*B2		
IC109	*B2	THP1	*A2
IC301	*B3		
IC302	*B3		
L1	*B2		
L301	*B3		
L302	*A3		
Q101	*B2		
Q103	*A2		
Q104	*B1		
Q107	*A2		
Q110	B1		
Q111	B1		

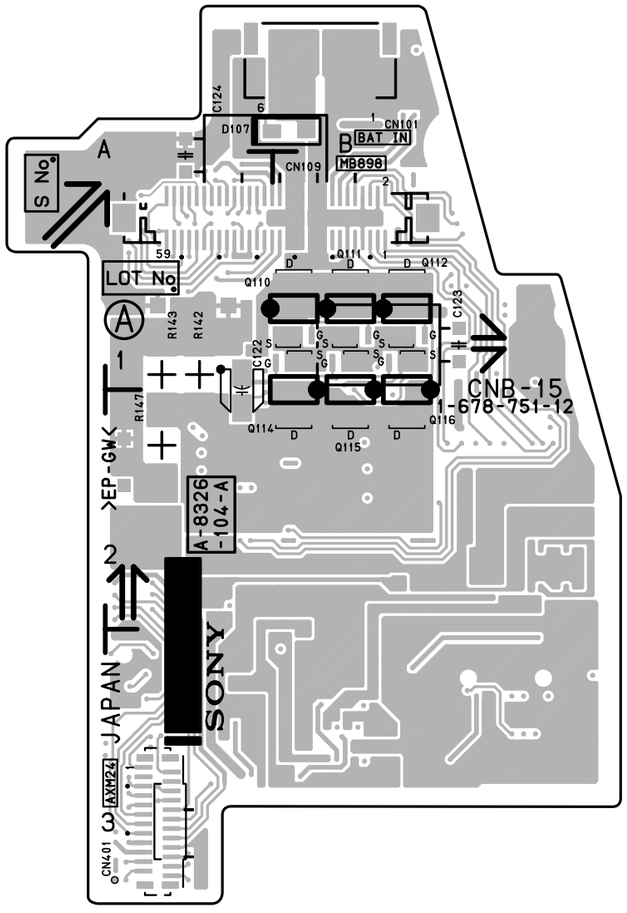

CNB-15 -A SIDE-
SUFFIX: -12

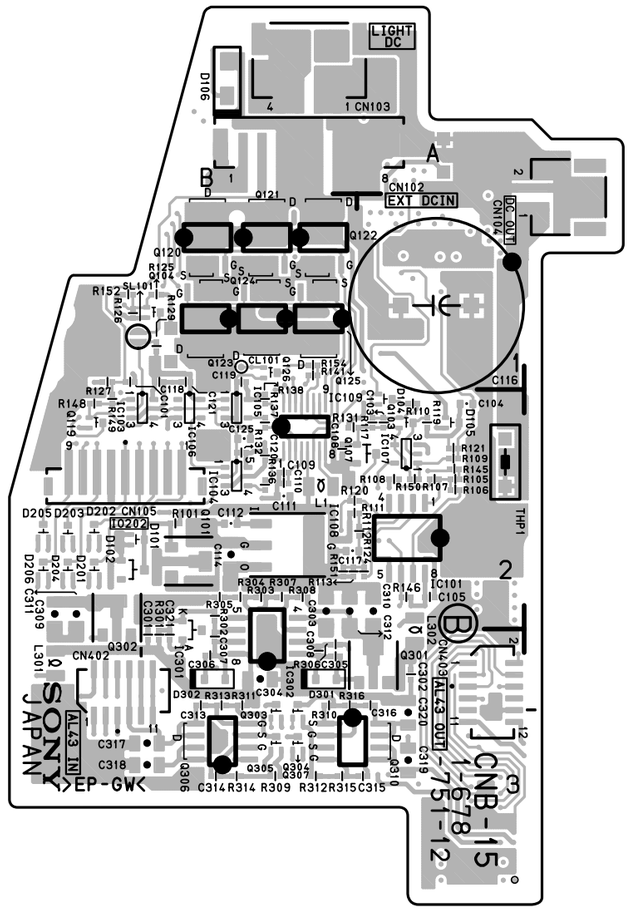

CNB-15 -B SIDE-
SUFFIX: -12

DC-111, PS-595, SW-1030



DC-111 -A SIDE-
SUFFIX: -11



DC-111 -B SIDE-
SUFFIX: -11

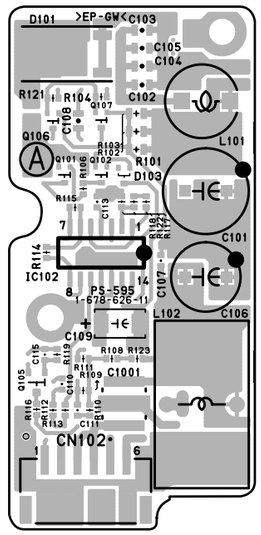

PS-595 -A SIDE-
SUFFIX: -11

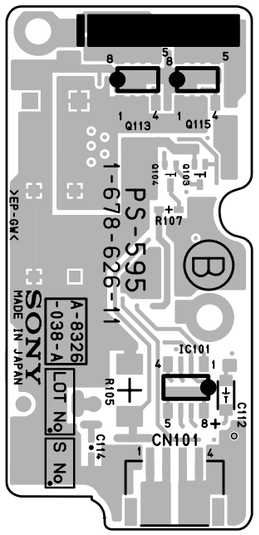

PS-595 -B SIDE-
SUFFIX: -11



SW-1030 -A SIDE-
SUFFIX: -11



SW-1030 -B SIDE-
SUFFIX: -11

5-44

MB-898 (1-678-730-12)
---

*:B SIDE

C1	B1
C2	B1
C3	B1
C4	B1
C5	B2
C6	C1
C7	C1
C8	A1
C9	B2
C10	E2
C11	B2
C12	C2
C13	E2
C14	B2
C15	E2
C101	E2
C102	E1
C103	E1
C104	E1
C105	E1
C106	E2
C107	E2
C108	E2
C109	E2
C110	E2
C111	E2
C112	E1
C113	E2
C114	E1
C115	A1
C116	A1
C117	A1
C118	A1
C119	A1
C120	A1
C121	A2
C122	A2
C123	A2
C124	A2
CL101	C2
CL102	B2
CN101	B1
CN102	C1
CN103	C1
CN104	C2
CN105	B2
CN106	C2
CN107	D2
CN108	D2
CN109	*E1
CN110	E1
CN111	E2
CN112	E1
CN114	*E1
CN115	*E1
CN116	E1
CN117	E2
CN118	A1
CN119	A2
CN120	A1
CN121	A1
CN122	A2
CN201	D2

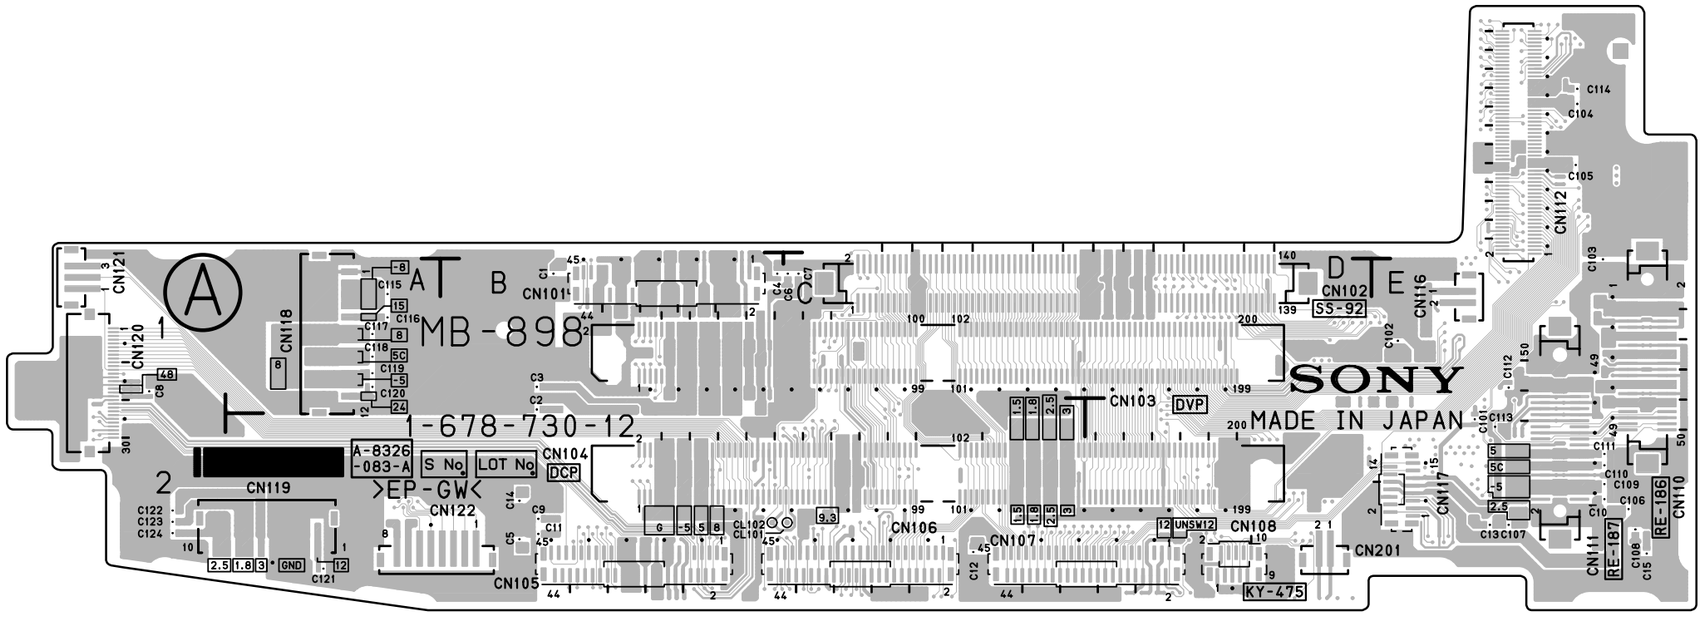

MB-898 -A SIDE-
SUFFIX: -12

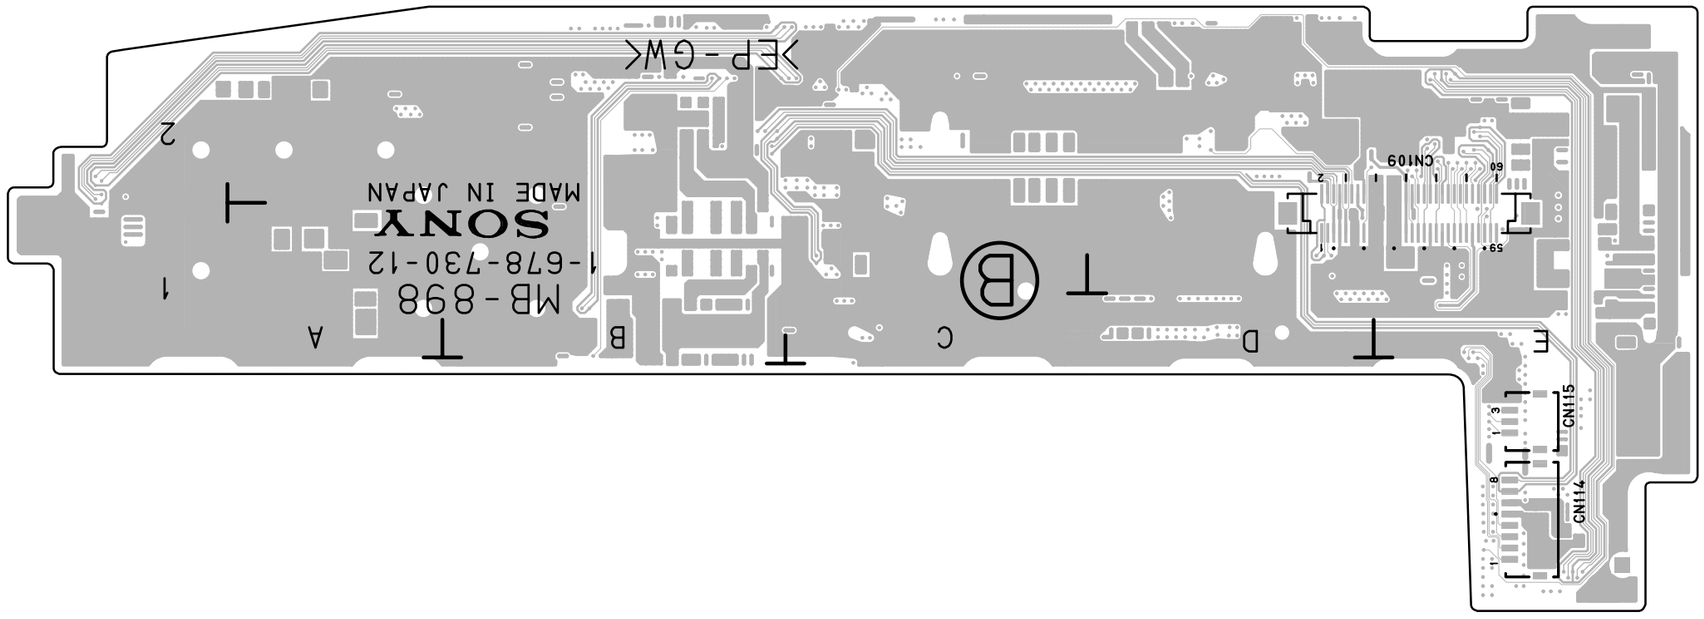

MB-898 -B SIDE-
SUFFIX: -12

HDW-750 (UCJ)
HDW-750 (J) J, E
9-968-582-01

Sony Corporation
Communication System Solutions Network Company

Printed in Japan
2001. 1 16
©2001